



Appendix H for 5.2G WIFI RF Test Data

Product Name: Tablet

Test Model: TAB 50

Environmental Conditions

Temperature:	22.3° C
Relative Humidity:	52.8%
ATM Pressure:	100.0 kPa
Test Engineer:	Nick Peng
Supervised by:	Ling Zhu





H.1 Centre Frequencies

Condition	Mode	Frequency (MHz)	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
NVNT	a	5180	5180.04	7.72	20	Pass
	ac20	5180	5179.97	-5.79	20	Pass
	ac40	5190	5190.02	3.85	20	Pass
	ac80	5210	5209.98	-3.84	20	Pass
	n20	5180	5180.03	5.79	20	Pass
	n40	5190	5190.01	1.93	20	Pass

Condition	Mode	Frequency (MHz)	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
NVLT	a	5180	5179.97	-5.79	20	Pass
	ac20	5180	5179.96	-7.72	20	Pass
	ac40	5190	5190.00	0.00	20	Pass
	ac80	5210	5210.00	0.00	20	Pass
	n20	5180	5179.99	-1.93	20	Pass
	n40	5190	5189.97	-5.78	20	Pass

Condition	Mode	Frequency (MHz)	Measured Frequency (MHz)	Deviation (ppm)	Limit (ppm)	Verdict
NVHT	a	5180	5180.00	0.00	20	Pass
	ac20	5180	5179.97	-5.79	20	Pass
	ac40	5190	5190.04	7.71	20	Pass
	ac80	5210	5209.99	-1.92	20	Pass
	n20	5180	5179.99	-1.93	20	Pass
	n40	5190	5190.01	1.93	20	Pass






H.2 Nominal Channel Bandwidth and Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Center Frequency (MHz)	OBW (MHz)	Lower Limit (MHz)	Upper Limit(MHz)	Verdict
NVNT	a	5180	5179.982	16.361	16	20	Pass
NVNT	ac20	5180	5179.978	17.564	16	20	Pass
NVNT	ac40	5190	5189.961	36.008	32	40	Pass
NVNT	ac80	5210	5209.863	75.444	64	80	Pass
NVNT	n20	5180	5179.98	17.566	16	20	Pass
NVNT	n40	5190	5189.948	35.941	32	40	Pass

OBW NVNT a 5180MHz

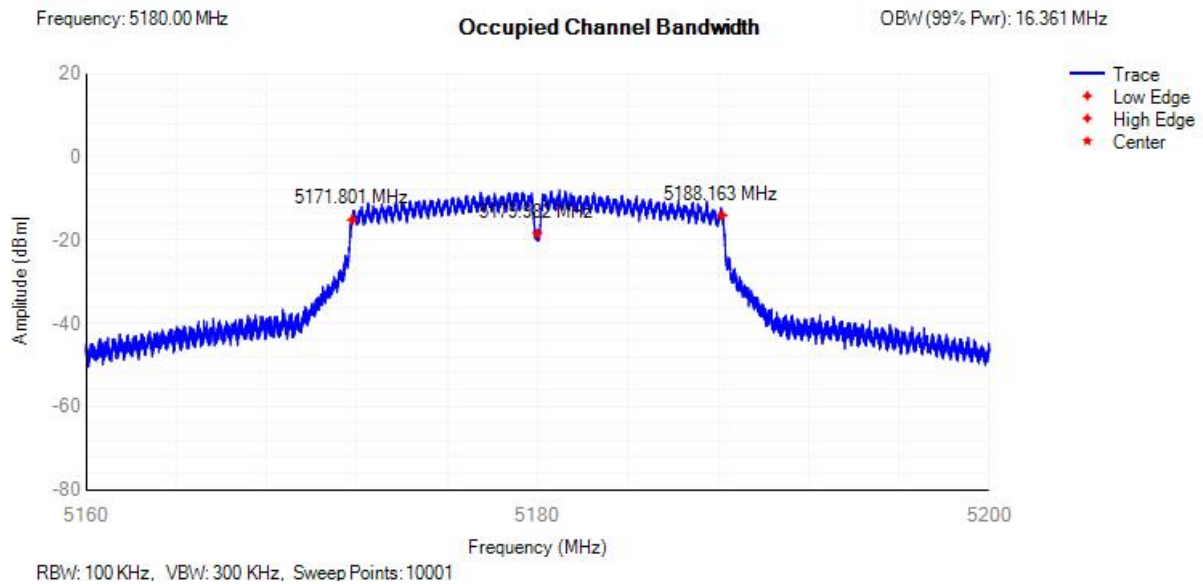




OBW NVNT ac20 5180MHz

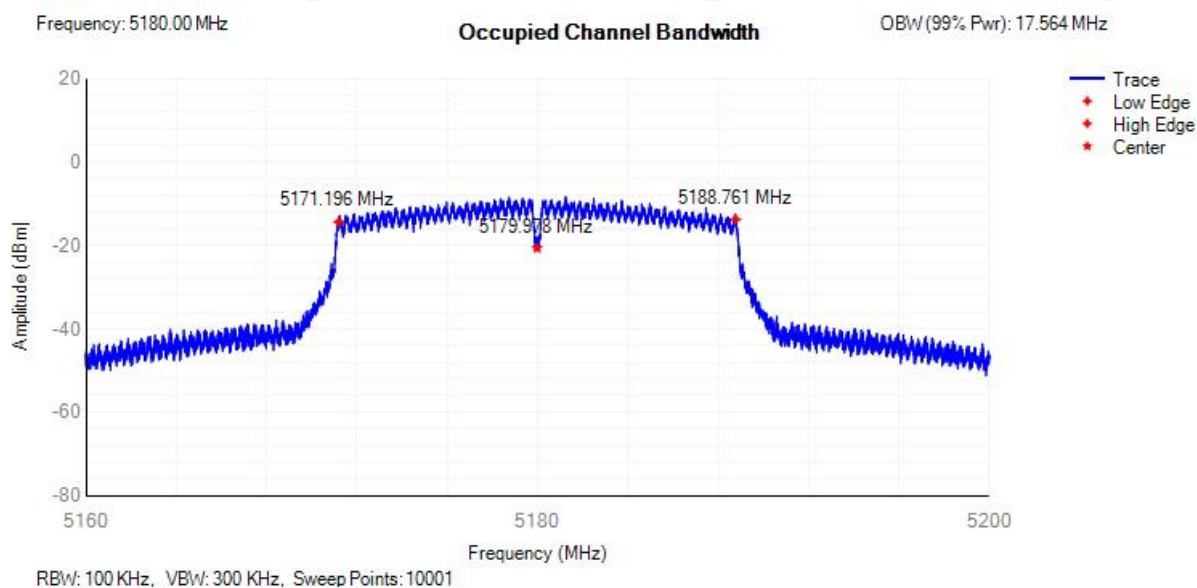

OBW NVNT ac40 5190MHz

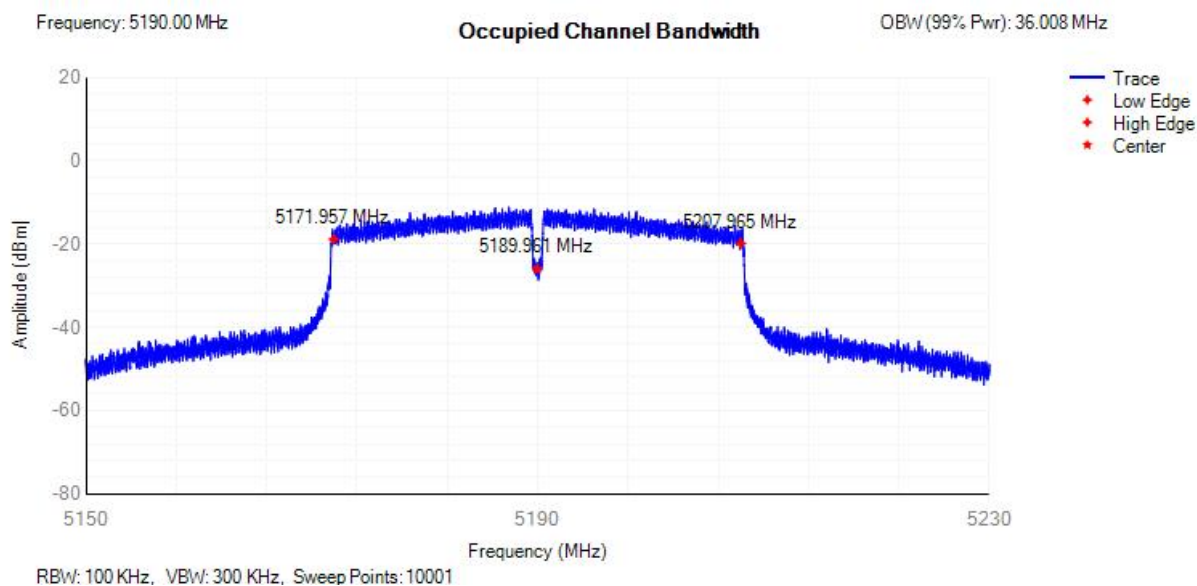

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



OBW NVNT ac80 5210MHz

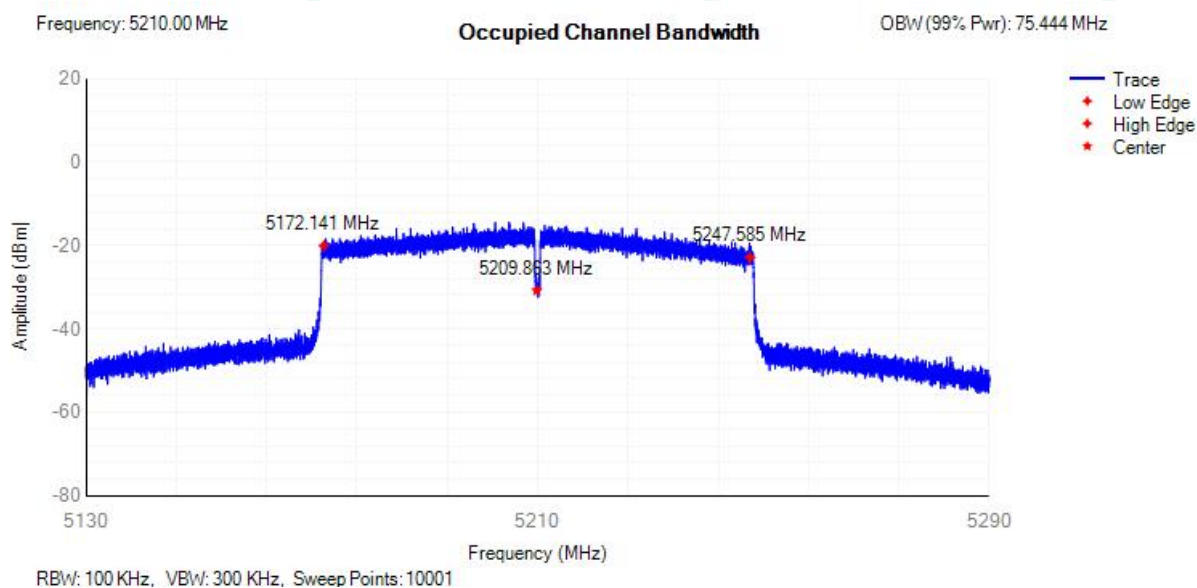


OBW NVNT n20 5180MHz

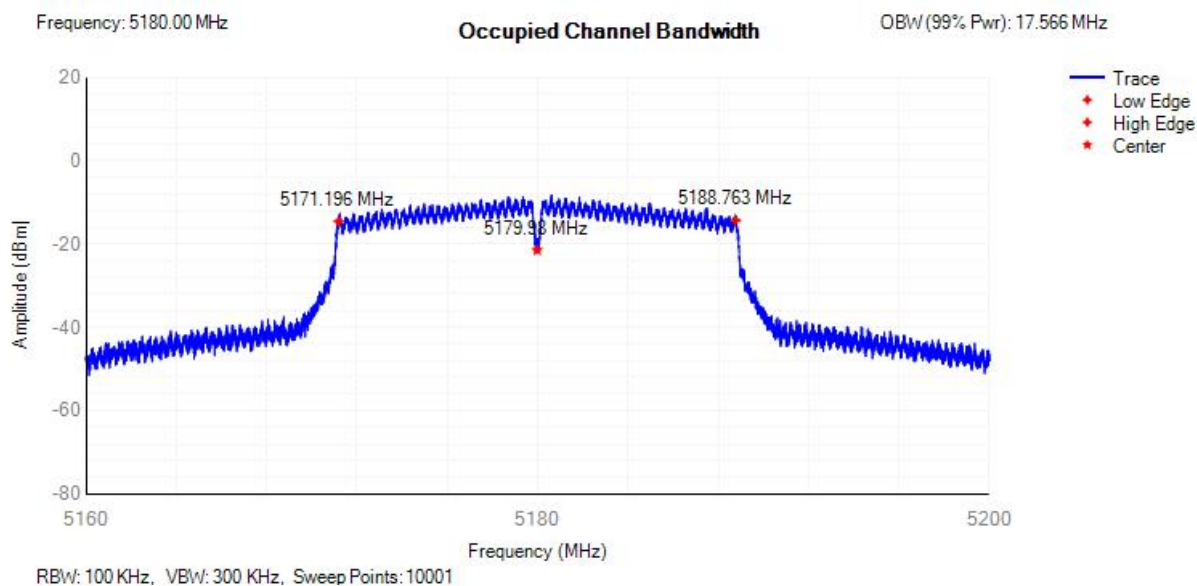



OBW NVNT n40 5190MHz

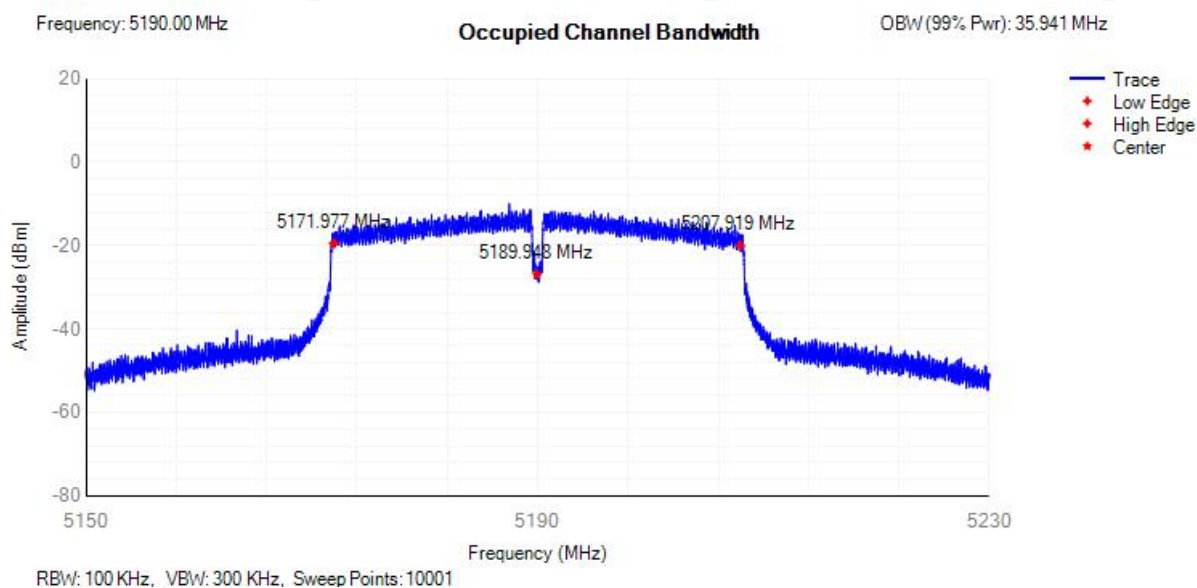

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



H.3 RF Output Power

Condition	Mode	Frequency (MHz)	Max EIRP (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	11.6	23	Pass
NVNT	ac20	5180	11.38	23	Pass
NVNT	ac40	5190	11.33	23	Pass
NVNT	ac80	5210	11.2	23	Pass
NVNT	n20	5180	11.39	23	Pass
NVNT	n40	5190	11.13	23	Pass

Condition	Mode	Frequency (MHz)	Max EIRP (dBm)	Limit (dBm)	Verdict
NVLT	a	5180	11.45	23	Pass
NVLT	ac20	5180	11.19	23	Pass
NVLT	ac40	5190	11.12	23	Pass
NVLT	ac80	5210	11.14	23	Pass
NVLT	n20	5180	11.24	23	Pass
NVLT	n40	5190	10.92	23	Pass

Condition	Mode	Frequency (MHz)	Max EIRP (dBm)	Limit (dBm)	Verdict
NVHT	a	5180	11.30	23	Pass
NVHT	ac20	5180	11.01	23	Pass
NVHT	ac40	5190	11.01	23	Pass
NVHT	ac80	5210	10.92	23	Pass
NVHT	n20	5180	11.17	23	Pass
NVHT	n40	5190	10.74	23	Pass

***Note: 20 bursts had been captured for power measurement.







H.4 Power Spectral Density

Condition	Mode	Frequency (MHz)	Max PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	0.04	10	Pass
NVNT	ac20	5180	-0.32	10	Pass
NVNT	ac40	5190	-3.27	10	Pass
NVNT	ac80	5210	-6.29	10	Pass
NVNT	n20	5180	-0.3	10	Pass
NVNT	n40	5190	-3.46	10	Pass

PSD NVNT a 5180MHz

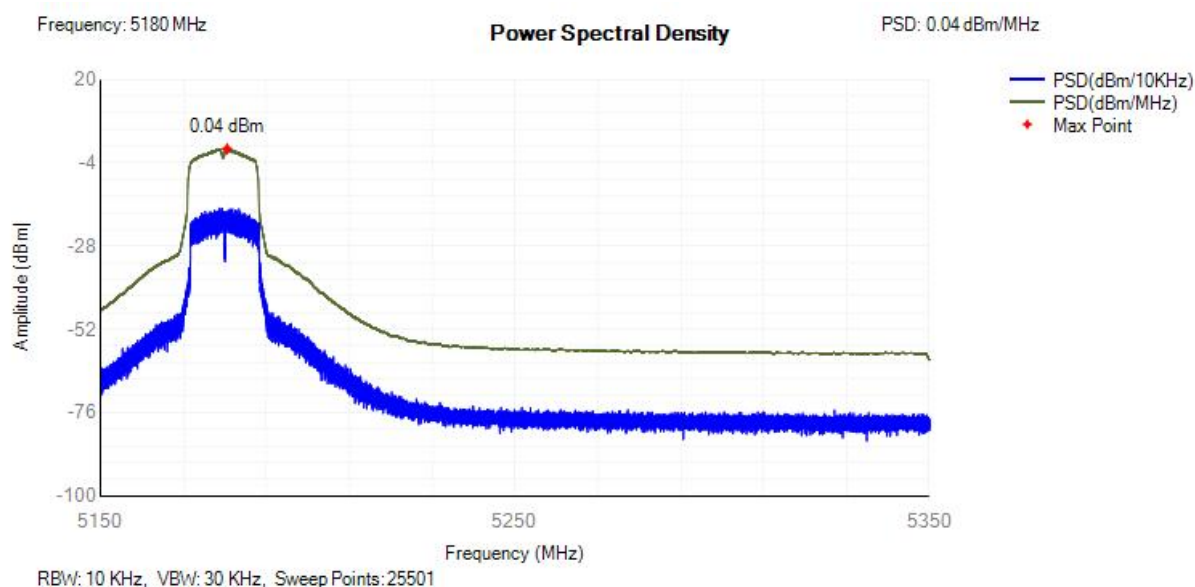

PSD NVNT ac20 5180MHz

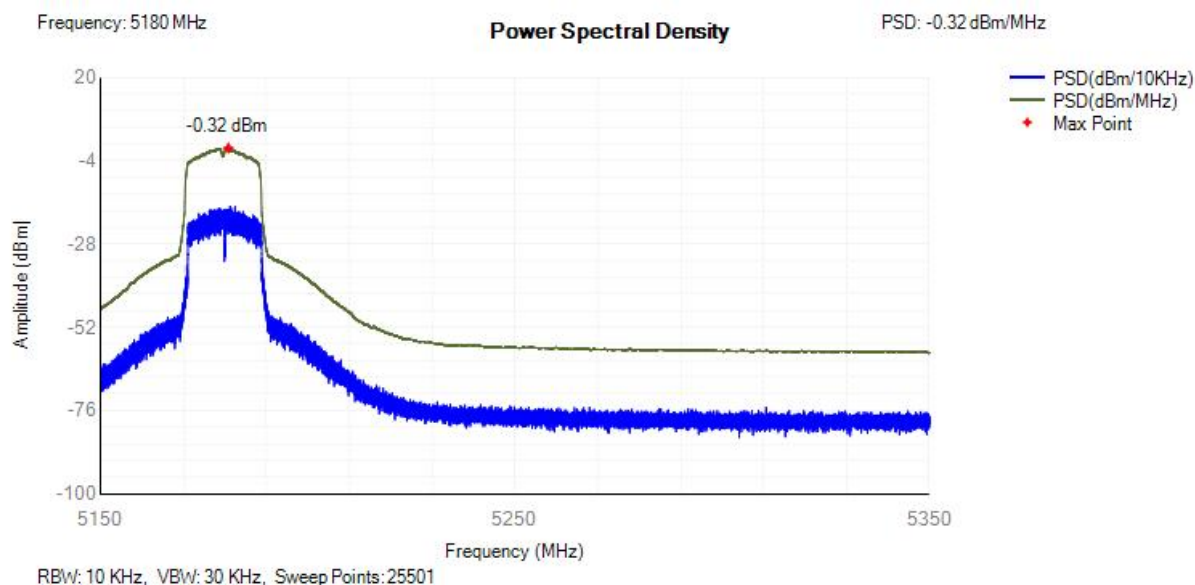

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT ac40 5190MHz

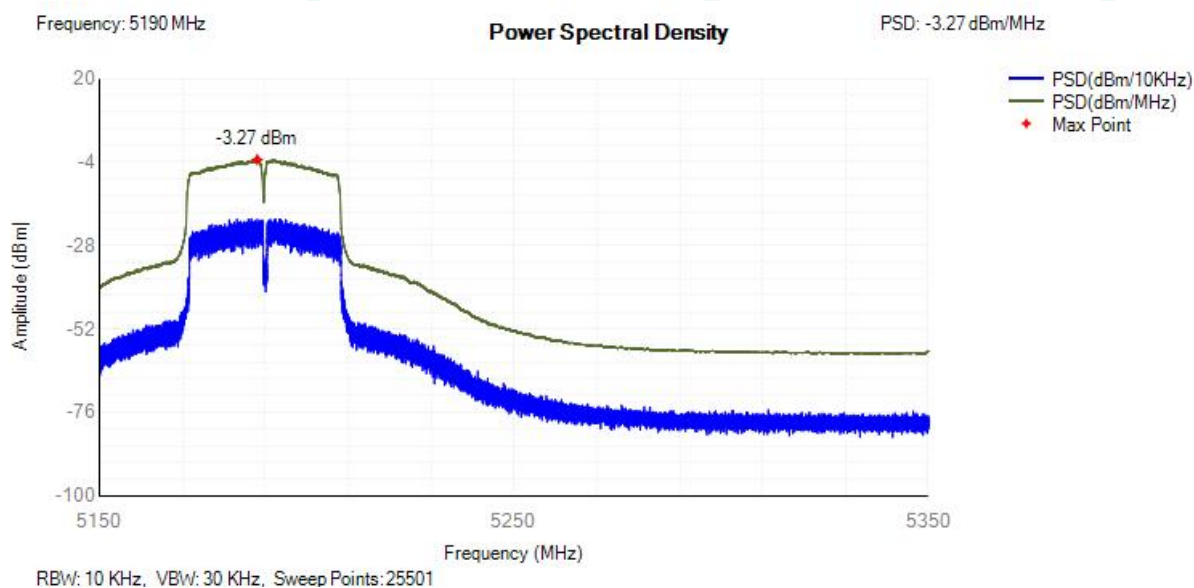

PSD NVNT ac80 5210MHz

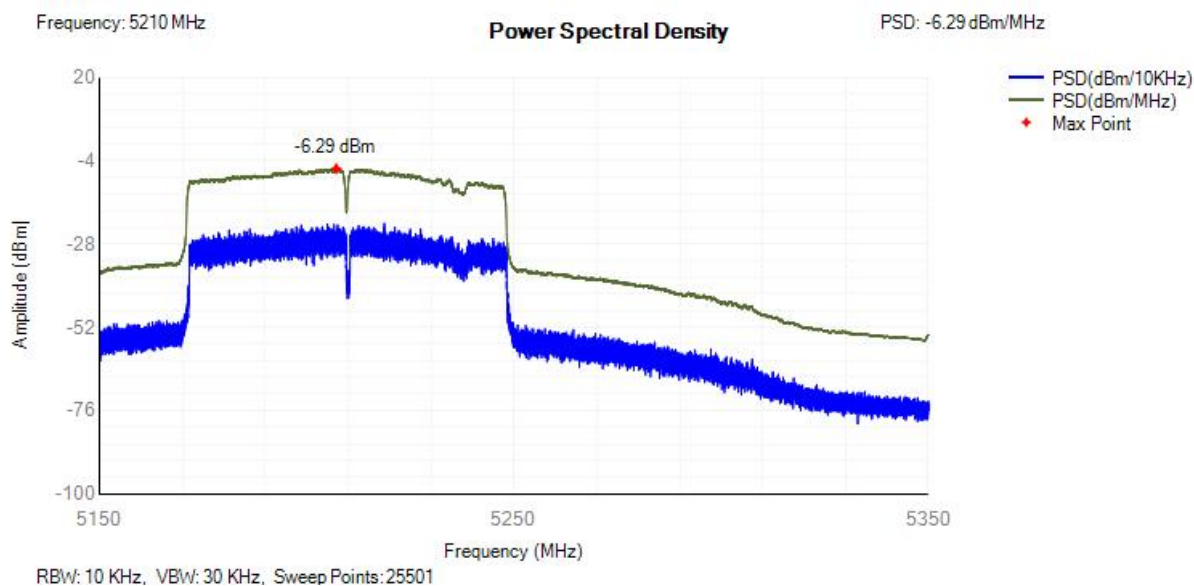

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT n20 5180MHz

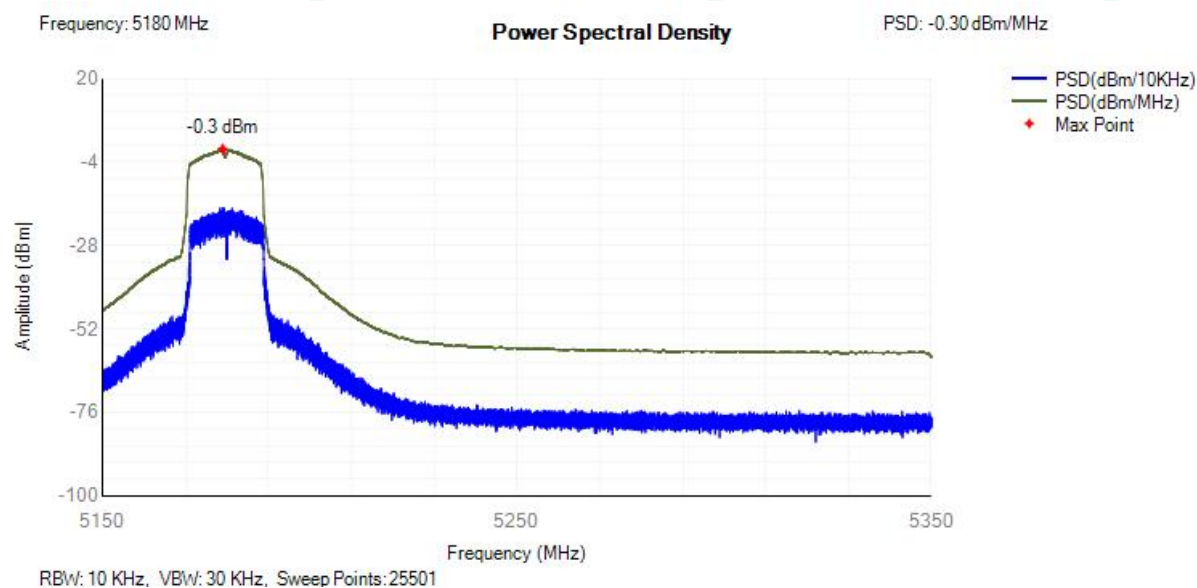

PSD NVNT n40 5190MHz

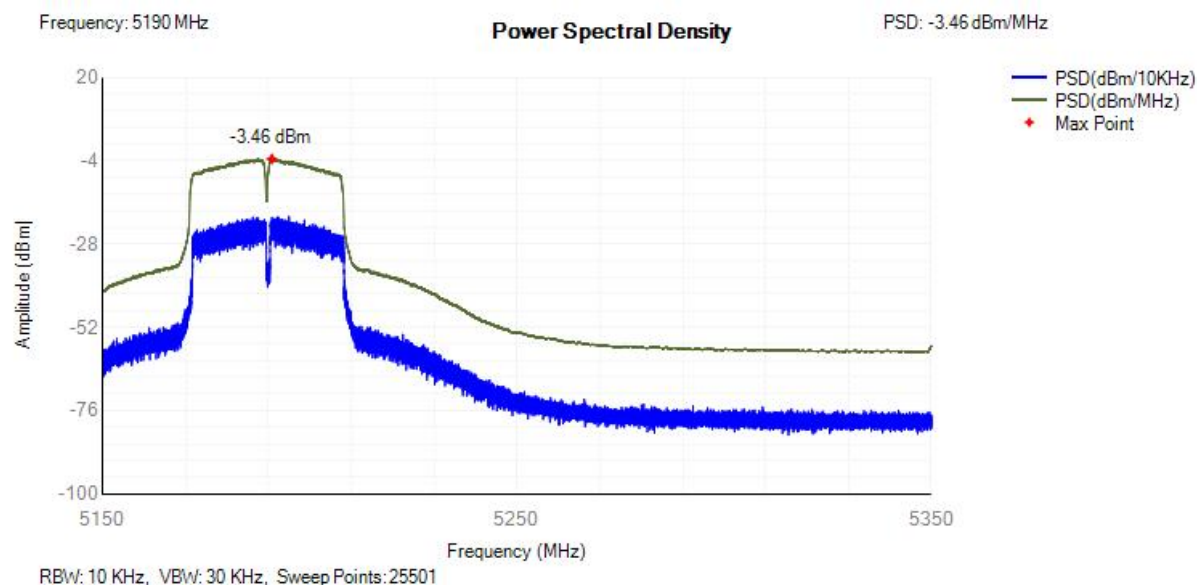

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



H.5 Transmitter unwanted emissions in the spurious domain

The Worst Test Result For 802.11a					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 36 (5180MHz)					
58.72	H	-84.77	-54.00	-30.77	PK
62.73	V	-74.49	-54.00	-20.49	PK
809.40	H	-77.52	-54.00	-23.52	PK
922.50	V	-75.94	-36.00	-39.94	PK
3497.33	H	-50.59	-30.00	-20.59	PK
3482.20	V	-61.93	-30.00	-31.93	PK
10360.09	H	-55.66	-30.00	-25.66	PK
10360.09	V	-51.40	-30.00	-21.40	PK

The Worst Test Result For 802.11n(20MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 36 (5180MHz)					
58.35	H	-81.13	-54.00	-27.13	PK
66.94	V	-74.09	-54.00	-20.09	PK
811.30	H	-75.26	-54.00	-21.26	PK
924.37	V	-74.47	-36.00	-38.47	PK
3471.12	H	-48.95	-30.00	-18.95	PK
3489.04	V	-61.47	-30.00	-31.47	PK
10360.09	H	-52.46	-30.00	-22.46	PK
10360.01	V	-50.44	-30.00	-20.44	PK



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



The Worst Test Result For 802.11ac(20MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 36 (5180MHz)					
59.21	H	-81.56	-54.00	-27.56	PK
66.66	V	-73.74	-54.00	-19.74	PK
810.55	H	-75.74	-54.00	-21.74	PK
924.67	V	-74.24	-36.00	-38.24	PK
3474.12	H	-49.56	-30.00	-19.56	PK
3482.97	V	-61.08	-30.00	-31.08	PK
10360.01	H	-53.06	-30.00	-23.06	PK
10360.07	V	-50.66	-30.00	-20.66	PK

The Worst Test Result For 802.11n(40MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 38 (5190MHz)					
58.08	H	-83.27	-54.00	-29.27	PK
66.49	V	-73.51	-54.00	-19.51	PK
810.97	H	-76.09	-54.00	-22.09	PK
923.64	V	-74.04	-36.00	-38.04	PK
3453.57	H	-48.78	-30.00	-18.78	PK
3486.68	V	-59.54	-30.00	-29.54	PK
10380.01	H	-53.17	-30.00	-23.17	PK
10380.03	V	-51.06	-30.00	-21.06	PK





The Worst Test Result For 802.11ac(40MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 38 (5190MHz)					
60.08	H	-82.89	-54.00	-28.89	PK
64.61	V	-73.38	-54.00	-19.38	PK
811.90	H	-76.24	-54.00	-22.24	PK
923.74	V	-74.08	-36.00	-38.08	PK
3459.09	H	-49.44	-30.00	-19.44	PK
3483.37	V	-60.00	-30.00	-30.00	PK
10380.00	H	-53.95	-30.00	-23.95	PK
10380.02	V	-50.85	-30.00	-20.85	PK

The Worst Test Result For 802.11ac(80MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 42(5210MHz)					
59.88	H	-82.61	-54.00	-28.61	PK
66.74	V	-73.33	-54.00	-19.33	PK
809.64	H	-75.96	-54.00	-21.96	PK
922.41	V	-74.43	-36.00	-38.43	PK
3522.41	H	-49.88	-30.00	-19.88	PK
3517.10	V	-60.39	-30.00	-30.39	PK
10420.01	H	-53.89	-30.00	-23.89	PK
10420.06	V	-50.76	-30.00	-20.76	PK

Note: All test modes were tested, but we only recorded the worst (Low Channel) case in this report.






H.6 Transmitter unwanted emissions within the 5 GHz RLAN bands


Condition	Mode	Frequency (MHz)	Sub Band	Worst EIB Frequency (MHz)	Level (dB)	Limit (dB)	Verdict
NVNT	a	5180	Band1	5151.28	-44.44	-38.46	Pass
NVNT	a	5180	Band2	5473.46	-72.29	-47	Pass
NVNT	ac20	5180	Band1	5151.08	-43.46	-38.7	Pass
NVNT	ac20	5180	Band2	5472.19	-72.3	-47	Pass
NVNT	ac40	5190	Band1	5223.88	-32.9	-25.28	Pass
NVNT	ac40	5190	Band2	5625.65	-71.64	-47	Pass
NVNT	ac80	5210	Band1	5159.67	-25.89	-21.4	Pass
NVNT	ac80	5210	Band2	5474.59	-63.21	-40	Pass
NVNT	n20	5180	Band1	5154	-40.99	-35.2	Pass
NVNT	n20	5180	Band2	5472.14	-72.11	-47	Pass
NVNT	n40	5190	Band1	5158.24	-34.06	-24.33	Pass
NVNT	n40	5190	Band2	5624.02	-71.52	-47	Pass

Tx. Emissions EIB NVNT a 5180MHz Sub Band1

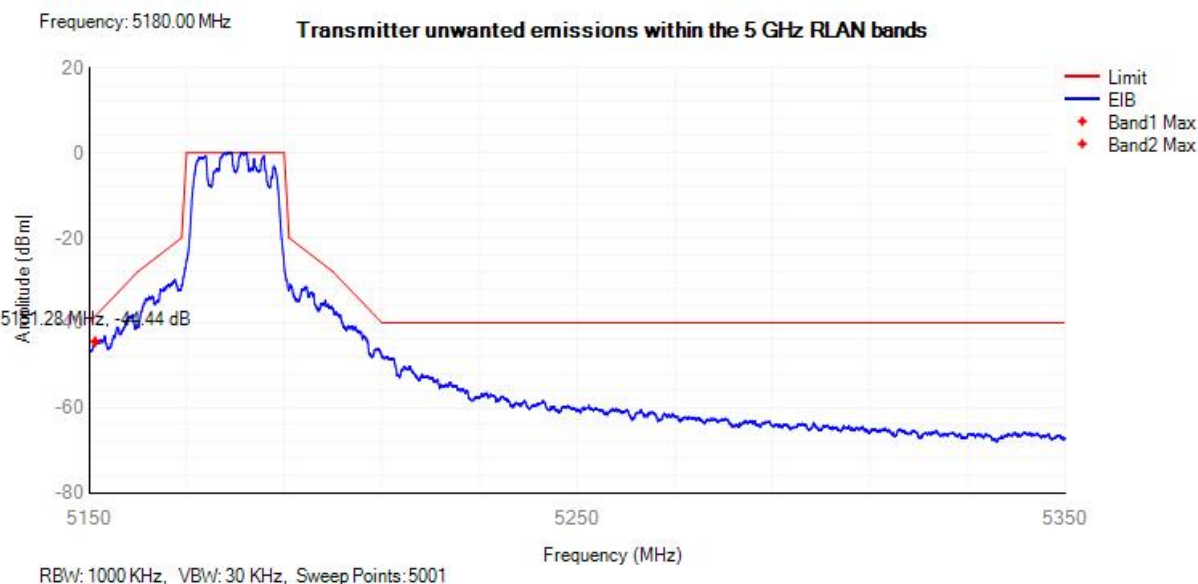




Tx. Emissions EIB NVNT a 5180MHz Sub Band2

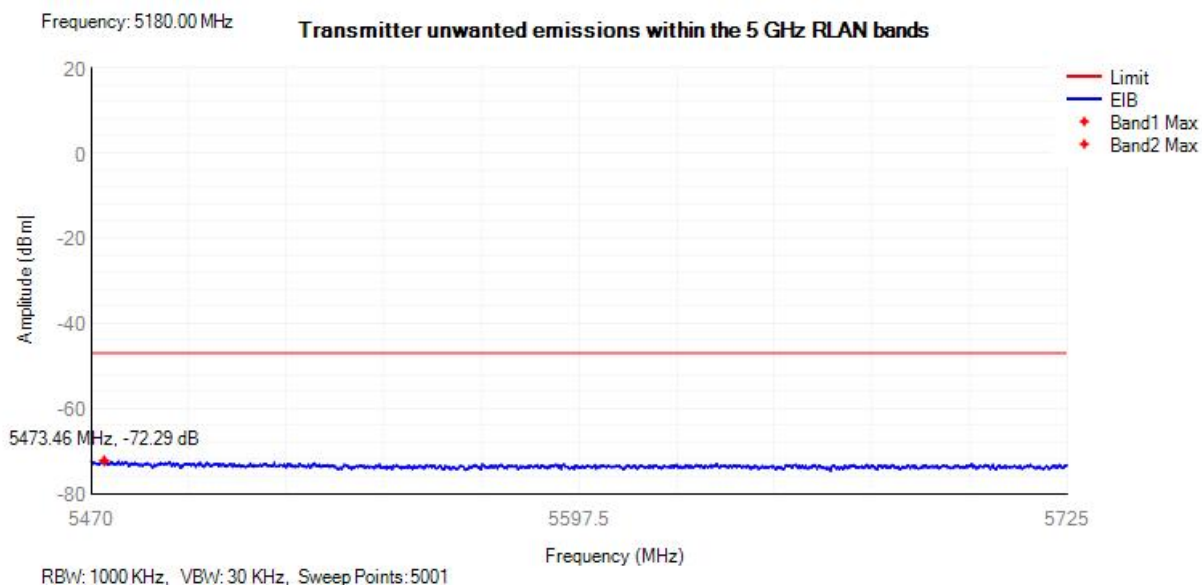

Tx. Emissions EIB NVNT ac20 5180MHz Sub Band1

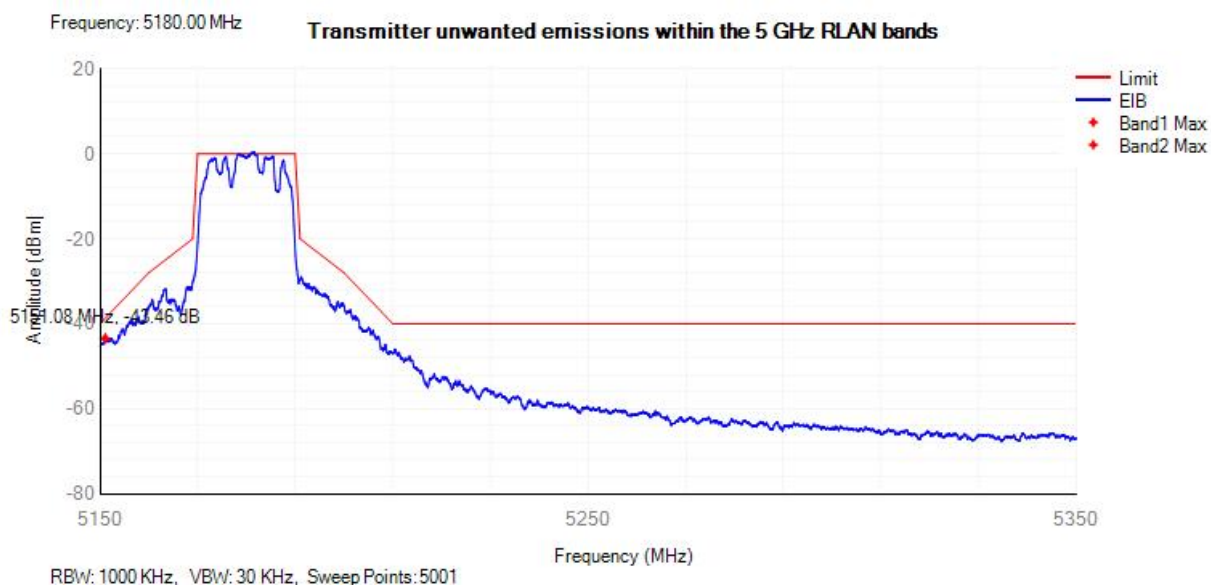

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Emissions EIB NVNT ac20 5180MHz Sub Band2

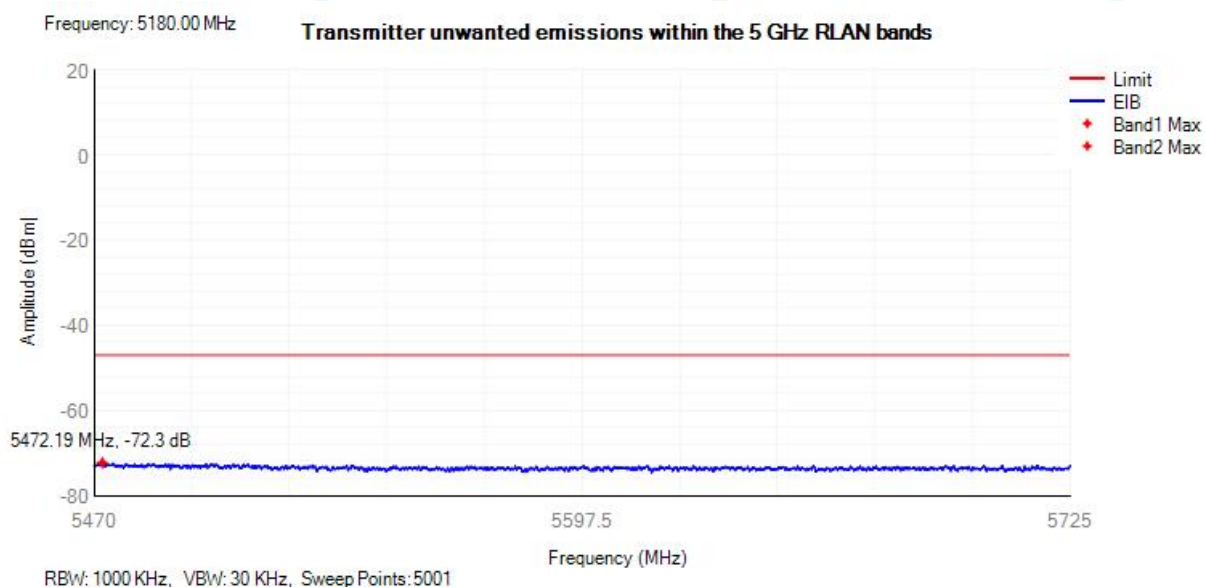


Tx. Emissions EIB NVNT ac40 5190MHz Sub Band1

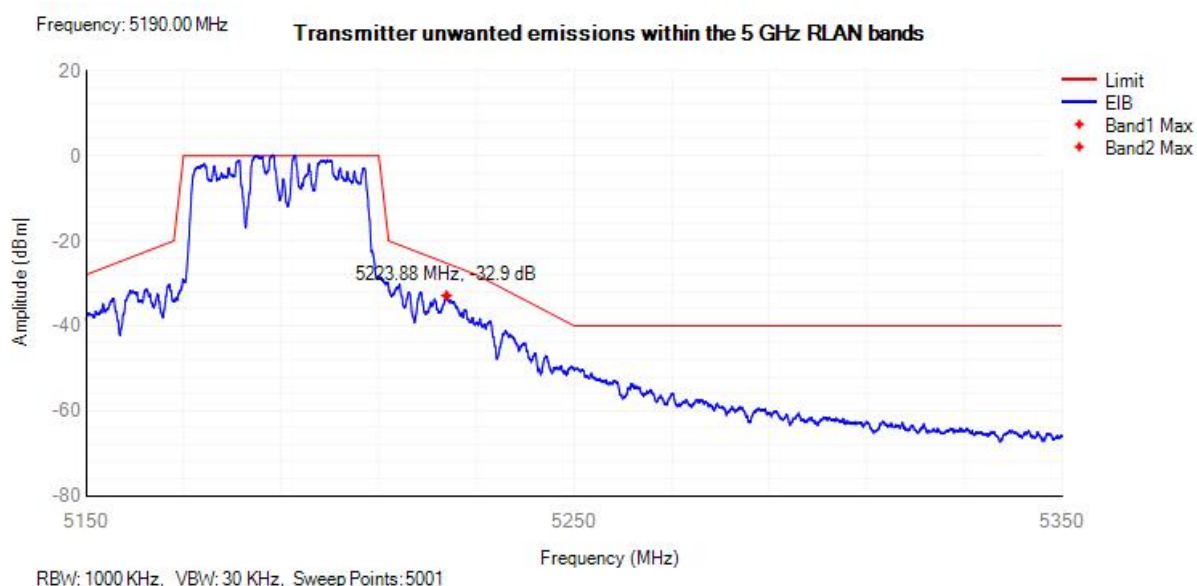




Tx. Emissions EIB NVNT ac40 5190MHz Sub Band2

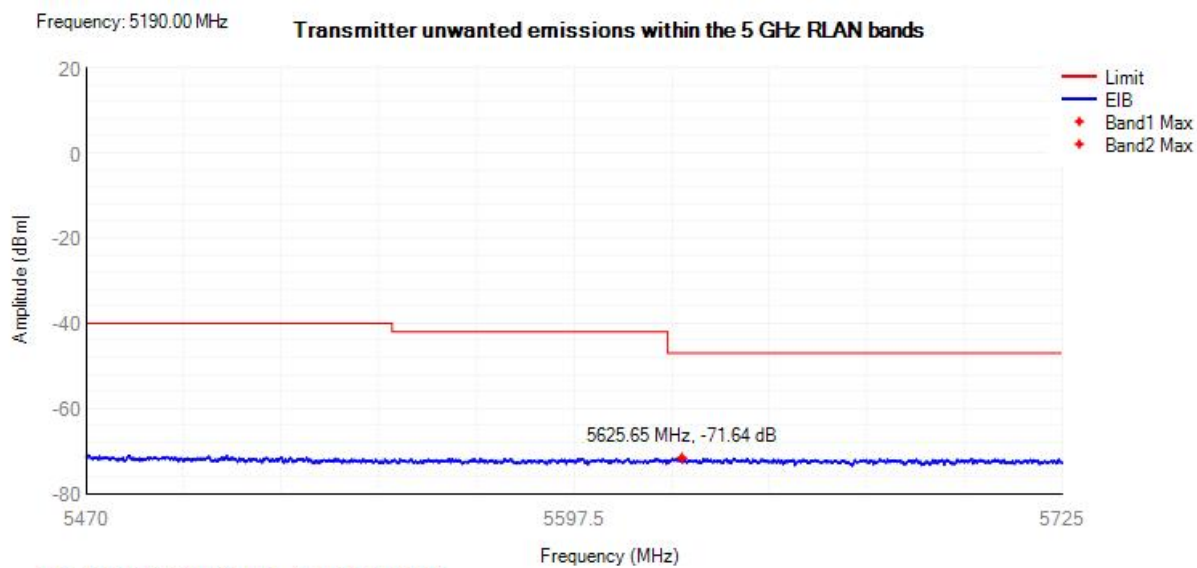

Tx. Emissions EIB NVNT ac80 5210MHz Sub Band1

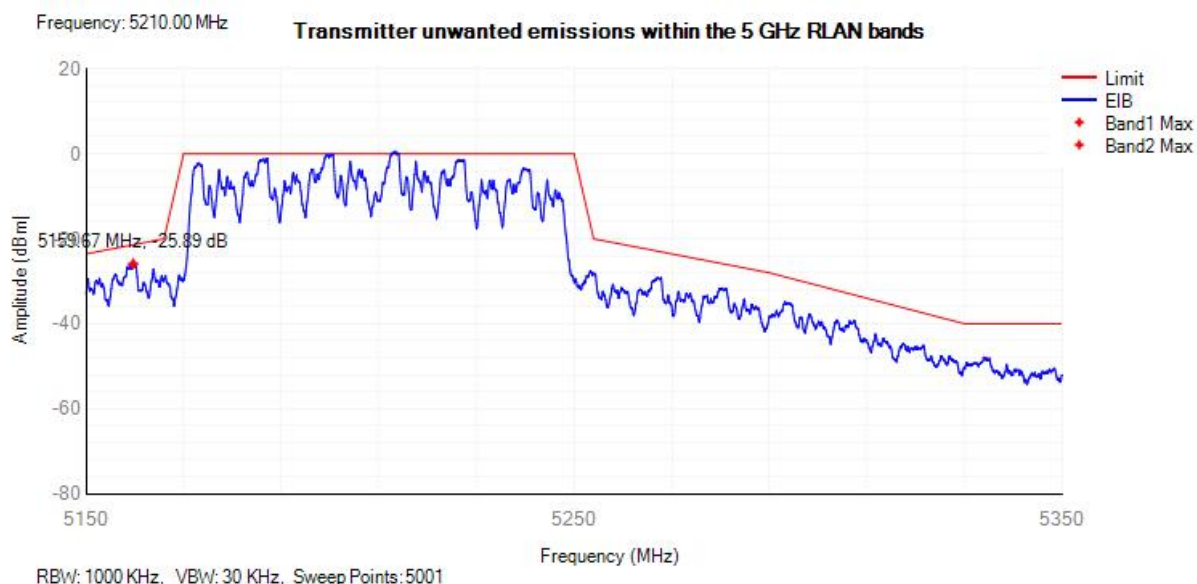

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Emissions EIB NVNT ac80 5210MHz Sub Band2

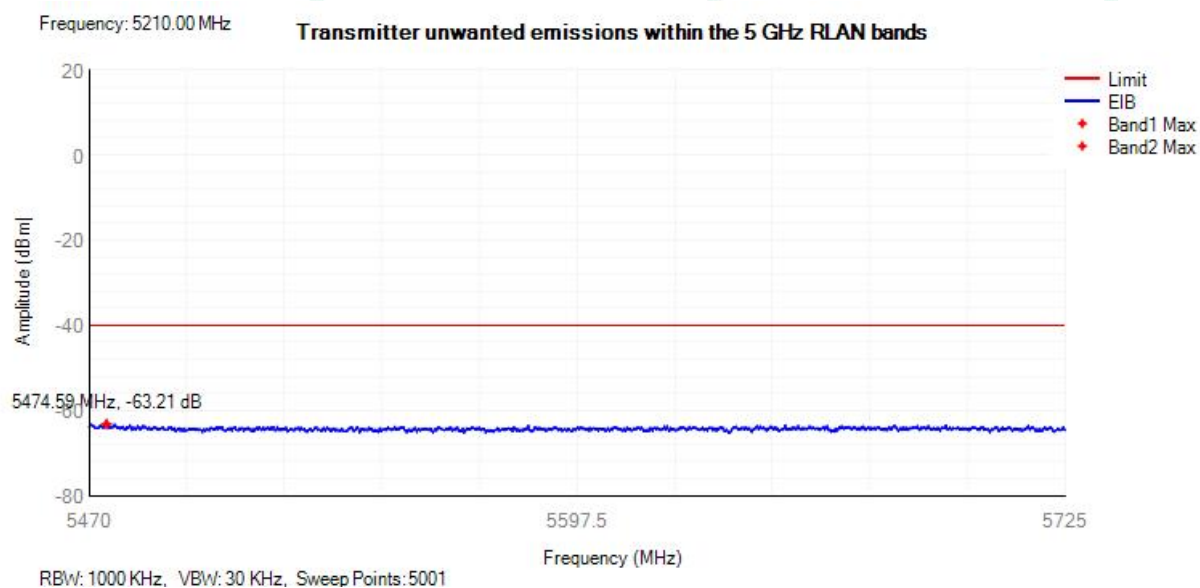

Tx. Emissions EIB NVNT n20 5180MHz Sub Band1

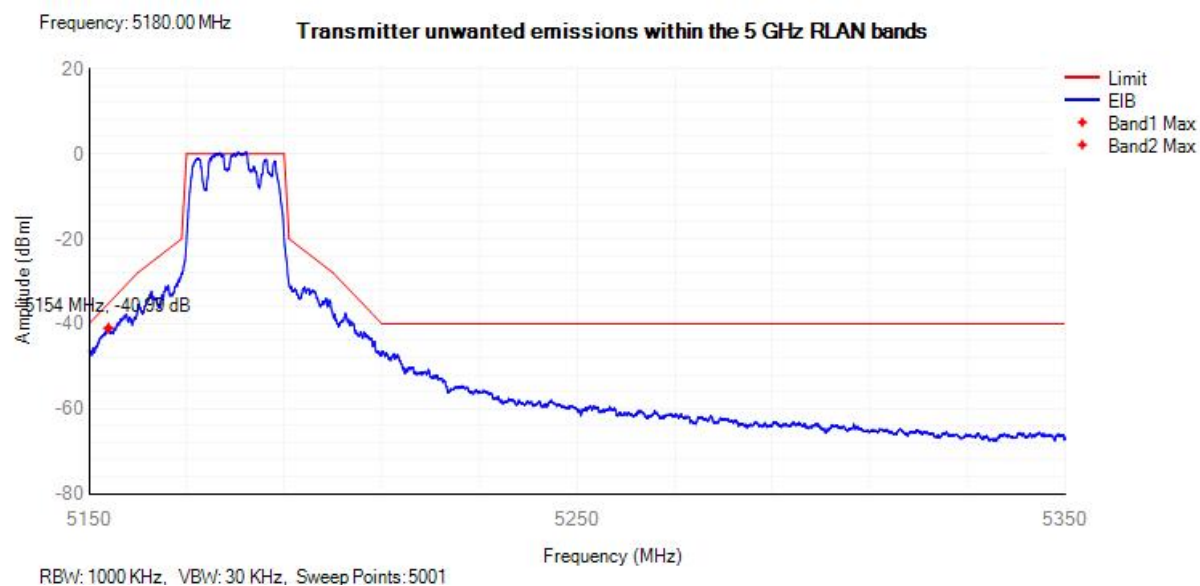

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Tx. Emissions EIB NVNT n20 5180MHz Sub Band2

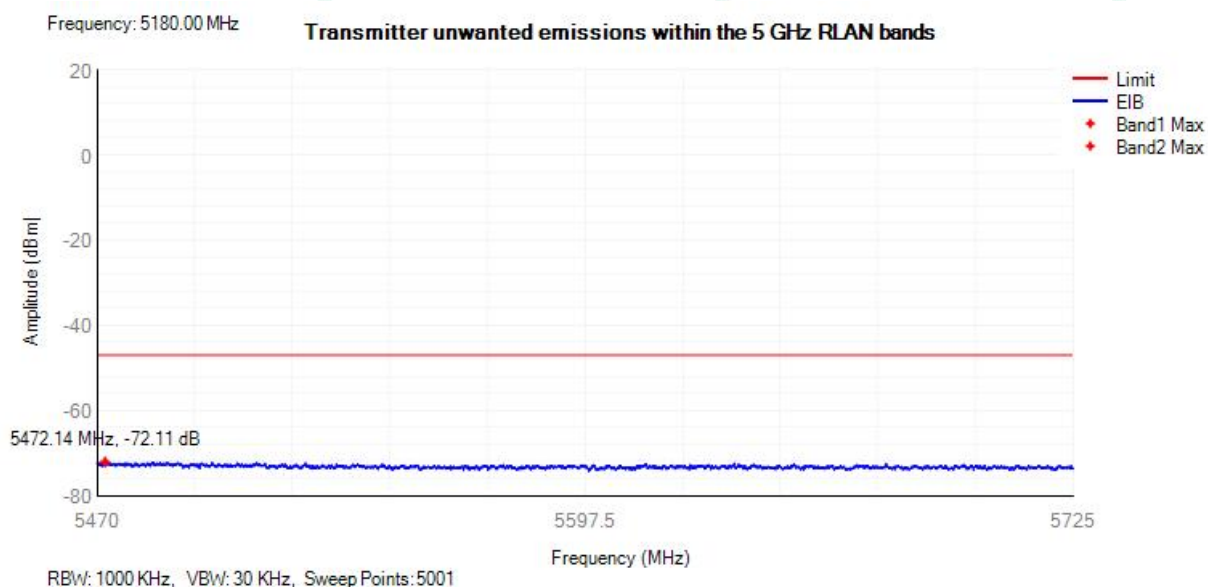

Tx. Emissions EIB NVNT n40 5190MHz Sub Band1

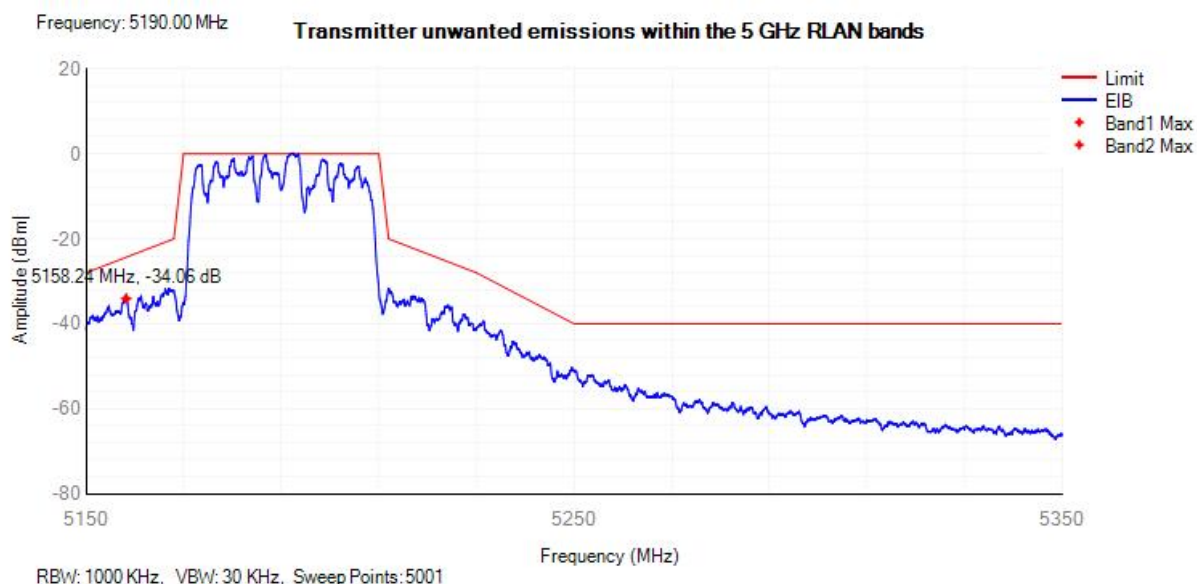

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



Tx. Emissions EIB NVNT n40 5190MHz Sub Band2

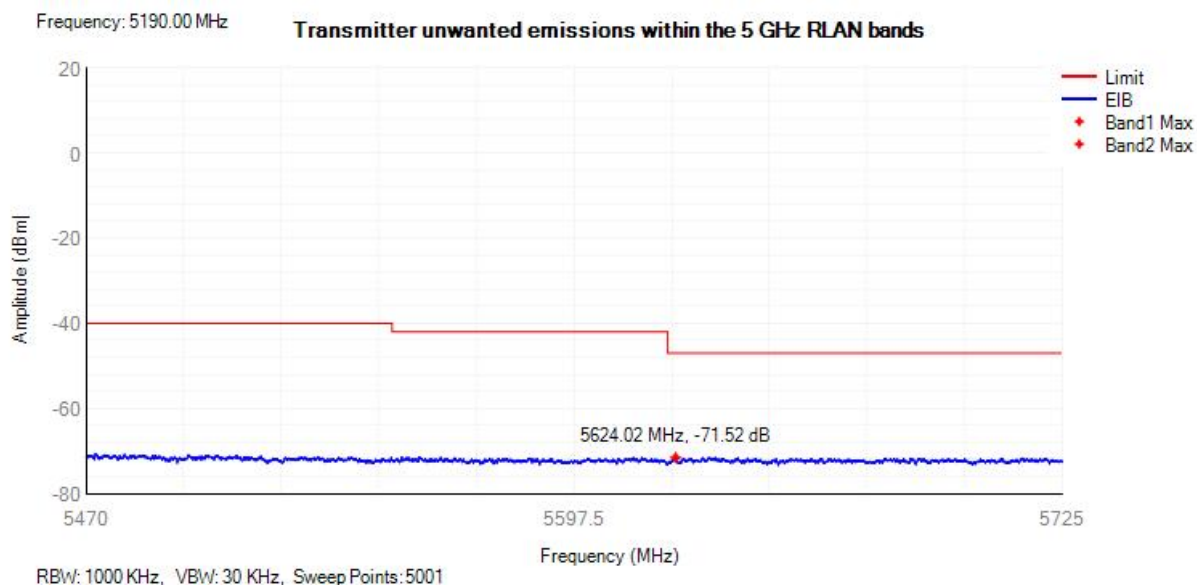

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



H.7 Receiver Spurious Emissions

The Worst Test Result For 802.11a					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 36 (5180MHz)					
60.45	H	-81.83	-57.00	-24.83	PK
72.33	V	-73.31	-57.00	-16.31	PK
810.43	H	-72.43	-57.00	-15.43	PK
924.73	V	-72.77	-57.00	-15.77	PK
3489.10	H	-61.36	-47.00	-14.36	PK
3457.00	V	-62.46	-47.00	-15.46	PK
10360.08	H	-57.37	-47.00	-10.37	PK
10360.10	V	-57.39	-47.00	-10.39	PK

The Worst Test Result For 802.11n(20MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 36 (5180MHz)					
57.03	H	-82.31	-57.00	-25.31	PK
67.72	V	-74.05	-57.00	-17.05	PK
808.98	H	-74.78	-57.00	-17.78	PK
923.16	V	-73.91	-57.00	-16.91	PK
3460.62	H	-63.37	-47.00	-16.37	PK
3484.73	V	-64.53	-47.00	-17.53	PK
10360.06	H	-58.38	-47.00	-11.38	PK
10360.08	V	-59.58	-47.00	-12.58	PK



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street,
Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



The Worst Test Result For 802.11ac(20MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 36 (5180MHz)					
56.89	H	-82.09	-57.00	-25.09	PK
65.98	V	-74.03	-57.00	-17.03	PK
812.25	H	-74.86	-57.00	-17.86	PK
922.61	V	-74.43	-57.00	-17.43	PK
3481.68	H	-63.38	-47.00	-16.38	PK
3486.26	V	-63.90	-47.00	-16.90	PK
10360.05	H	-58.25	-47.00	-11.25	PK
10360.05	V	-59.28	-47.00	-12.28	PK

The Worst Test Result For 802.11n(40MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 38 (5190MHz)					
57.53	H	-82.70	-57.00	-25.70	PK
66.65	V	-74.90	-57.00	-17.90	PK
810.17	H	-74.74	-57.00	-17.74	PK
923.65	V	-73.47	-57.00	-16.47	PK
3456.15	H	-63.87	-47.00	-16.87	PK
3460.98	V	-63.12	-47.00	-16.12	PK
10380.05	H	-58.92	-47.00	-11.92	PK
10380.02	V	-59.85	-47.00	-12.85	PK





The Worst Test Result For 802.11ac(40MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 38 (5190MHz)					
58.67	H	-82.51	-57.00	-25.51	PK
66.35	V	-74.76	-57.00	-17.76	PK
812.74	H	-74.63	-57.00	-17.63	PK
924.16	V	-73.45	-57.00	-16.45	PK
3479.41	H	-63.65	-47.00	-16.65	PK
3470.36	V	-63.58	-47.00	-16.58	PK
10380.05	H	-59.04	-47.00	-12.04	PK
10380.07	V	-60.18	-47.00	-13.18	PK

The Worst Test Result For 802.11ac(80MHz)					
Frequency (MHz)	Polarization (H/V)	Measure Level (dBm)	Limit (dBm)	Margin (dB)	Detector
Channel 42 (5210MHz)					
57.58	H	-82.48	-57.00	-25.48	PK
67.23	V	-74.66	-57.00	-17.66	PK
809.42	H	-74.28	-57.00	-17.28	PK
927.59	V	-74.63	-57.00	-17.63	PK
3501.79	H	-63.53	-47.00	-16.53	PK
3512.93	V	-64.24	-47.00	-17.24	PK
10420.10	H	-58.71	-47.00	-11.71	PK
10420.05	V	-60.90	-47.00	-13.90	PK

Note: All test modes were tested, but we only recorded the worst case (Low Channel) in this report.






H.8 Adaptivity (Channel Access Mechanism)

Condition	Mode	Frequency (MHz)	Interfer Type	Short Control (ms)	Limit (ms)	Short Control (n)	Limit (n)	Verdict
NVNT	ac20	5180	AWGN	0.34	≤ 2.5	9	≤ 50	Pass
NVNT	ac20	5180	LTE	0.39	≤ 2.5	6	≤ 50	Pass
NVNT	ac20	5180	OFDM	0.66	≤ 2.5	3	≤ 50	Pass
NVNT	ac40	5190	AWGN	0.25	≤ 2.5	8	≤ 50	Pass
NVNT	ac40	5190	LTE	0.76	≤ 2.5	5	≤ 50	Pass
NVNT	ac40	5190	OFDM	0.58	≤ 2.5	14	≤ 50	Pass
NVNT	ac80	5210	AWGN	0.16	≤ 2.5	7	≤ 50	Pass
NVNT	ac80	5210	LTE	0.18	≤ 2.5	13	≤ 50	Pass
NVNT	ac80	5210	OFDM	0.36	≤ 2.5	12	≤ 50	Pass

Adaptivity NVNT ac20 5180MHz AWGN

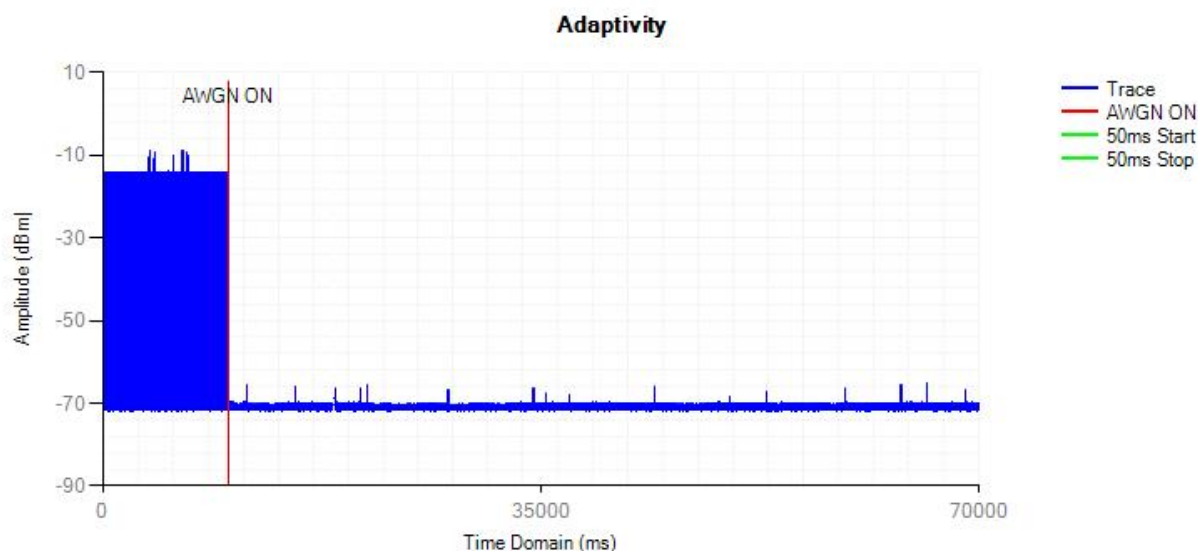

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Adaptivity NVNT ac20 5180MHz LTE

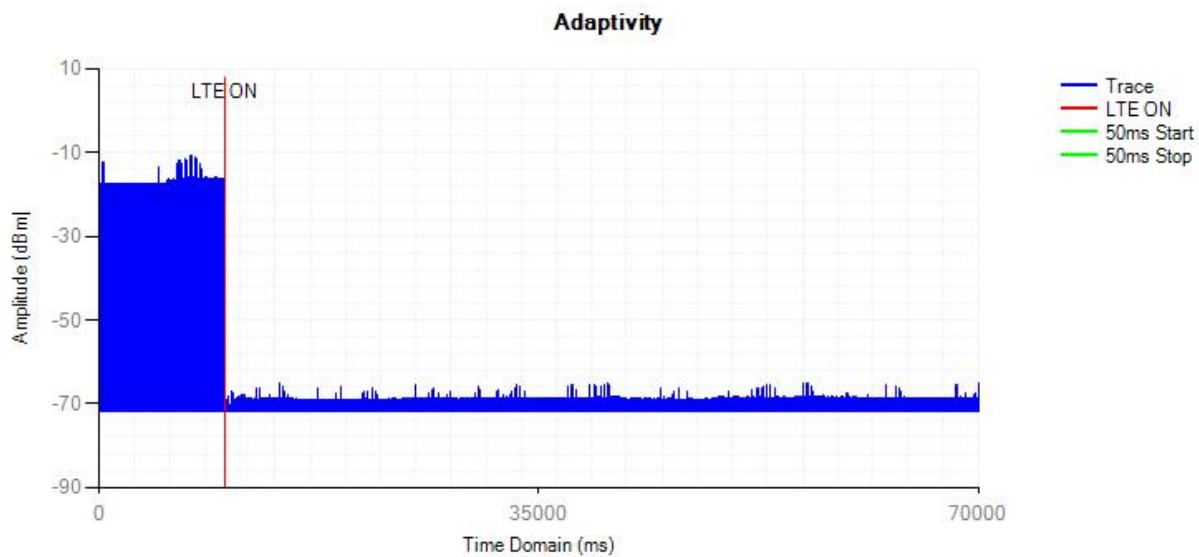

Adaptivity NVNT ac20 5180MHz OFDM

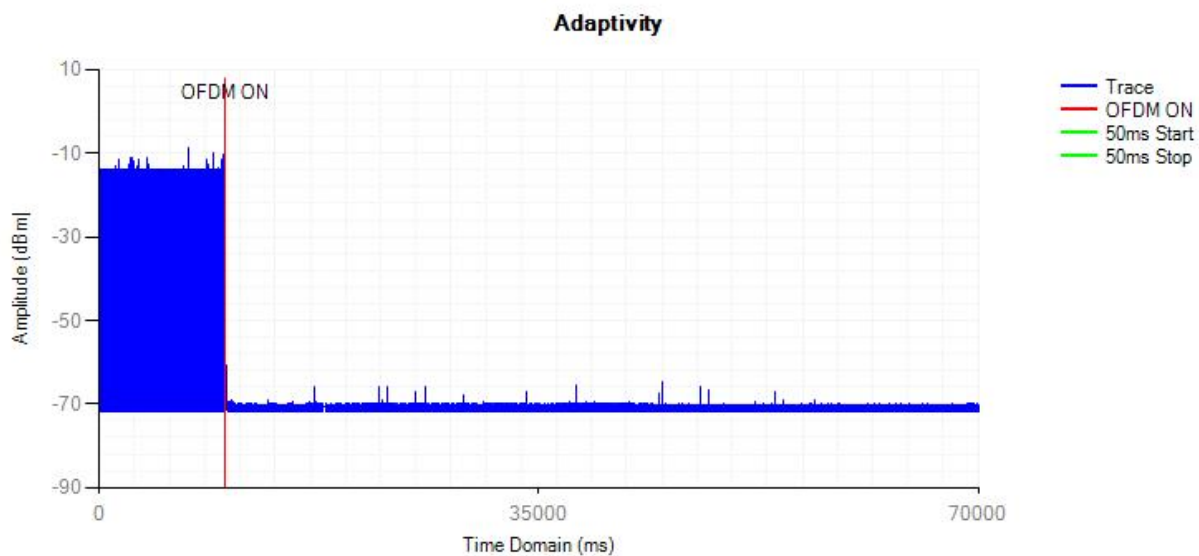

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: Room 101, 201, Building A and Room 301, Building C, Juji Industrial Park, Yabianxueziwei, Shajing Street, Bao'an District, Shenzhen, Guangdong, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



Adaptivity NVNT ac40 5190MHz AWGN

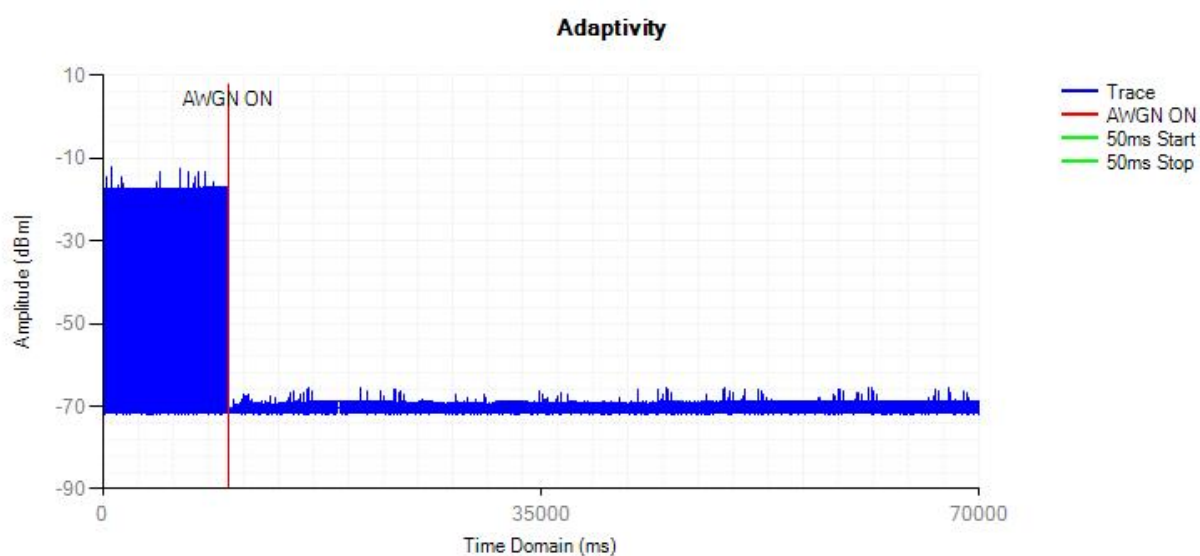


Adaptivity NVNT ac40 5190MHz LTE

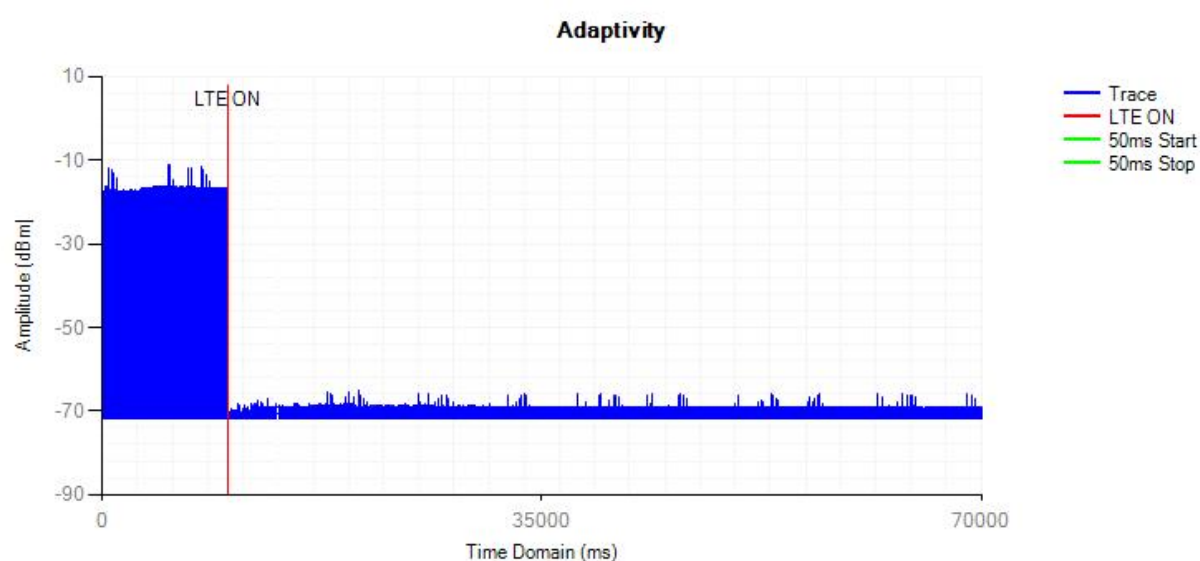




Adaptivity NVNT ac40 5190MHz OFDM

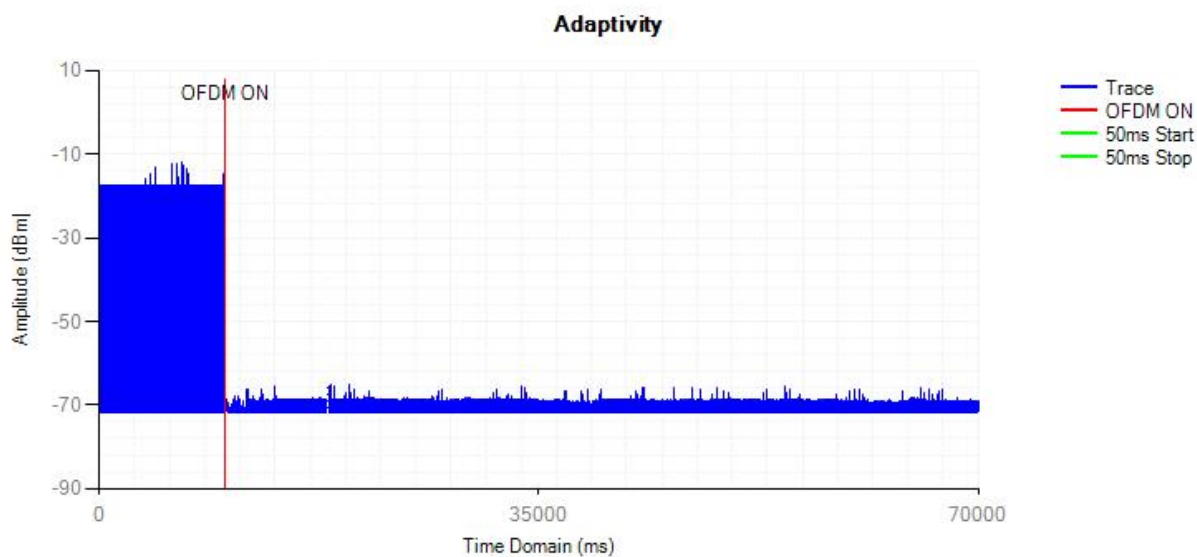


Adaptivity NVNT ac80 5210MHz AWGN

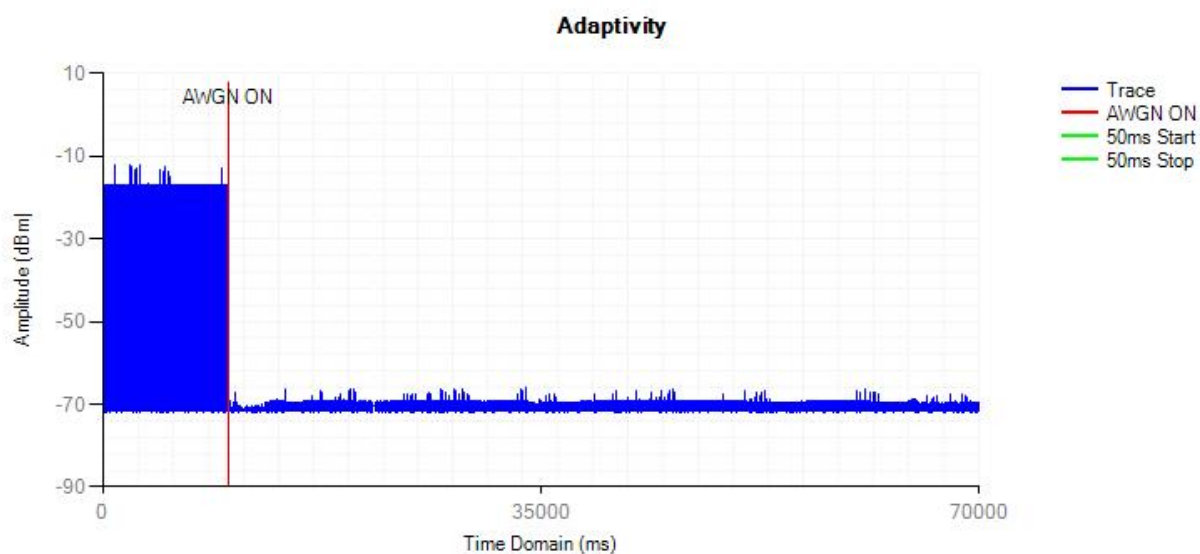




Adaptivity NVNT ac80 5210MHz LTE

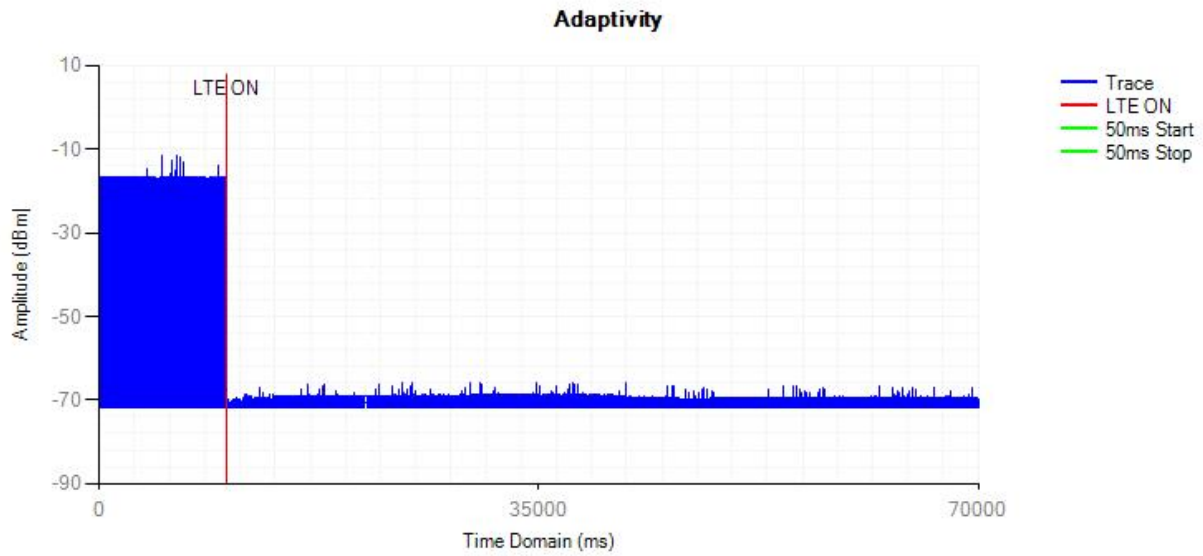

Adaptivity NVNT ac80 5210MHz OFDM

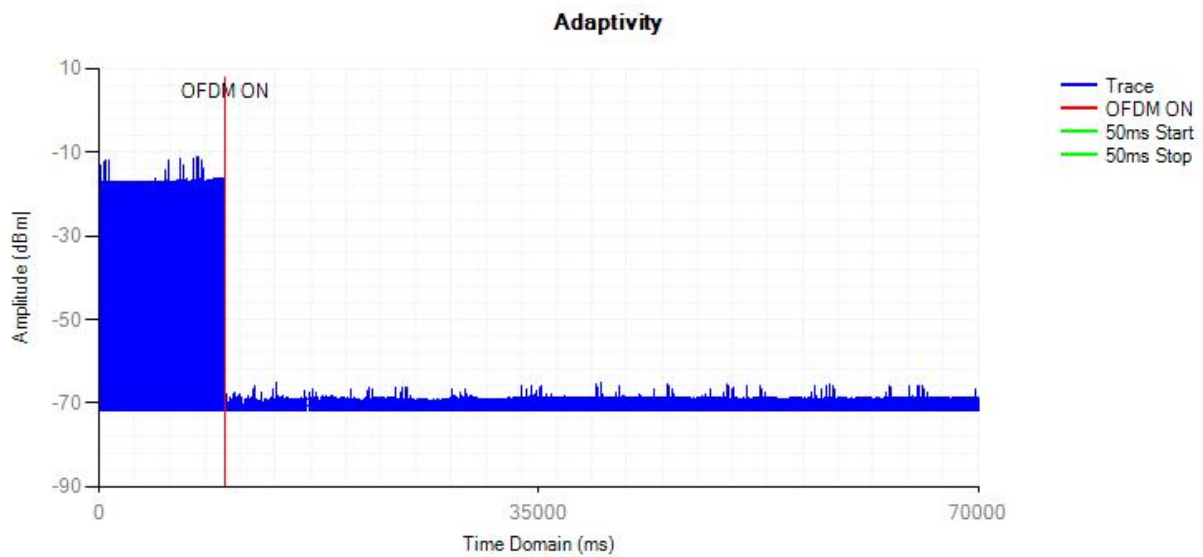



H.9 Receiver Blocking

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm)		Type of blocking signal	PER(%)		Test Result
		Test Value	Limit		Test Value	Limit	
Pmin + 6 dB	5100	-53	≥-59	CW	2.13	10	Pass
	4900	-45	≥-53	CW	3.26	10	Pass
	5000	-44	≥-53	CW	1.17	10	Pass
	5975	-47	≥-53	CW	1.18	10	Pass

