



Clause 4.2.26 Frequency error and Modulation accuracy in EGPRS Configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
EGPRS1800	698	1747.4	5;5;5;5	Frequency Error (Hz)	9.36	-174.74	174.74	PASS
EGPRS1800	698	1747.4	5;5;5;5	RMS EVM (%)	3.39	0	9	PASS
EGPRS1800	698	1747.4	5;5;5;5	Peak EVM (%)	8.61	0	30	PASS
EGPRS1800	698	1747.4	18;18;18;18	Frequency Error (Hz)	19.44	-174.74	174.74	PASS
EGPRS1800	698	1747.4	18;18;18;18	RMS EVM (%)	1.67	0	9	PASS
EGPRS1800	698	1747.4	18;18;18;18	Peak EVM (%)	5.02	0	30	PASS
EGPRS1900	661	1880	5;5;5;5	Frequency Error (Hz)	18.66	-188	188	PASS
EGPRS1900	661	1880	5;5;5;5	RMS EVM (%)	3.13	0	9	PASS
EGPRS1900	661	1880	5;5;5;5	Peak EVM (%)	8.38	0	30	PASS
EGPRS1900	661	1880	18;18;18;18	Frequency Error (Hz)	-4.07	-188	188	PASS
EGPRS1900	661	1880	18;18;18;18	RMS EVM (%)	2.48	0	9	PASS
EGPRS1900	661	1880	18;18;18;18	Peak EVM (%)	7.69	0	30	PASS
EGPRS850	190	836.6	6;6;6;6	Frequency Error (Hz)	5.29	-83.66	83.66	PASS
EGPRS850	190	836.6	6;6;6;6	RMS EVM (%)	1.71	0	9	PASS
EGPRS850	190	836.6	6;6;6;6	Peak EVM (%)	4.22	0	30	PASS
EGPRS850	190	836.6	17;17;17;17	Frequency Error (Hz)	9.62	-83.66	83.66	PASS
EGPRS850	190	836.6	17;17;17;17	RMS EVM (%)	1.18	0	9	PASS
EGPRS850	190	836.6	17;17;17;17	Peak EVM (%)	3.21	0	30	PASS
EGPRS900	38	897.6	6;6;6;6	Frequency Error (Hz)	-1.61	-89.76	89.76	PASS
EGPRS900	38	897.6	6;6;6;6	RMS EVM (%)	2.34	0	9	PASS
EGPRS900	38	897.6	6;6;6;6	Peak EVM (%)	6.55	0	30	PASS
EGPRS900	38	897.6	17;17;17;17	Frequency Error (Hz)	7.49	-89.76	89.76	PASS
EGPRS900	38	897.6	17;17;17;17	RMS EVM (%)	1.27	0	9	PASS
EGPRS900	38	897.6	17;17;17;17	Peak EVM (%)	3.55	0	30	PASS


EGPRS1800 Channel=698 Gamma=5;5;5;5

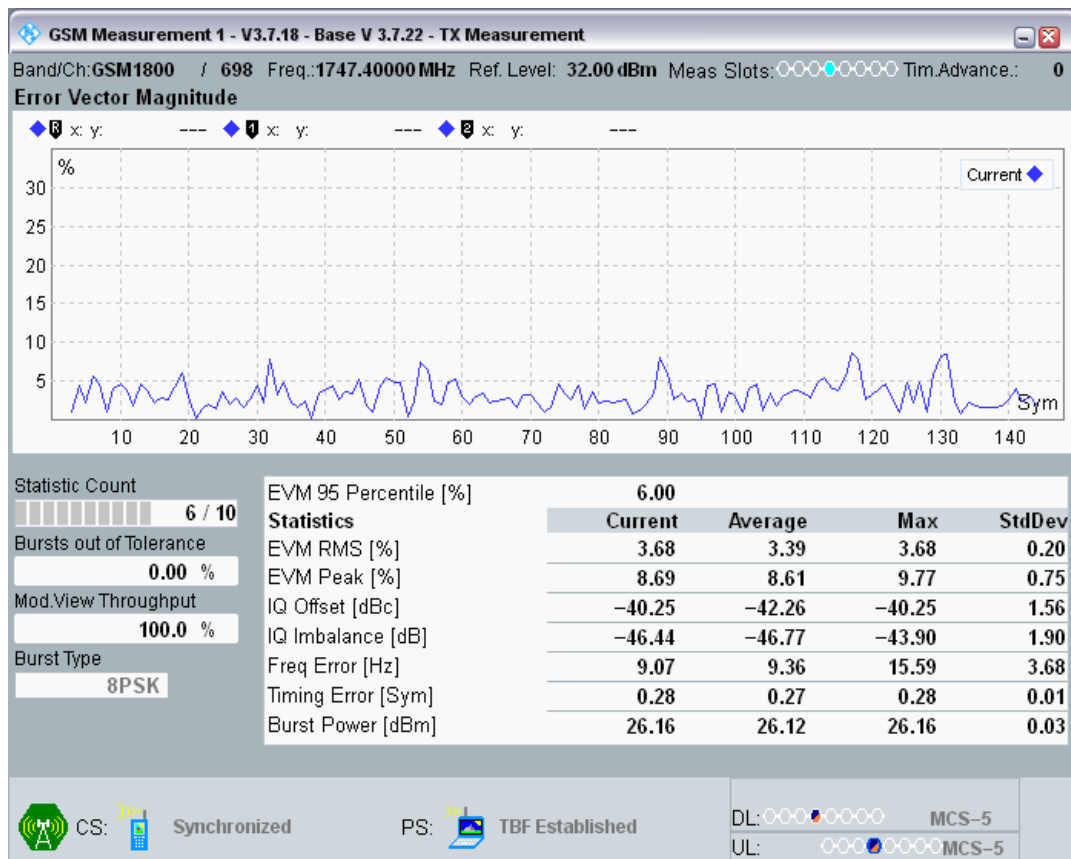


EGPRS1800 Channel=698 Gamma=18;18;18;18

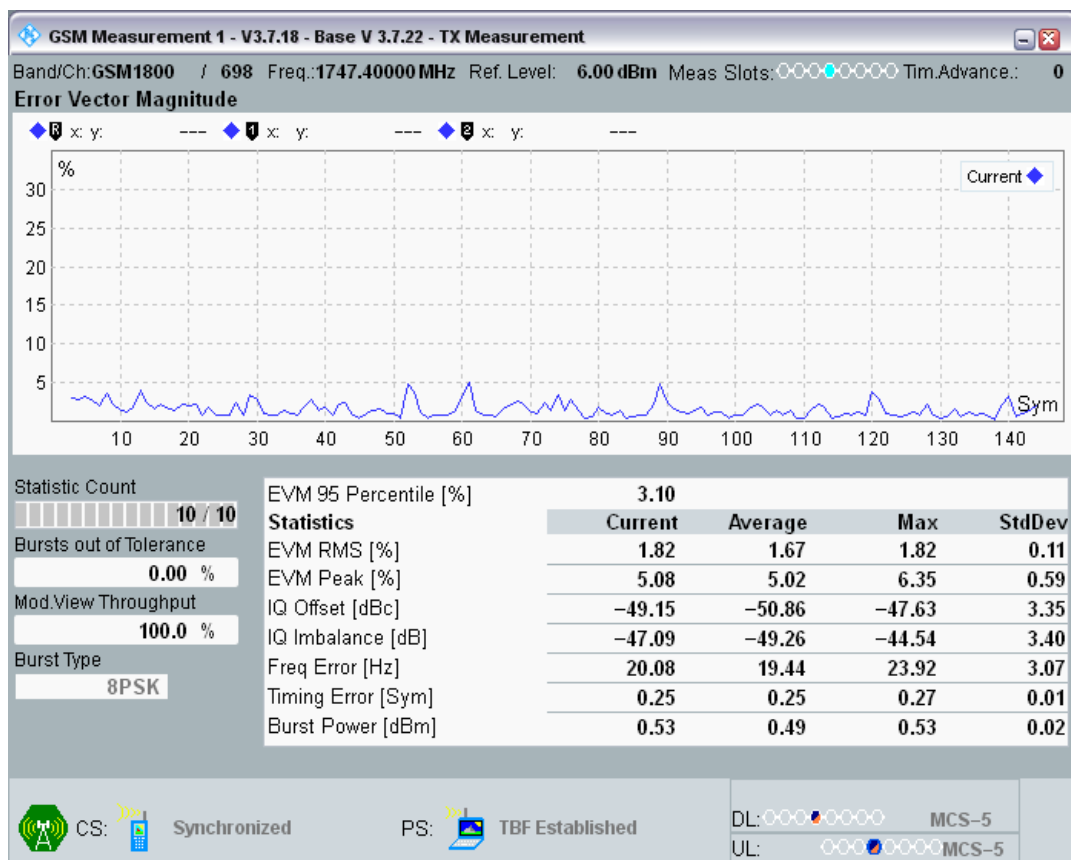


EGPRS1900 Channel=661 Gamma=5;5;5;5

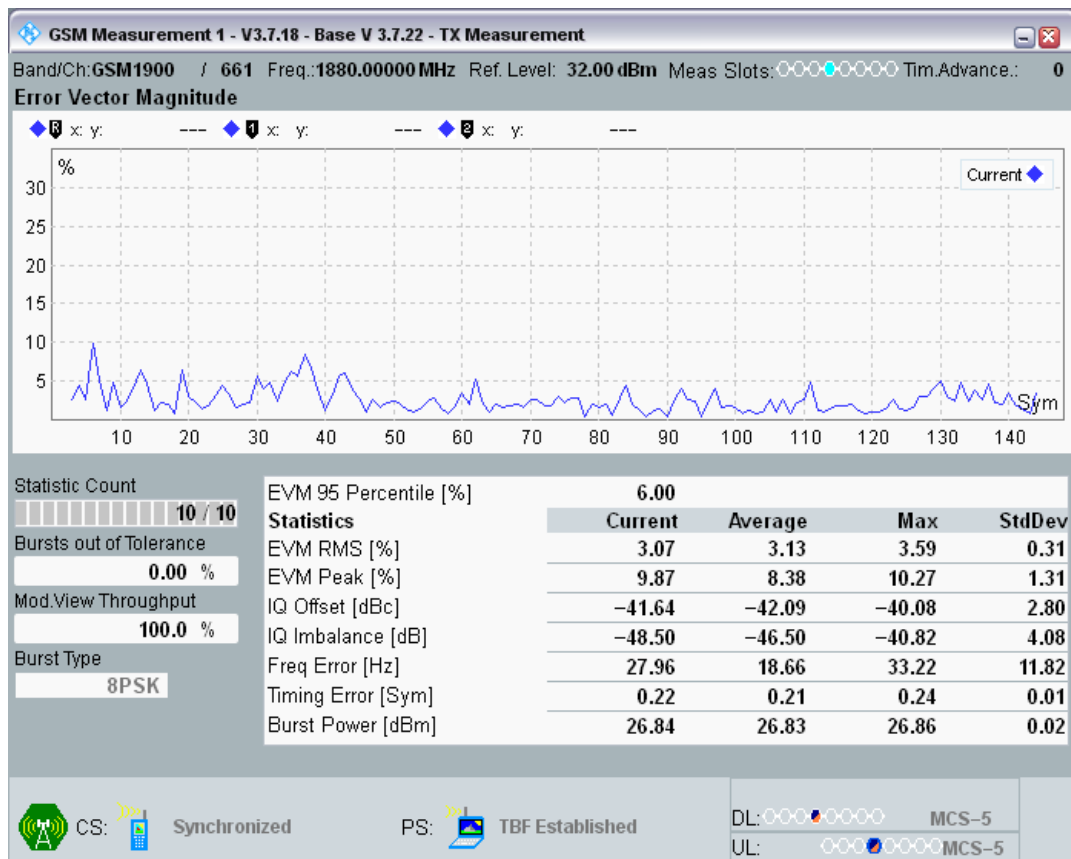


EGPRS1900 Channel=661 Gamma=18;18;18;18

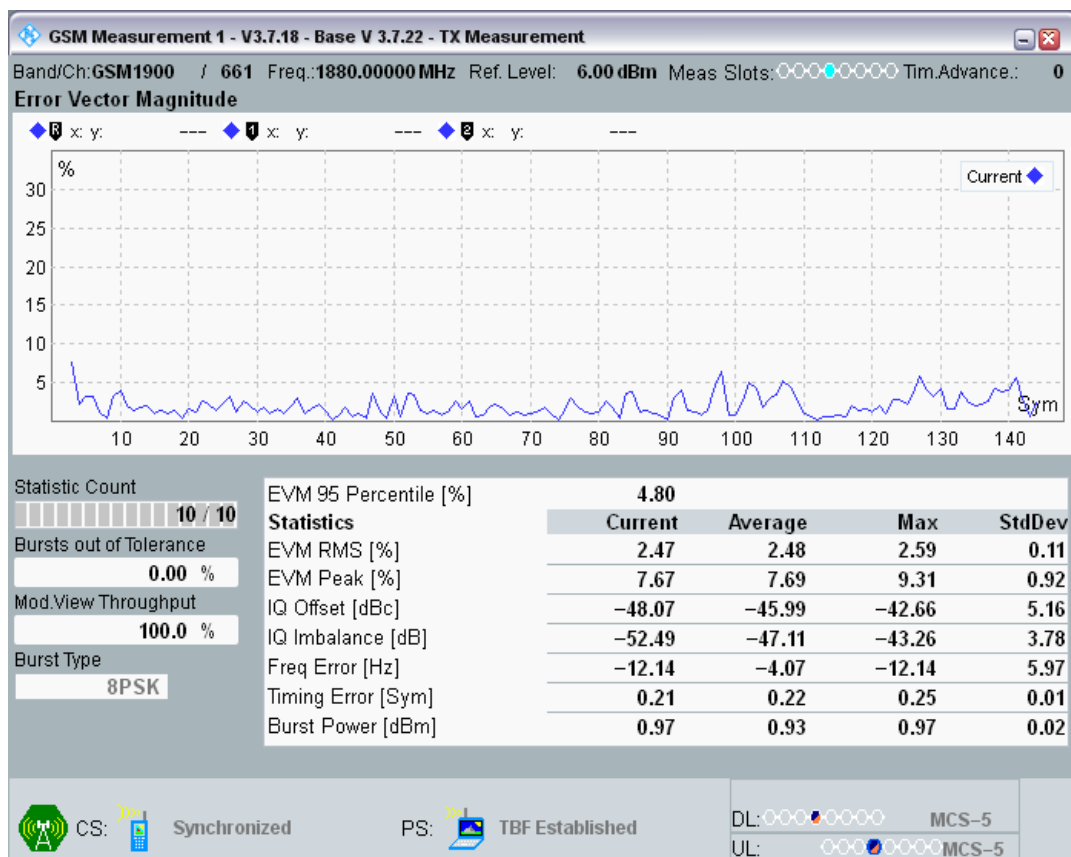


EGPRS850 Channel=190 Gamma=6;6;6;6

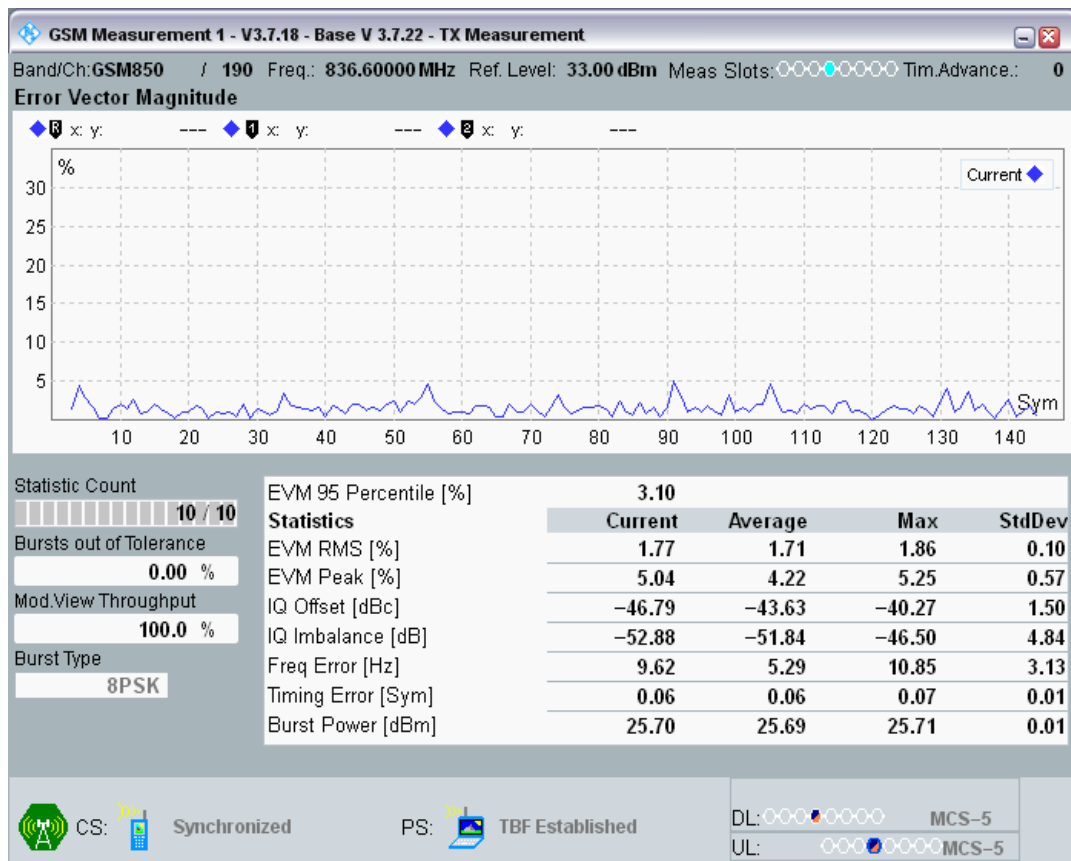


EGPRS850 Channel=190 Gamma=17;17;17;17

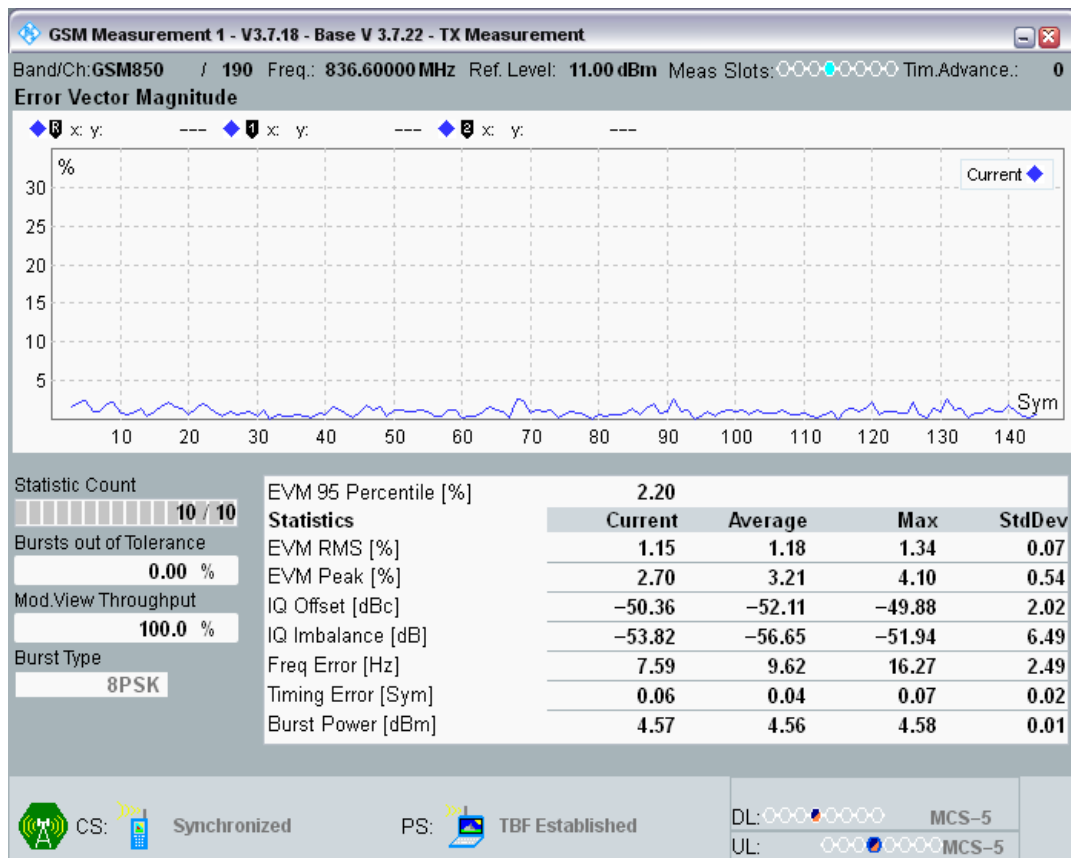

EGPRS900 Channel=38 Gamma=6;6;6;6

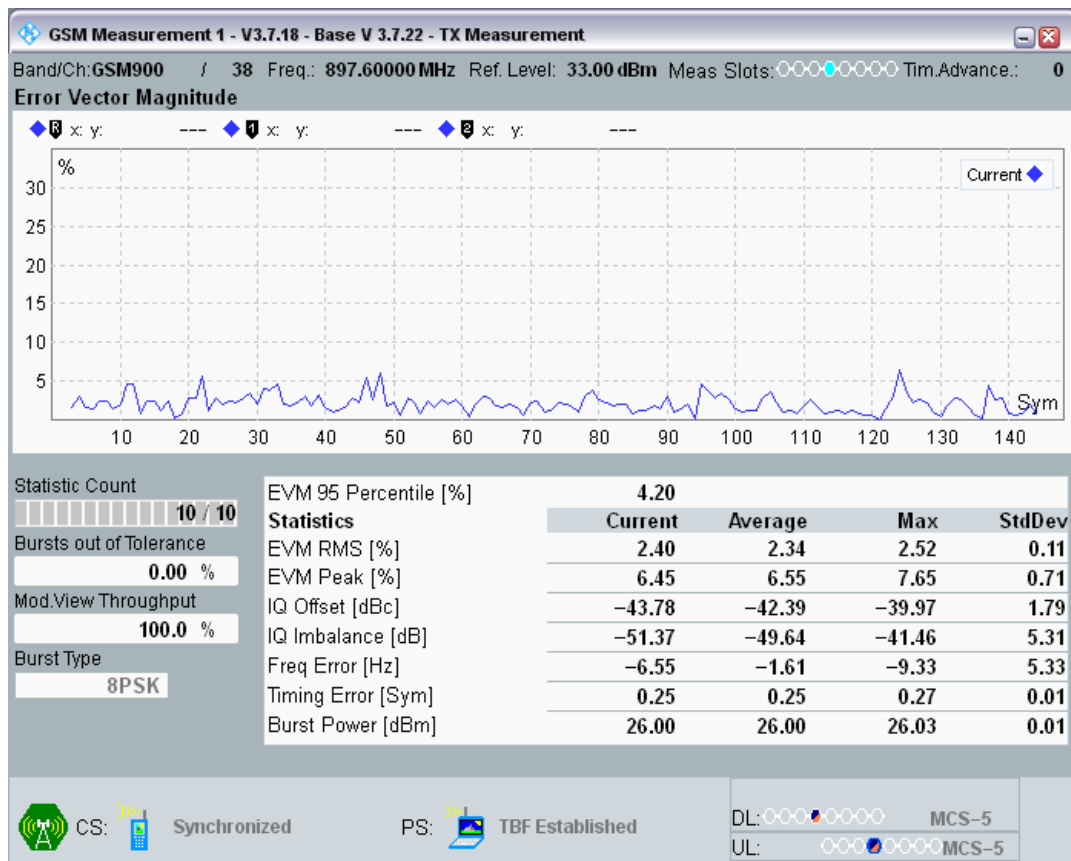

EGPRS900 Channel=38 Gamma=17;17;17;17

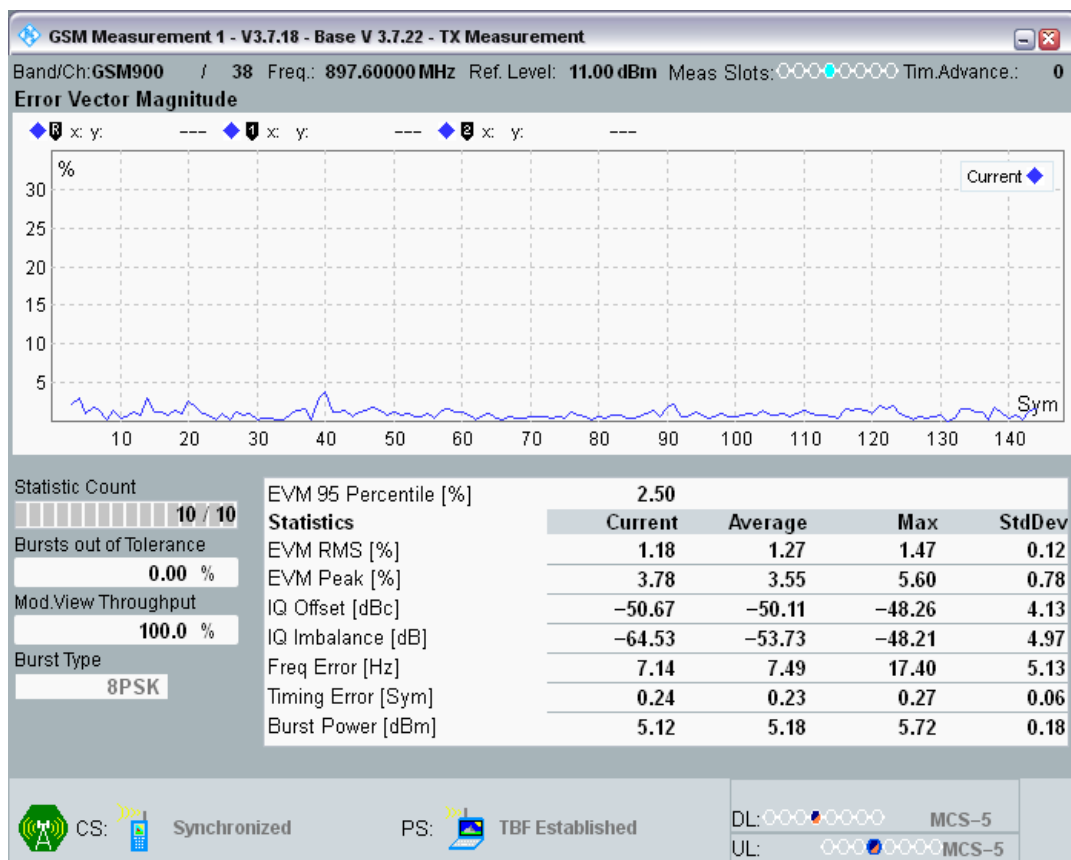

Clause 4.2.27 Frequency error under multipath inEGPRS Configuration


Band	Type	Channel	Frequency (MHz)	Gamma	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
EGPRS1800	RA250 @Connect	698	1747.4	5;5;5;5	9.52	-174.74	174.74	PASS
EGPRS1800	RA250 @Sens1	698	1747.4	5;5;5;5	1.00	-174.74	174.74	PASS
EGPRS1800	RA250 @Sens2	698	1747.4	5;5;5;5	10.53	-174.74	174.74	PASS
EGPRS1800	RA250 @Sens3	698	1747.4	5;5;5;5	5.07	-174.74	174.74	PASS
EGPRS1800	RA250 @Sens4	698	1747.4	5;5;5;5	5.04	-174.74	174.74	PASS
EGPRS1800	RA250 @Sens5	698	1747.4	5;5;5;5	10.46	-174.74	174.74	PASS
EGPRS1800	HT100 @Connect	698	1747.4	5;5;5;5	13.82	-524.74	524.74	PASS
EGPRS1800	HT100 @Sens1	698	1747.4	5;5;5;5	14.37	-524.74	524.74	PASS
EGPRS1800	HT100 @Sens2	698	1747.4	5;5;5;5	4.00	-524.74	524.74	PASS
EGPRS1800	HT100 @Sens3	698	1747.4	5;5;5;5	10.04	-524.74	524.74	PASS
EGPRS1800	HT100 @Sens4	698	1747.4	5;5;5;5	4.04	-524.74	524.74	PASS
EGPRS1800	HT100 @Sens5	698	1747.4	5;5;5;5	14.85	-524.74	524.74	PASS
EGPRS1800	TU50 @Connect	698	1747.4	5;5;5;5	-5.62	-434.74	434.74	PASS
EGPRS1800	TU50 @Sens1	698	1747.4	5;5;5;5	6.20	-434.74	434.74	PASS
EGPRS1800	TU50 @Sens2	698	1747.4	5;5;5;5	1.39	-434.74	434.74	PASS
EGPRS1800	TU50 @Sens3	698	1747.4	5;5;5;5	15.27	-434.74	434.74	PASS
EGPRS1800	TU50 @Sens4	698	1747.4	5;5;5;5	-1.39	-434.74	434.74	PASS
EGPRS1800	TU50 @Sens5	698	1747.4	5;5;5;5	-0.52	-434.74	434.74	PASS
EGPRS1800	TU3 @Connect	698	1747.4	5;5;5;5	-1.97	-174.74	174.74	PASS
EGPRS1800	TU3 @1	698	1747.4	5;5;5;5	8.88	-174.74	174.74	PASS
EGPRS1800	TU3 @2	698	1747.4	5;5;5;5	6.36	-174.74	174.74	PASS
EGPRS1800	TU3 @3	698	1747.4	5;5;5;5	5.49	-174.74	174.74	PASS
EGPRS1800	TU3 @4	698	1747.4	5;5;5;5	5.20	-174.74	174.74	PASS
EGPRS1800	TU3 @5	698	1747.4	5;5;5;5	0.45	-174.74	174.74	PASS
EGPRS1800	TU3 @6	698	1747.4	5;5;5;5	0.32	-174.74	174.74	PASS
EGPRS1800	TU3 @7	698	1747.4	5;5;5;5	-0.10	-174.74	174.74	PASS
EGPRS1800	TU3 @8	698	1747.4	5;5;5;5	-1.94	-174.74	174.74	PASS
EGPRS1800	TU3 @9	698	1747.4	5;5;5;5	-2.07	-174.74	174.74	PASS
EGPRS1800	TU3 @10	698	1747.4	5;5;5;5	-6.20	-174.74	174.74	PASS
EGPRS1800	TU3 @11	698	1747.4	5;5;5;5	-6.13	-174.74	174.74	PASS
EGPRS1800	TU3 @12	698	1747.4	5;5;5;5	-9.98	-174.74	174.74	PASS
EGPRS1800	TU3 @13	698	1747.4	5;5;5;5	-0.94	-174.74	174.74	PASS
EGPRS1800	TU3 @14	698	1747.4	5;5;5;5	-3.13	-174.74	174.74	PASS
EGPRS1800	TU3 @15	698	1747.4	5;5;5;5	8.46	-174.74	174.74	PASS
EGPRS1800	TU3 @16	698	1747.4	5;5;5;5	-5.62	-174.74	174.74	PASS
EGPRS1800	TU3 @17	698	1747.4	5;5;5;5	-8.65	-174.74	174.74	PASS
EGPRS1800	TU3 @18	698	1747.4	5;5;5;5	-8.75	-174.74	174.74	PASS
EGPRS1800	TU3 @19	698	1747.4	5;5;5;5	-10.17	-174.74	174.74	PASS
EGPRS1800	TU3 @20	698	1747.4	5;5;5;5	-2.49	-174.74	174.74	PASS
EGPRS1900	RA250 @Connect	661	1880	5;5;5;5	3.07	-188	188	PASS

EGPRS1900	RA250 @Sens1	661	1880	5;5;5;5	1.45	-188	188	PASS
EGPRS1900	RA250 @Sens2	661	1880	5;5;5;5	-6.75	-188	188	PASS
EGPRS1900	RA250 @Sens3	661	1880	5;5;5;5	19.24	-188	188	PASS
EGPRS1900	RA250 @Sens4	661	1880	5;5;5;5	10.43	-188	188	PASS
EGPRS1900	RA250 @Sens5	661	1880	5;5;5;5	6.62	-188	188	PASS
EGPRS1900	HT100 @Connect	661	1880	5;5;5;5	10.33	-538	538	PASS
EGPRS1900	HT100 @Sens1	661	1880	5;5;5;5	-5.17	-538	538	PASS
EGPRS1900	HT100 @Sens2	661	1880	5;5;5;5	8.33	-538	538	PASS
EGPRS1900	HT100 @Sens3	661	1880	5;5;5;5	-2.58	-538	538	PASS
EGPRS1900	HT100 @Sens4	661	1880	5;5;5;5	1.58	-538	538	PASS
EGPRS1900	HT100 @Sens5	661	1880	5;5;5;5	3.29	-538	538	PASS
EGPRS1900	TU50 @Connect	661	1880	5;5;5;5	14.50	-448	448	PASS
EGPRS1900	TU50 @Sens1	661	1880	5;5;5;5	-2.87	-448	448	PASS
EGPRS1900	TU50 @Sens2	661	1880	5;5;5;5	-1.58	-448	448	PASS
EGPRS1900	TU50 @Sens3	661	1880	5;5;5;5	0.32	-448	448	PASS
EGPRS1900	TU50 @Sens4	661	1880	5;5;5;5	-4.62	-448	448	PASS
EGPRS1900	TU50 @Sens5	661	1880	5;5;5;5	-4.81	-448	448	PASS
EGPRS1900	TU3 @Connect	661	1880	5;5;5;5	-11.14	-188	188	PASS
EGPRS1900	TU3 @1	661	1880	5;5;5;5	14.21	-188	188	PASS
EGPRS1900	TU3 @2	661	1880	5;5;5;5	13.04	-188	188	PASS
EGPRS1900	TU3 @3	661	1880	5;5;5;5	-22.96	-188	188	PASS
EGPRS1900	TU3 @4	661	1880	5;5;5;5	0.90	-188	188	PASS
EGPRS1900	TU3 @5	661	1880	5;5;5;5	14.88	-188	188	PASS
EGPRS1900	TU3 @6	661	1880	5;5;5;5	-0.06	-188	188	PASS
EGPRS1900	TU3 @7	661	1880	5;5;5;5	13.66	-188	188	PASS
EGPRS1900	TU3 @8	661	1880	5;5;5;5	-1.68	-188	188	PASS
EGPRS1900	TU3 @9	661	1880	5;5;5;5	2.45	-188	188	PASS
EGPRS1900	TU3 @10	661	1880	5;5;5;5	7.23	-188	188	PASS
EGPRS1900	TU3 @11	661	1880	5;5;5;5	2.00	-188	188	PASS
EGPRS1900	TU3 @12	661	1880	5;5;5;5	15.69	-188	188	PASS
EGPRS1900	TU3 @13	661	1880	5;5;5;5	13.56	-188	188	PASS
EGPRS1900	TU3 @14	661	1880	5;5;5;5	7.52	-188	188	PASS
EGPRS1900	TU3 @15	661	1880	5;5;5;5	16.53	-188	188	PASS
EGPRS1900	TU3 @16	661	1880	5;5;5;5	-2.45	-188	188	PASS
EGPRS1900	TU3 @17	661	1880	5;5;5;5	15.34	-188	188	PASS
EGPRS1900	TU3 @18	661	1880	5;5;5;5	7.39	-188	188	PASS
EGPRS1900	TU3 @19	661	1880	5;5;5;5	5.49	-188	188	PASS
EGPRS1900	TU3 @20	661	1880	5;5;5;5	8.14	-188	188	PASS
EGPRS850	RA250 @Connect	190	836.6	6;6;6;6	5.49	-383.66	383.66	PASS
EGPRS850	RA250 @Sens1	190	836.6	6;6;6;6	10.36	-383.66	383.66	PASS
EGPRS850	RA250 @Sens2	190	836.6	6;6;6;6	8.07	-383.66	383.66	PASS
EGPRS850	RA250 @Sens3	190	836.6	6;6;6;6	7.39	-383.66	383.66	PASS
EGPRS850	RA250 @Sens4	190	836.6	6;6;6;6	12.04	-383.66	383.66	PASS


EGPRS850	RA250 @Sens5	190	836.6	6;6;6;6	3.78	-383.66	383.66	PASS
EGPRS850	HT100 @Connect	190	836.6	6;6;6;6	5.68	-263.66	263.66	PASS
EGPRS850	HT100 @Sens1	190	836.6	6;6;6;6	6.78	-263.66	263.66	PASS
EGPRS850	HT100 @Sens2	190	836.6	6;6;6;6	1.26	-263.66	263.66	PASS
EGPRS850	HT100 @Sens3	190	836.6	6;6;6;6	-2.10	-263.66	263.66	PASS
EGPRS850	HT100 @Sens4	190	836.6	6;6;6;6	2.78	-263.66	263.66	PASS
EGPRS850	HT100 @Sens5	190	836.6	6;6;6;6	3.97	-263.66	263.66	PASS
EGPRS850	TU50 @Connect	190	836.6	6;6;6;6	4.55	-243.66	243.66	PASS
EGPRS850	TU50 @Sens1	190	836.6	6;6;6;6	6.59	-243.66	243.66	PASS
EGPRS850	TU50 @Sens2	190	836.6	6;6;6;6	4.16	-243.66	243.66	PASS
EGPRS850	TU50 @Sens3	190	836.6	6;6;6;6	0.06	-243.66	243.66	PASS
EGPRS850	TU50 @Sens4	190	836.6	6;6;6;6	10.40	-243.66	243.66	PASS
EGPRS850	TU50 @Sens5	190	836.6	6;6;6;6	2.23	-243.66	243.66	PASS
EGPRS850	TU3 @Connect	190	836.6	6;6;6;6	9.75	-313.66	313.66	PASS
EGPRS850	TU3 @1	190	836.6	6;6;6;6	10.30	-313.66	313.66	PASS
EGPRS850	TU3 @2	190	836.6	6;6;6;6	5.59	-313.66	313.66	PASS
EGPRS850	TU3 @3	190	836.6	6;6;6;6	11.85	-313.66	313.66	PASS
EGPRS850	TU3 @4	190	836.6	6;6;6;6	7.07	-313.66	313.66	PASS
EGPRS850	TU3 @5	190	836.6	6;6;6;6	8.91	-313.66	313.66	PASS
EGPRS850	TU3 @6	190	836.6	6;6;6;6	6.65	-313.66	313.66	PASS
EGPRS850	TU3 @7	190	836.6	6;6;6;6	5.49	-313.66	313.66	PASS
EGPRS850	TU3 @8	190	836.6	6;6;6;6	7.62	-313.66	313.66	PASS
EGPRS850	TU3 @9	190	836.6	6;6;6;6	7.75	-313.66	313.66	PASS
EGPRS850	TU3 @10	190	836.6	6;6;6;6	3.94	-313.66	313.66	PASS
EGPRS850	TU3 @11	190	836.6	6;6;6;6	2.49	-313.66	313.66	PASS
EGPRS850	TU3 @12	190	836.6	6;6;6;6	4.23	-313.66	313.66	PASS
EGPRS850	TU3 @13	190	836.6	6;6;6;6	8.68	-313.66	313.66	PASS
EGPRS850	TU3 @14	190	836.6	6;6;6;6	10.07	-313.66	313.66	PASS
EGPRS850	TU3 @15	190	836.6	6;6;6;6	10.46	-313.66	313.66	PASS
EGPRS850	TU3 @16	190	836.6	6;6;6;6	5.33	-313.66	313.66	PASS
EGPRS850	TU3 @17	190	836.6	6;6;6;6	6.59	-313.66	313.66	PASS
EGPRS850	TU3 @18	190	836.6	6;6;6;6	9.69	-313.66	313.66	PASS
EGPRS850	TU3 @19	190	836.6	6;6;6;6	5.17	-313.66	313.66	PASS
EGPRS850	TU3 @20	190	836.6	6;6;6;6	6.20	-313.66	313.66	PASS
EGPRS900	RA250 @Connect	38	897.6	6;6;6;6	7.46	-389.76	389.76	PASS
EGPRS900	RA250 @Sens1	38	897.6	6;6;6;6	3.71	-389.76	389.76	PASS
EGPRS900	RA250 @Sens2	38	897.6	6;6;6;6	2.68	-389.76	389.76	PASS
EGPRS900	RA250 @Sens3	38	897.6	6;6;6;6	11.01	-389.76	389.76	PASS
EGPRS900	RA250 @Sens4	38	897.6	6;6;6;6	15.88	-389.76	389.76	PASS
EGPRS900	RA250 @Sens5	38	897.6	6;6;6;6	-4.16	-389.76	389.76	PASS
EGPRS900	HT100 @Connect	38	897.6	6;6;6;6	3.49	-269.76	269.76	PASS
EGPRS900	HT100 @Sens1	38	897.6	6;6;6;6	0.68	-269.76	269.76	PASS
EGPRS900	HT100 @Sens2	38	897.6	6;6;6;6	-12.14	-269.76	269.76	PASS

EGPRS900	HT100 @Sens3	38	897.6	6;6;6;6	21.34	-269.76	269.76	PASS
EGPRS900	HT100 @Sens4	38	897.6	6;6;6;6	0.45	-269.76	269.76	PASS
EGPRS900	HT100 @Sens5	38	897.6	6;6;6;6	23.50	-269.76	269.76	PASS
EGPRS900	TU50 @Connect	38	897.6	6;6;6;6	-2.81	-249.76	249.76	PASS
EGPRS900	TU50 @Sens1	38	897.6	6;6;6;6	14.33	-249.76	249.76	PASS
EGPRS900	TU50 @Sens2	38	897.6	6;6;6;6	-8.56	-249.76	249.76	PASS
EGPRS900	TU50 @Sens3	38	897.6	6;6;6;6	-12.14	-249.76	249.76	PASS
EGPRS900	TU50 @Sens4	38	897.6	6;6;6;6	9.56	-249.76	249.76	PASS
EGPRS900	TU50 @Sens5	38	897.6	6;6;6;6	2.00	-249.76	249.76	PASS
EGPRS900	TU3 @Connect	38	897.6	6;6;6;6	7.26	-319.76	319.76	PASS
EGPRS900	TU3 @1	38	897.6	6;6;6;6	3.97	-319.76	319.76	PASS
EGPRS900	TU3 @2	38	897.6	6;6;6;6	3.26	-319.76	319.76	PASS
EGPRS900	TU3 @3	38	897.6	6;6;6;6	12.69	-319.76	319.76	PASS
EGPRS900	TU3 @4	38	897.6	6;6;6;6	10.36	-319.76	319.76	PASS
EGPRS900	TU3 @5	38	897.6	6;6;6;6	8.30	-319.76	319.76	PASS
EGPRS900	TU3 @6	38	897.6	6;6;6;6	11.36	-319.76	319.76	PASS
EGPRS900	TU3 @7	38	897.6	6;6;6;6	6.20	-319.76	319.76	PASS
EGPRS900	TU3 @8	38	897.6	6;6;6;6	10.40	-319.76	319.76	PASS
EGPRS900	TU3 @9	38	897.6	6;6;6;6	7.75	-319.76	319.76	PASS
EGPRS900	TU3 @10	38	897.6	6;6;6;6	17.53	-319.76	319.76	PASS
EGPRS900	TU3 @11	38	897.6	6;6;6;6	9.59	-319.76	319.76	PASS
EGPRS900	TU3 @12	38	897.6	6;6;6;6	5.46	-319.76	319.76	PASS
EGPRS900	TU3 @13	38	897.6	6;6;6;6	4.97	-319.76	319.76	PASS
EGPRS900	TU3 @14	38	897.6	6;6;6;6	3.87	-319.76	319.76	PASS
EGPRS900	TU3 @15	38	897.6	6;6;6;6	9.65	-319.76	319.76	PASS
EGPRS900	TU3 @16	38	897.6	6;6;6;6	7.55	-319.76	319.76	PASS
EGPRS900	TU3 @17	38	897.6	6;6;6;6	15.21	-319.76	319.76	PASS
EGPRS900	TU3 @18	38	897.6	6;6;6;6	4.49	-319.76	319.76	PASS
EGPRS900	TU3 @19	38	897.6	6;6;6;6	9.40	-319.76	319.76	PASS
EGPRS900	TU3 @20	38	897.6	6;6;6;6	6.23	-319.76	319.76	PASS


EGPRS1800 Channel=698 Gamma=5;5;5;5 RA250 @Connect

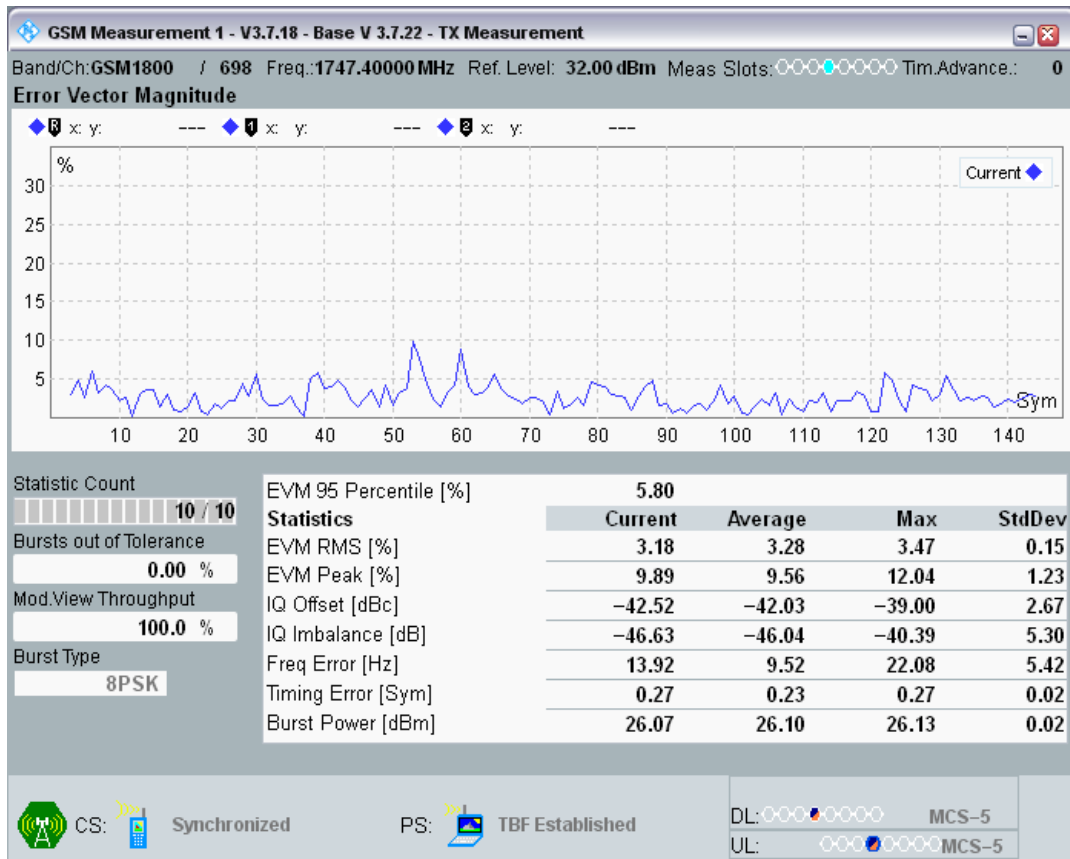


EGPRS1800 Channel=698 Gamma=5;5;5;5 RA250 @Sens1

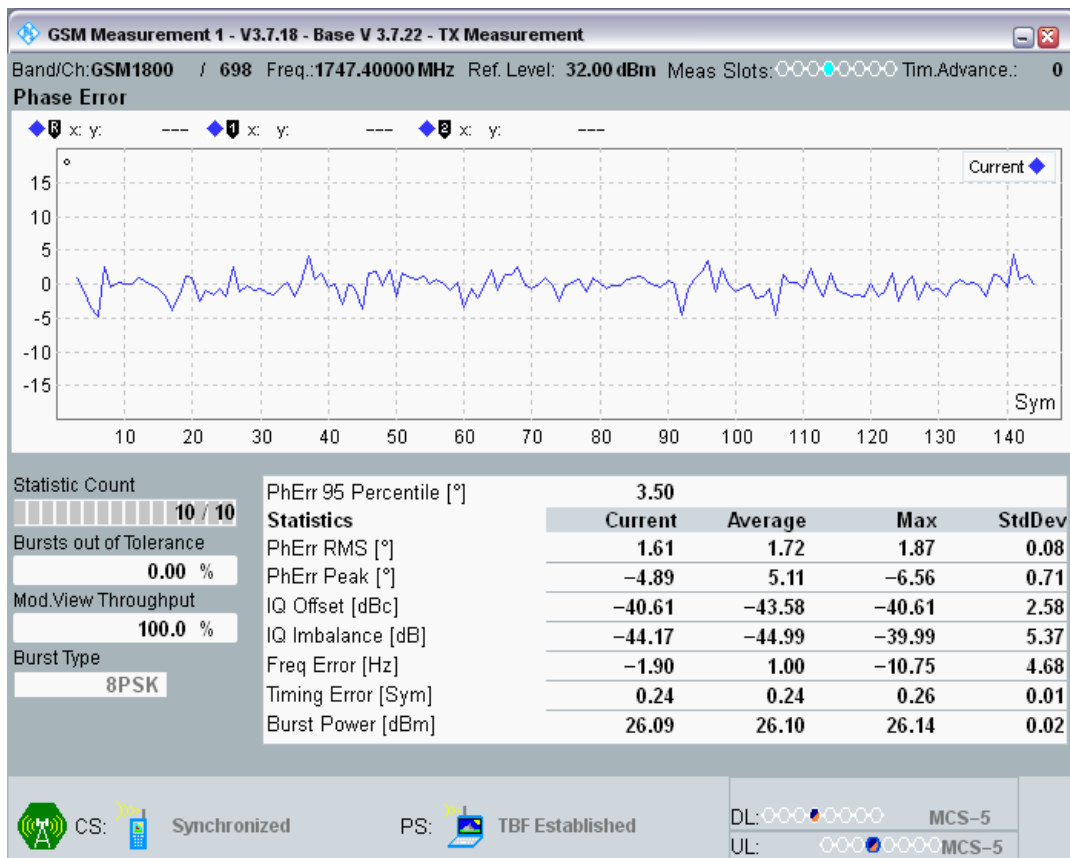


EGPRS1800 Channel=698 Gamma=5;5;5;5 RA250 @Sens2

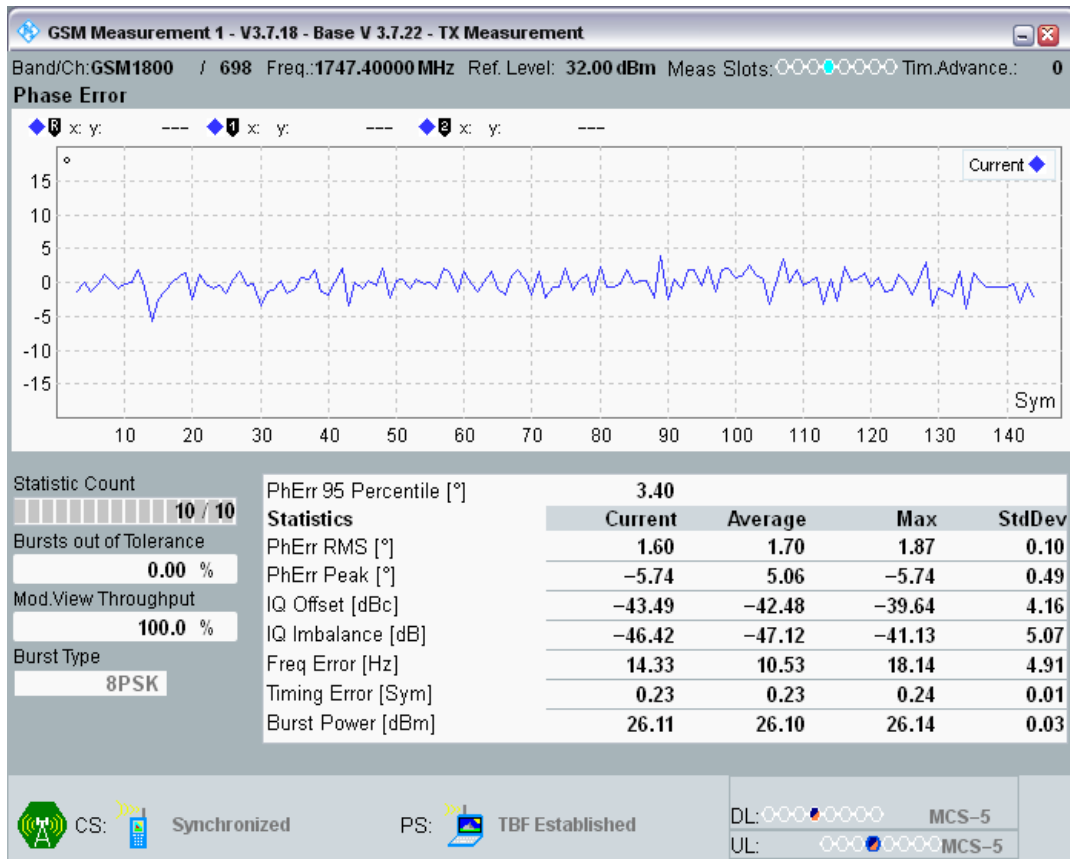


EGPRS1800 Channel=698 Gamma=5;5;5;5 RA250 @Sens3

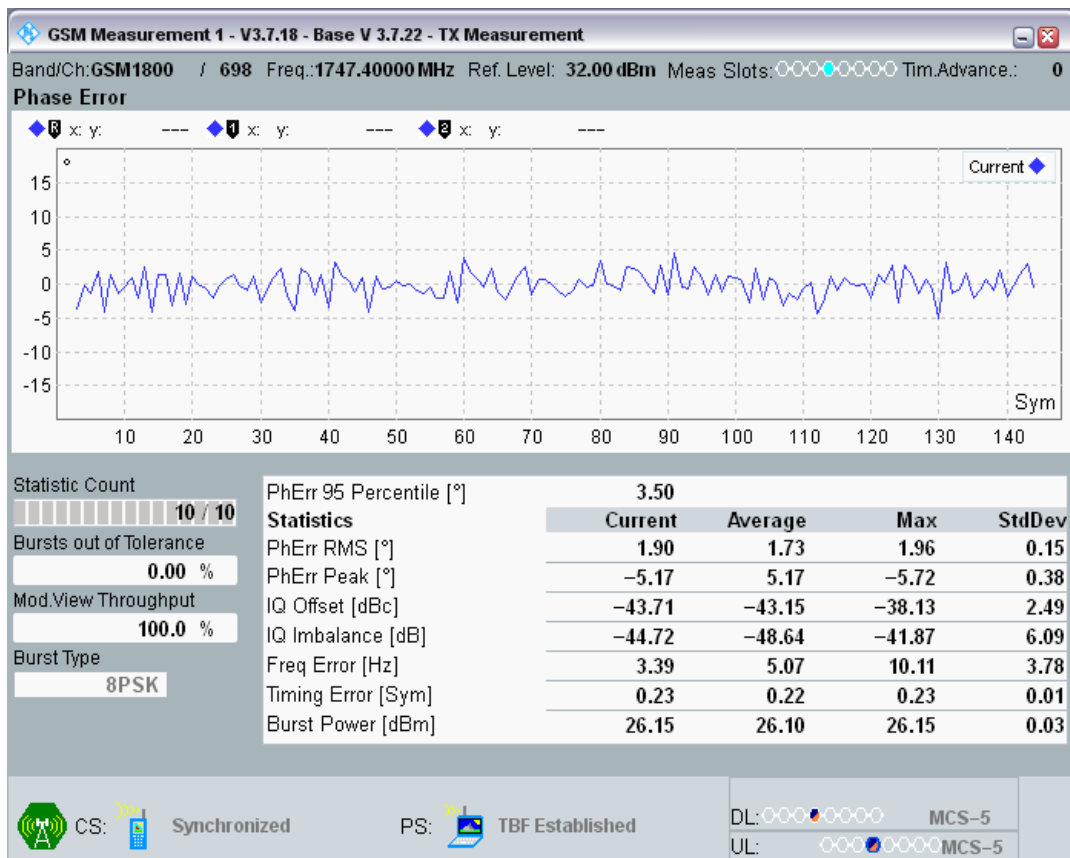


EGPRS1800 Channel=698 Gamma=5;5;5;5 RA250 @Sens4

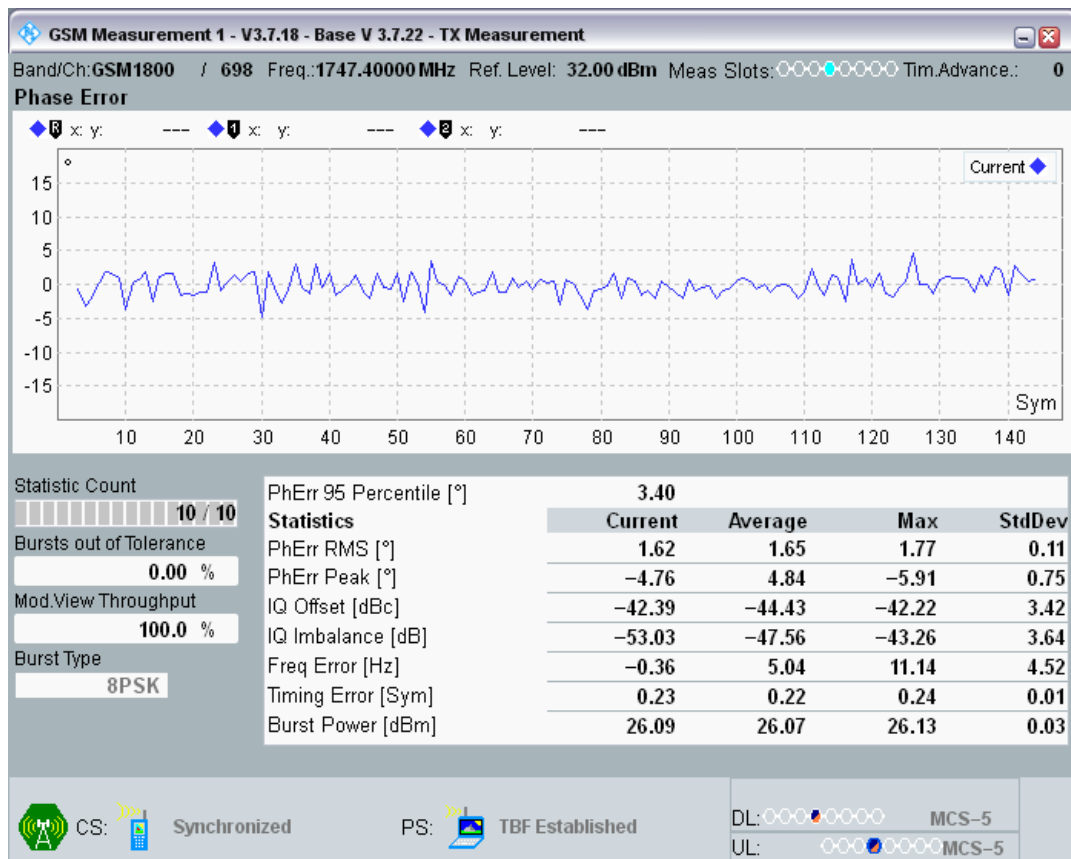


EGPRS1800 Channel=698 Gamma=5;5;5;5 RA250 @Sens5

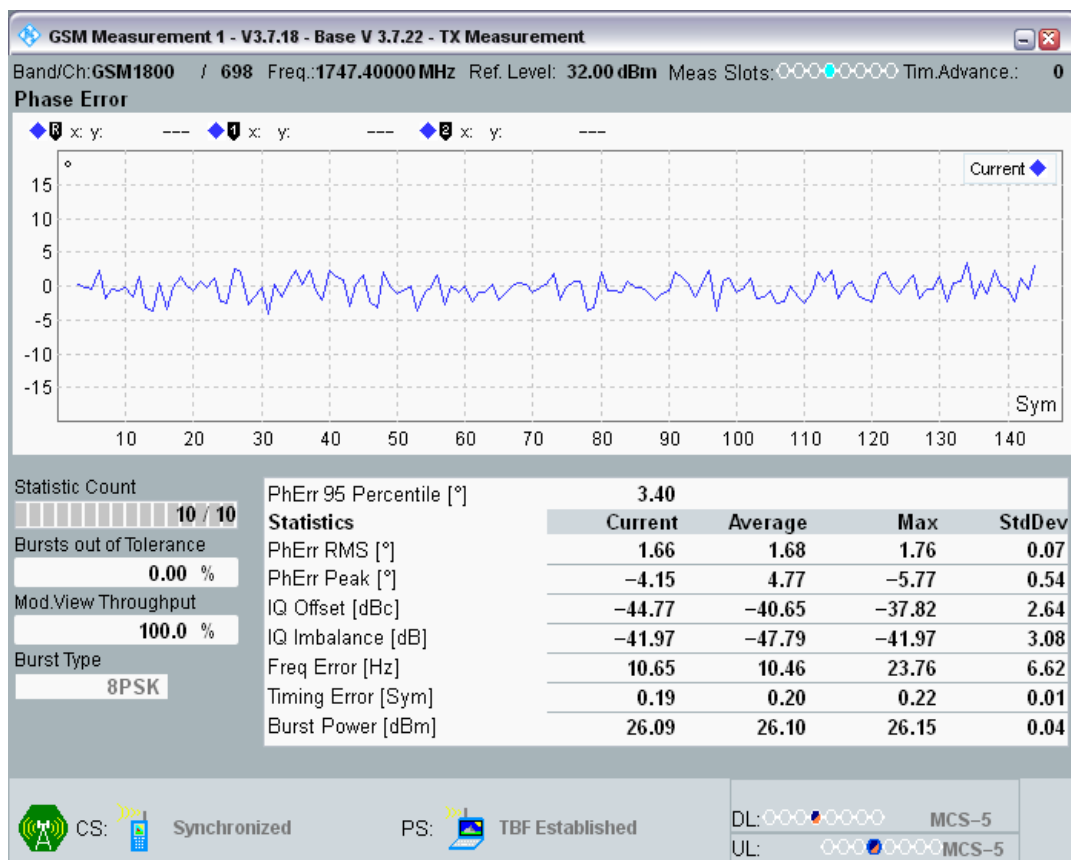


EGPRS1800 Channel=698 Gamma=5;5;5;5 HT100 @Connect

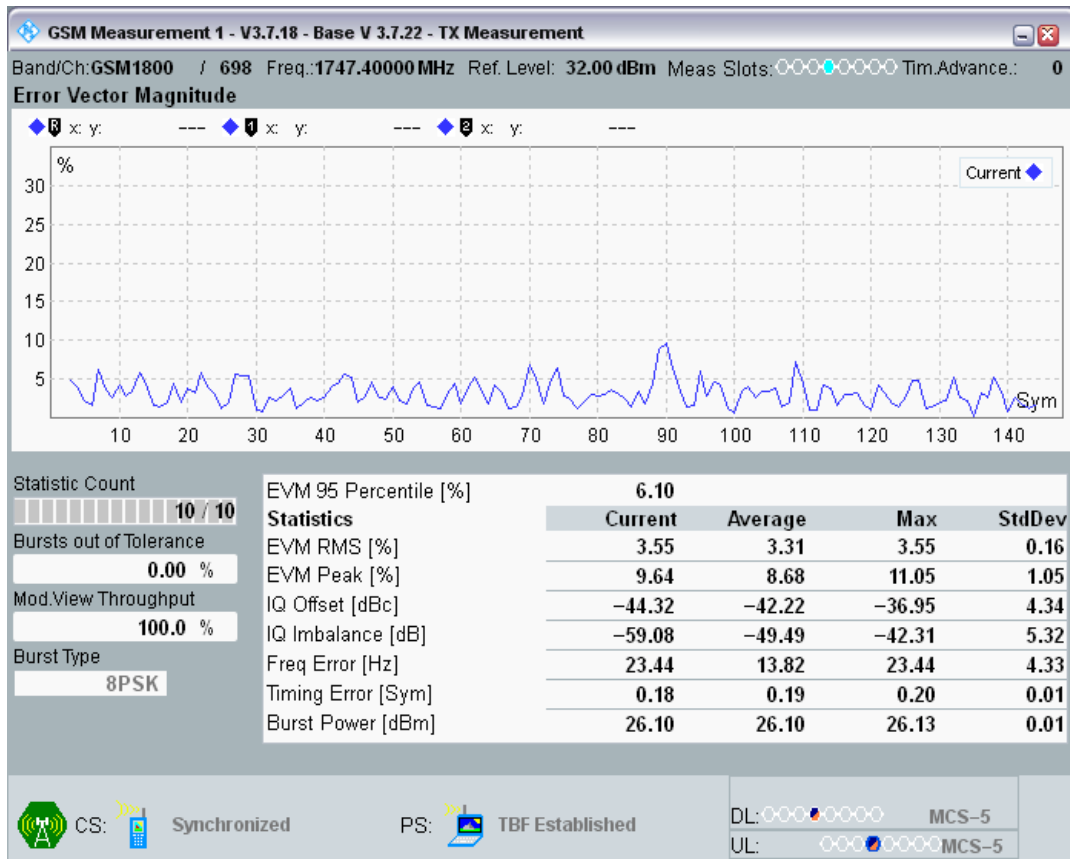


EGPRS1800 Channel=698 Gamma=5;5;5;5 HT100 @Sens1

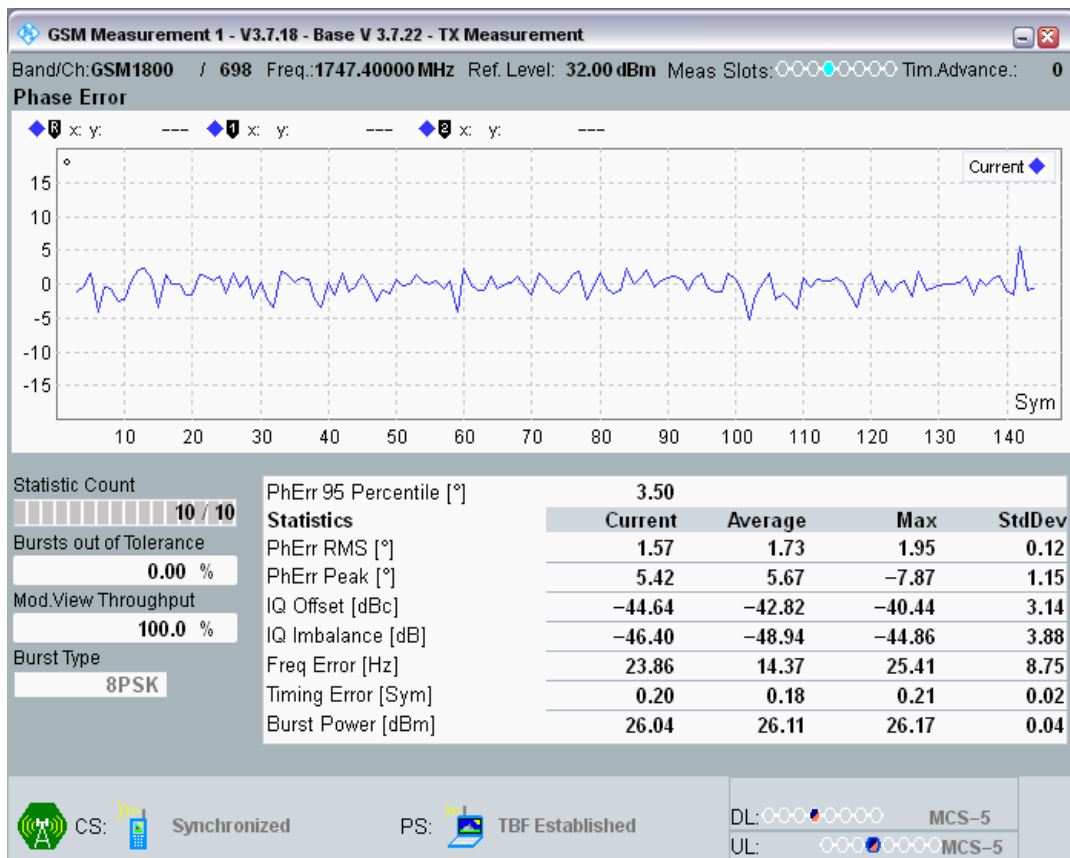


EGPRS1800 Channel=698 Gamma=5;5;5;5 HT100 @Sens2

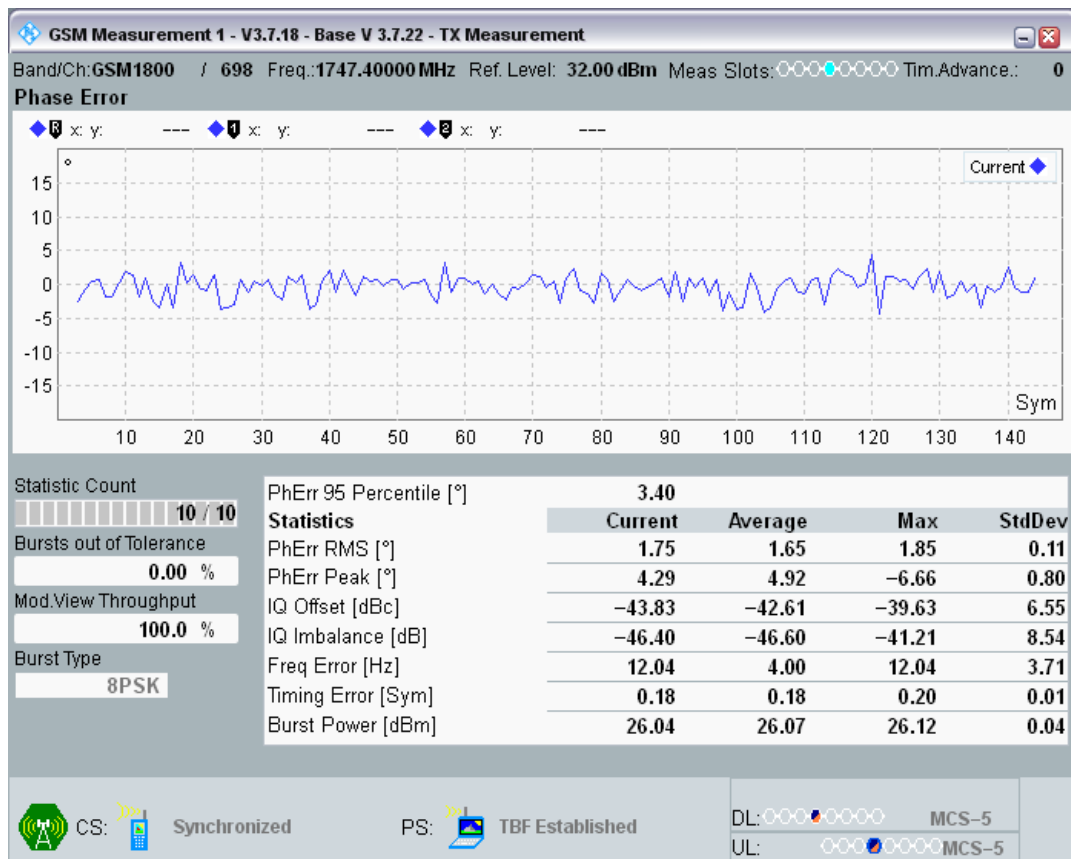


EGPRS1800 Channel=698 Gamma=5;5;5;5 HT100 @Sens3

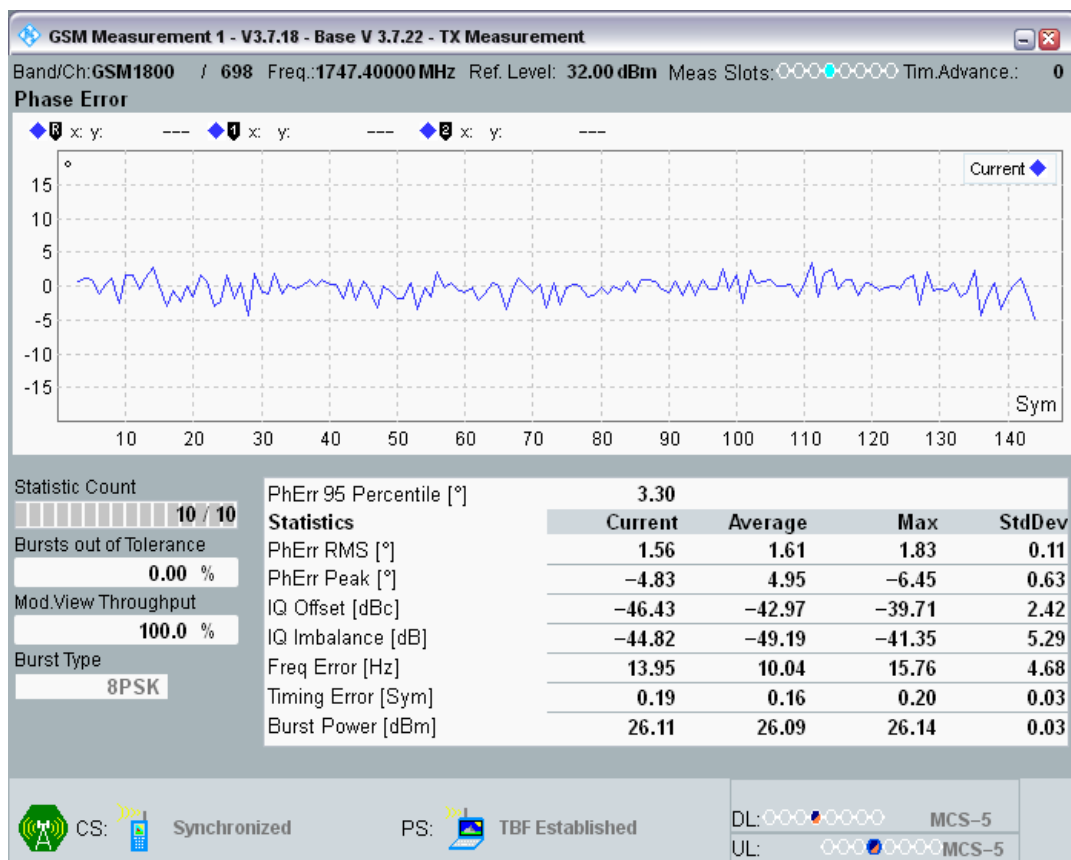


EGPRS1800 Channel=698 Gamma=5;5;5;5 HT100 @Sens4

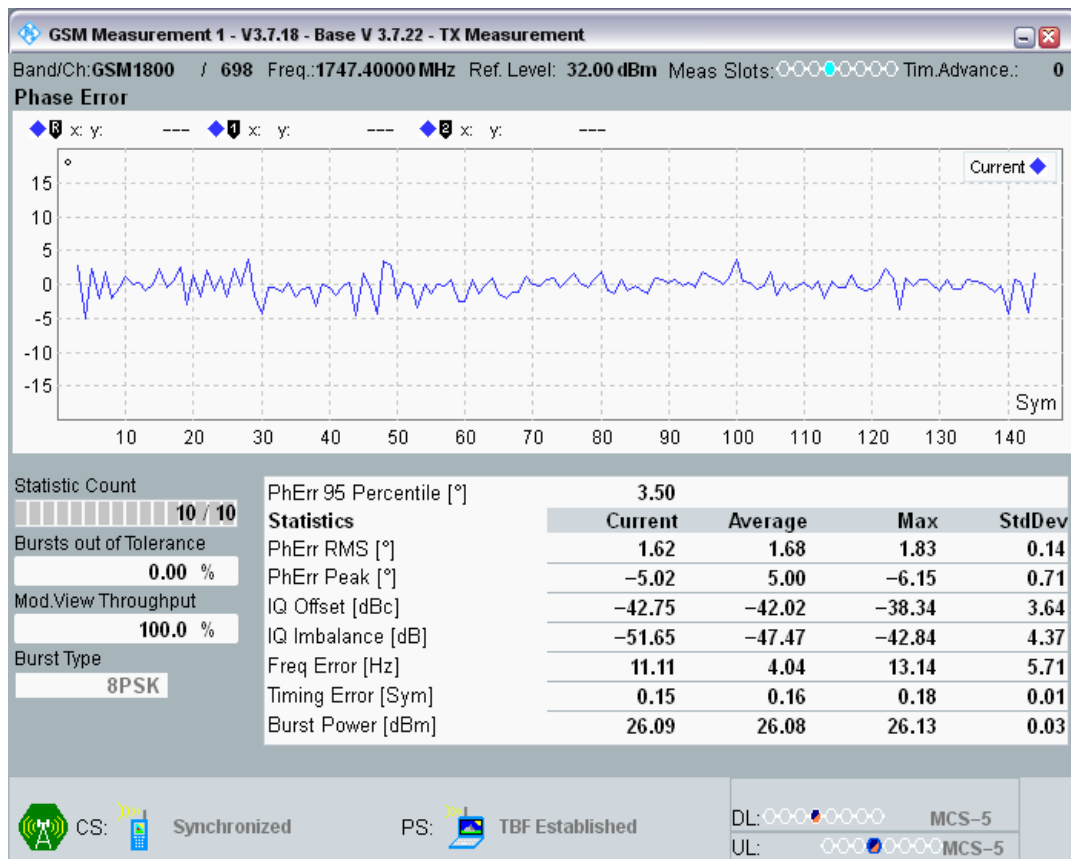


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU50 @Connect

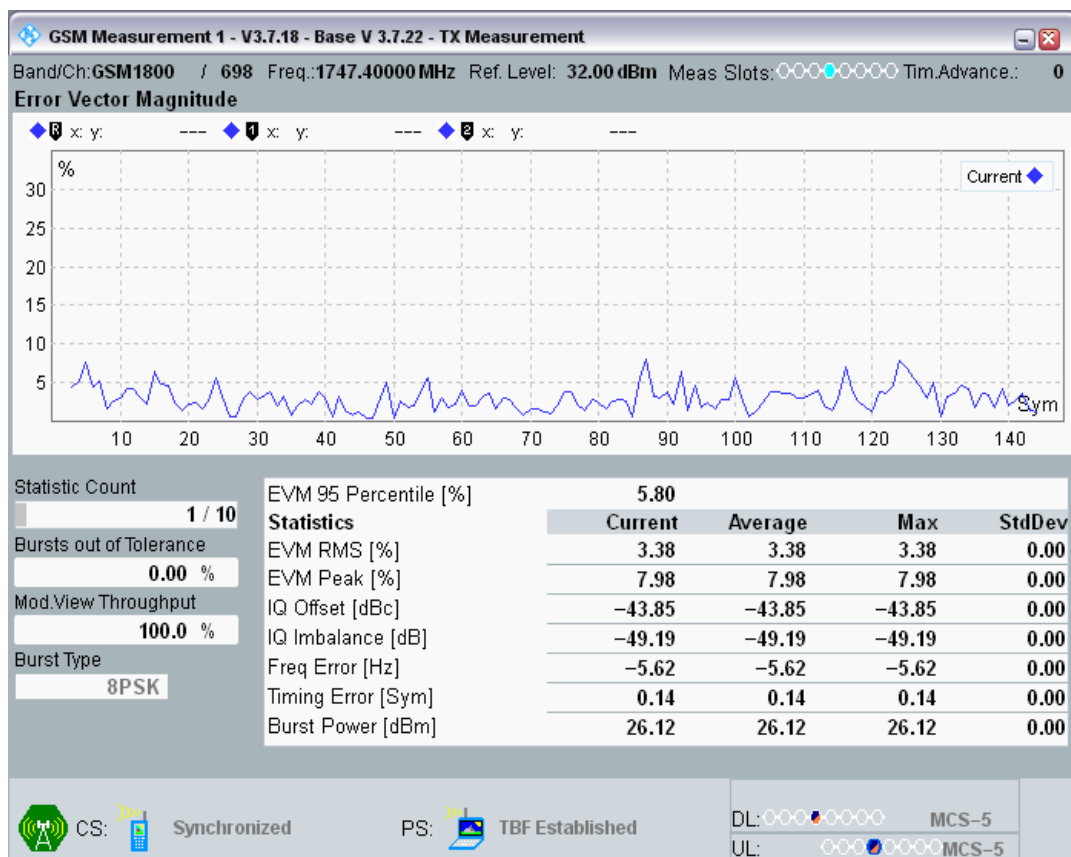


EGPRS1800 Channel=698 Gamma=5;5;5;5 HT100 @Sens5

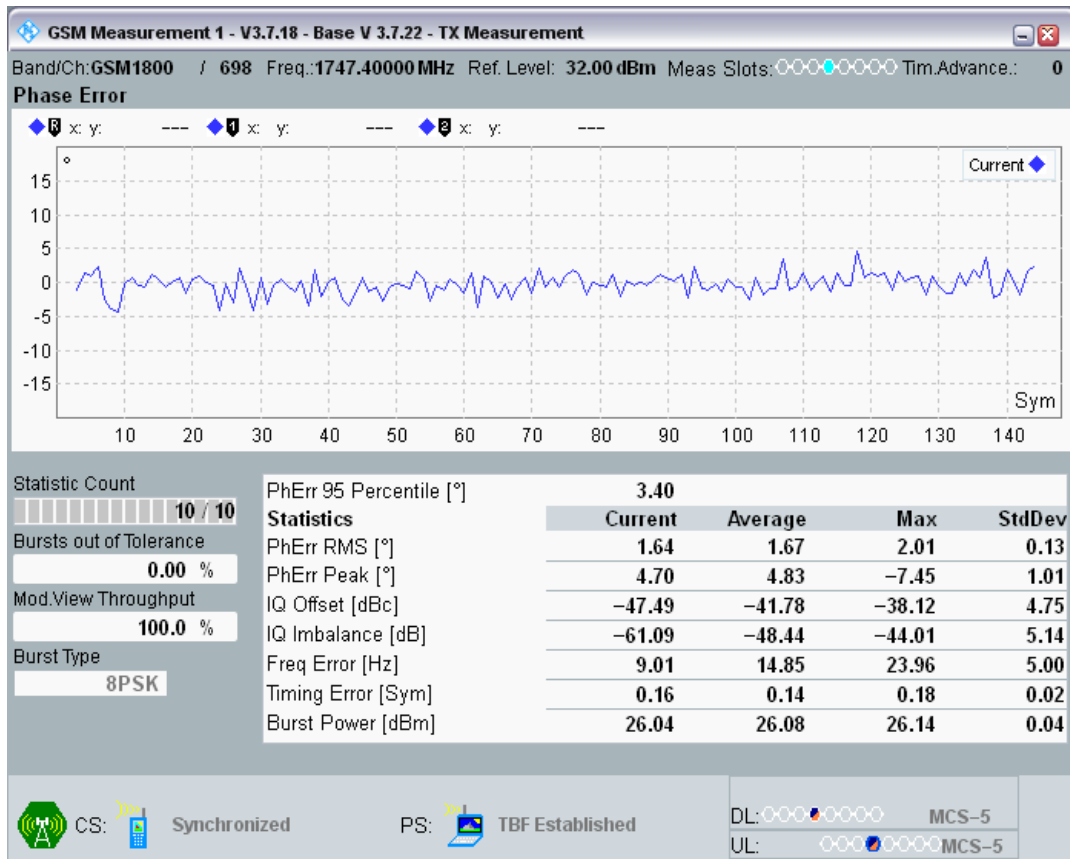


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU50 @Sens1

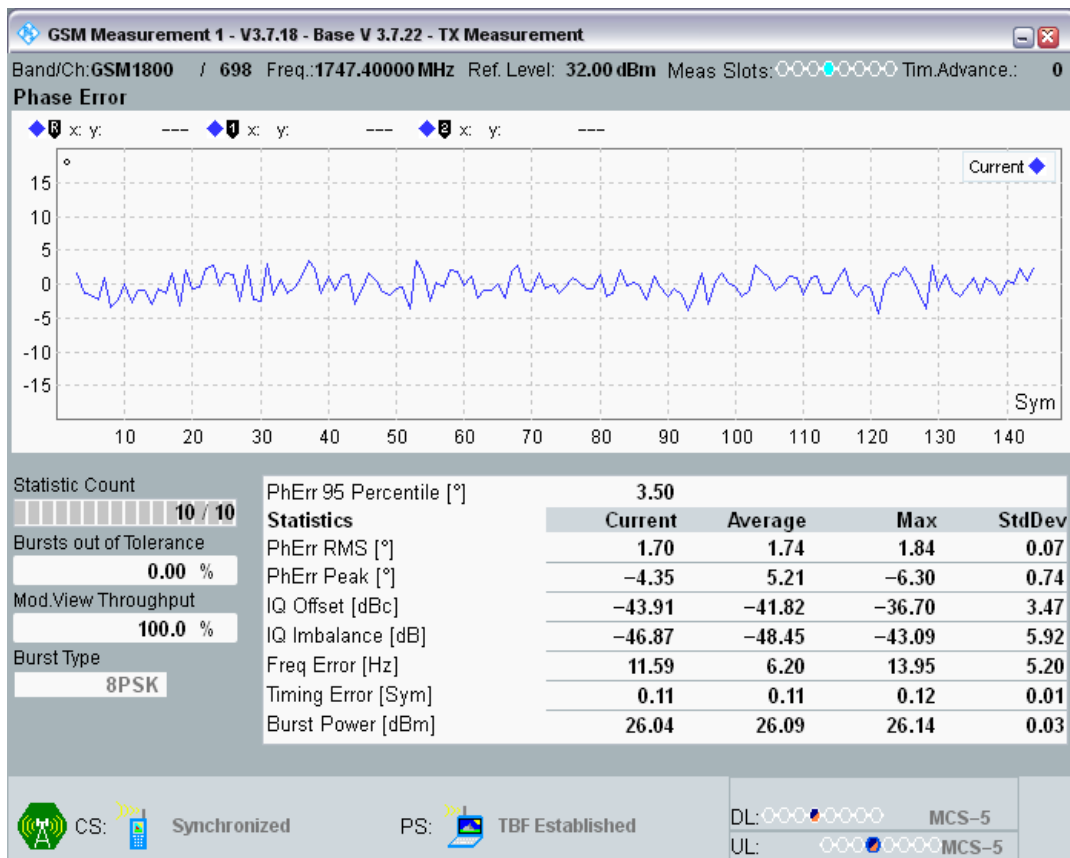


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU50 @Sens2

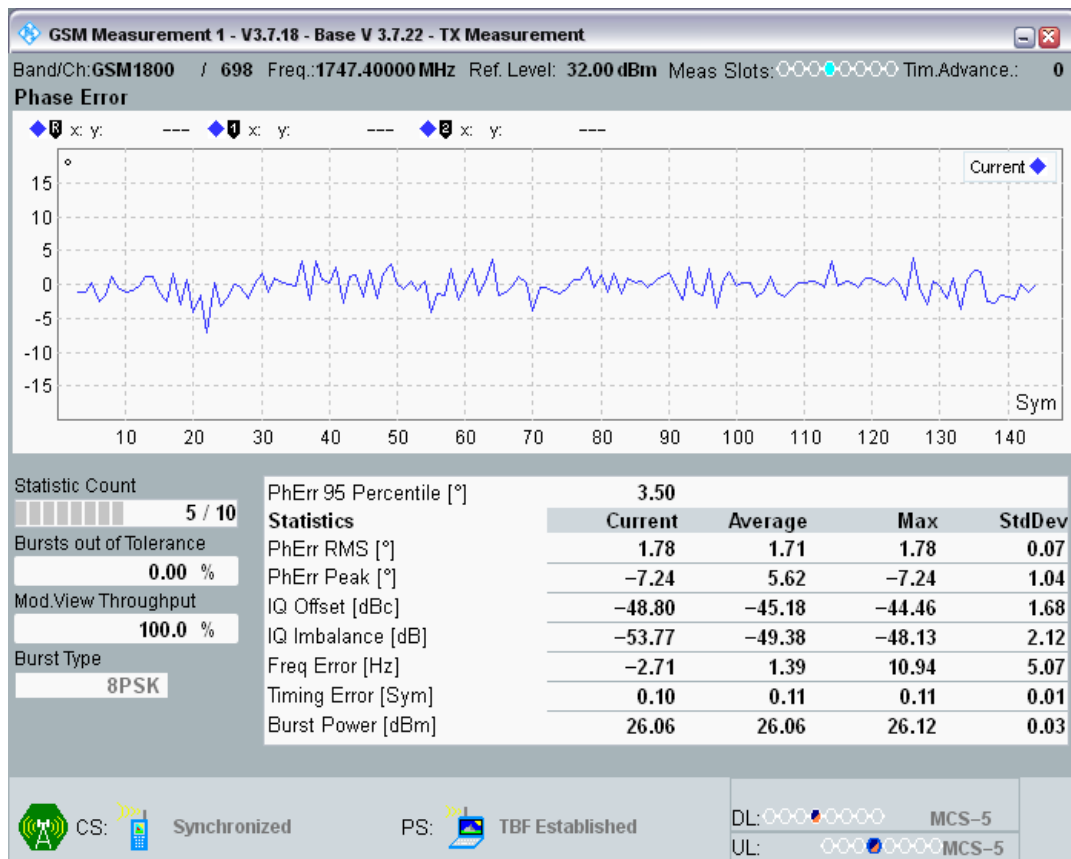


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU50 @Sens3

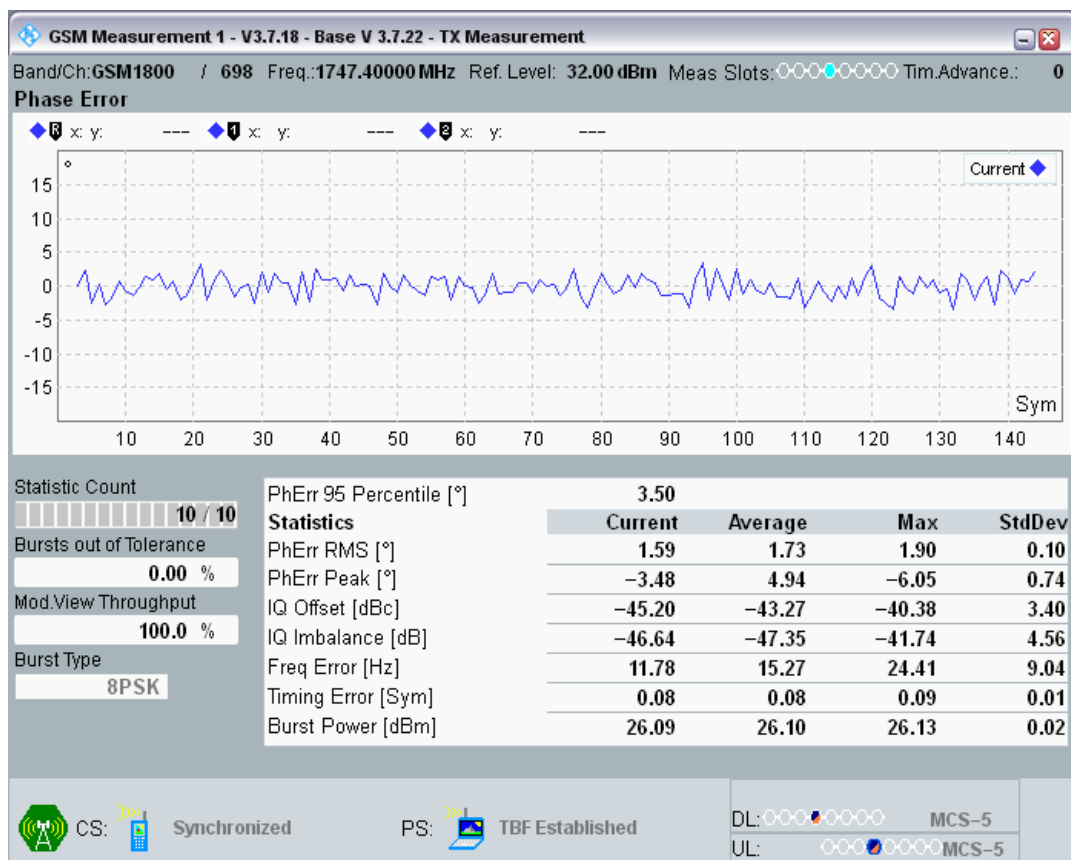


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU50 @Sens5

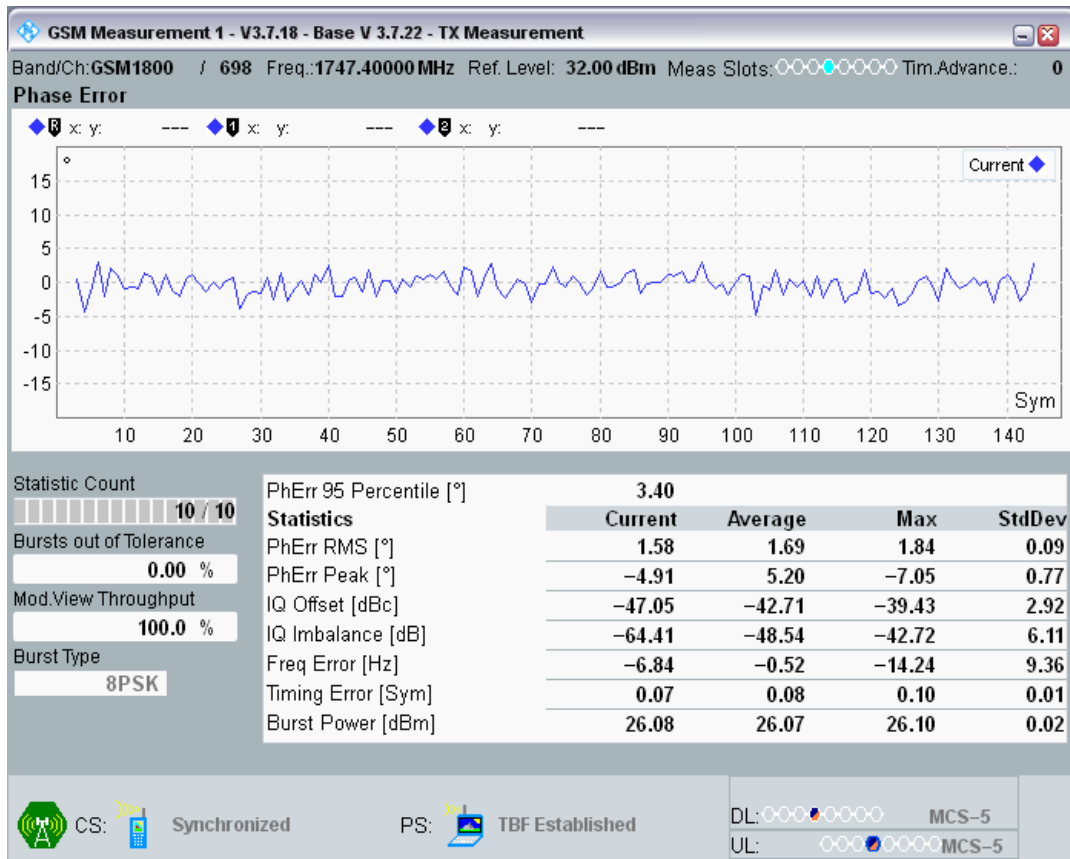


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU50 @Sens4

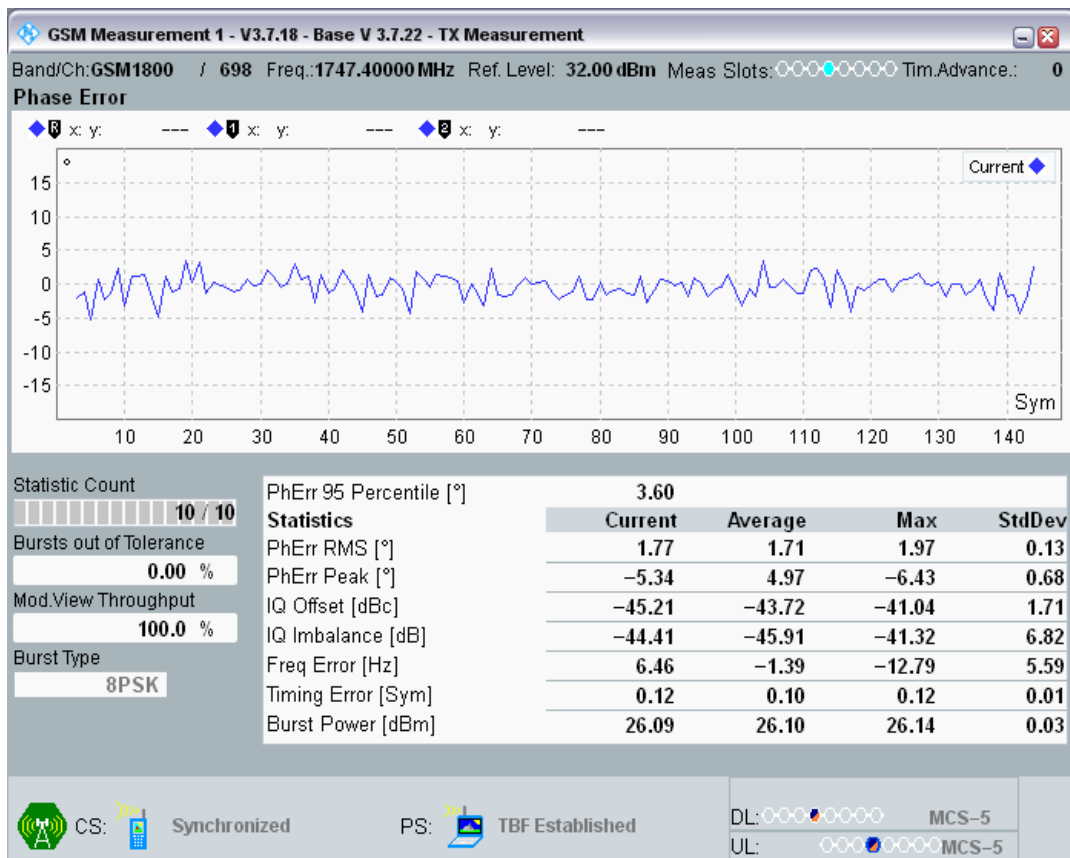


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @Connect

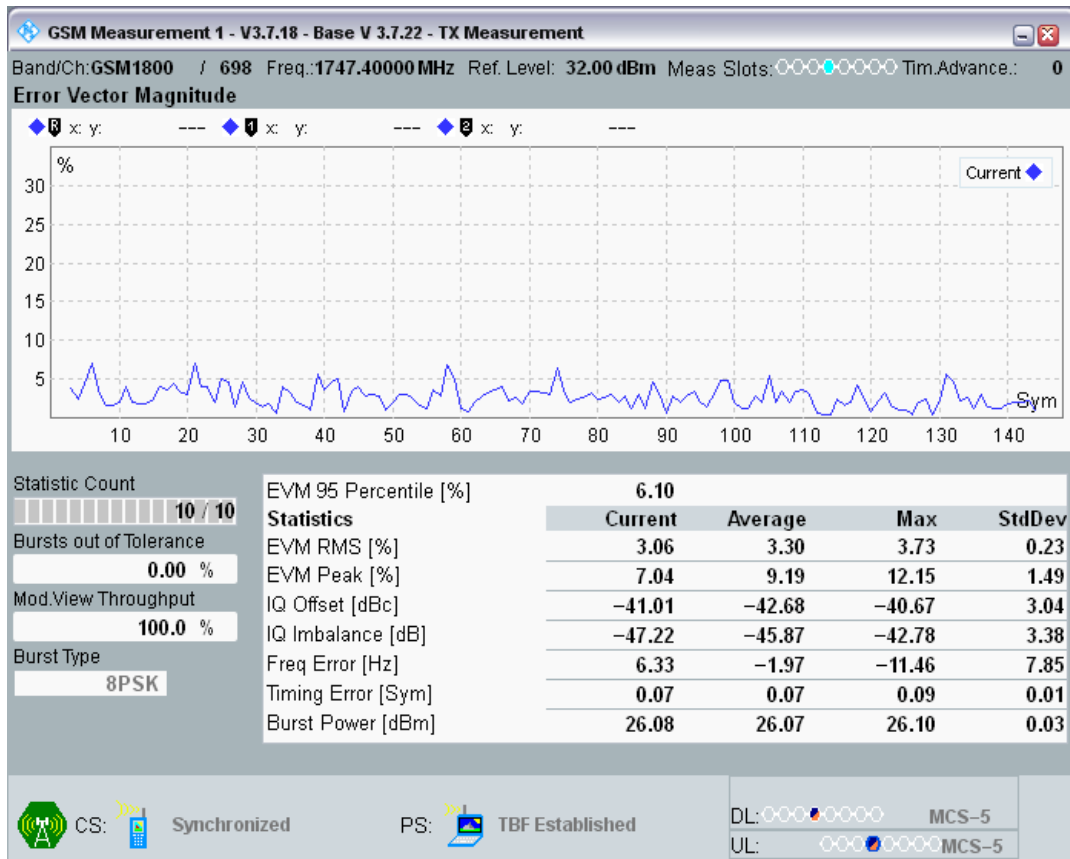


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @1

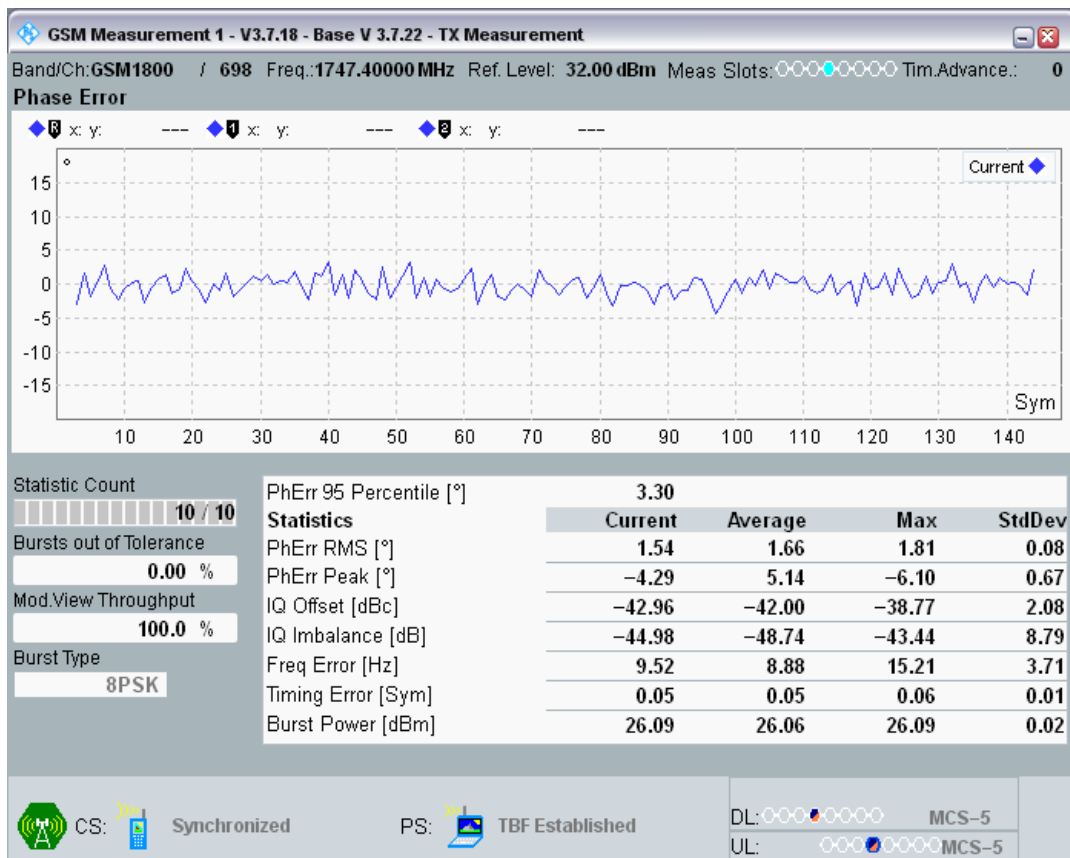


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @2

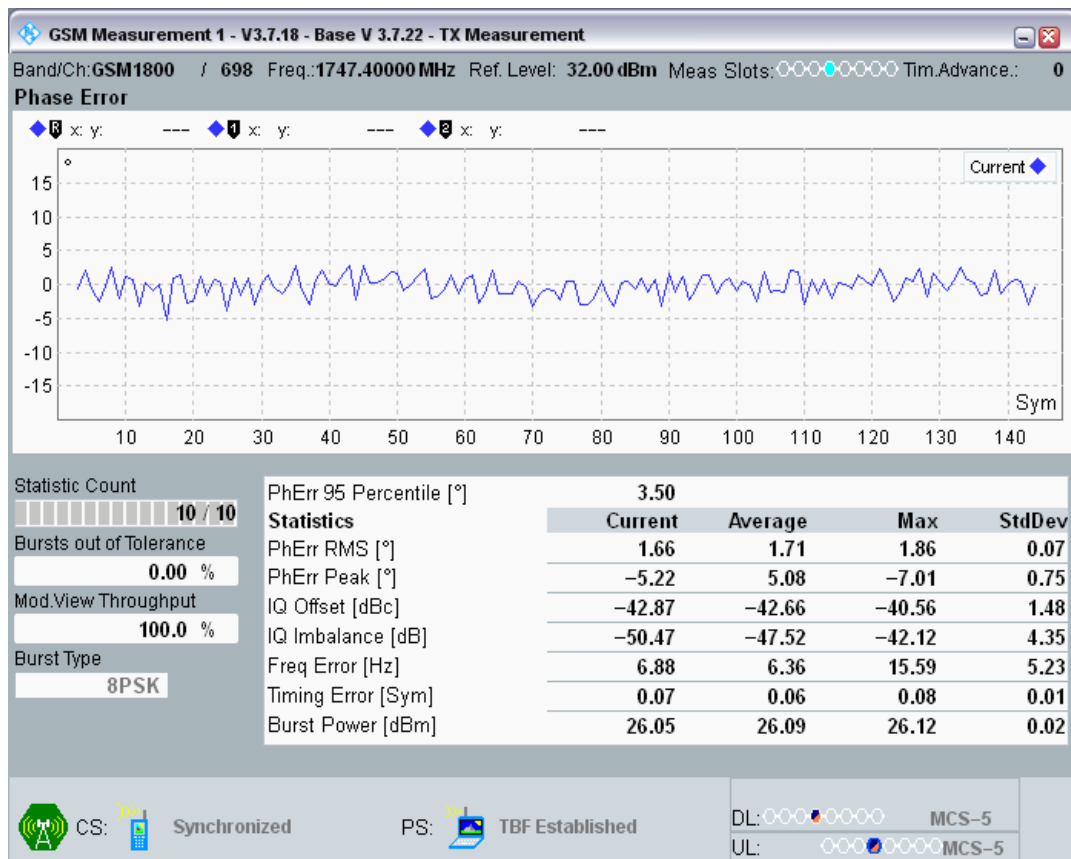


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @3

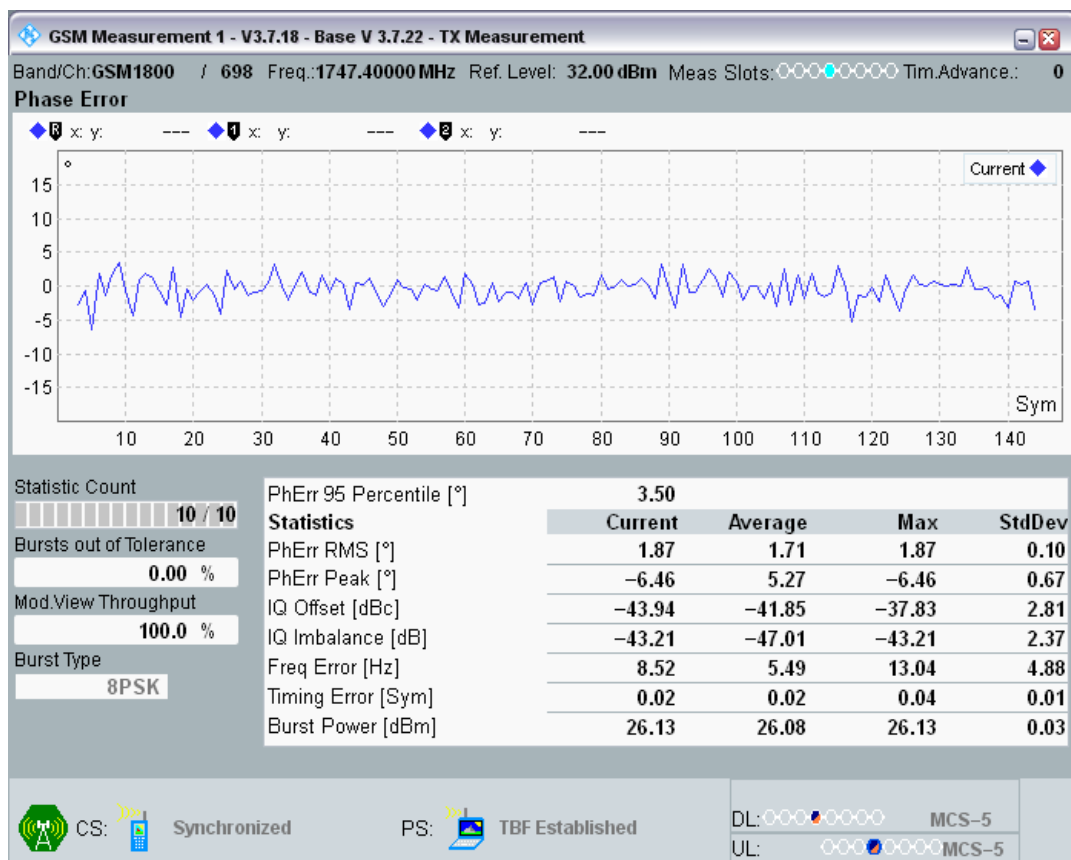


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @4

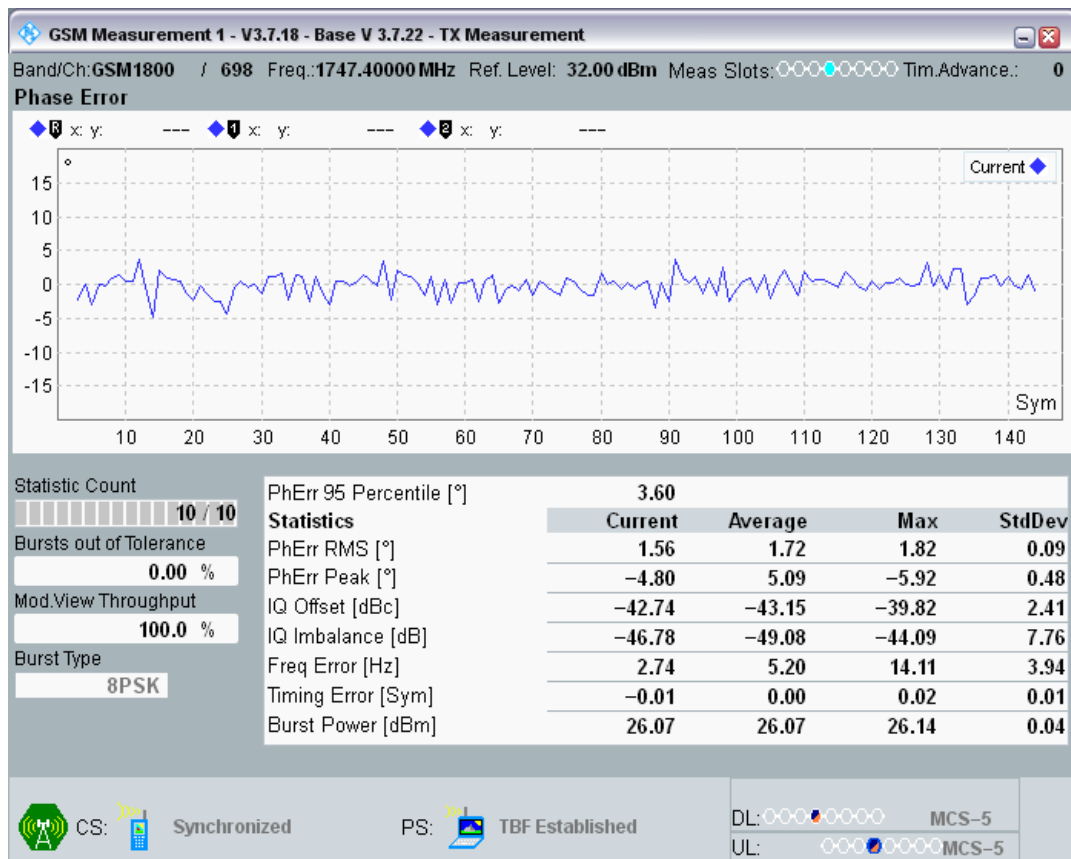


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @5

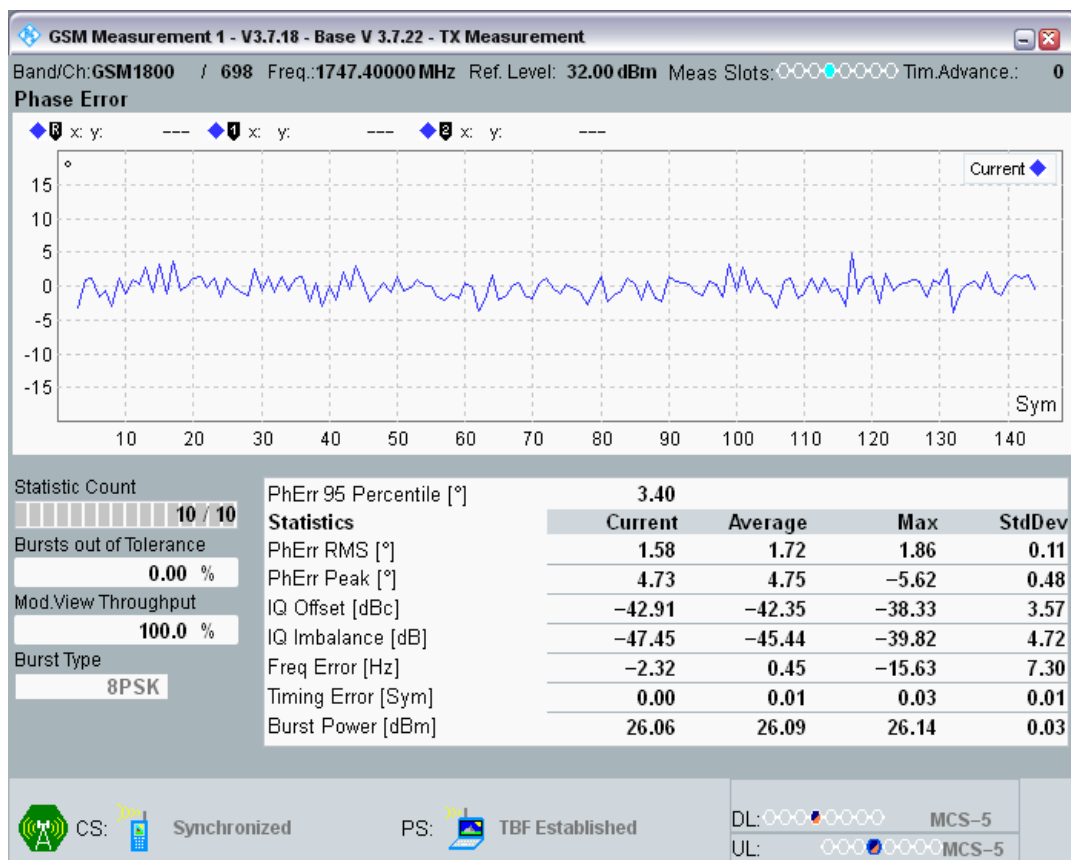


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @6

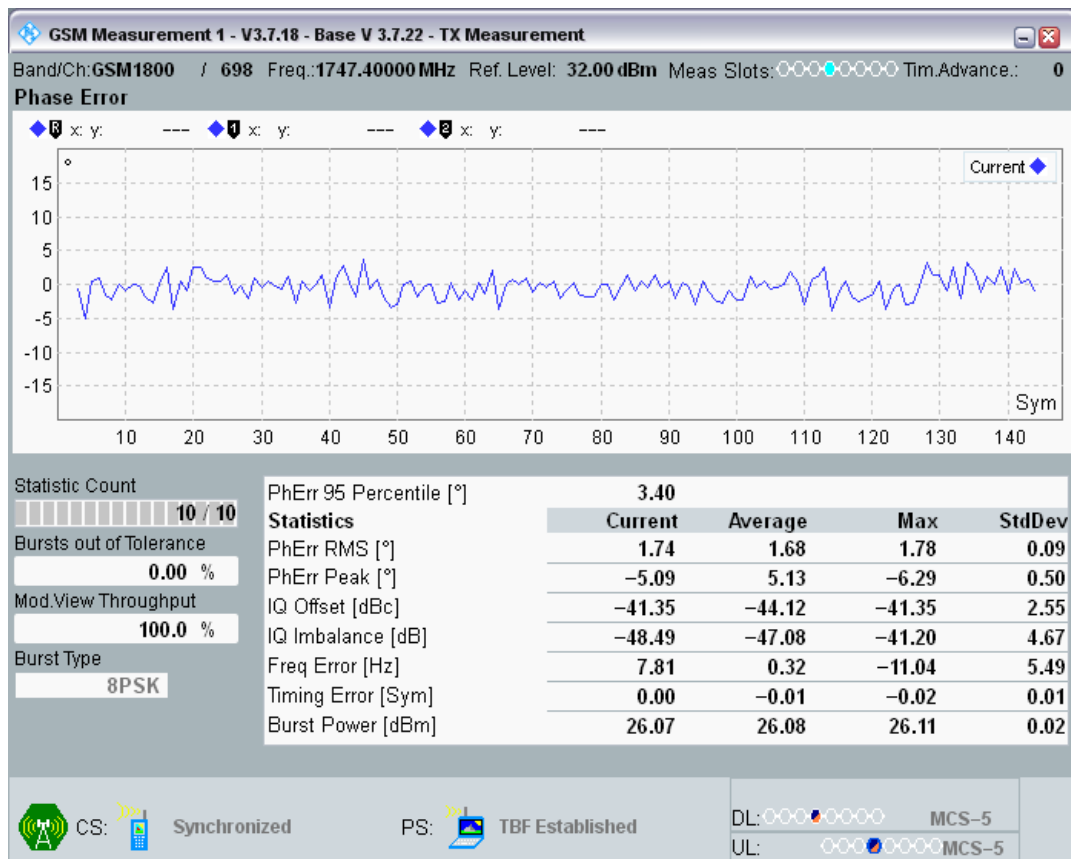


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @7

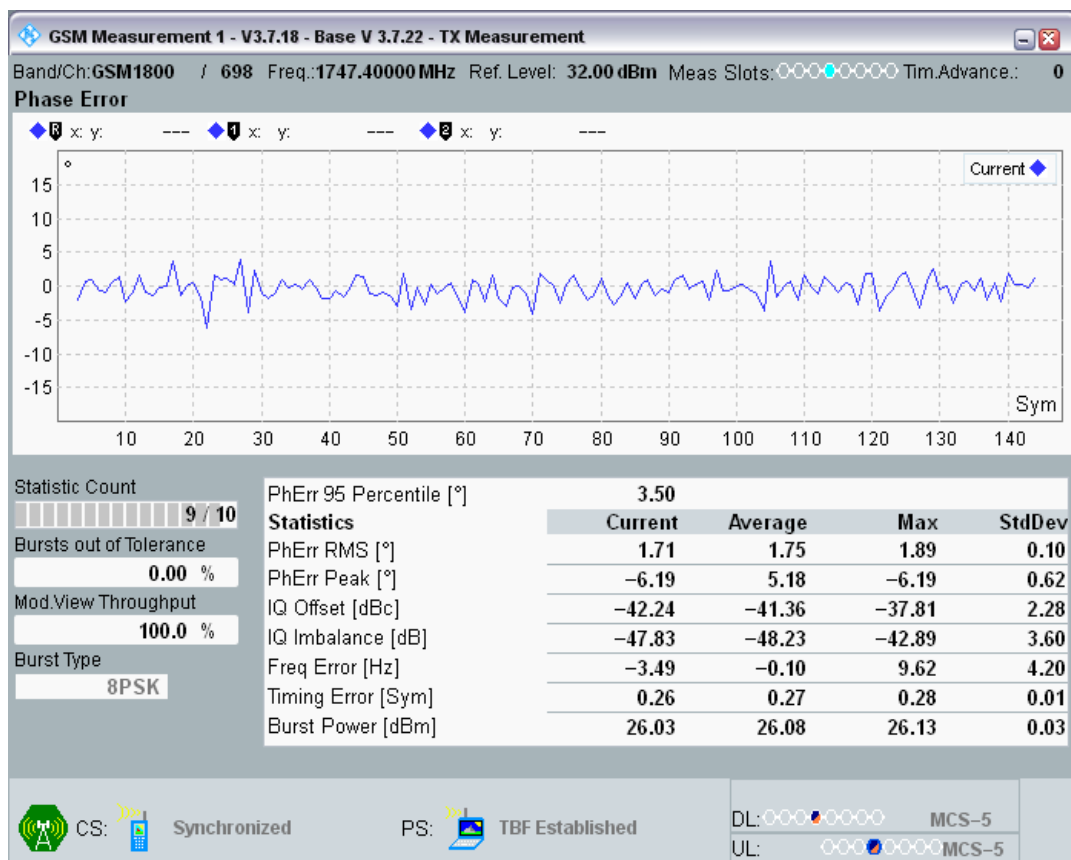


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @8

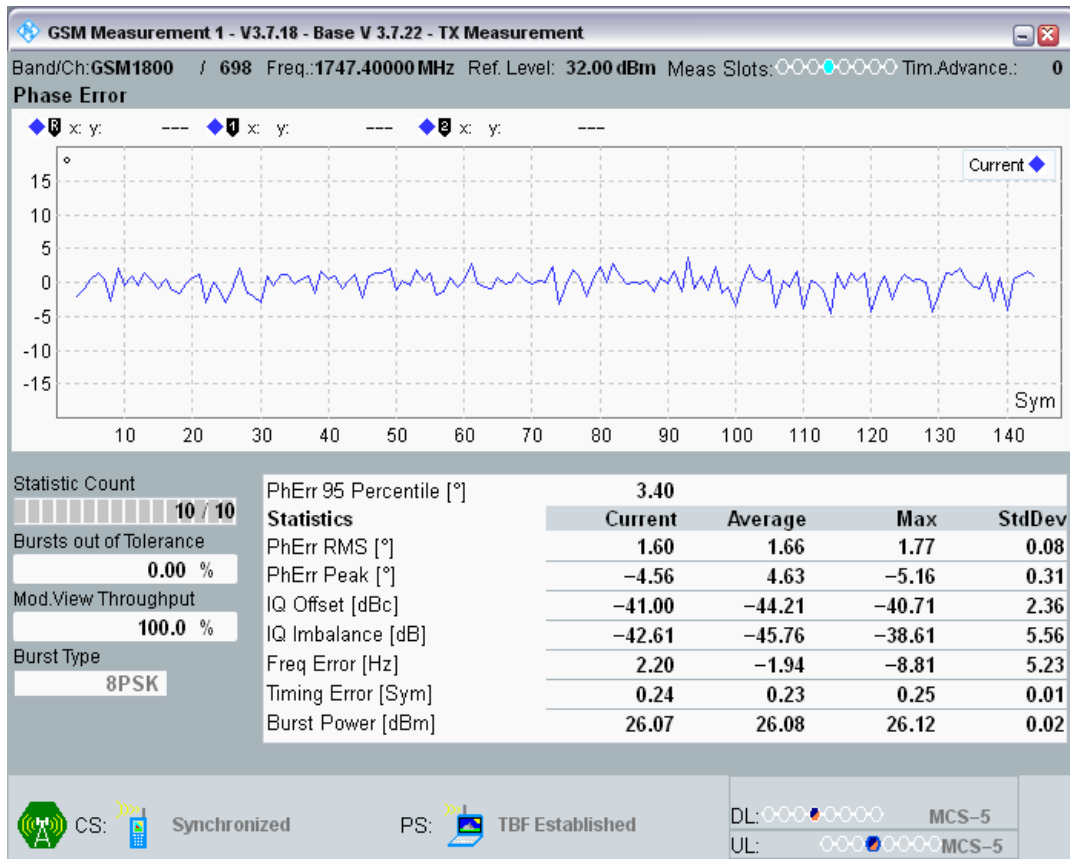


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @9

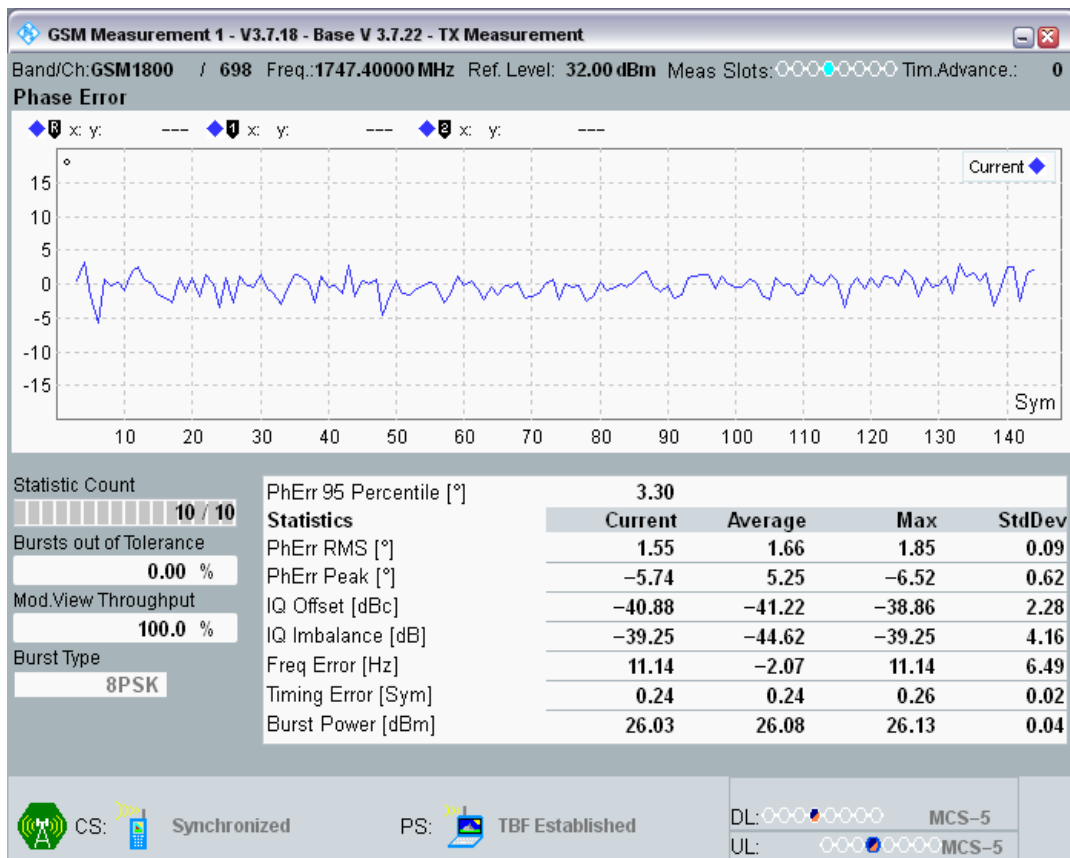


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @11

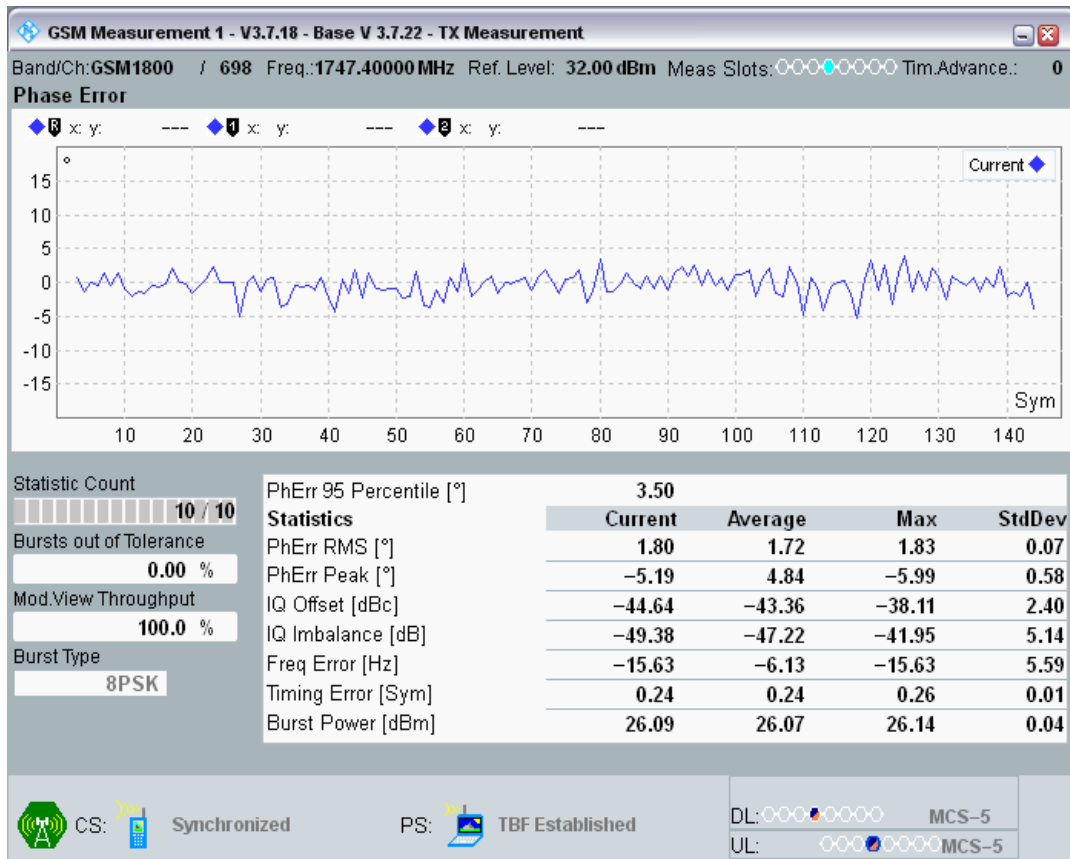


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @10

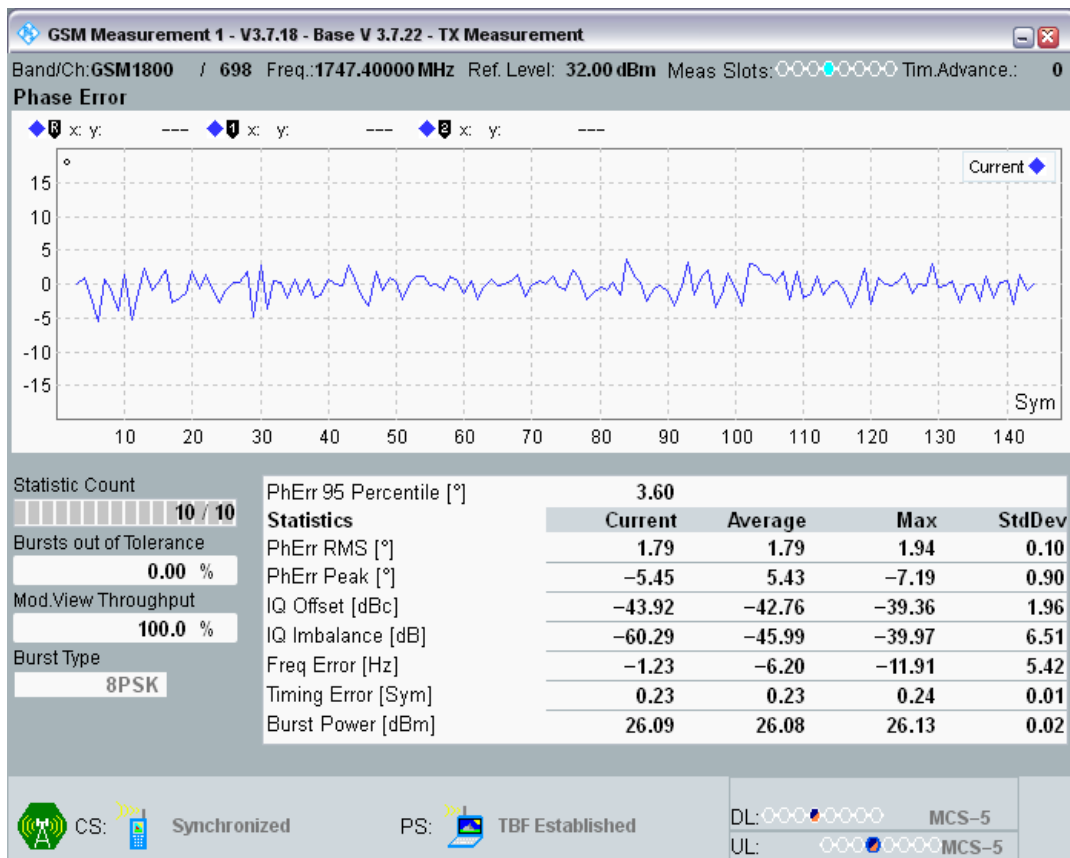


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @12

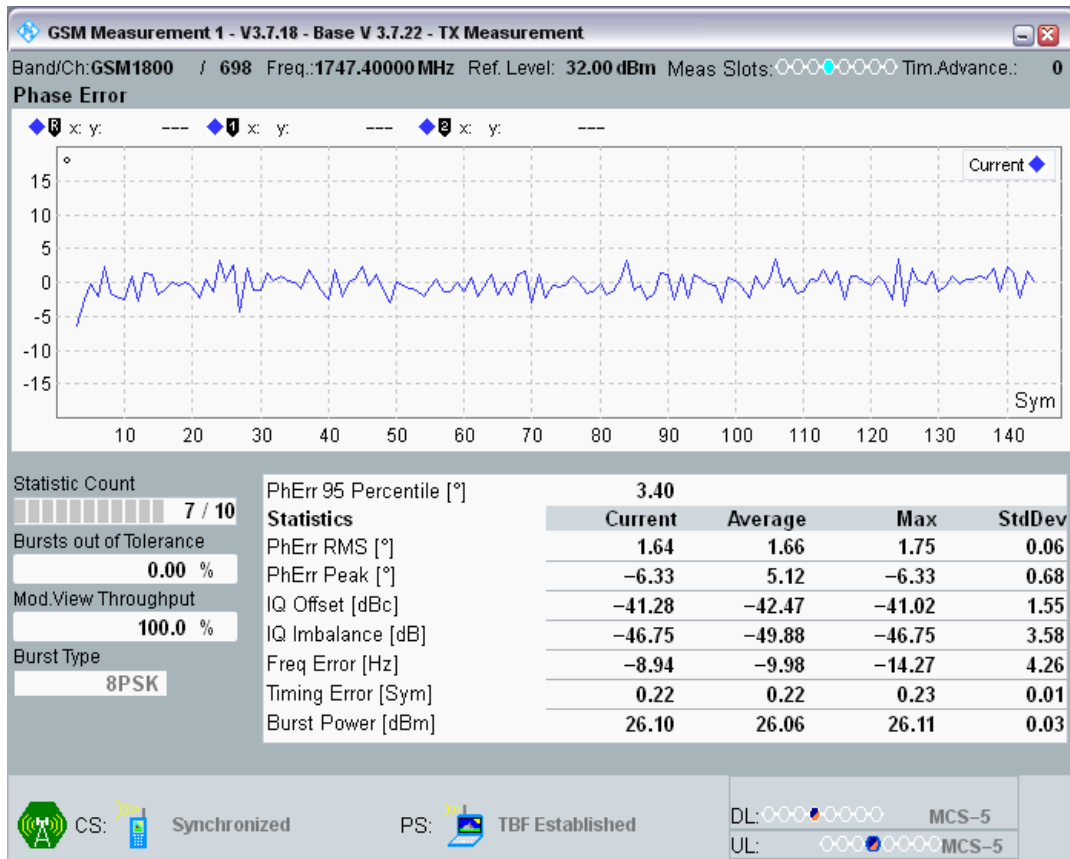


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @14

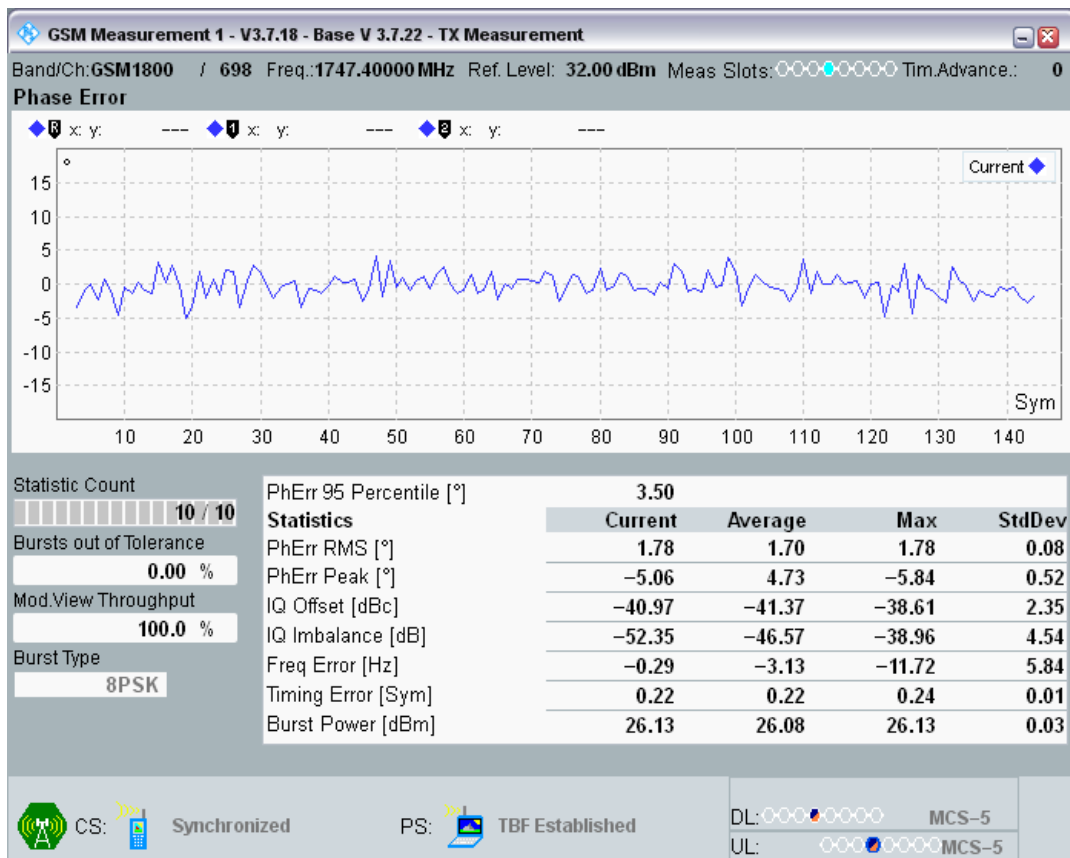


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @13

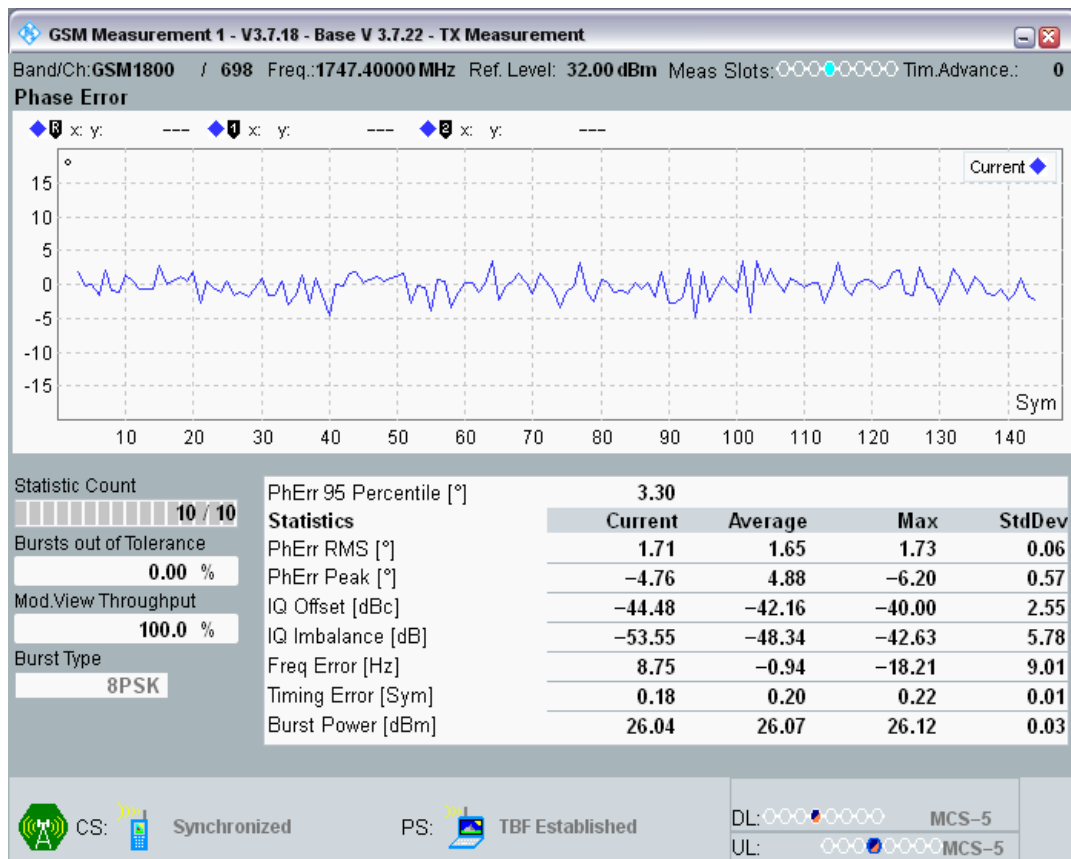


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @15

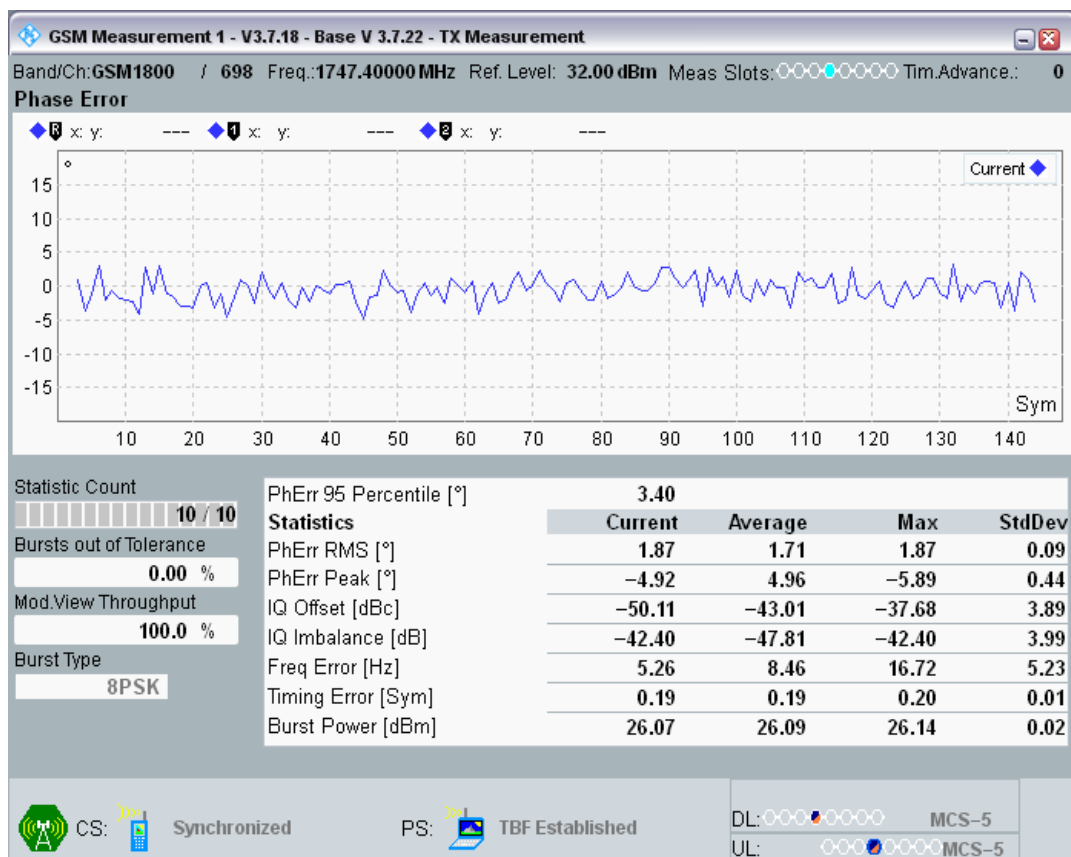


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @17

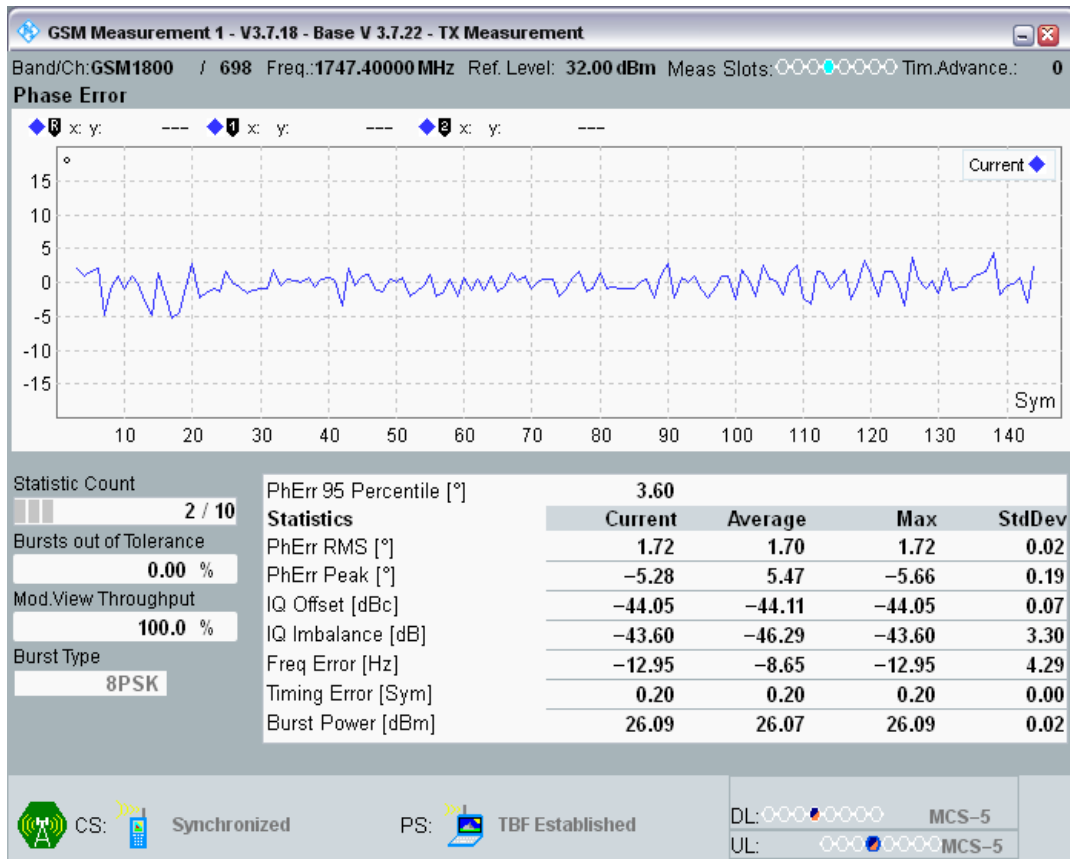


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @16

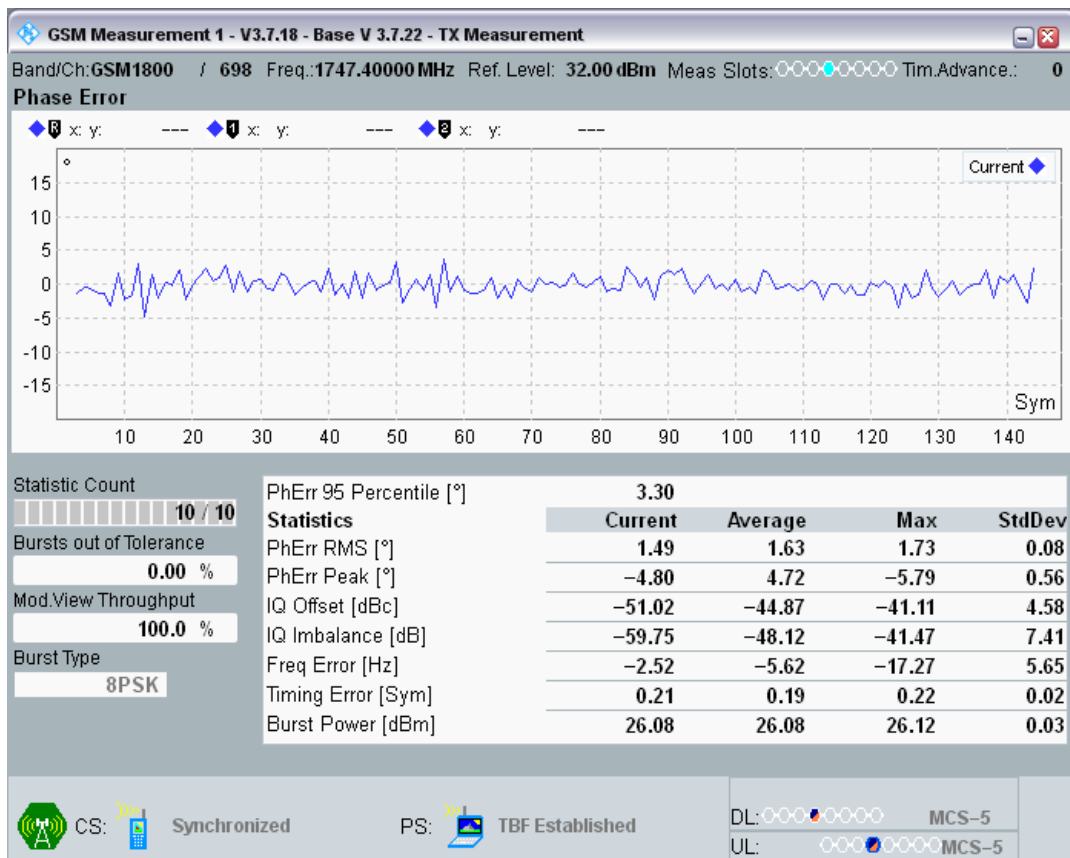


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @18

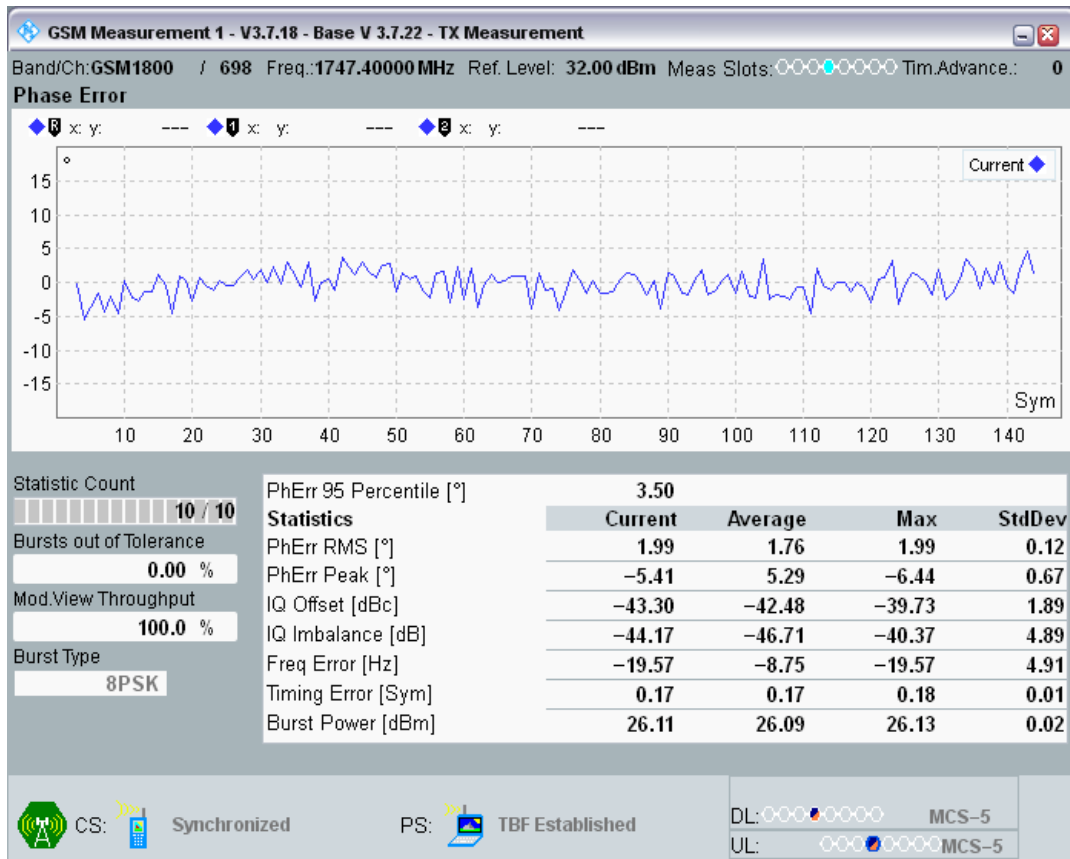


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @19

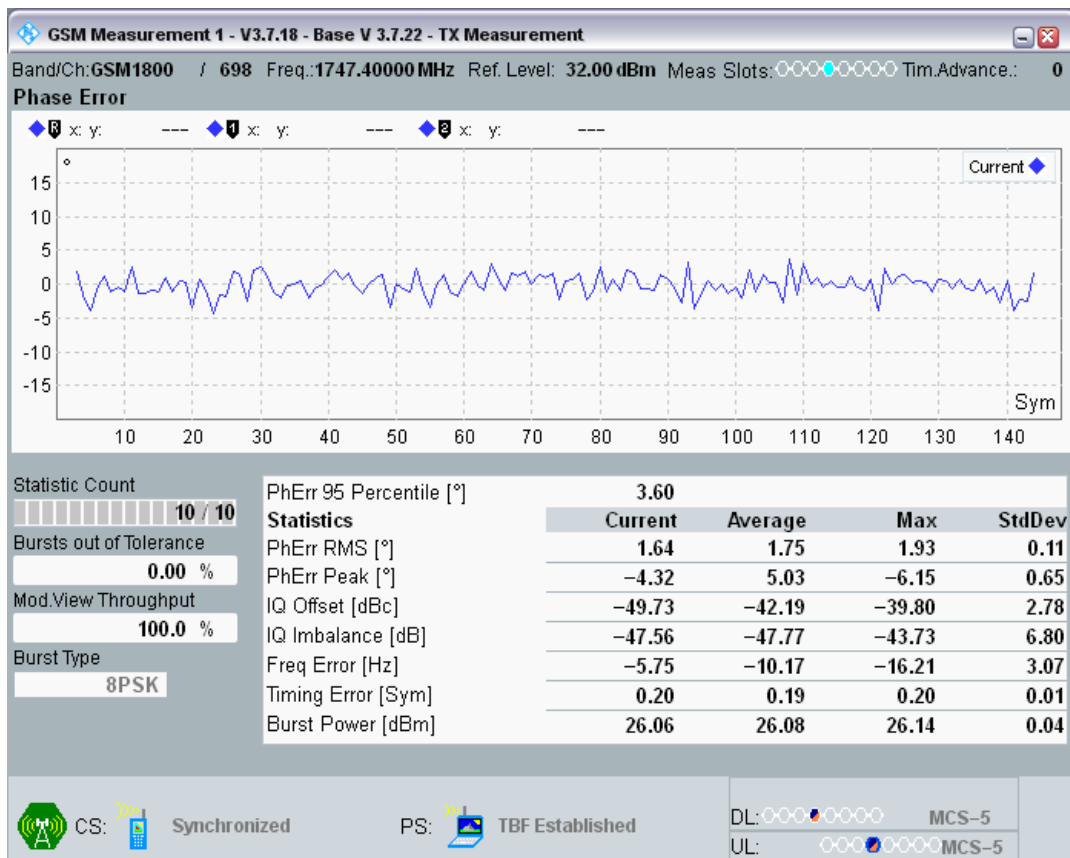


EGPRS1800 Channel=698 Gamma=5;5;5;5 TU3 @20

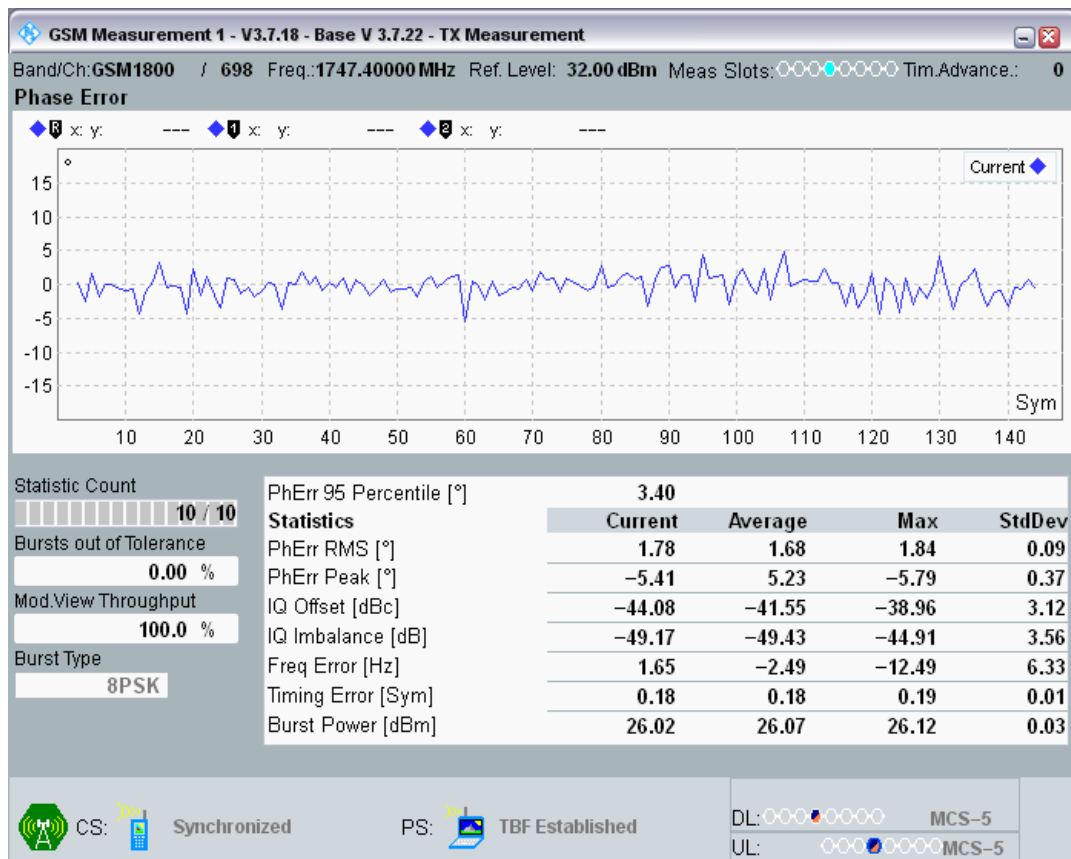


EGPRS1900 Channel=661 Gamma=5;5;5;5 RA250 @Sens1

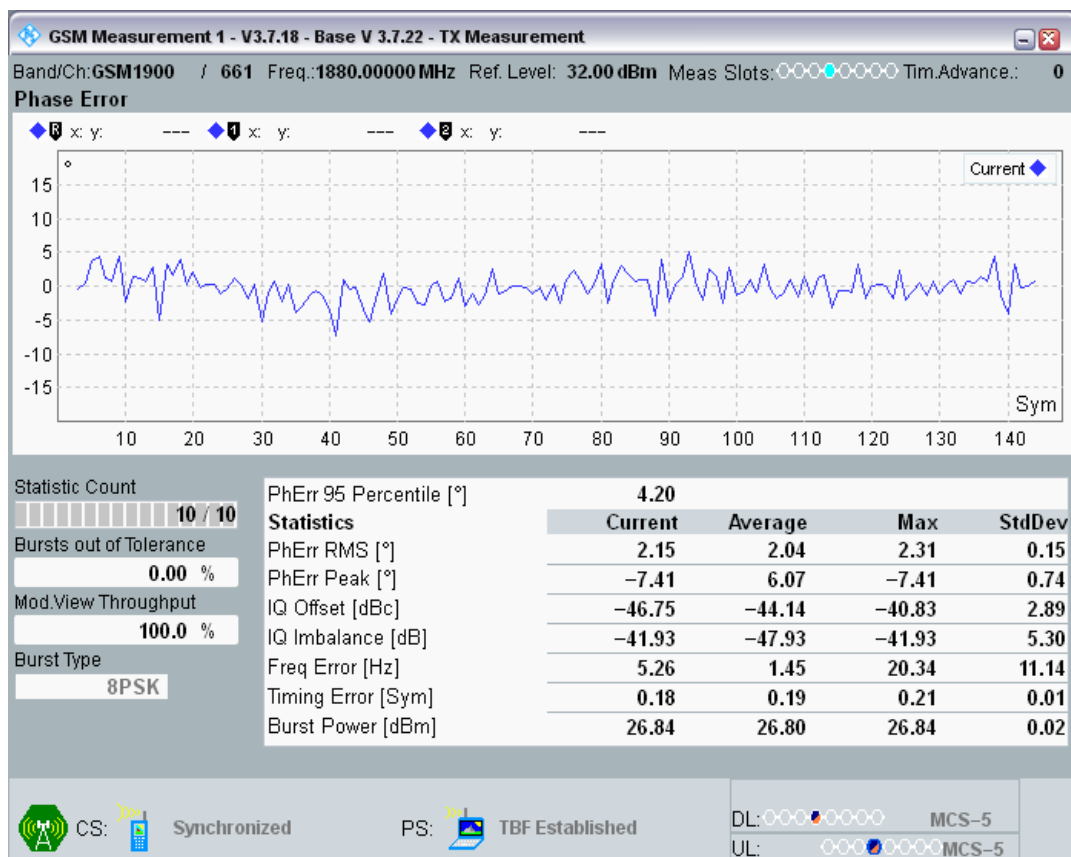


EGPRS1900 Channel=661 Gamma=5;5;5;5 RA250 @Connect

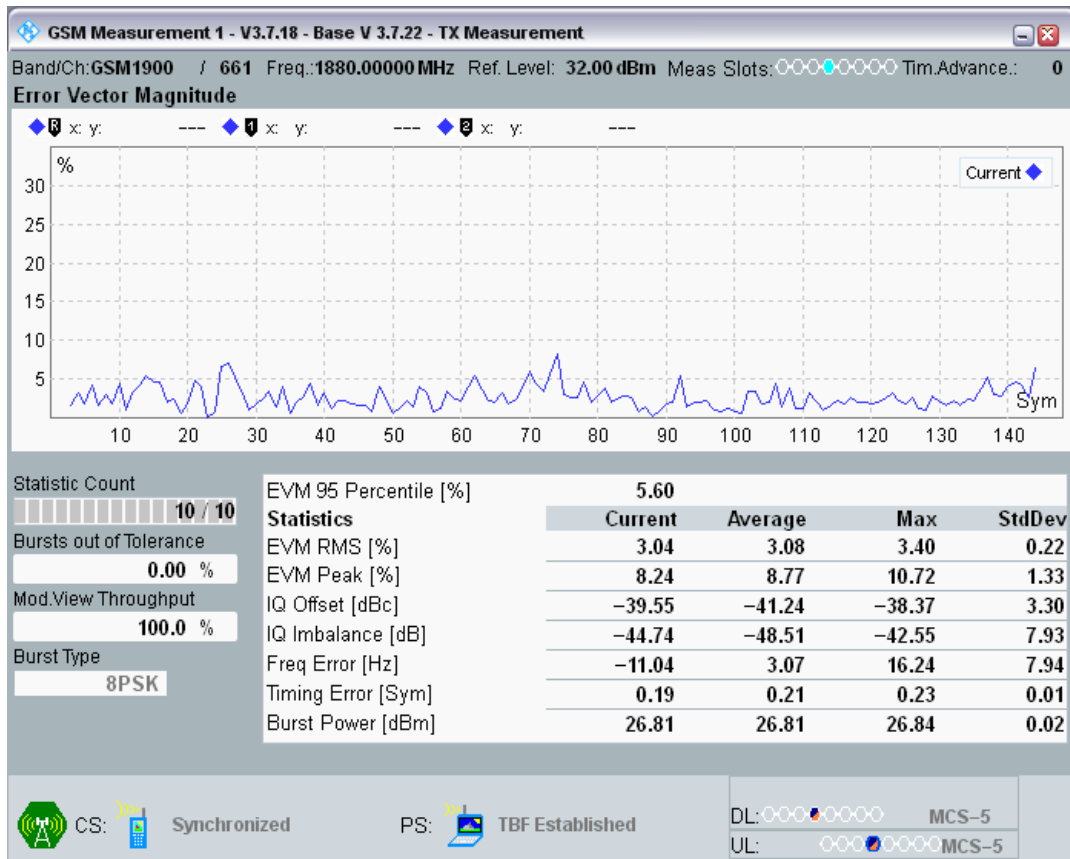


EGPRS1900 Channel=661 Gamma=5;5;5;5 RA250 @Sens2

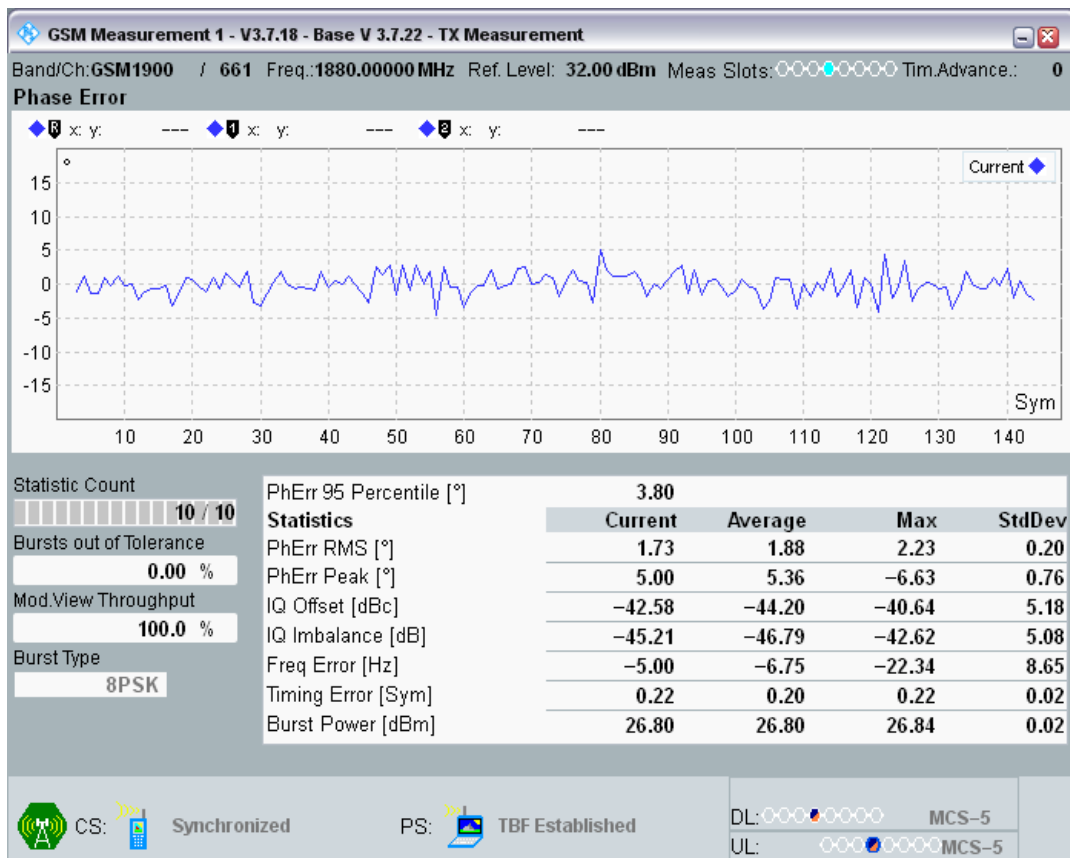


EGPRS1900 Channel=661 Gamma=5;5;5;5 RA250 @Sens3

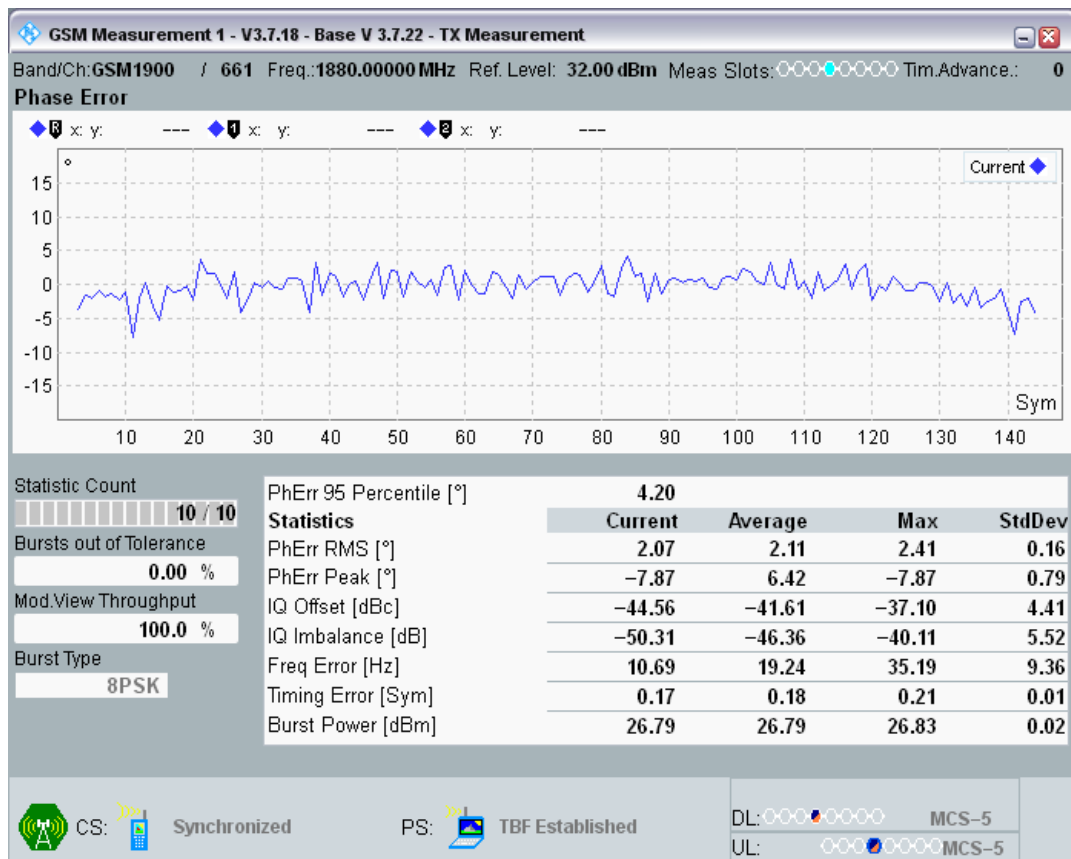


EGPRS1900 Channel=661 Gamma=5;5;5;5 RA250 @Sens4

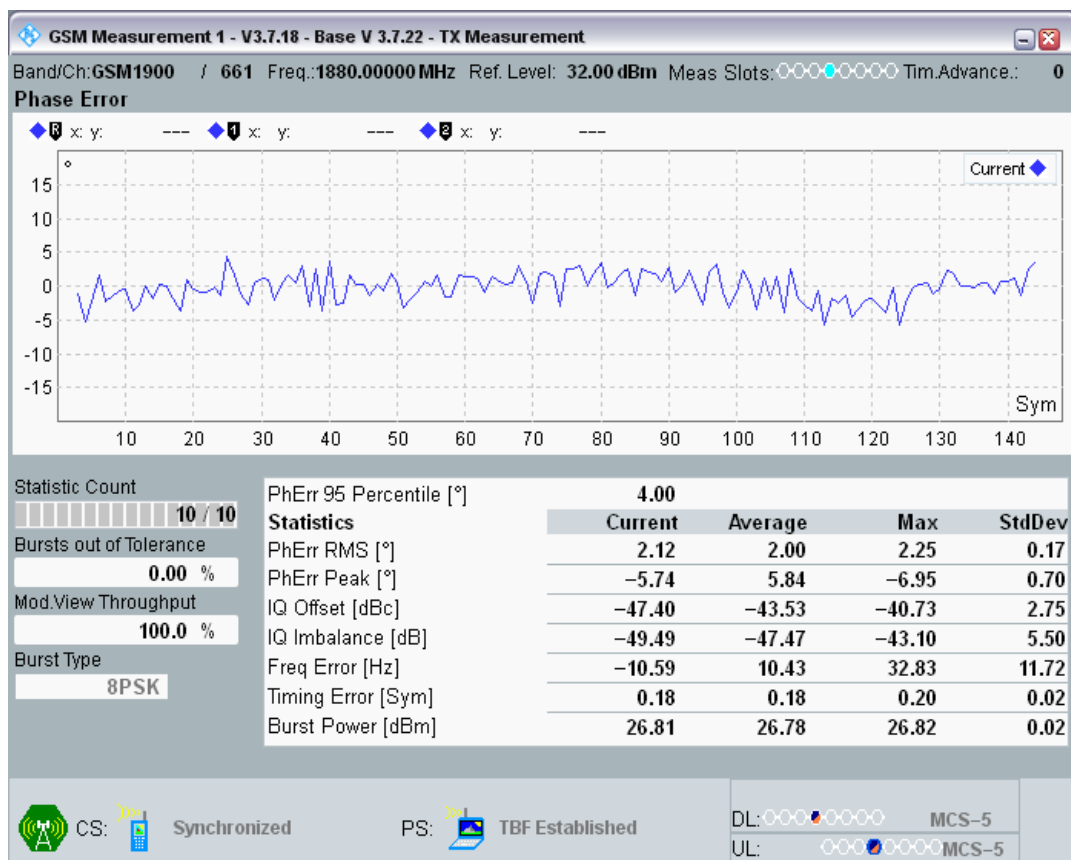


EGPRS1900 Channel=661 Gamma=5;5;5;5 RA250 @Sens5

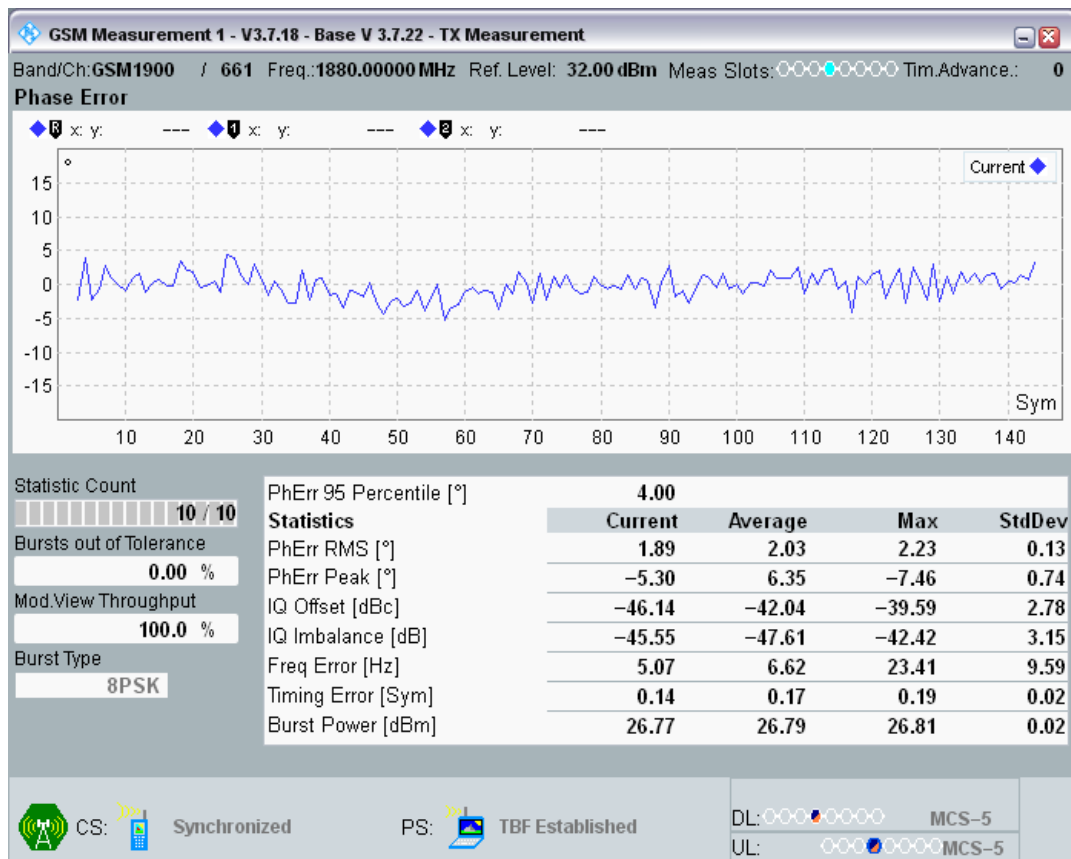


EGPRS1900 Channel=661 Gamma=5;5;5;5 HT100 @Connect

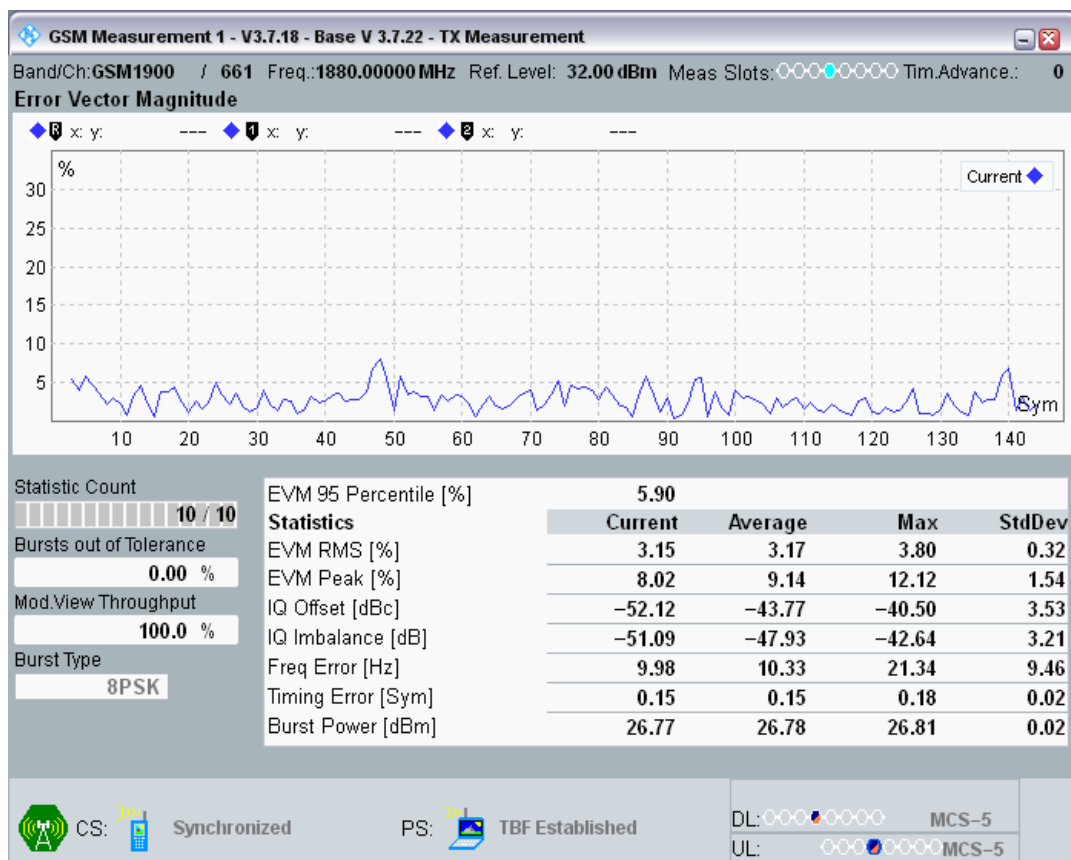


EGPRS1900 Channel=661 Gamma=5;5;5;5 HT100 @Sens1

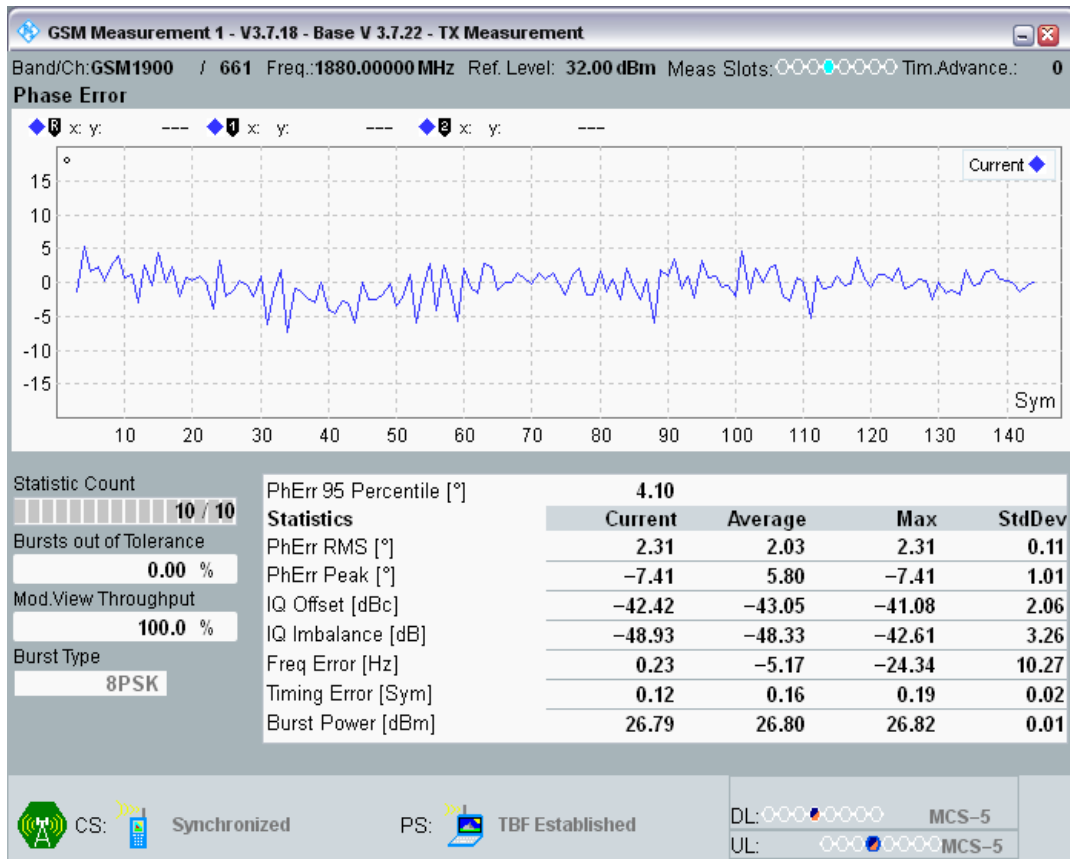


EGPRS1900 Channel=661 Gamma=5;5;5;5 HT100 @Sens2

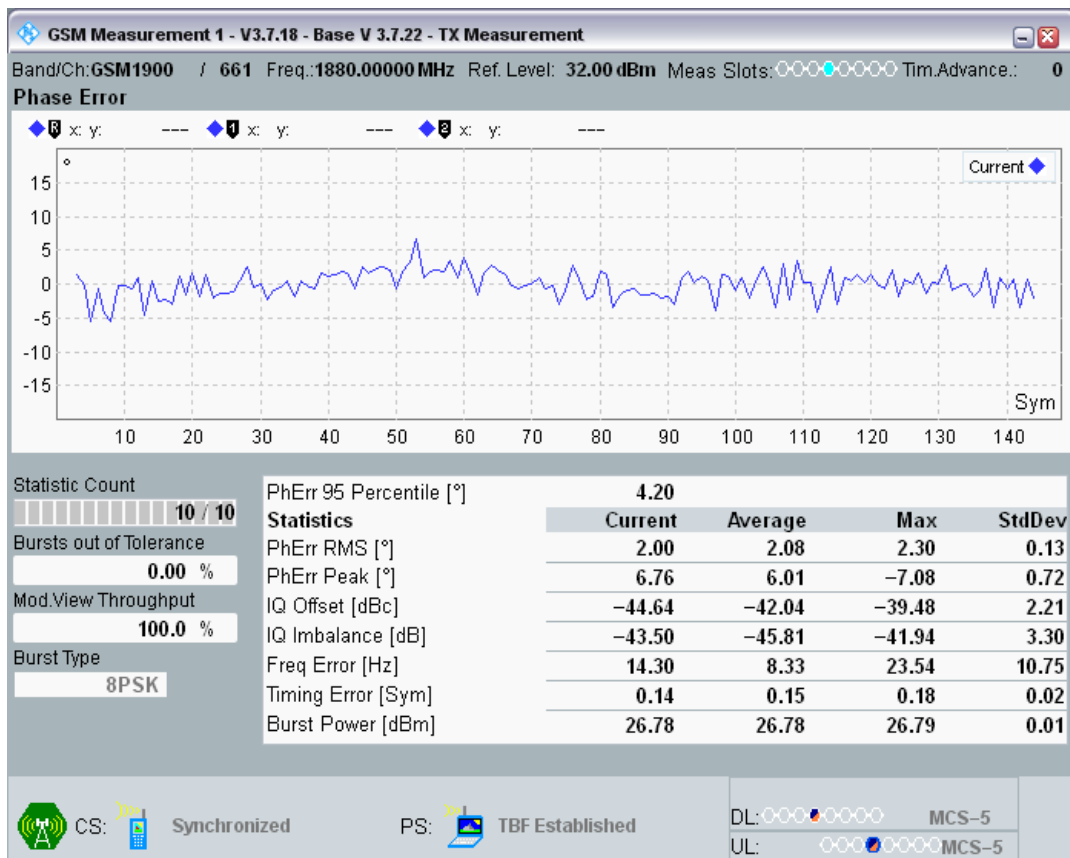


EGPRS1900 Channel=661 Gamma=5;5;5;5 HT100 @Sens3

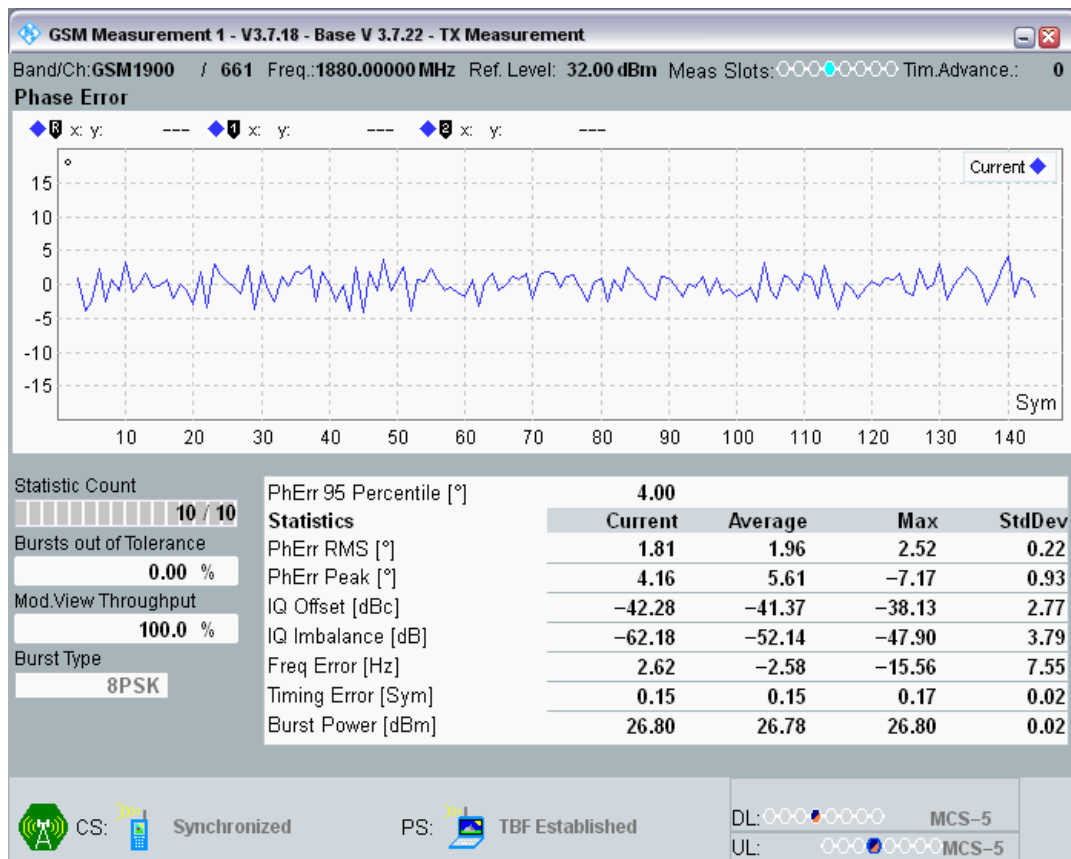


EGPRS1900 Channel=661 Gamma=5;5;5;5 HT100 @Sens5

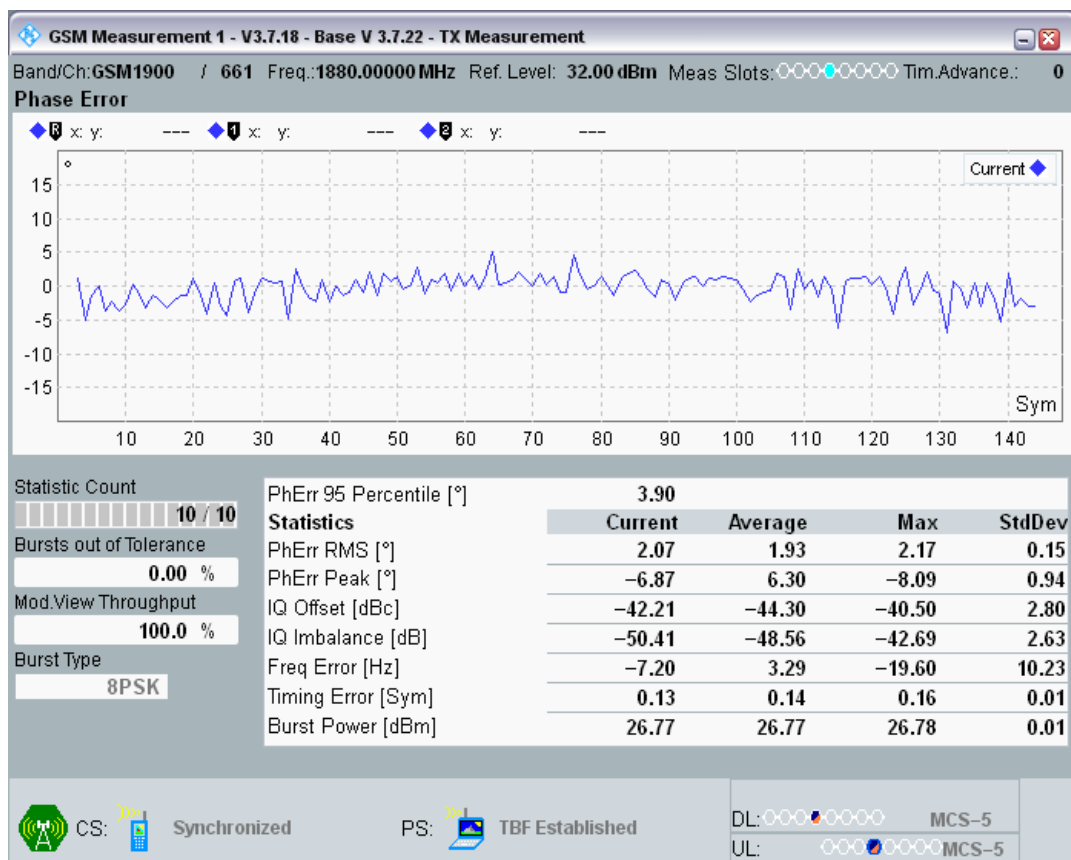


EGPRS1900 Channel=661 Gamma=5;5;5;5 HT100 @Sens4

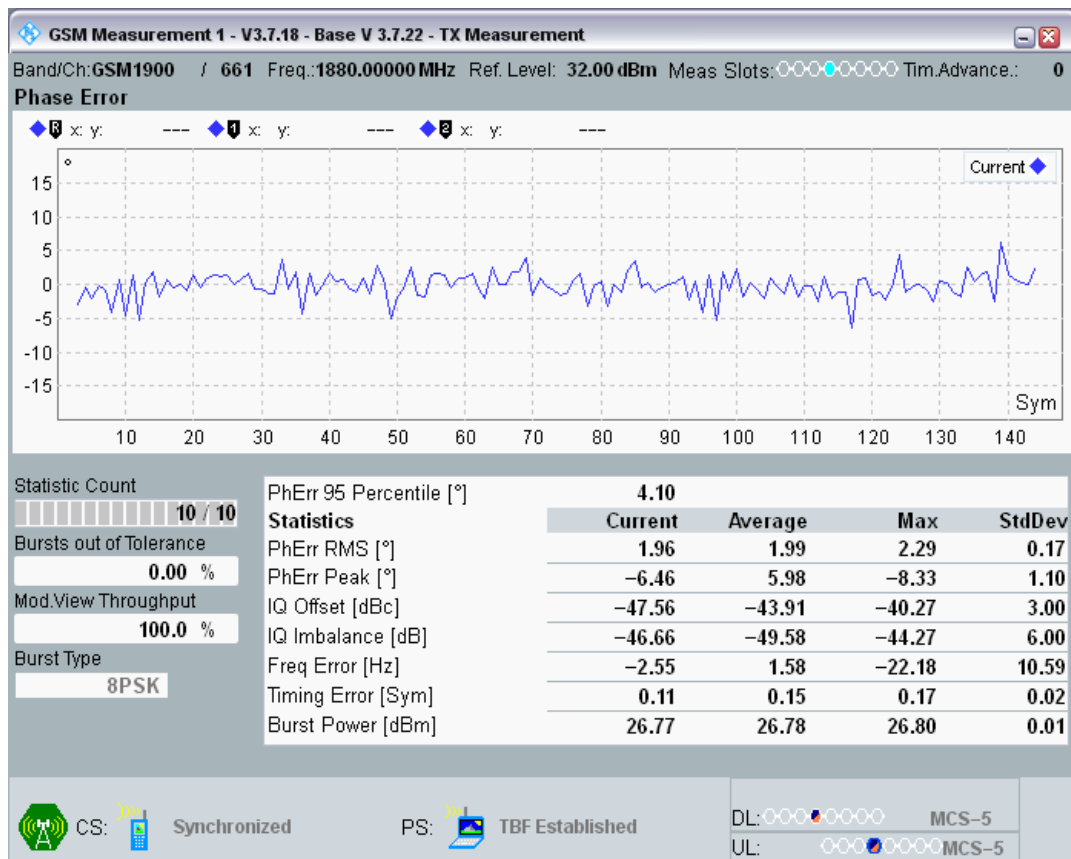


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU50 @Connect

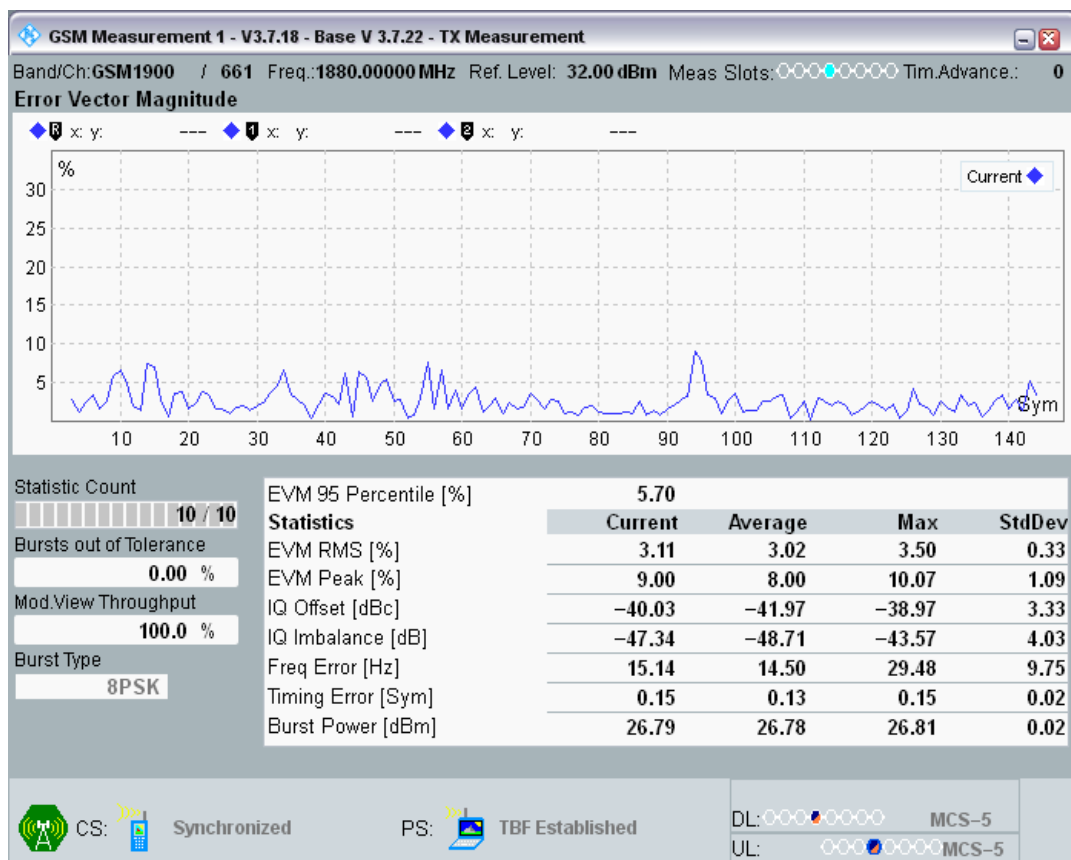


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU50 @Sens2

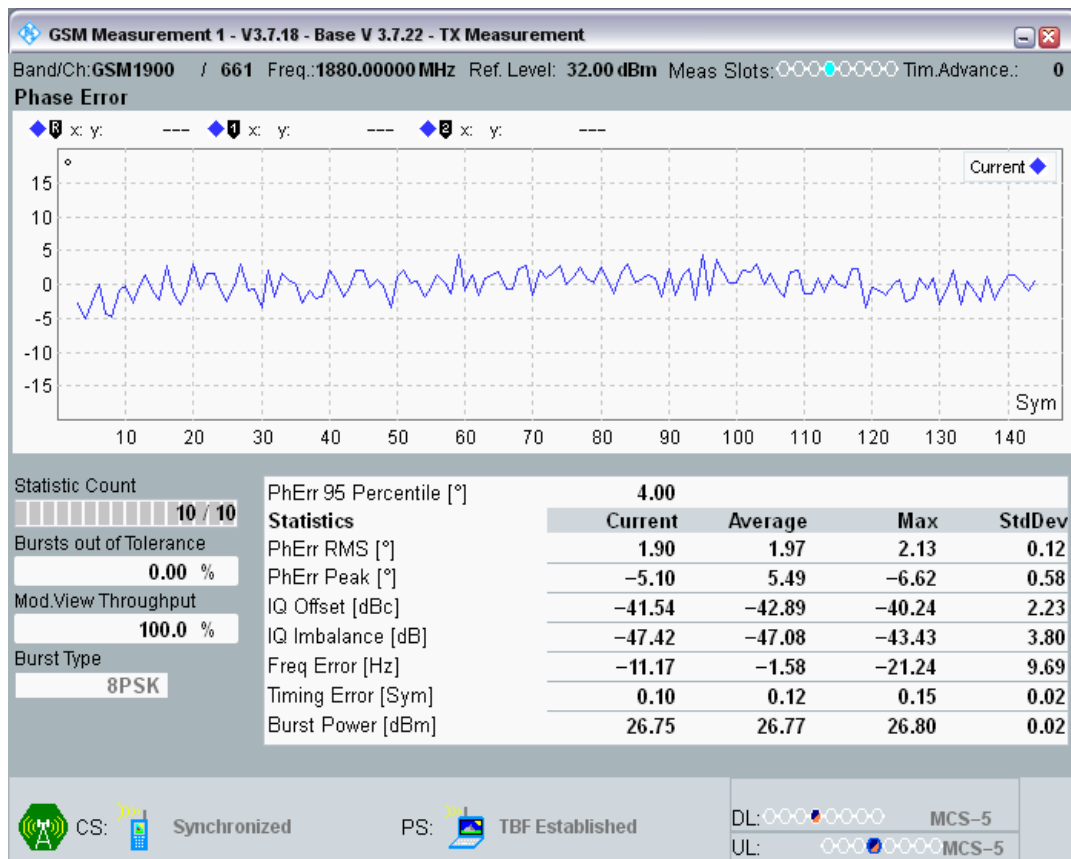


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU50 @Sens1

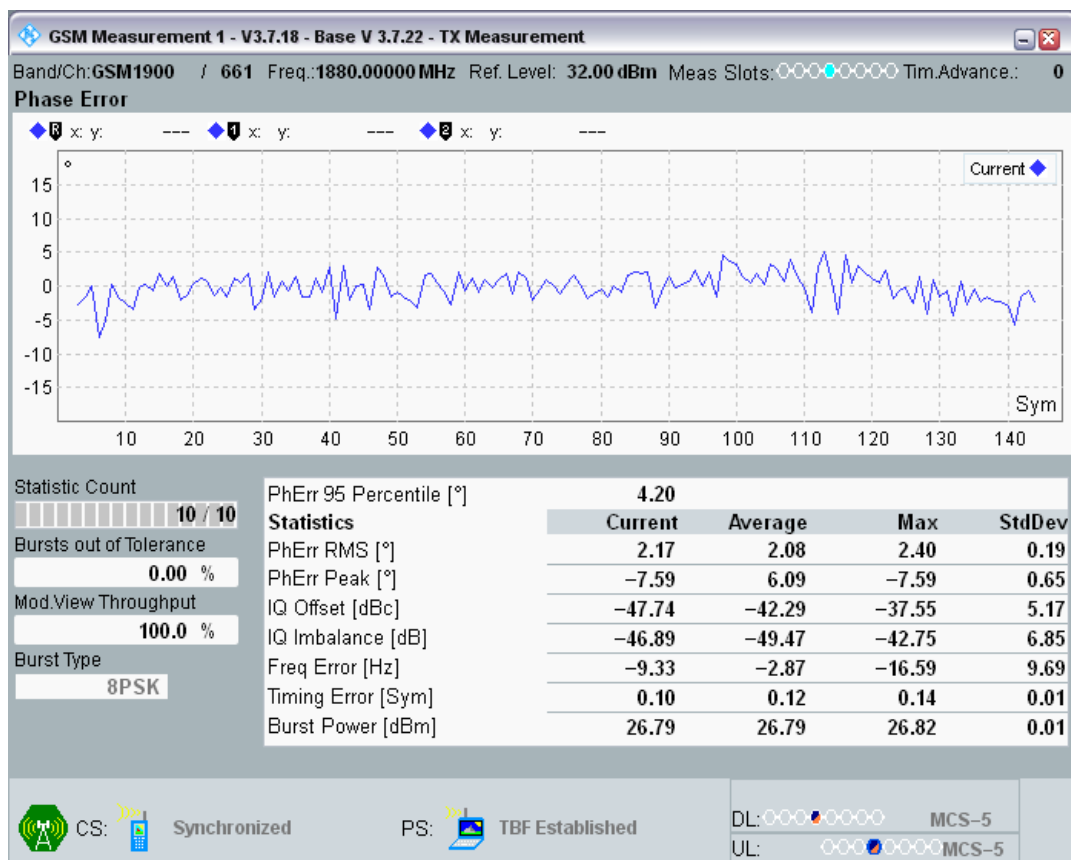


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU50 @Sens4

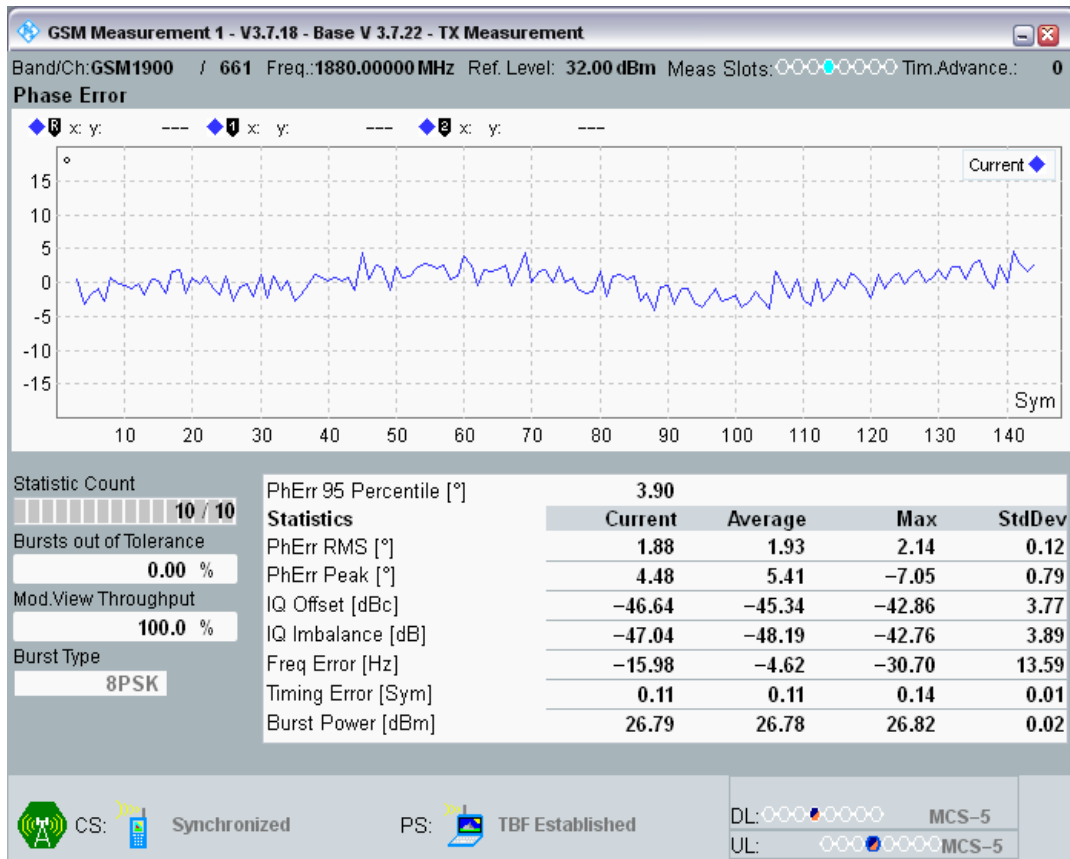


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU50 @Sens3

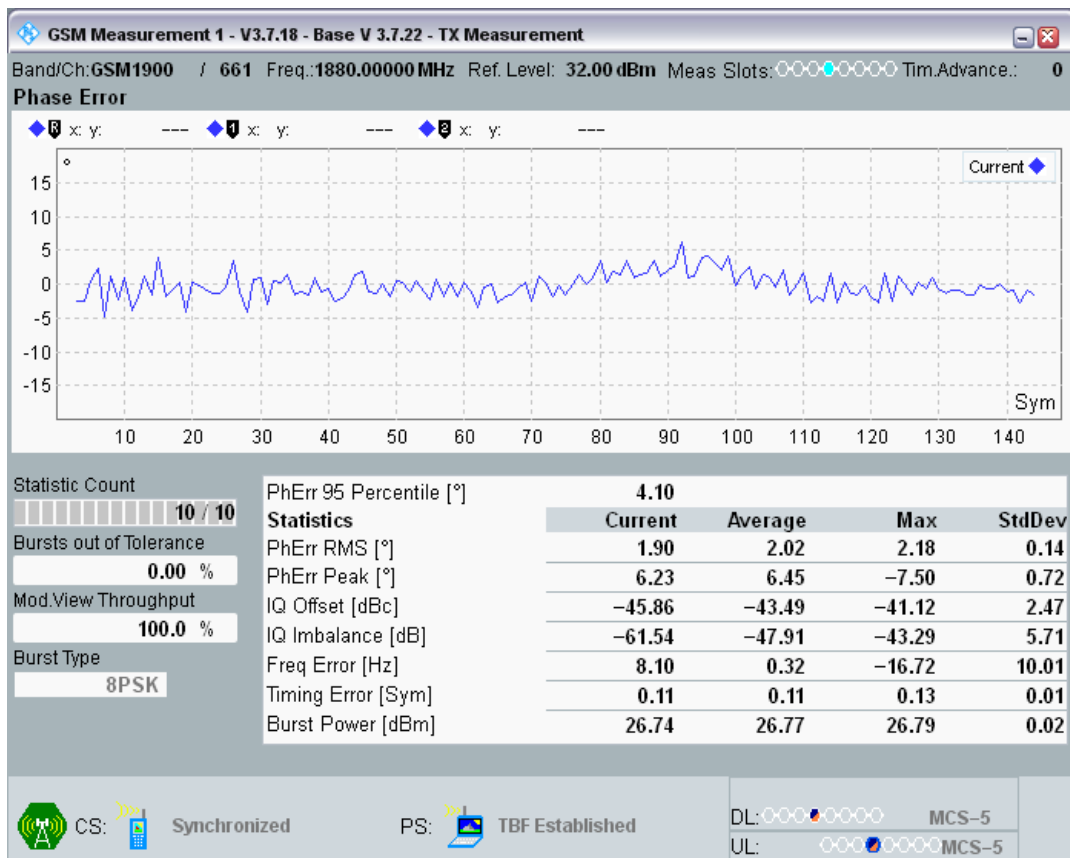


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU50 @Sens5

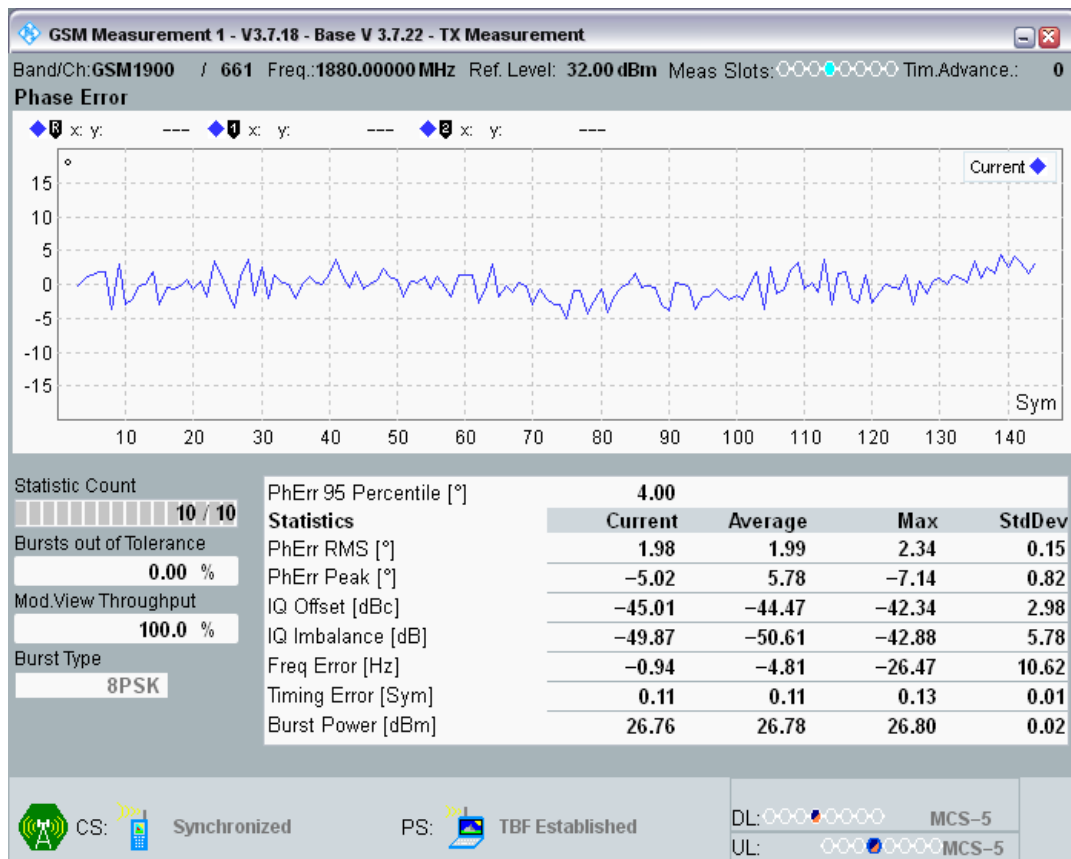


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @1

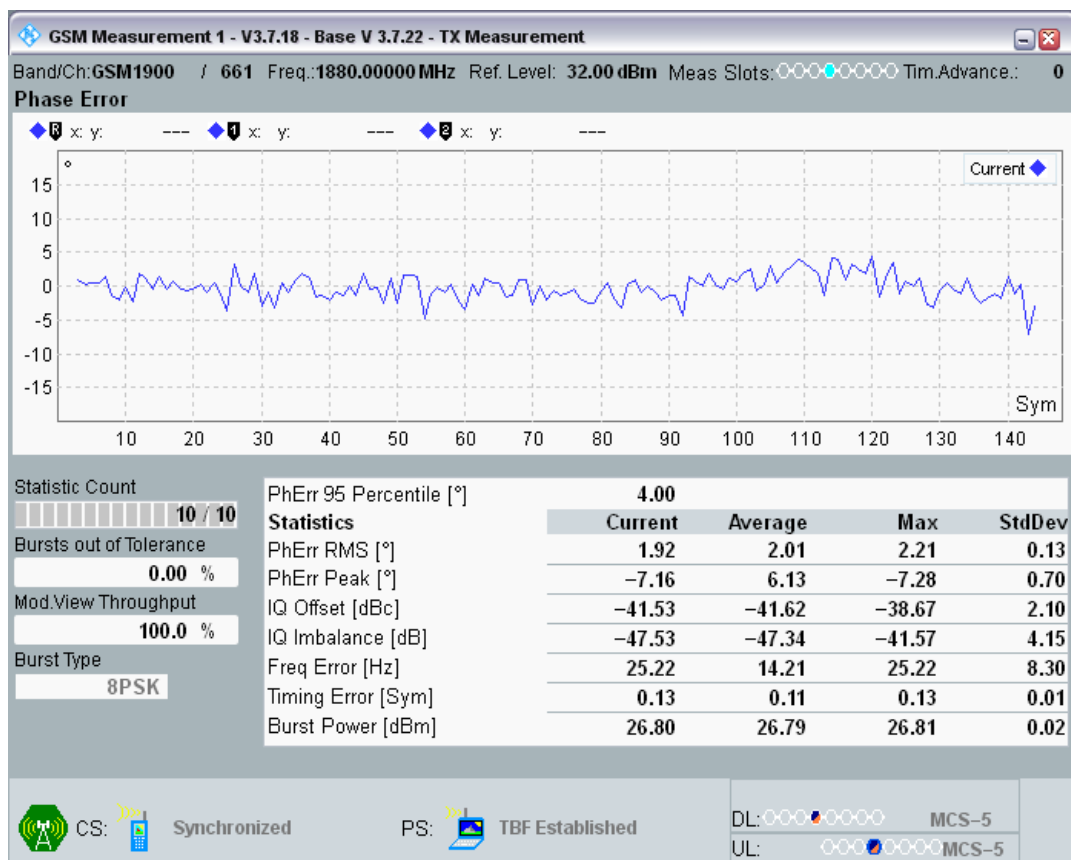


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @Connect

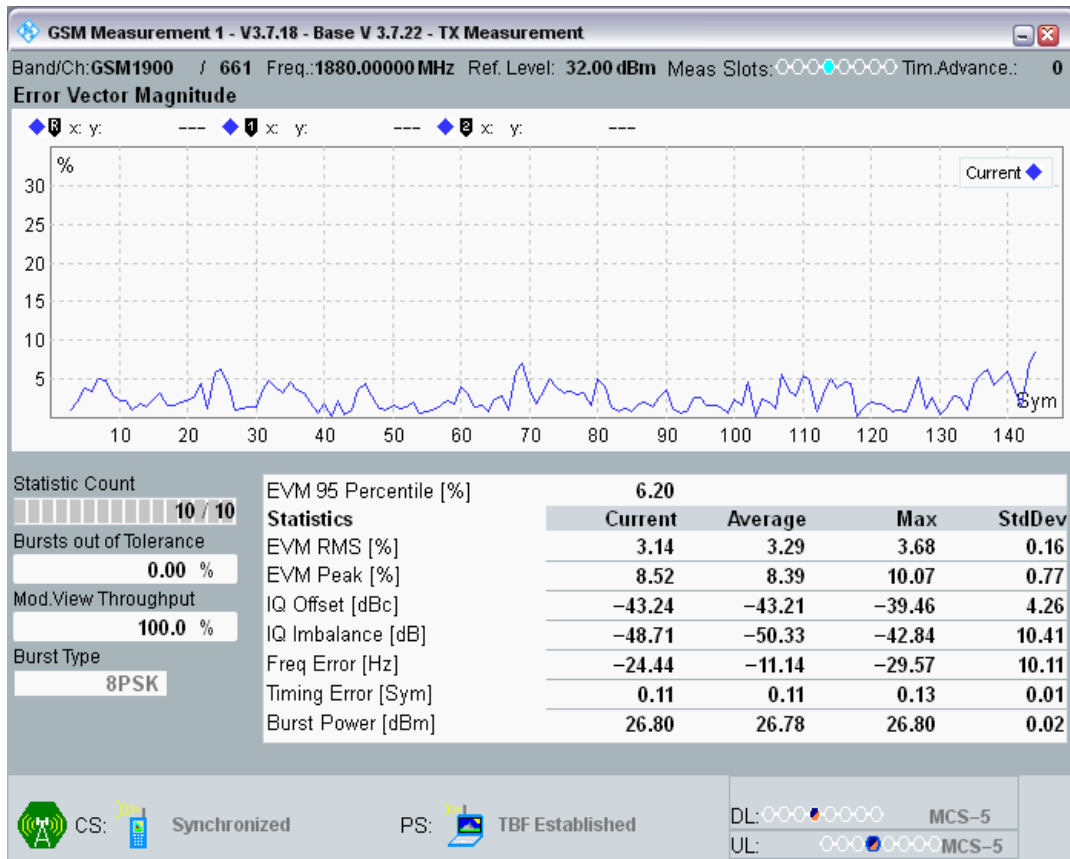


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @2

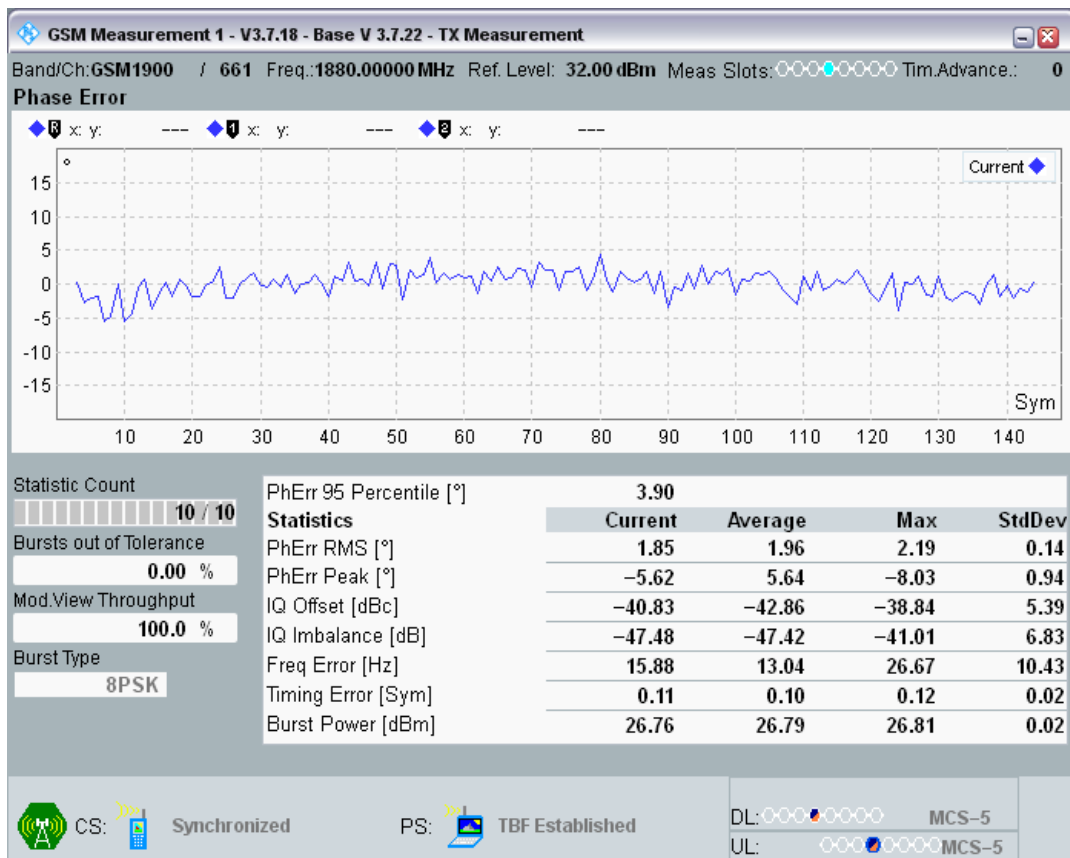


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @3

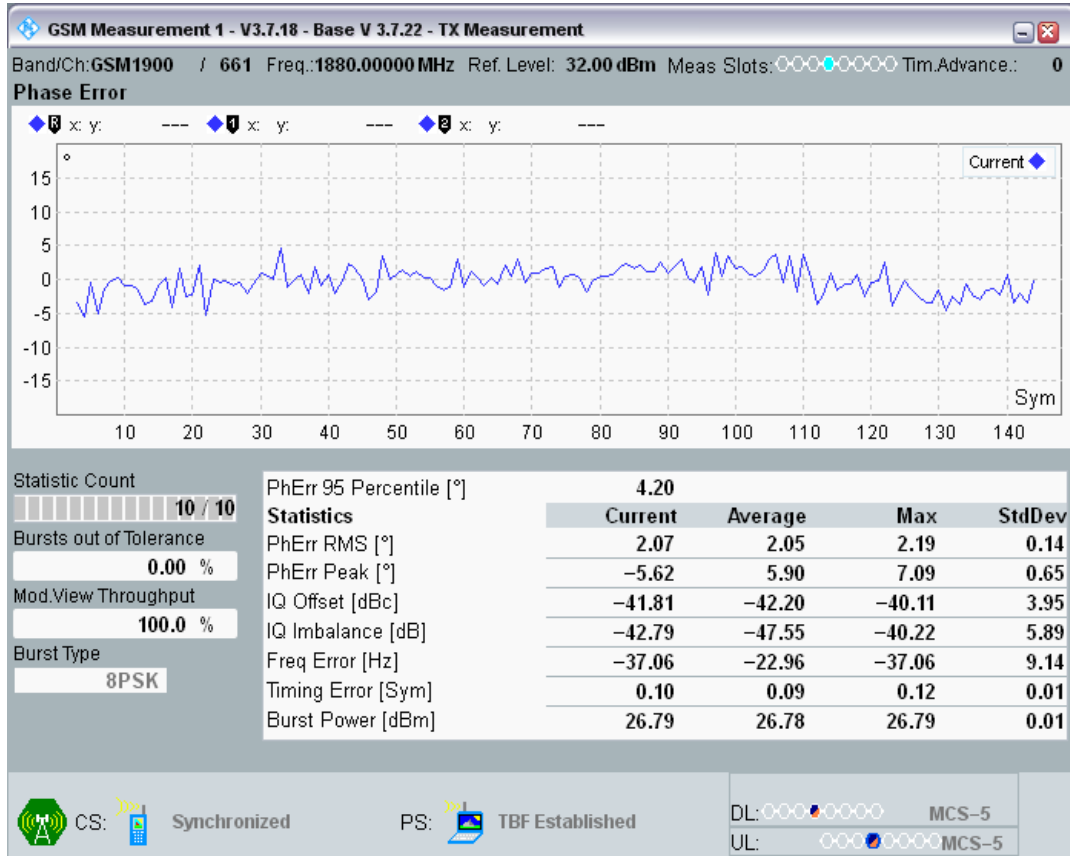


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @4

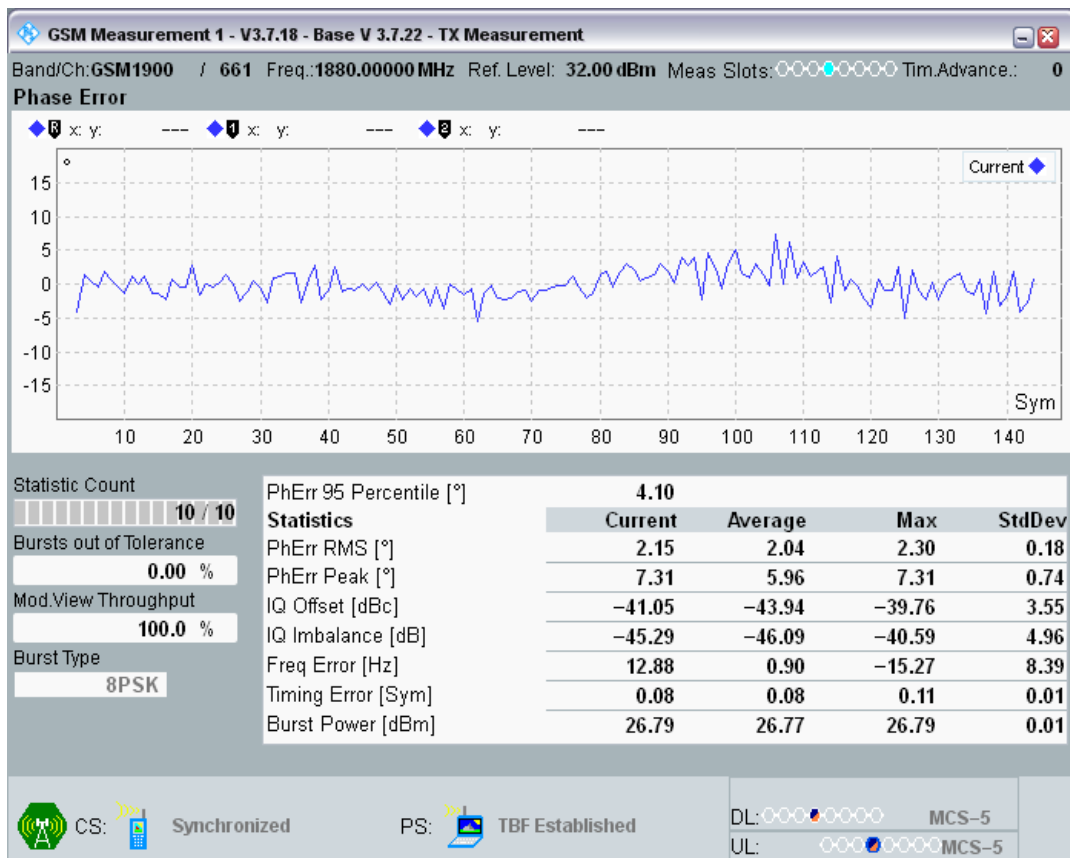


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @6

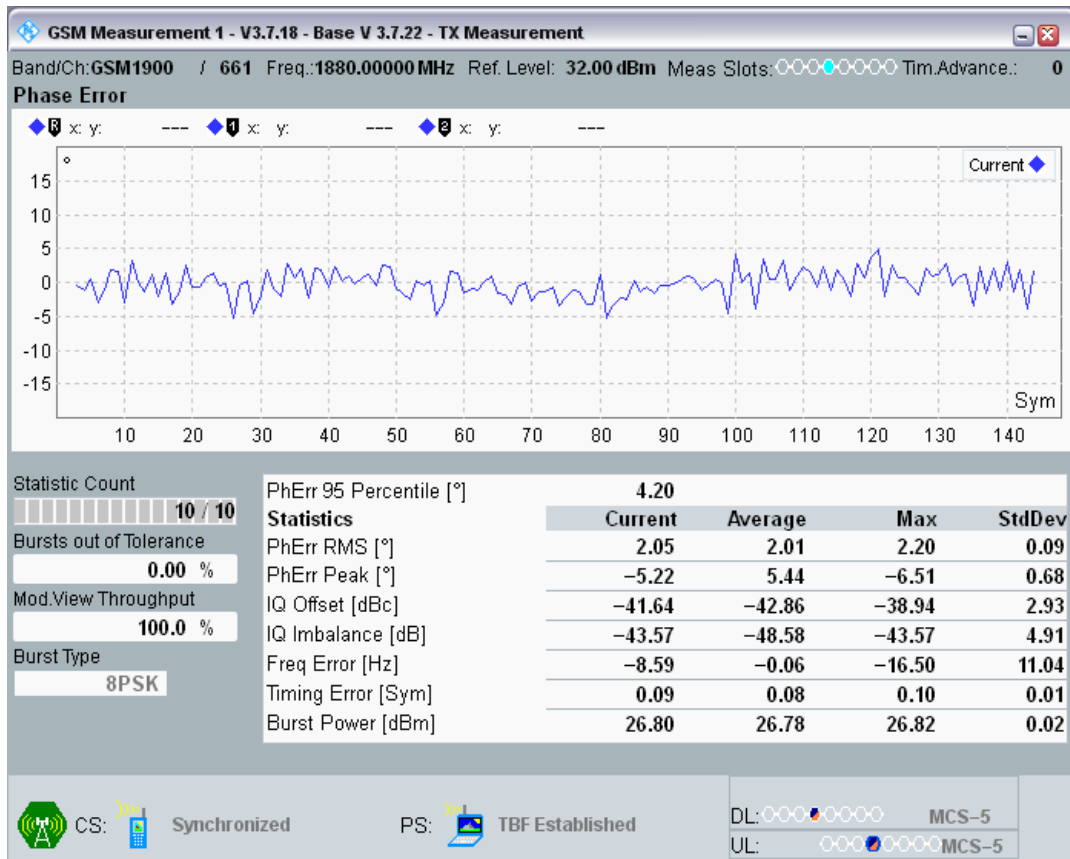


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @5

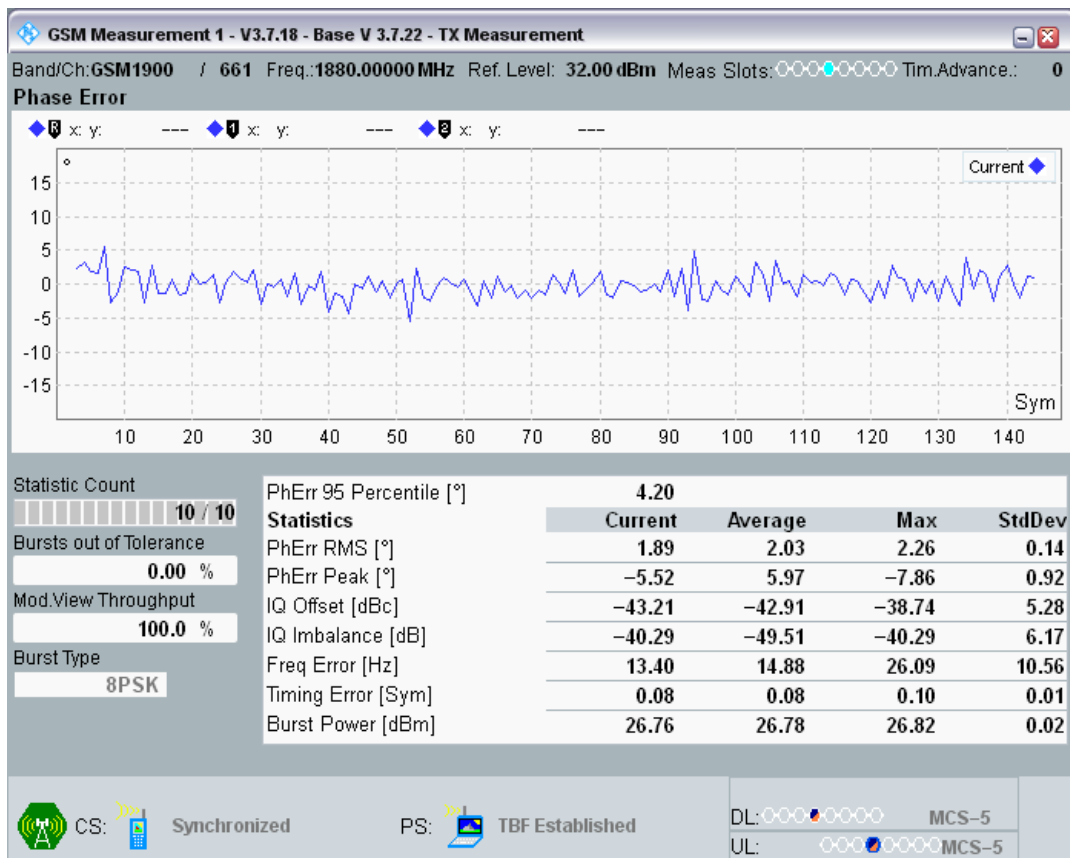


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @7

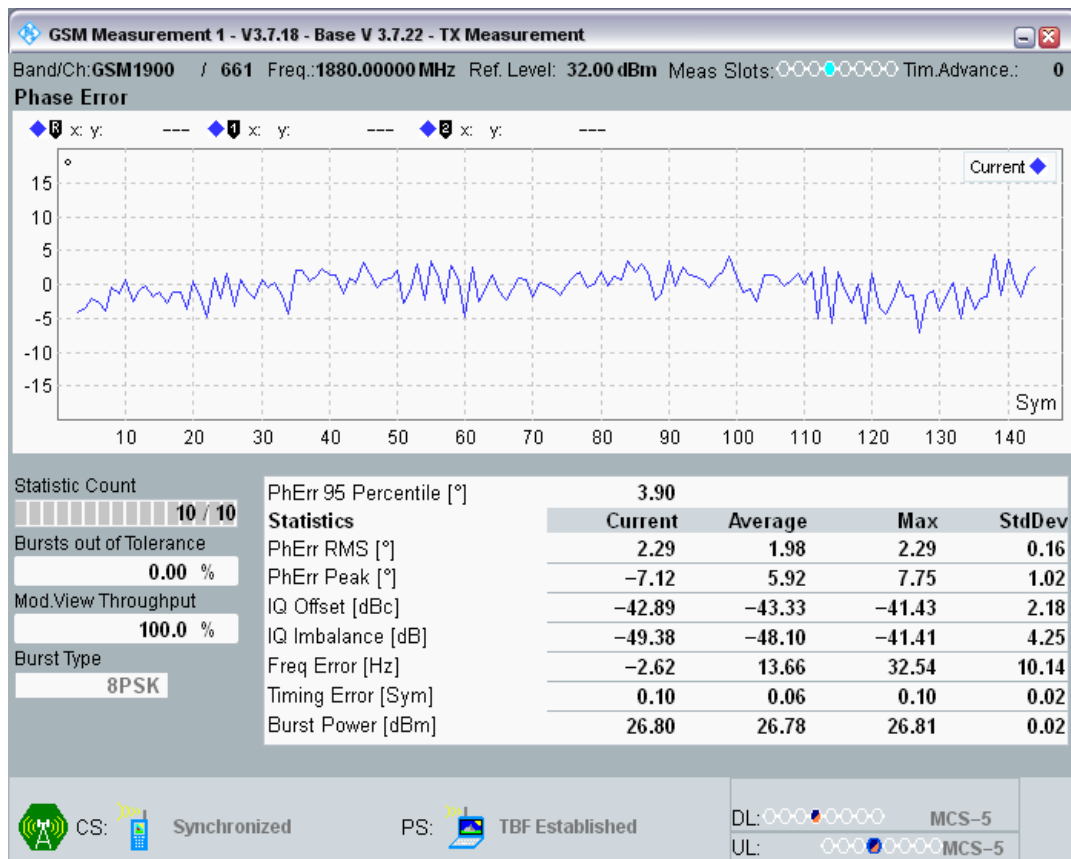

EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @8

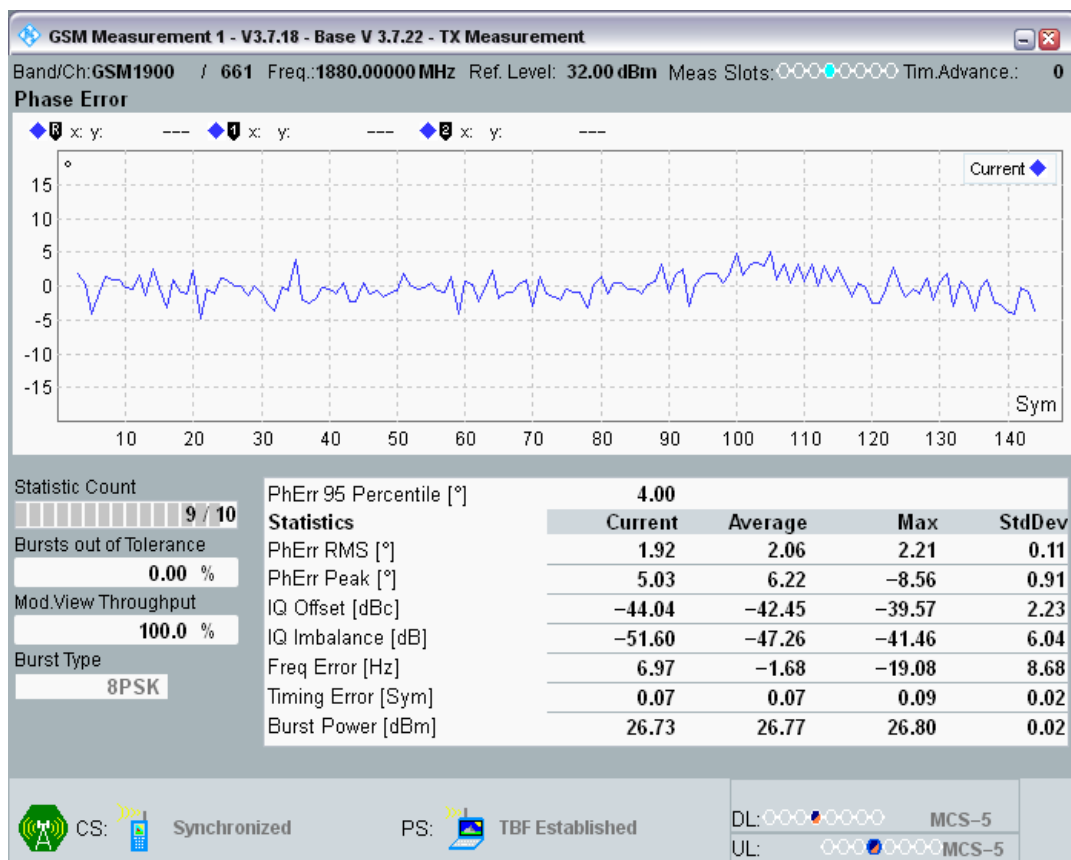


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @9

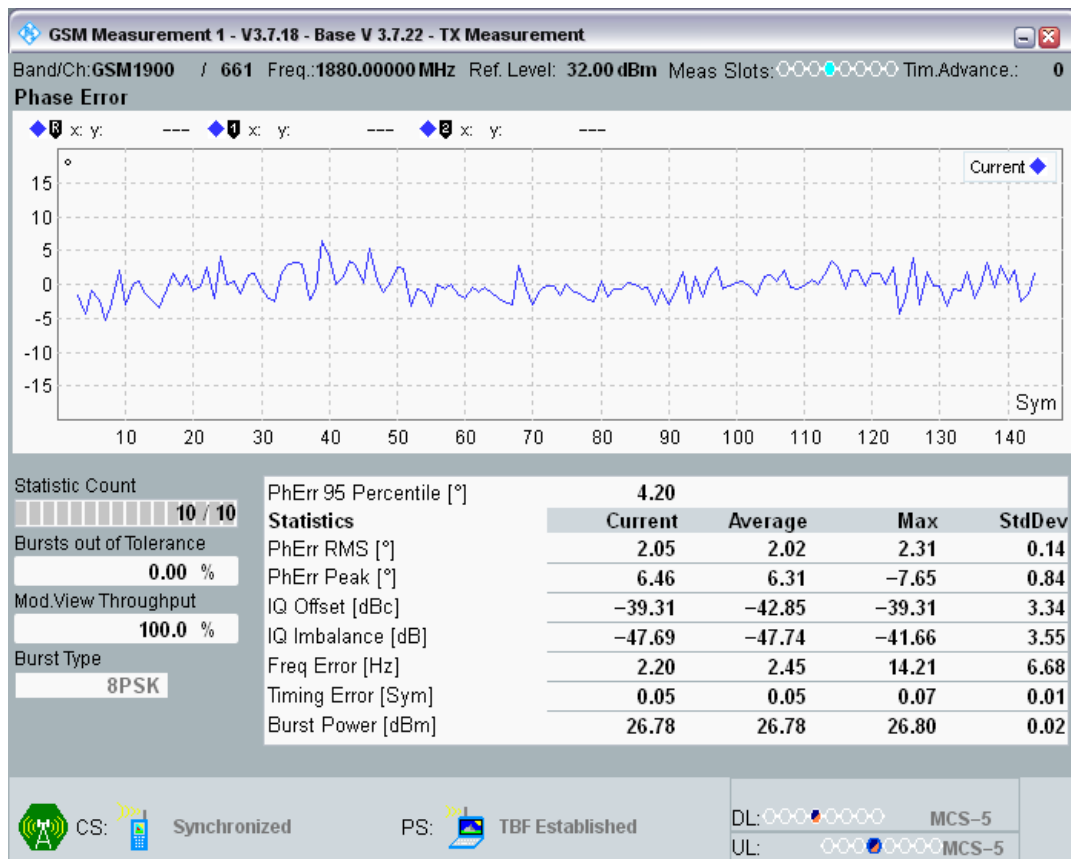


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @10




EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @11

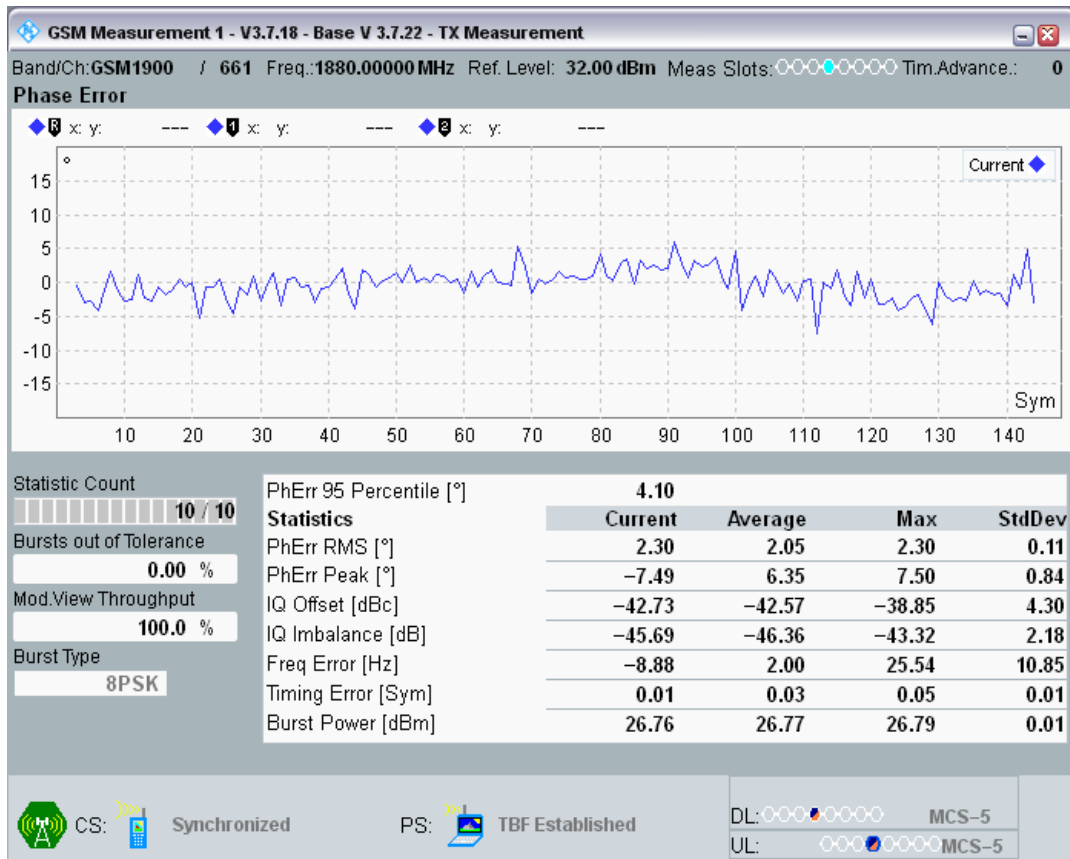


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @12

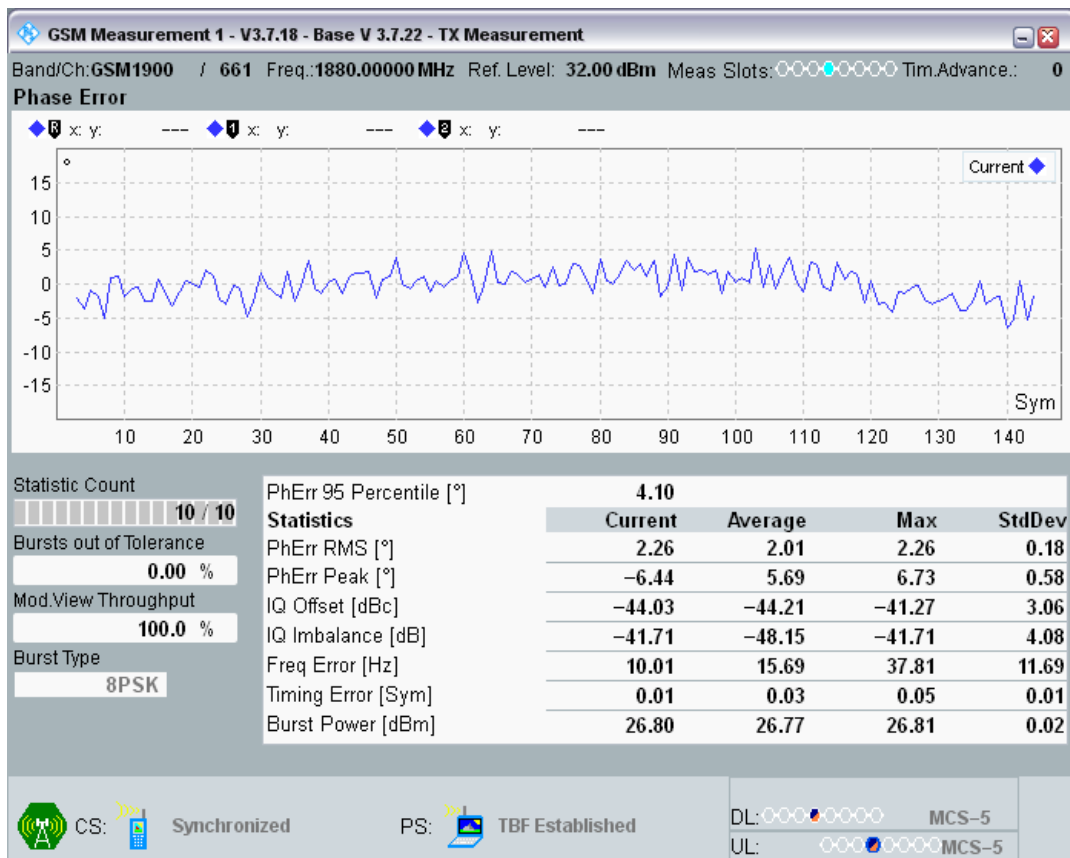


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @13

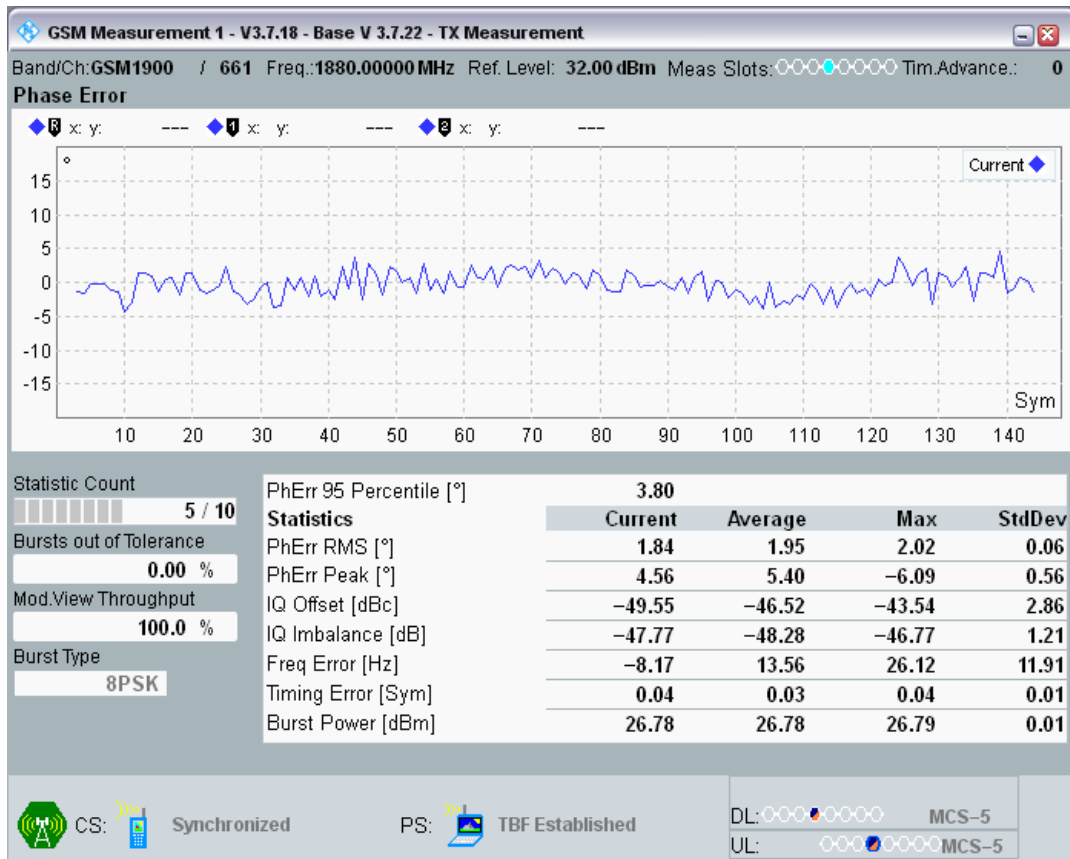


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @14

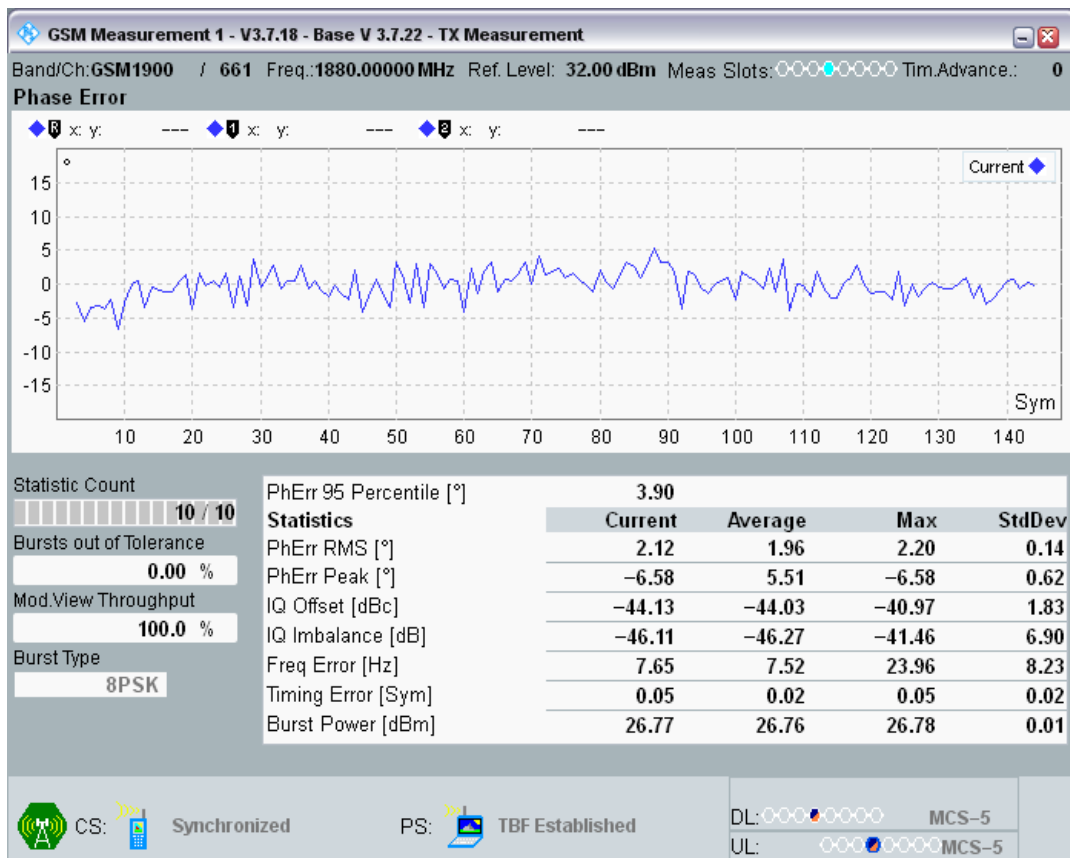


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @15

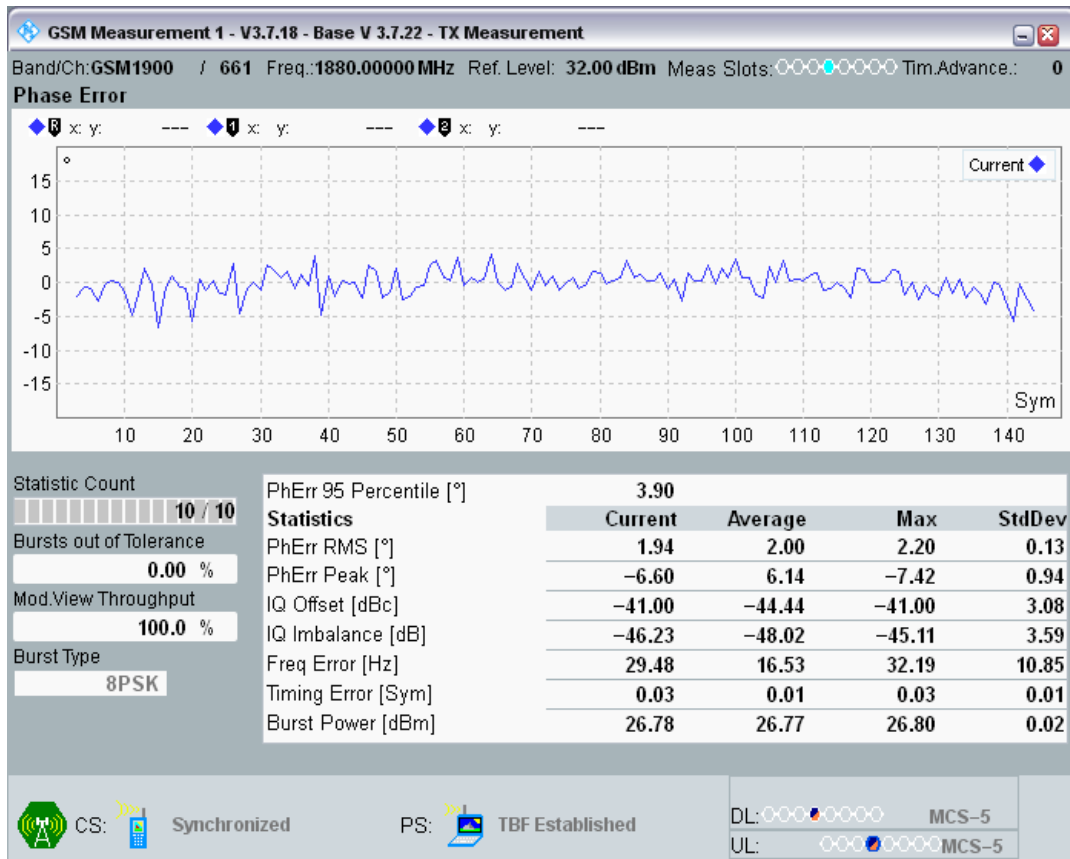


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @16

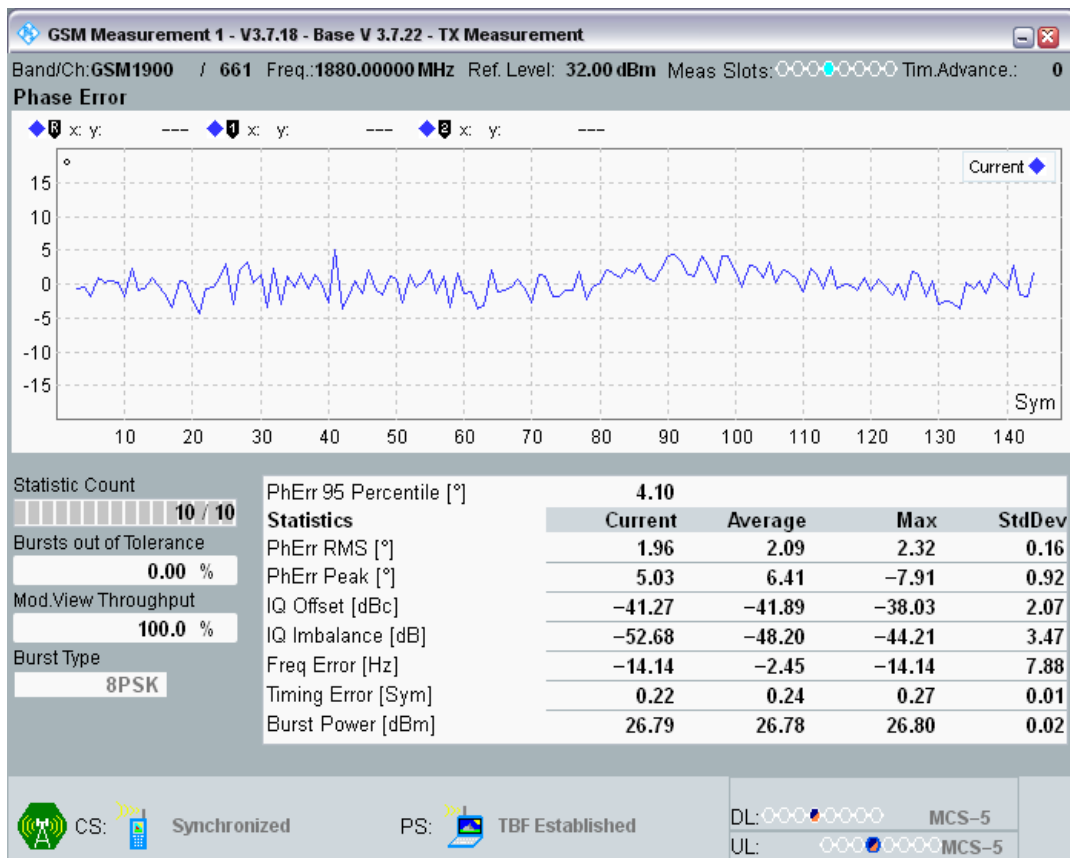


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @18

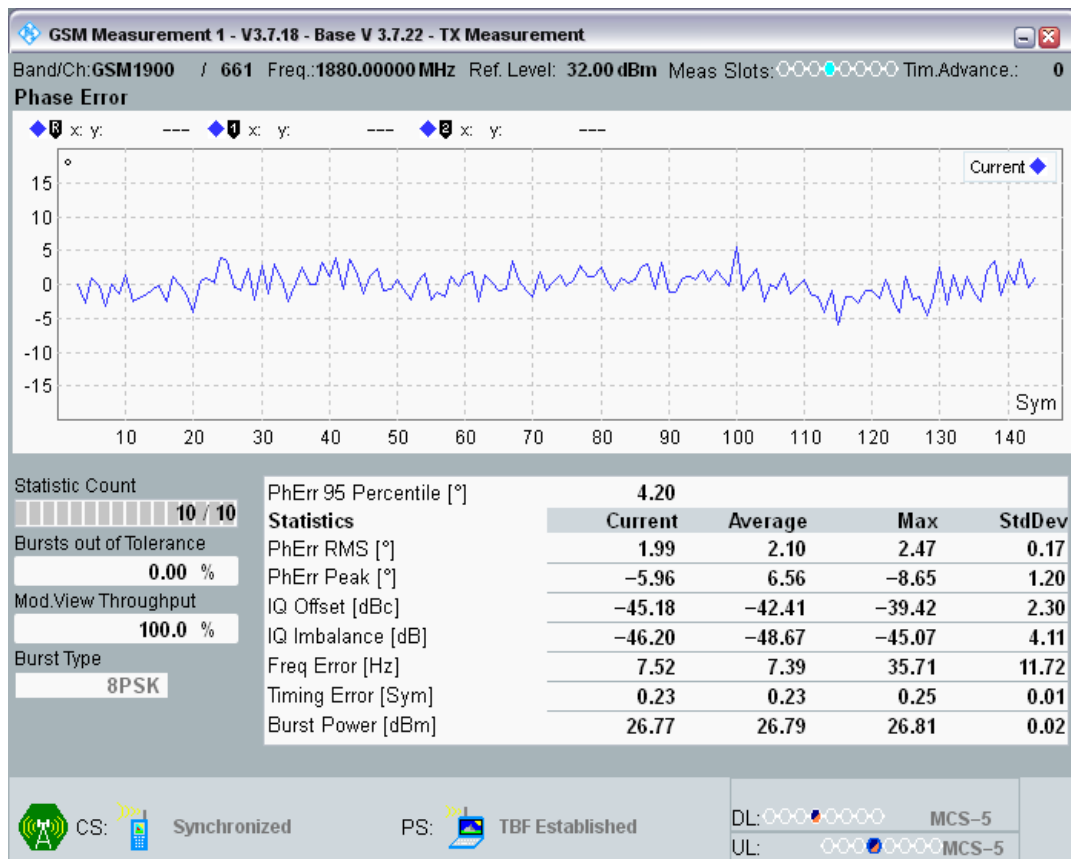


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @17

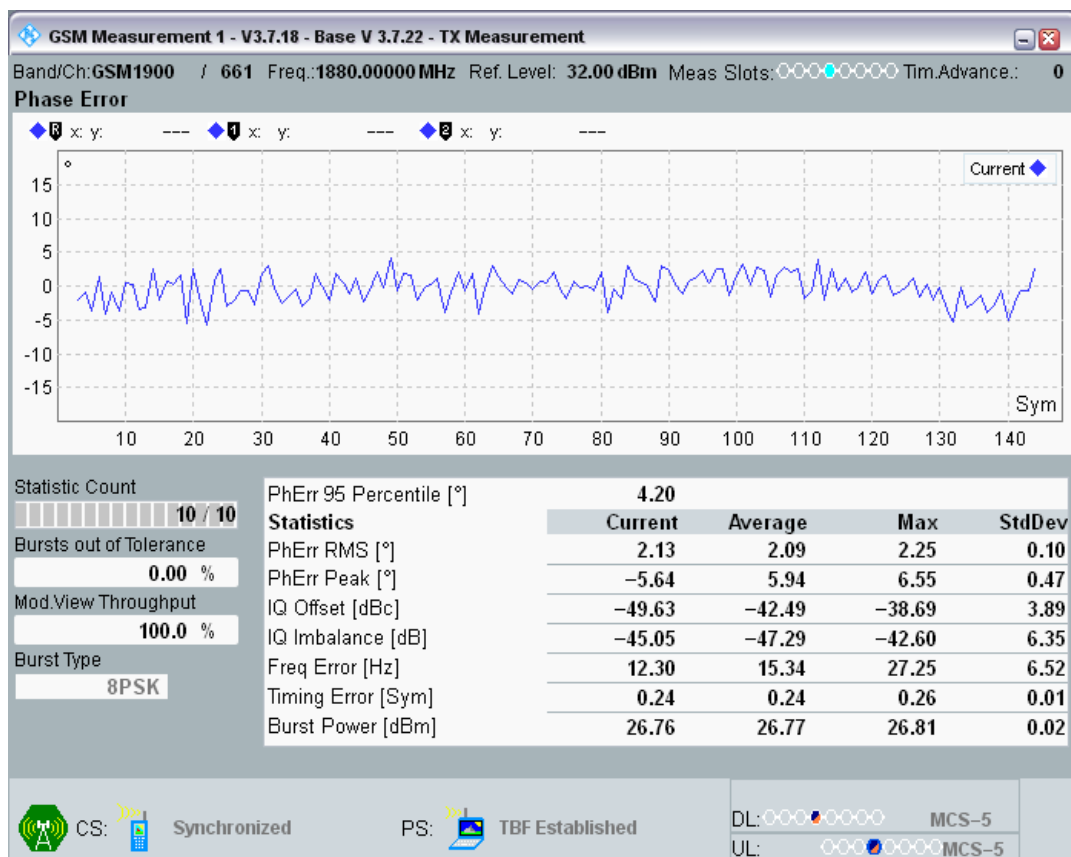


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @19

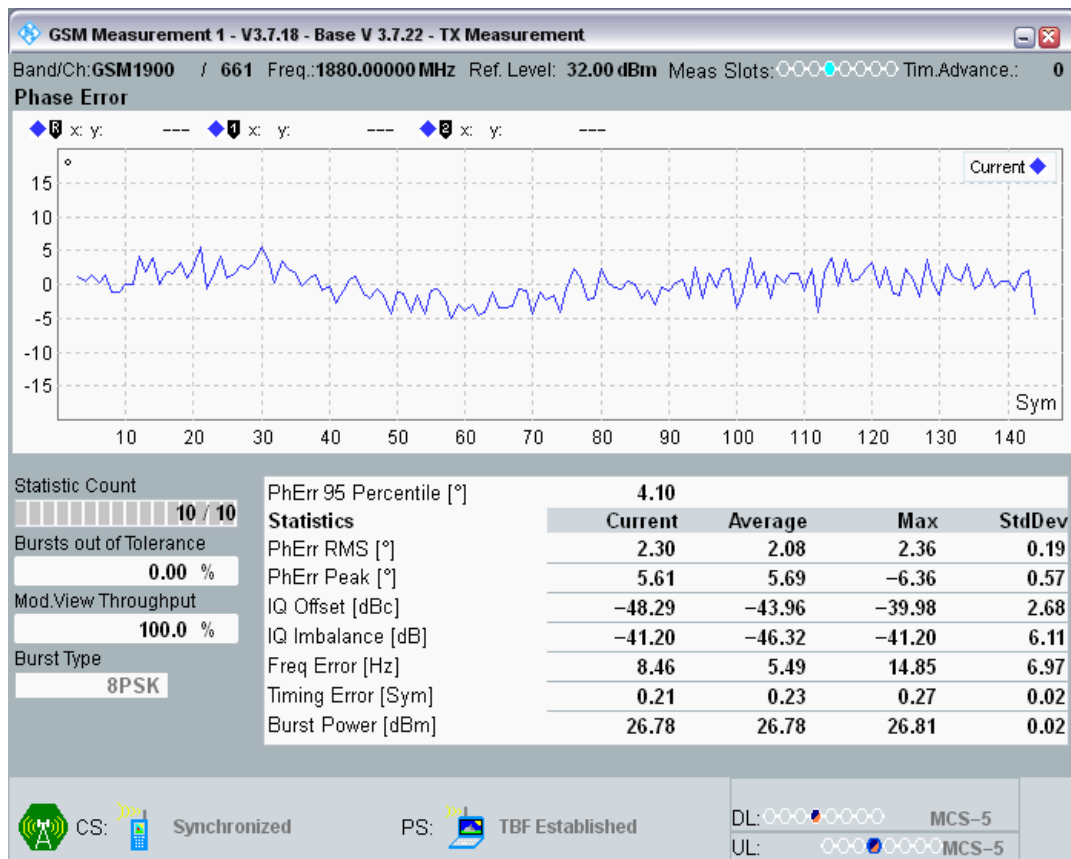


EGPRS1900 Channel=661 Gamma=5;5;5;5 TU3 @20

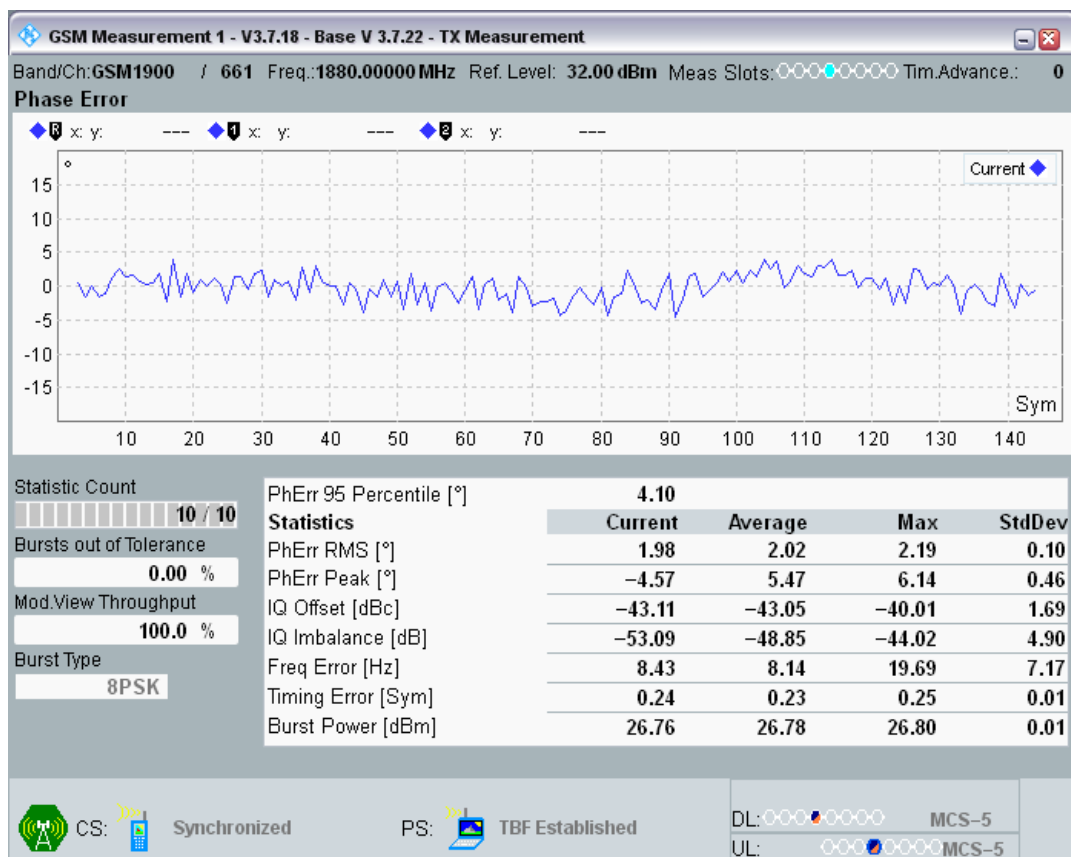


EGPRS850 Channel=190 Gamma=6;6;6;6 RA250 @Connect

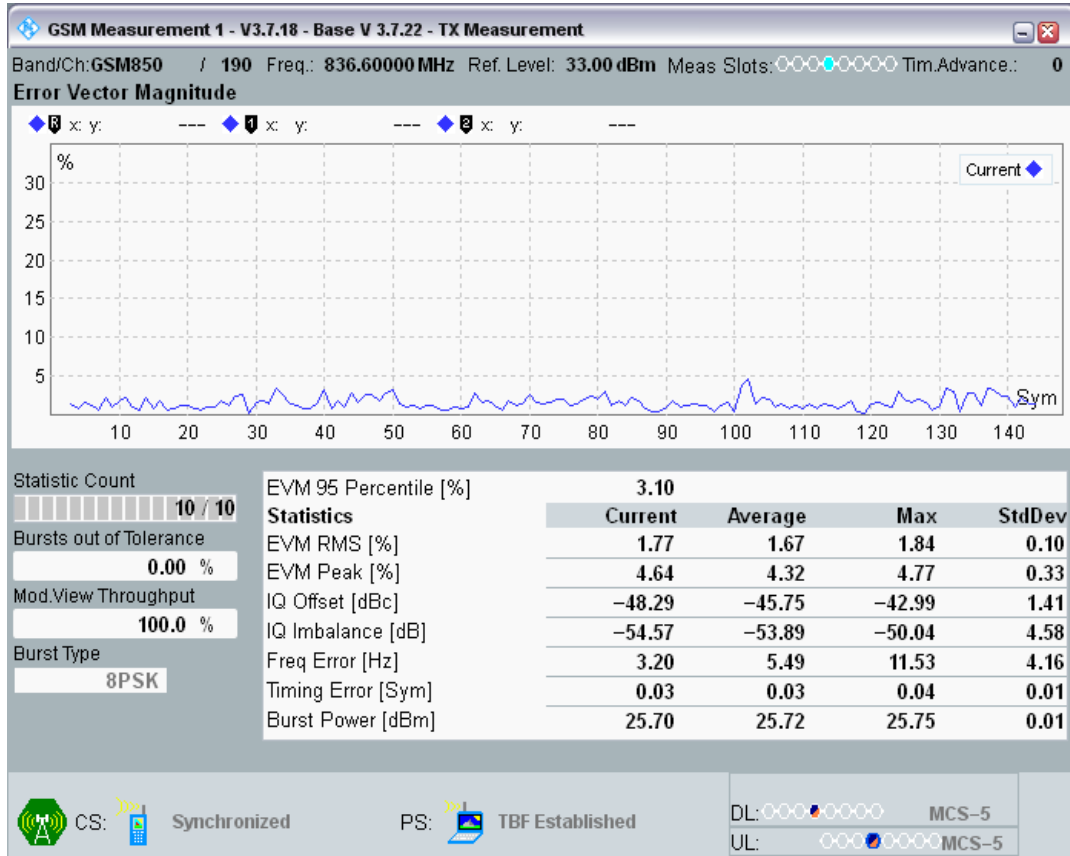


EGPRS850 Channel=190 Gamma=6;6;6 RA250 @Sens1

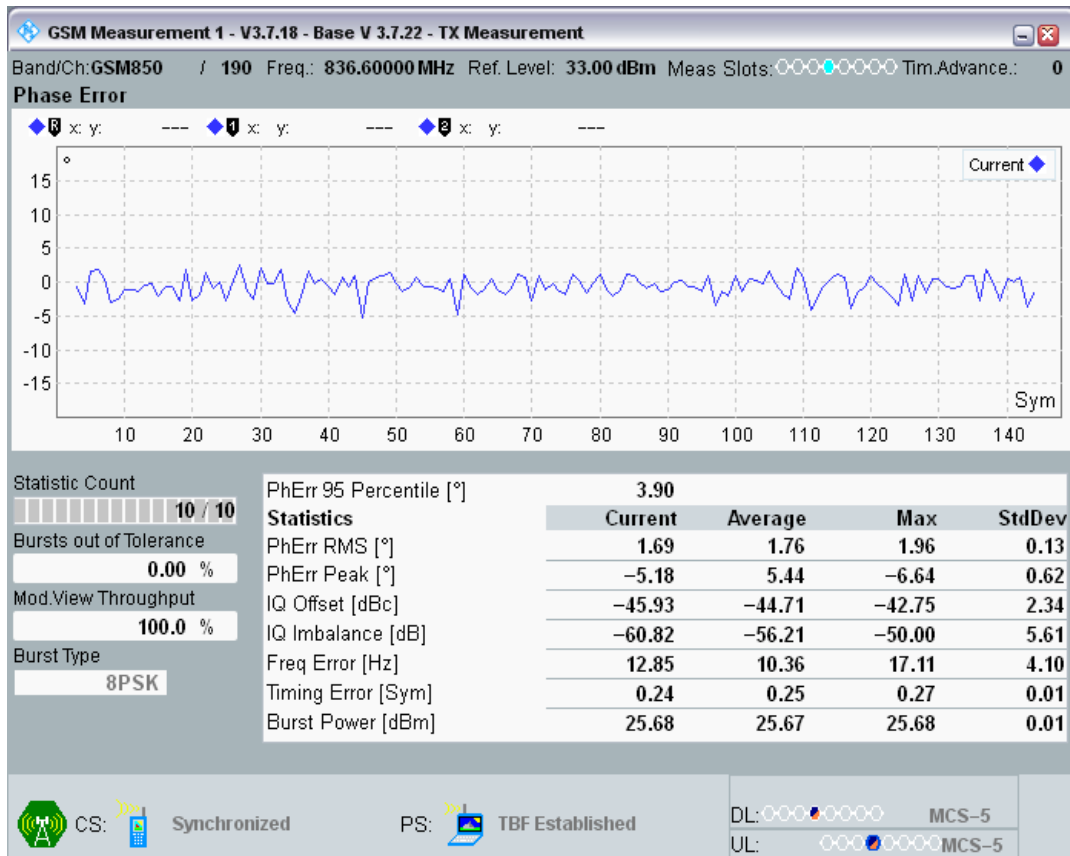


EGPRS850 Channel=190 Gamma=6;6;6 RA250 @Sens2

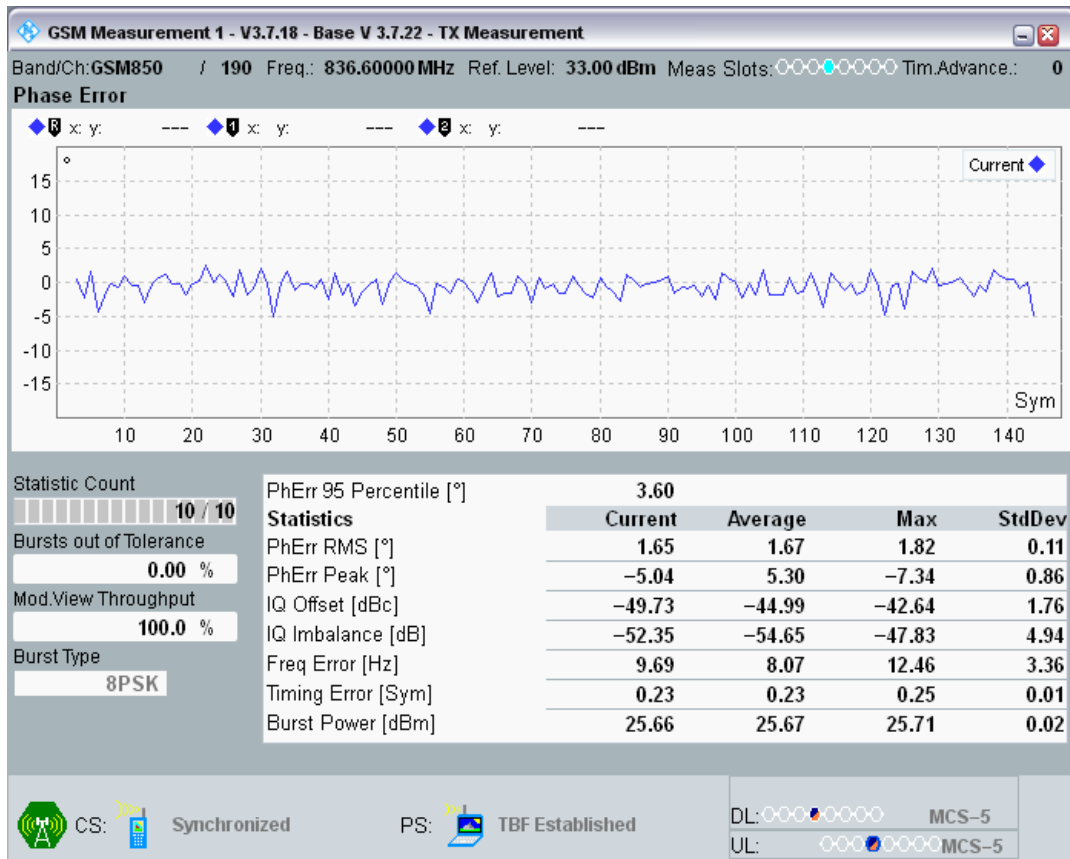


EGPRS850 Channel=190 Gamma=6;6;6 RA250 @Sens3

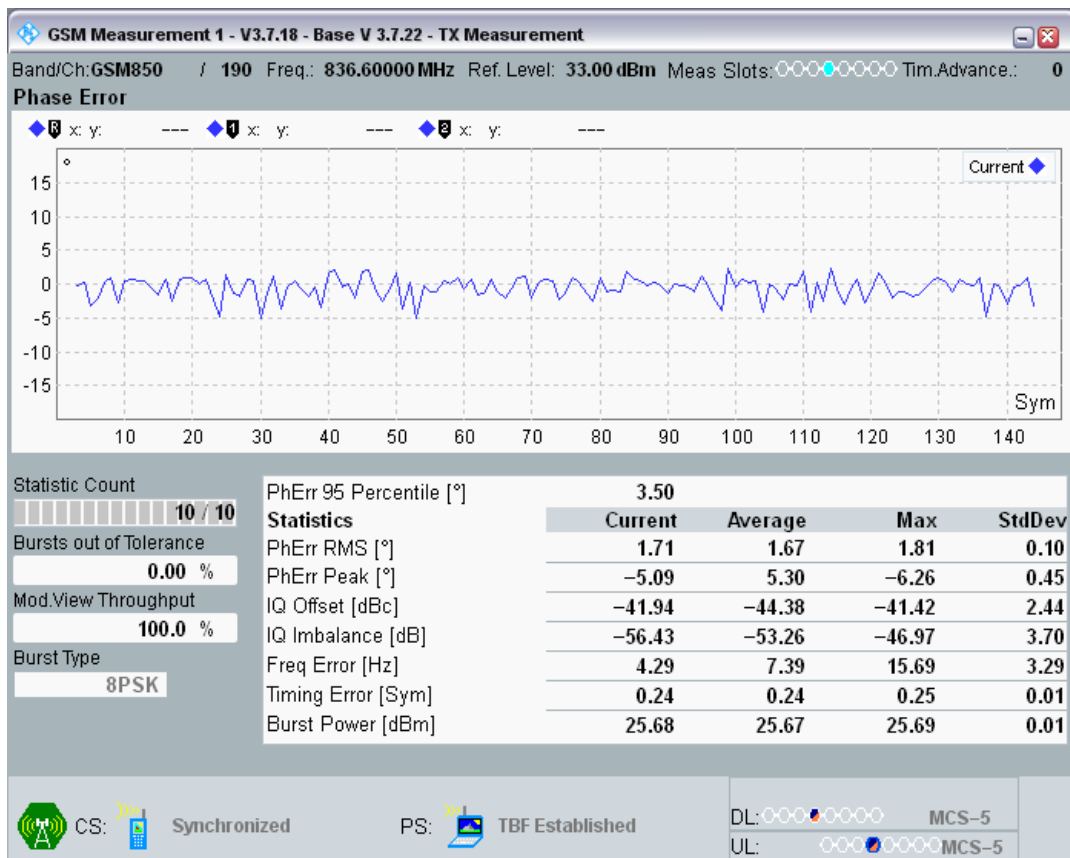


EGPRS850 Channel=190 Gamma=6;6;6 RA250 @Sens4

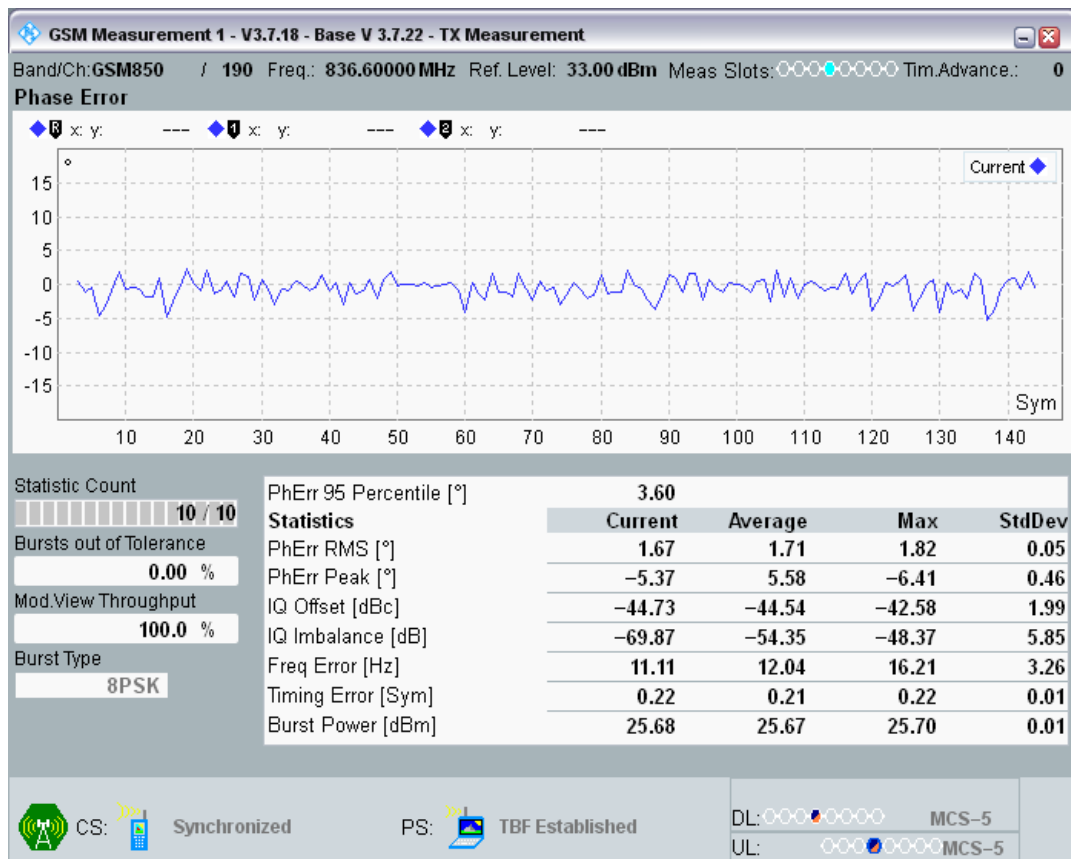


EGPRS850 Channel=190 Gamma=6;6;6;6 HT100 @Connect

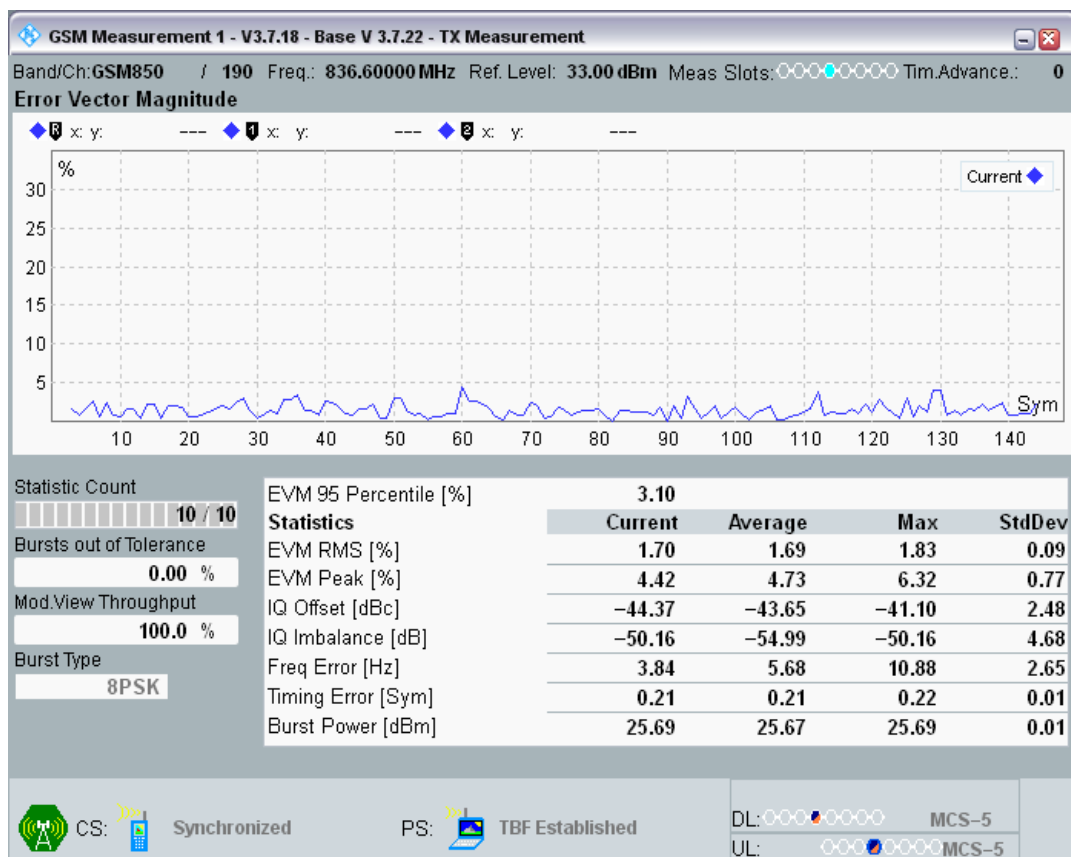


EGPRS850 Channel=190 Gamma=6;6;6;6 RA250 @Sens5

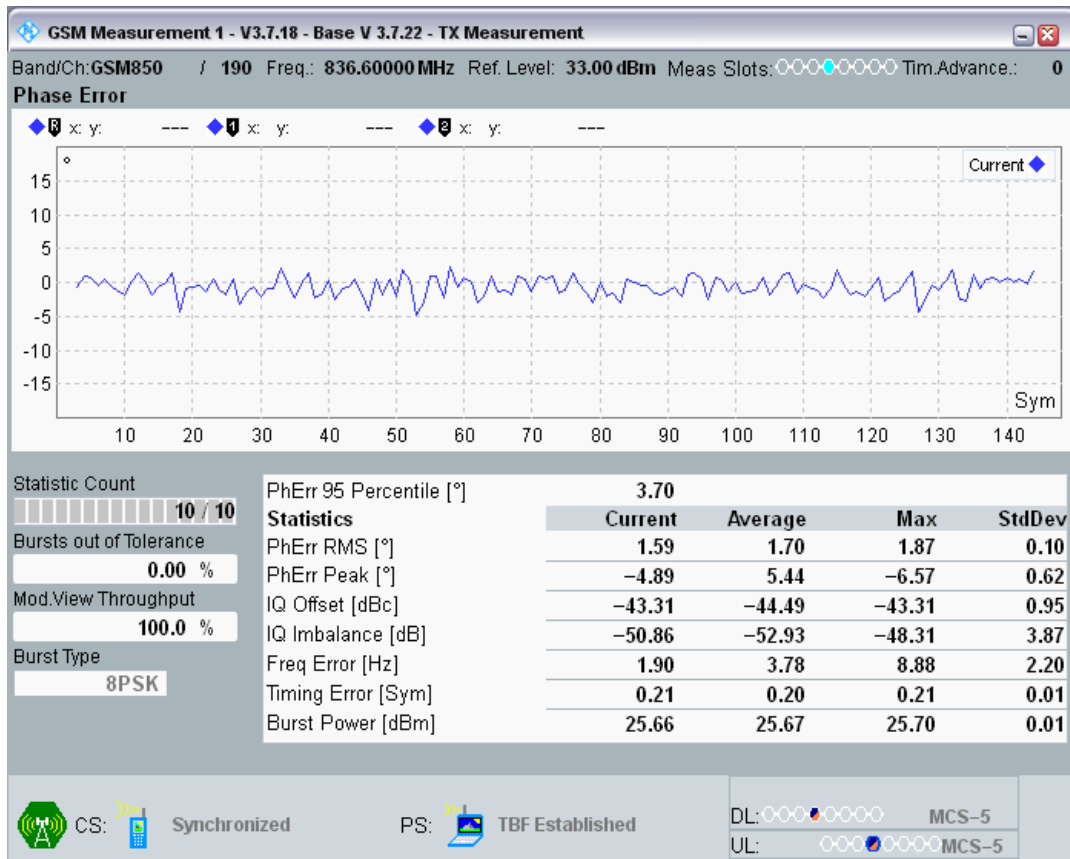


EGPRS850 Channel=190 Gamma=6;6;6 HT100 @Sens1

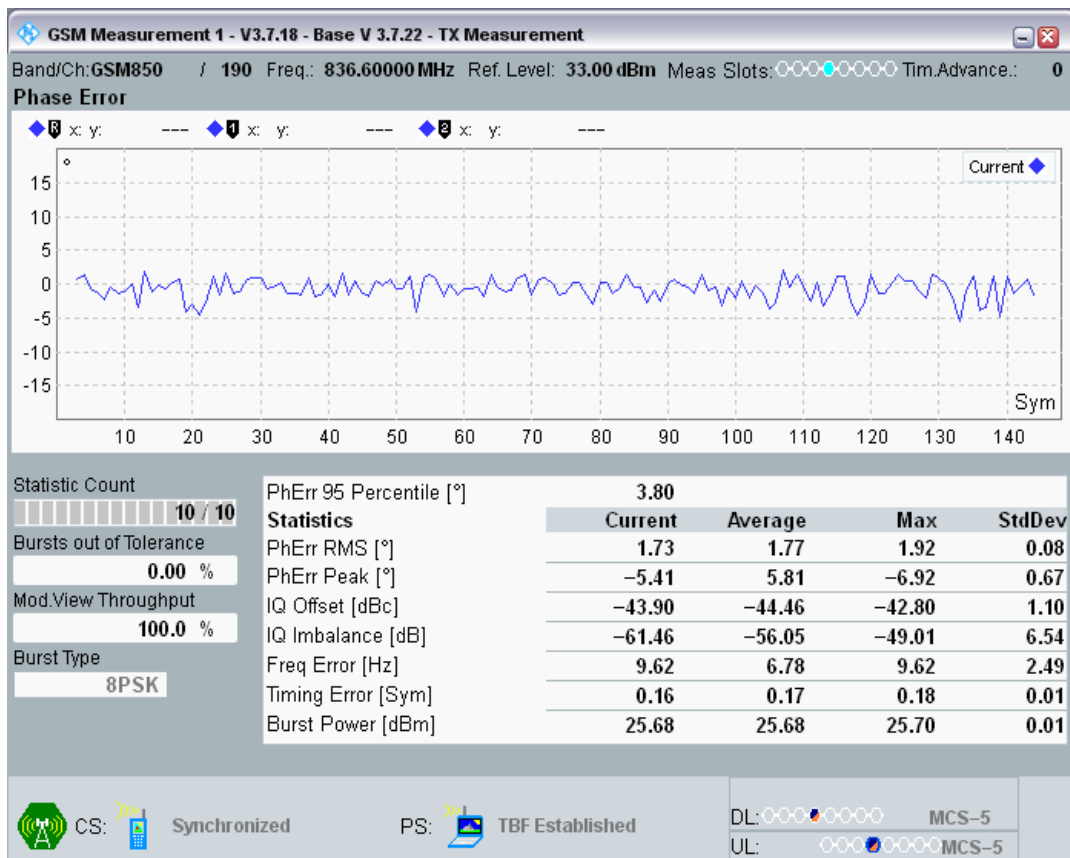


EGPRS850 Channel=190 Gamma=6;6;6 HT100 @Sens2

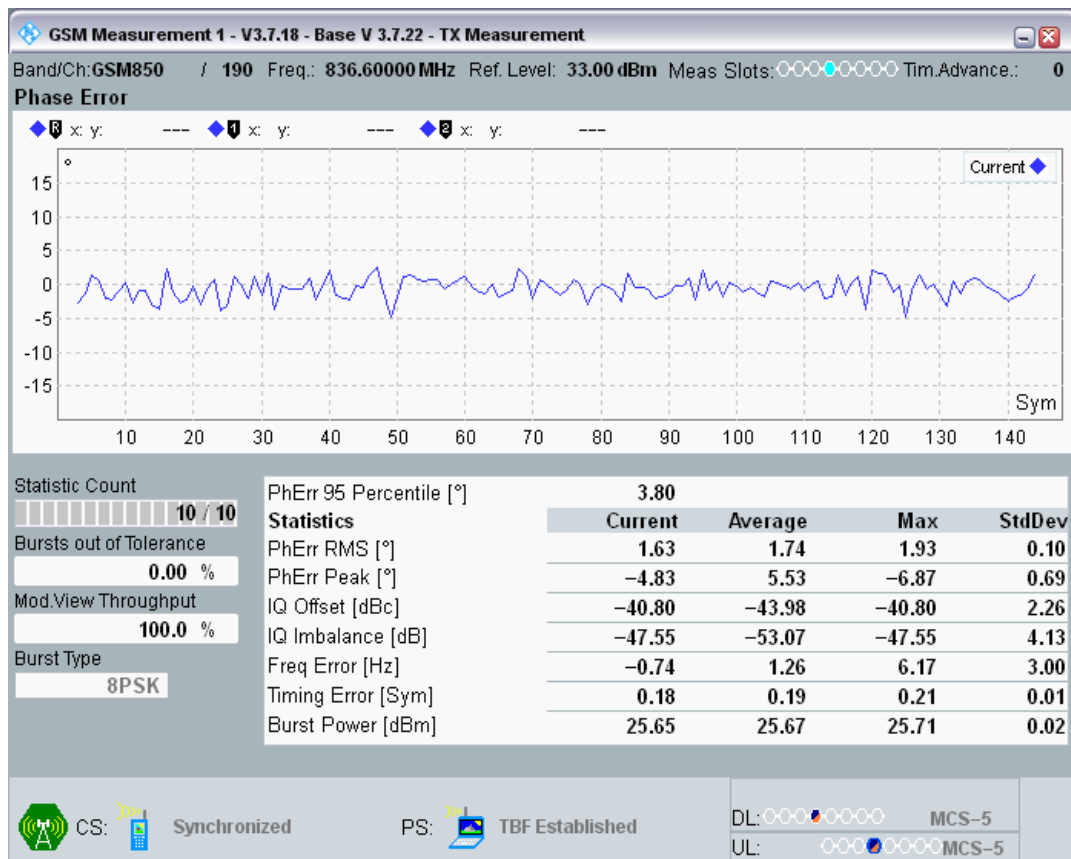


EGPRS850 Channel=190 Gamma=6;6;6 HT100 @Sens3

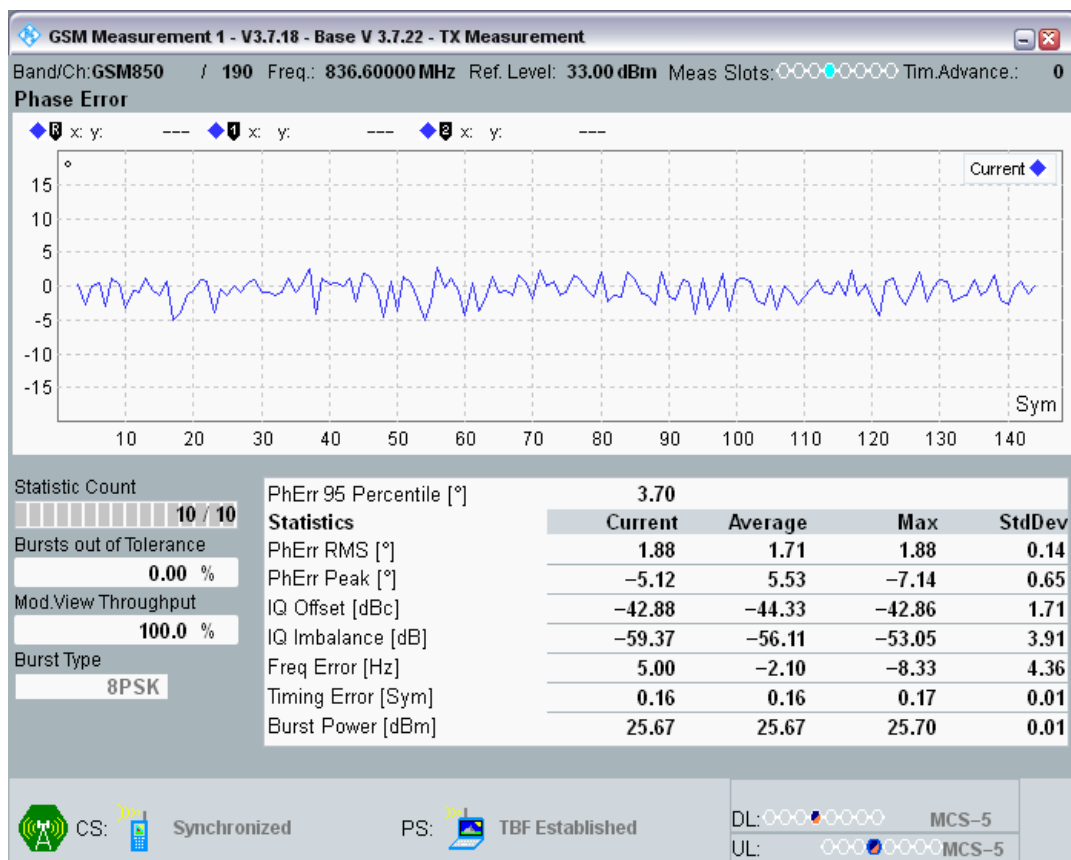


EGPRS850 Channel=190 Gamma=6;6;6 HT100 @Sens4

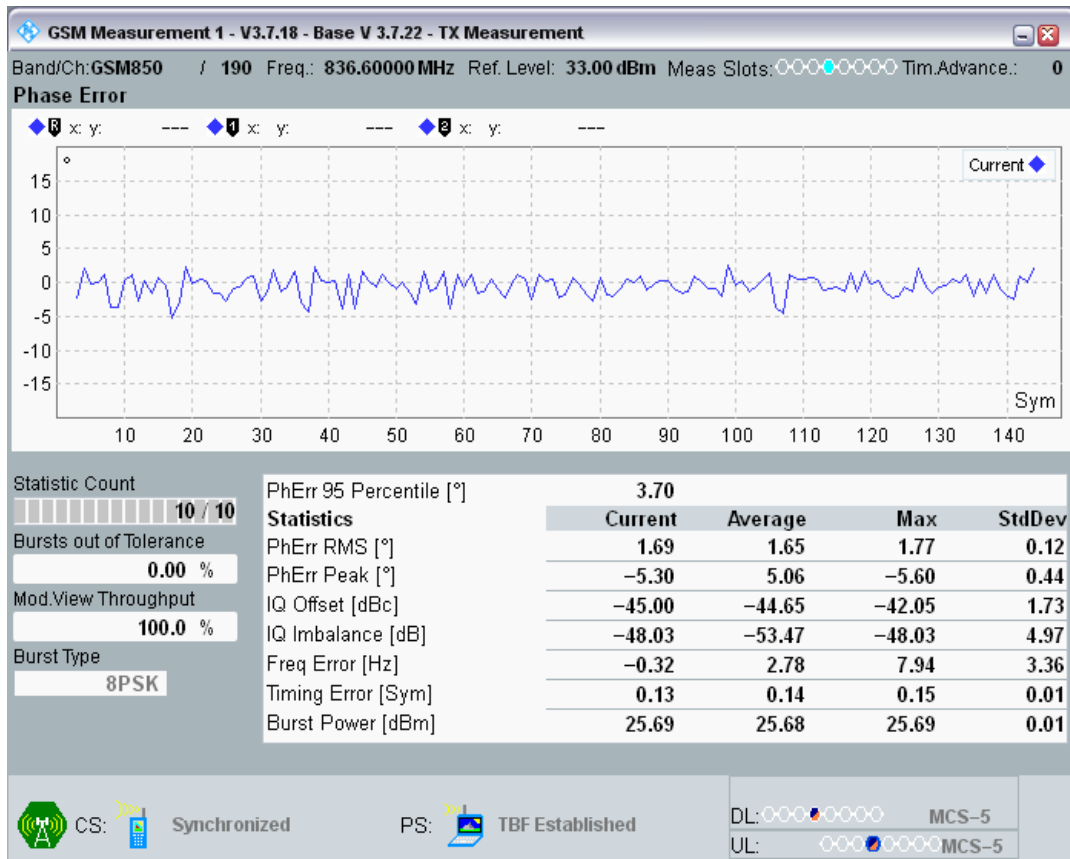


EGPRS850 Channel=190 Gamma=6;6;6;6 TU50 @Connect

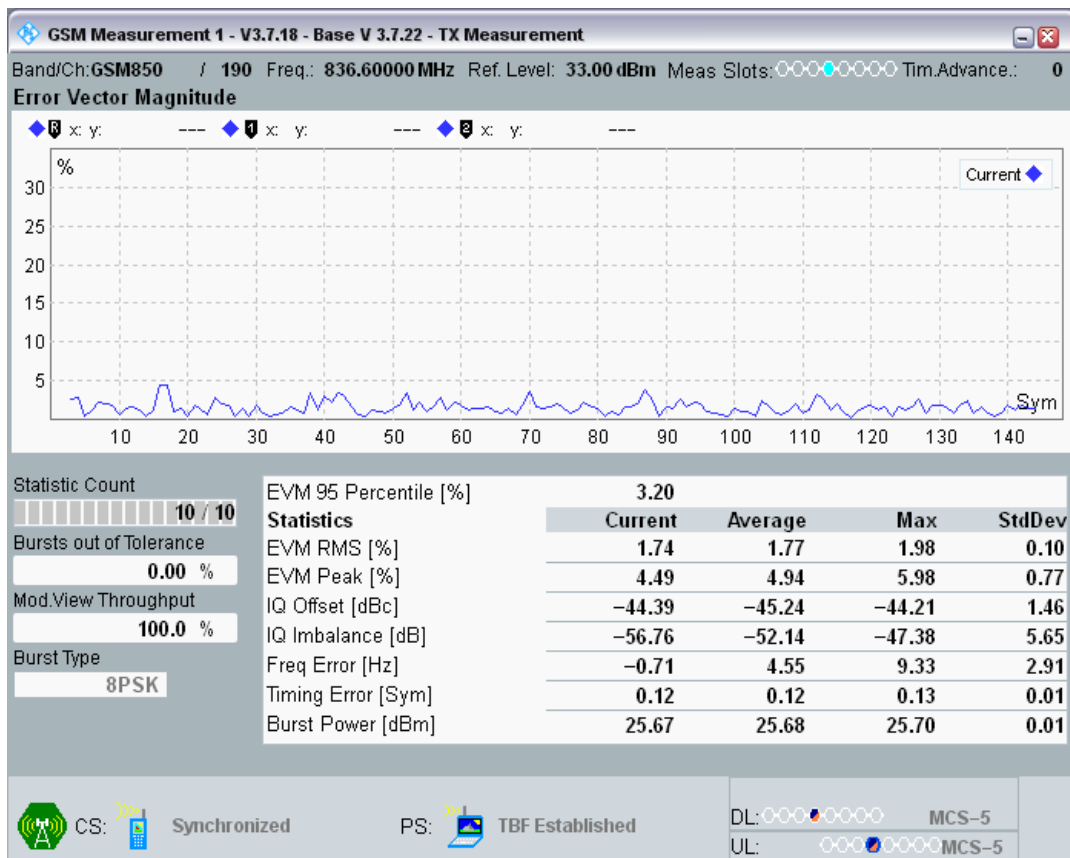


EGPRS850 Channel=190 Gamma=6;6;6;6 HT100 @Sens5

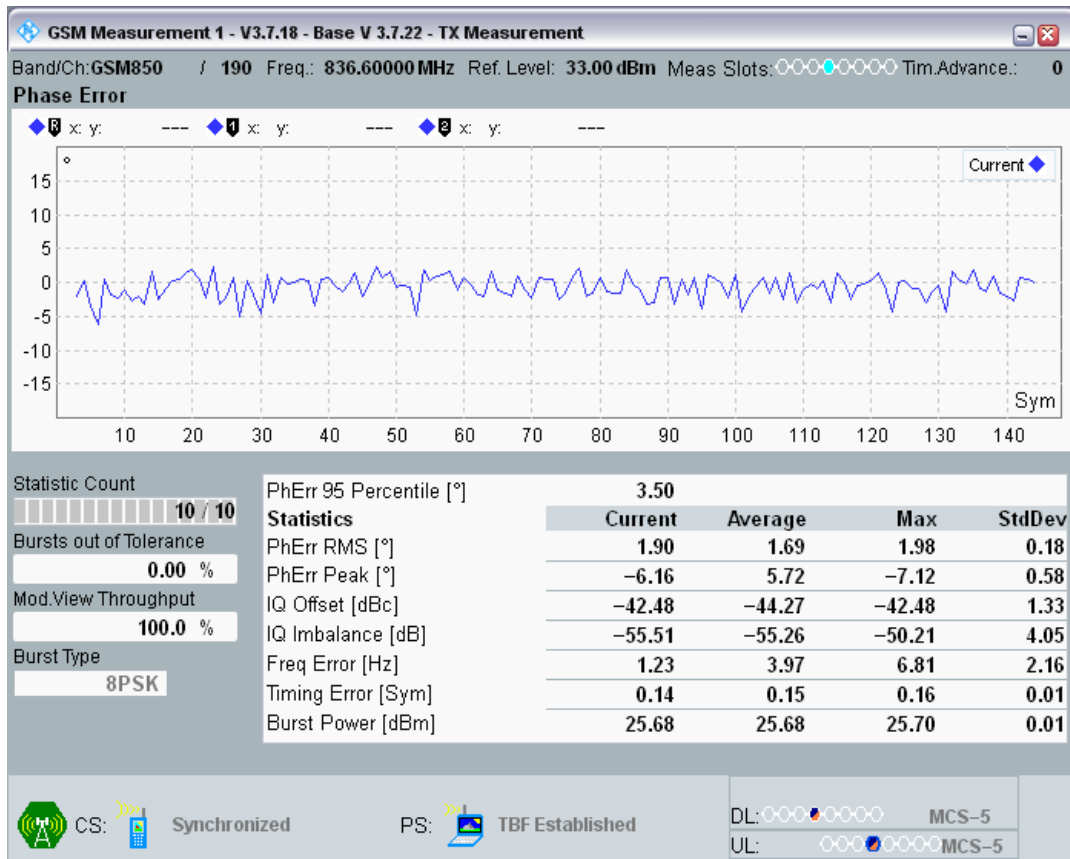


EGPRS850 Channel=190 Gamma=6;6;6 TU50 @Sens1

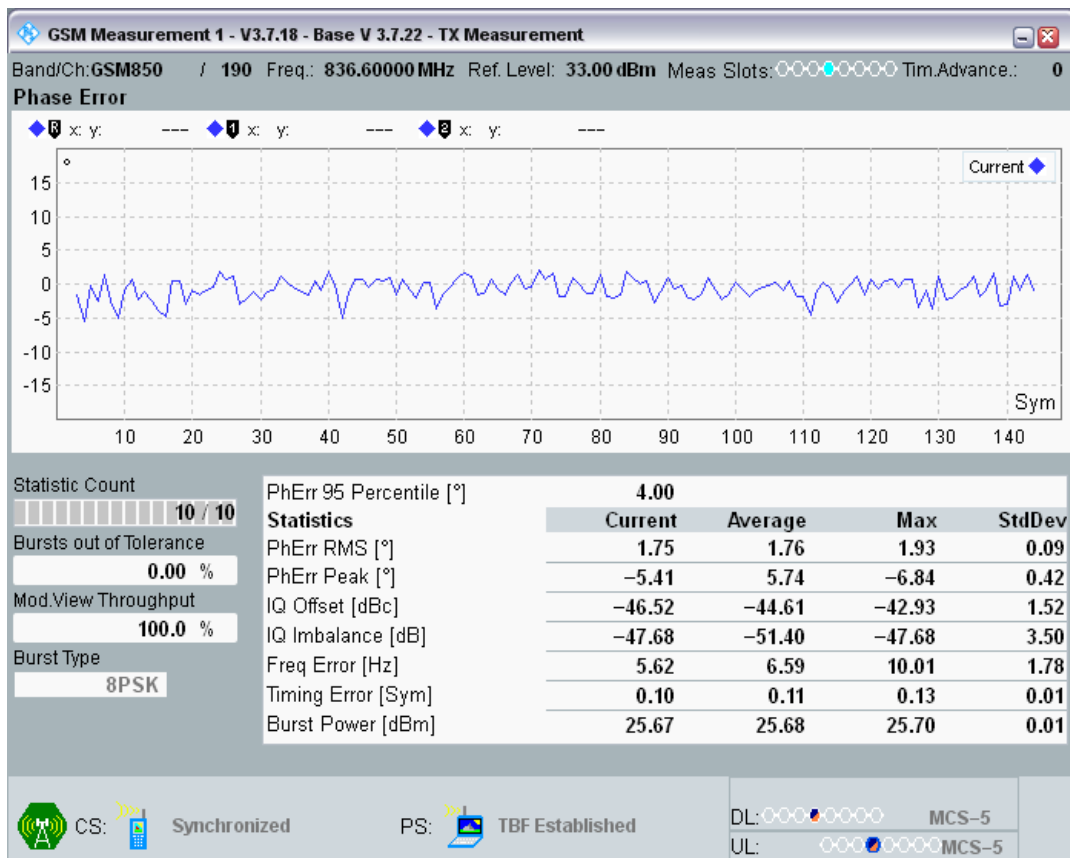


EGPRS850 Channel=190 Gamma=6;6;6 TU50 @Sens3

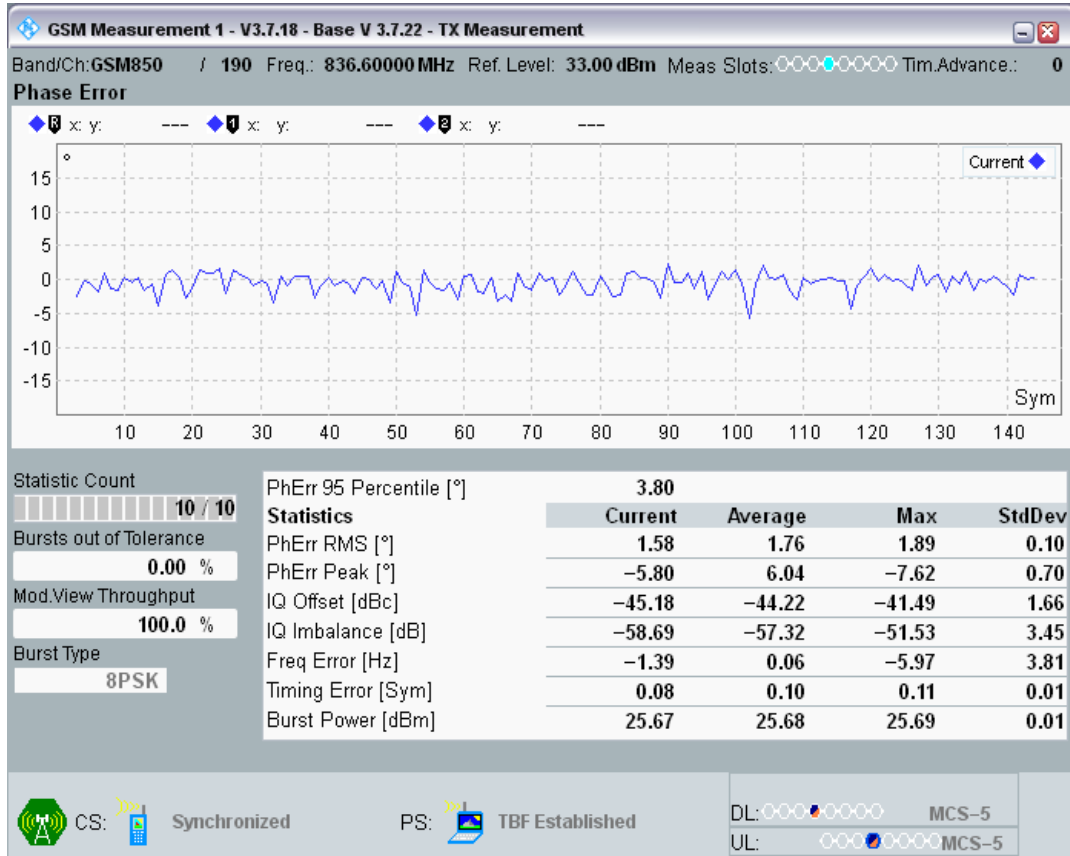


EGPRS850 Channel=190 Gamma=6;6;6 TU50 @Sens2

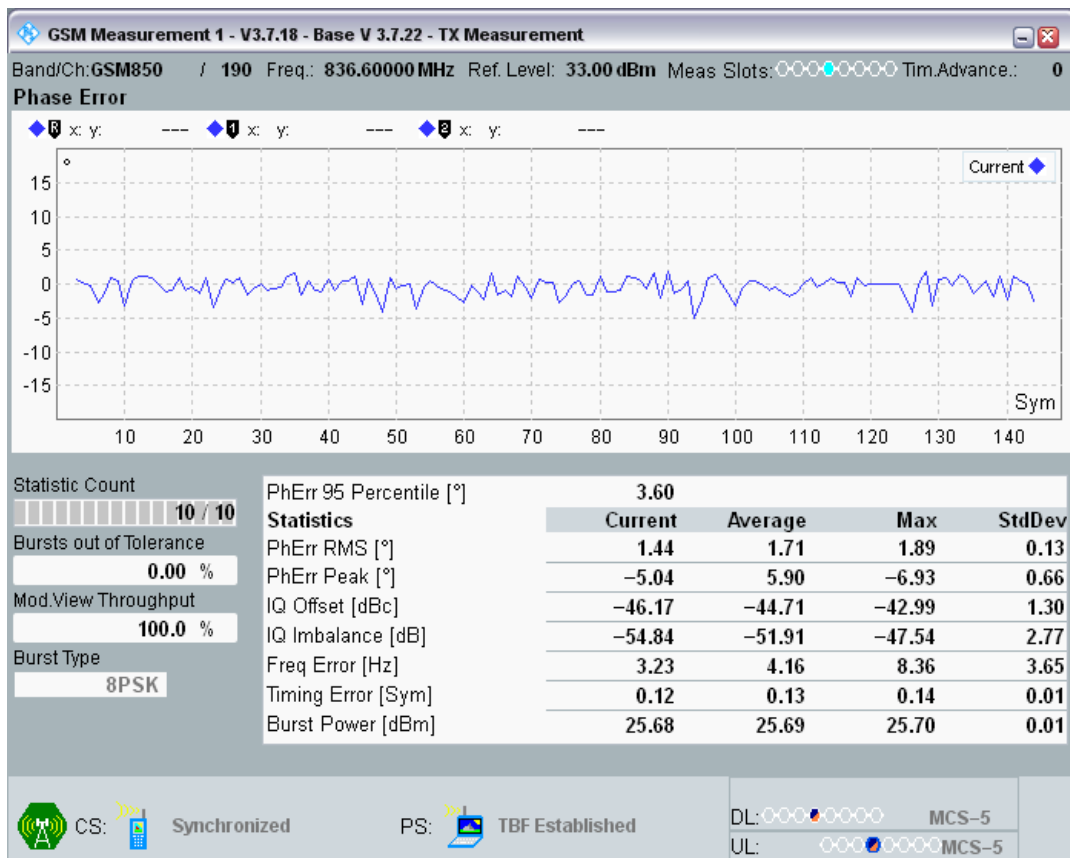


EGPRS850 Channel=190 Gamma=6;6;6 TU50 @Sens4

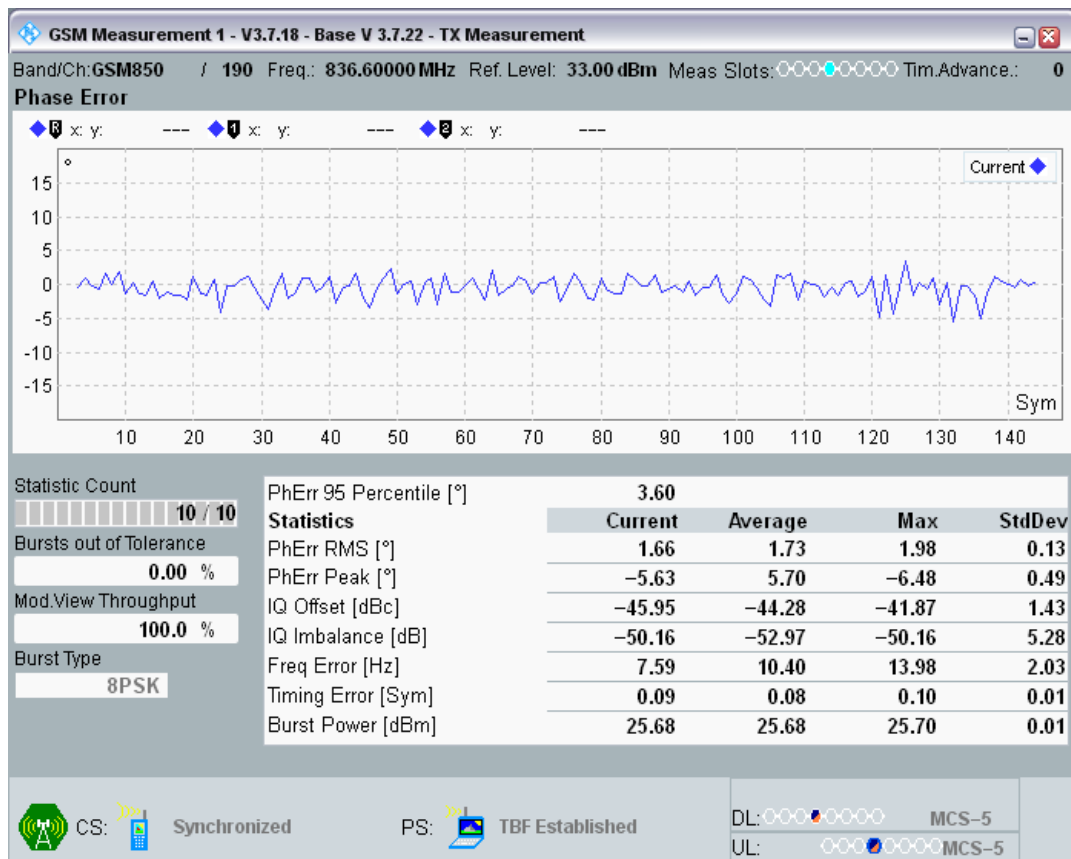


EGPRS850 Channel=190 Gamma=6;6;6 TU50 @Sens5

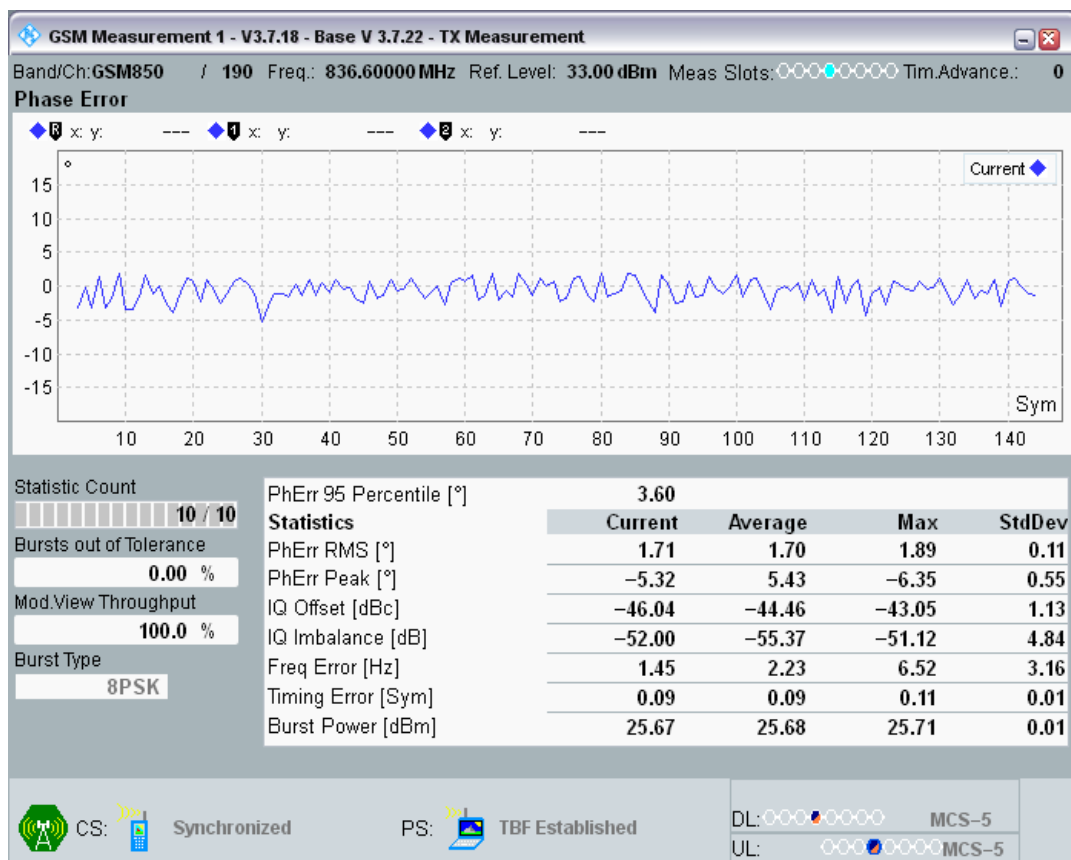


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @Connect

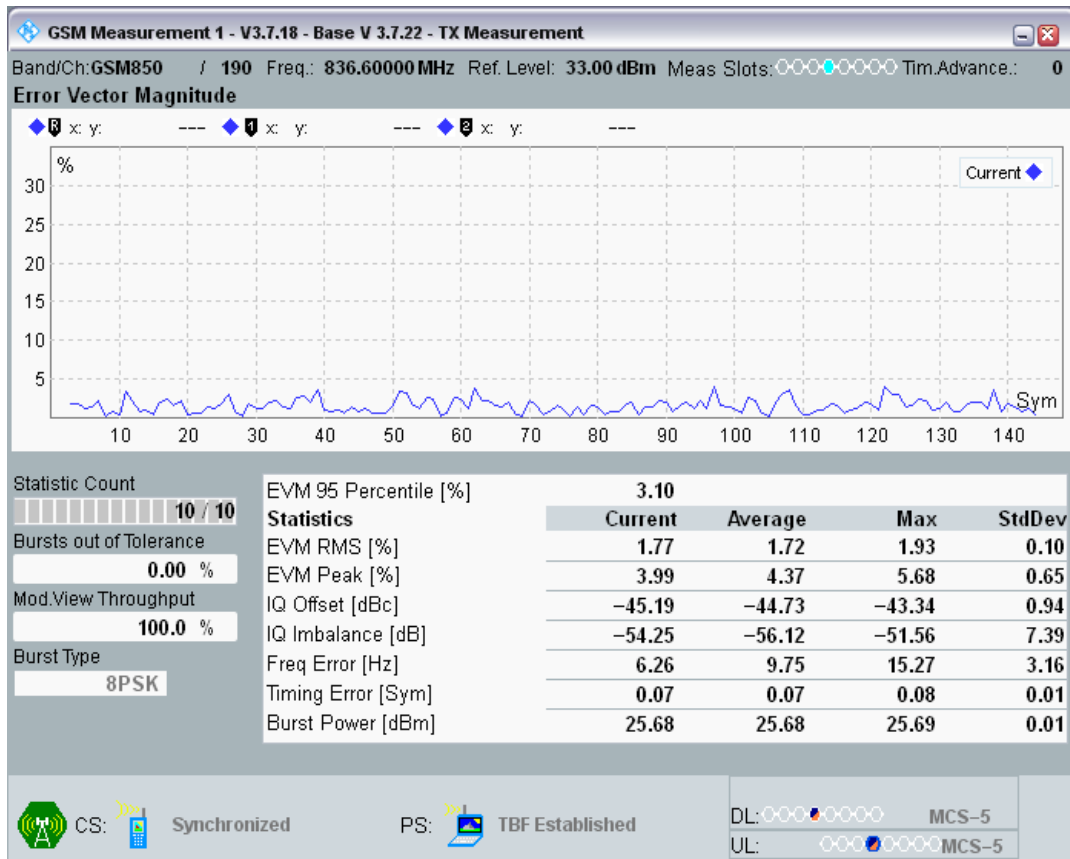


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @2

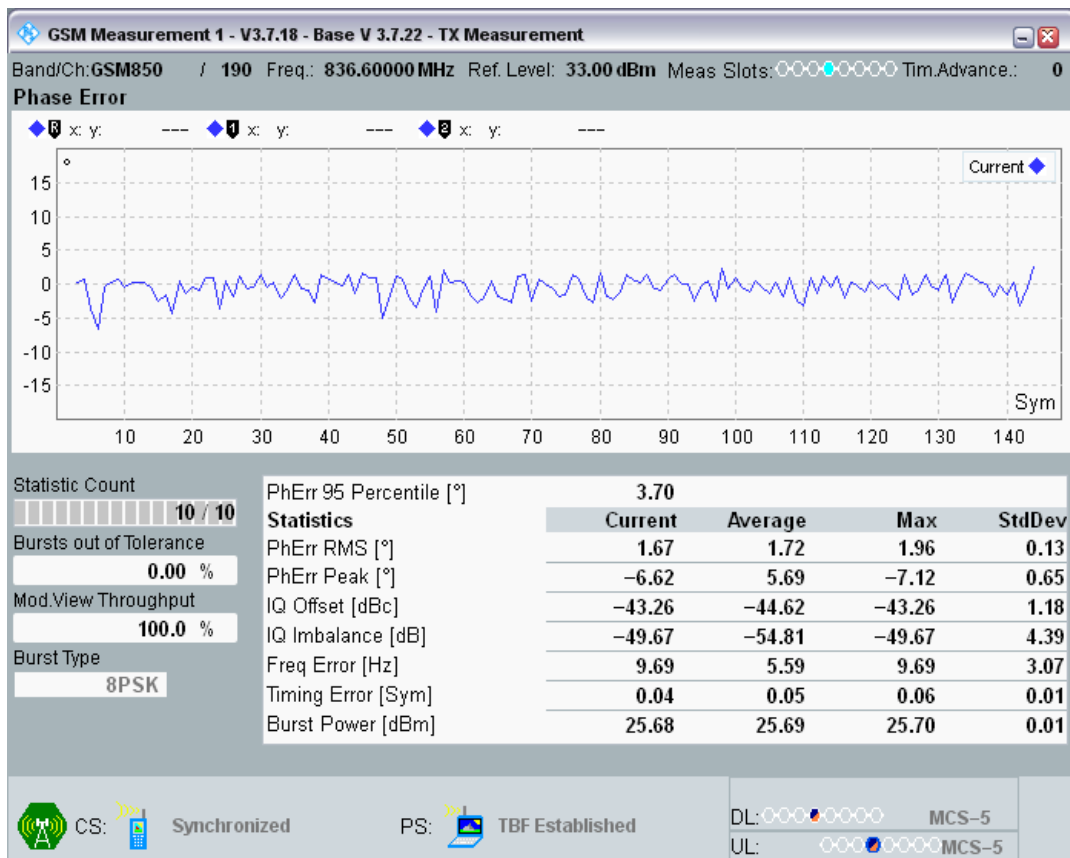


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @1

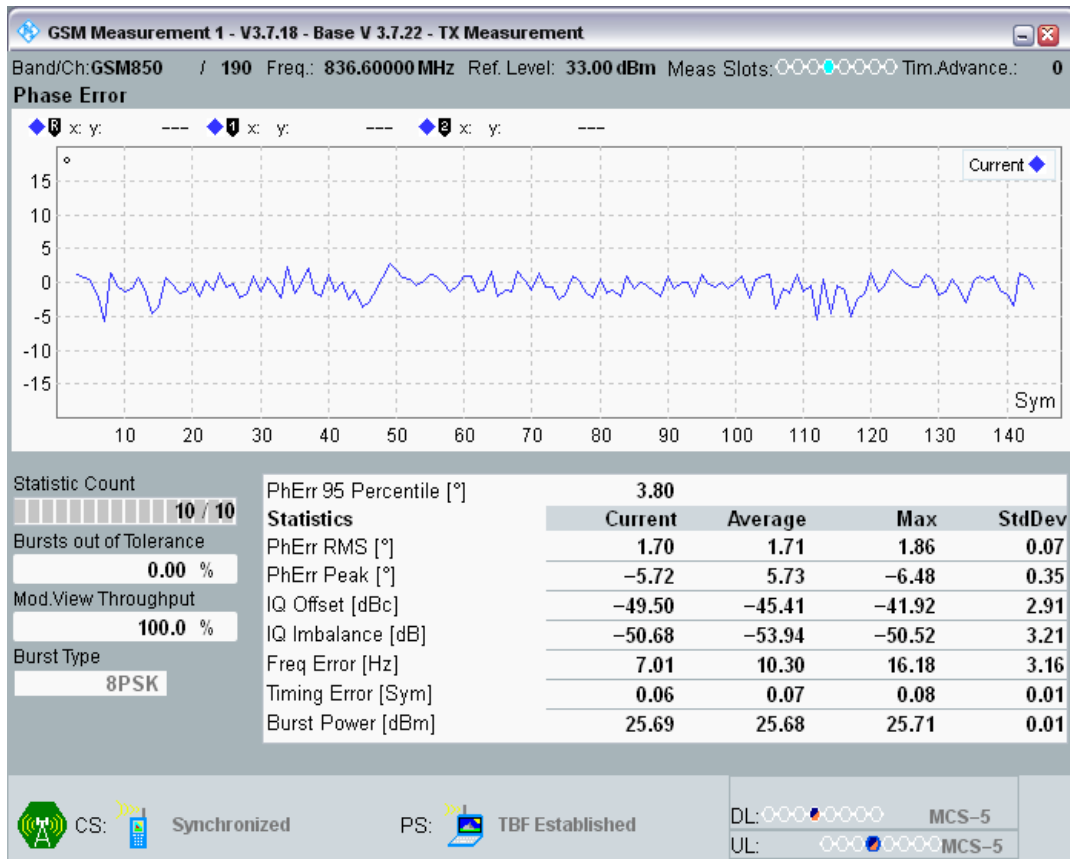


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @3

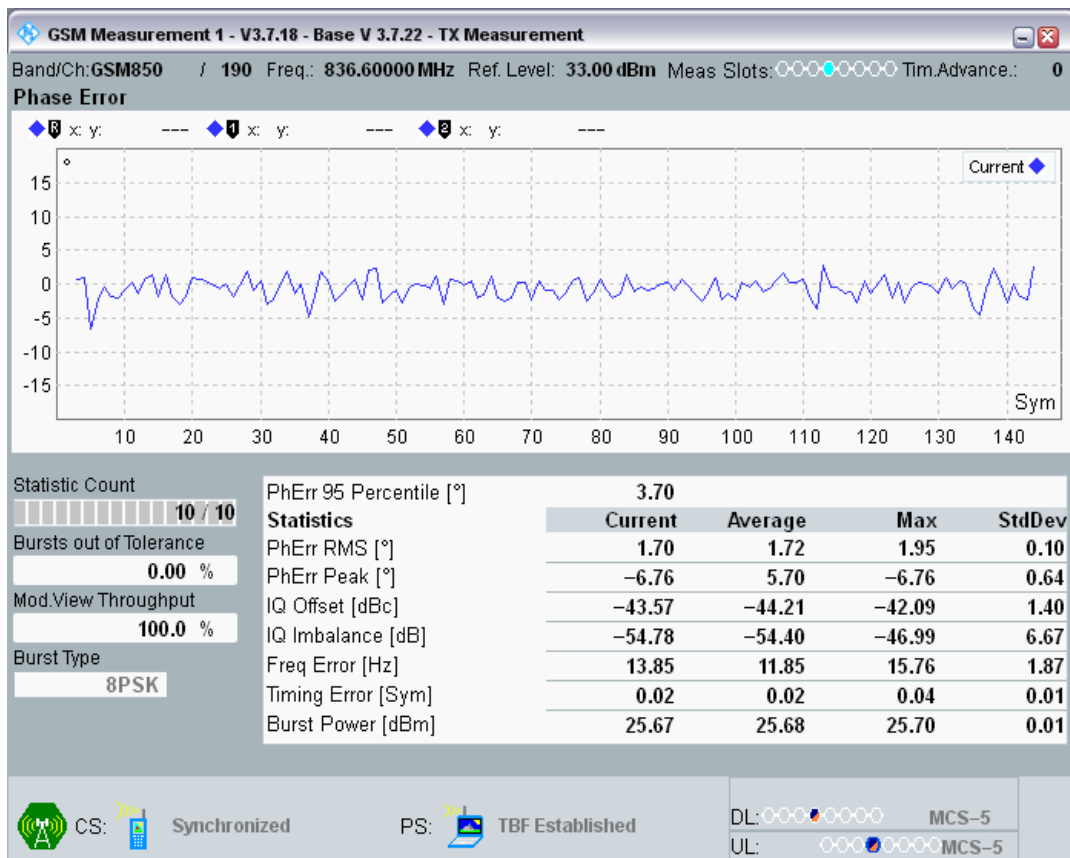


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @4

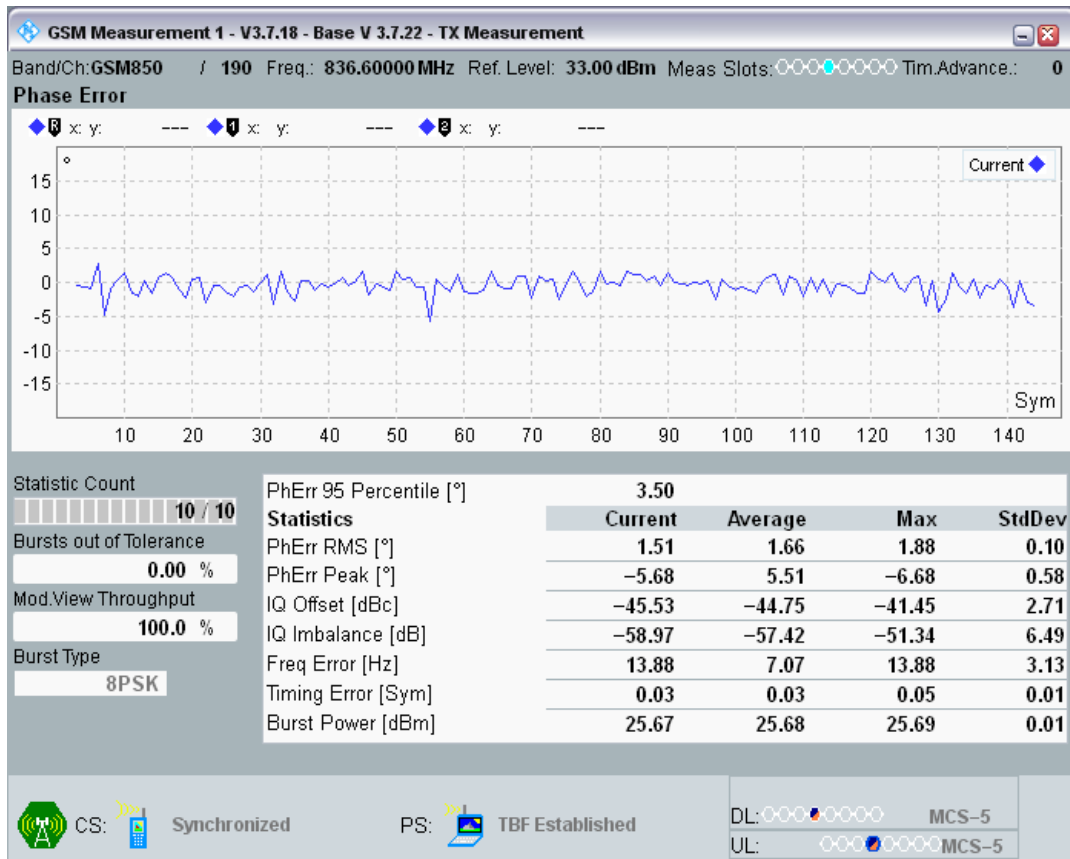


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @5

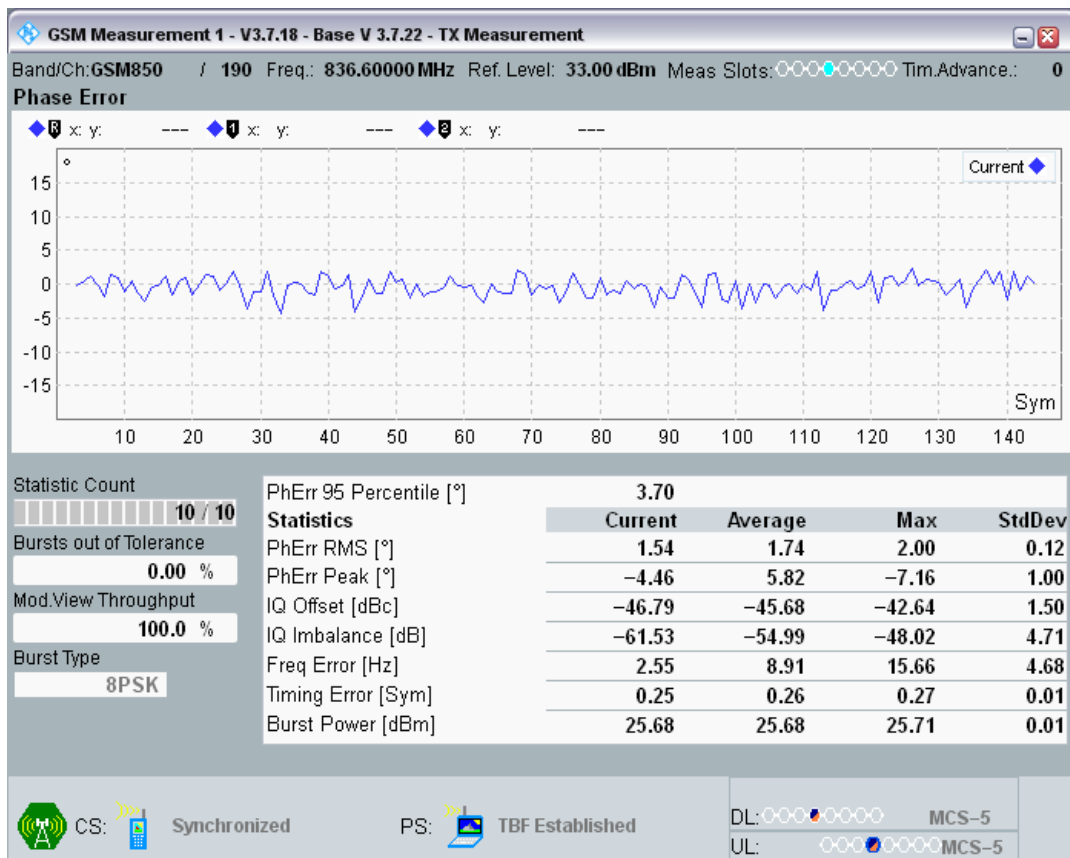


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @6

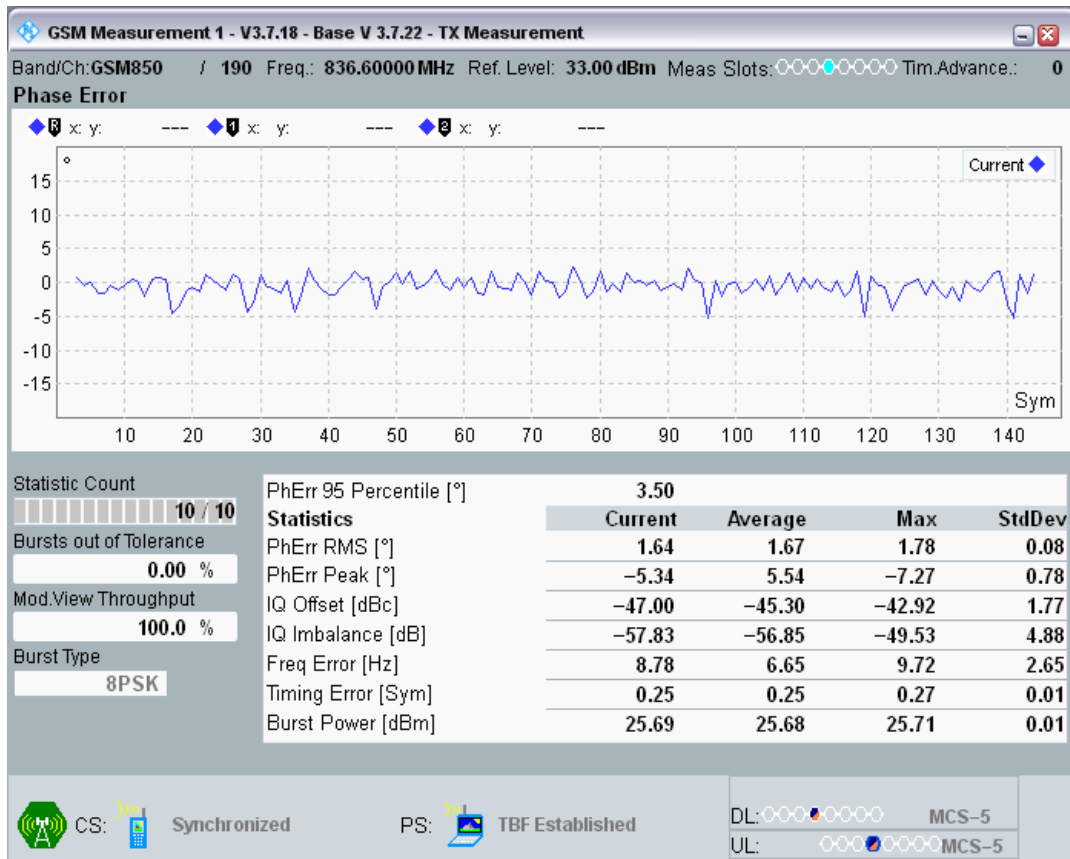


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @8

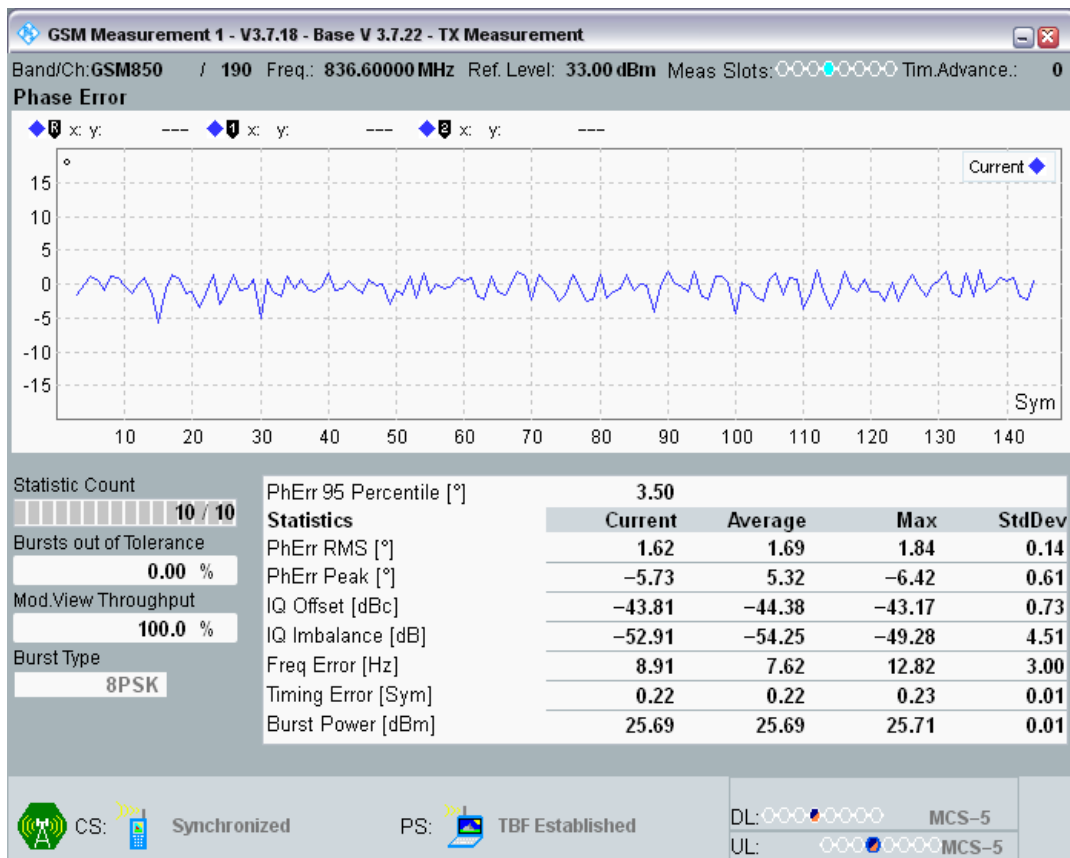


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @7

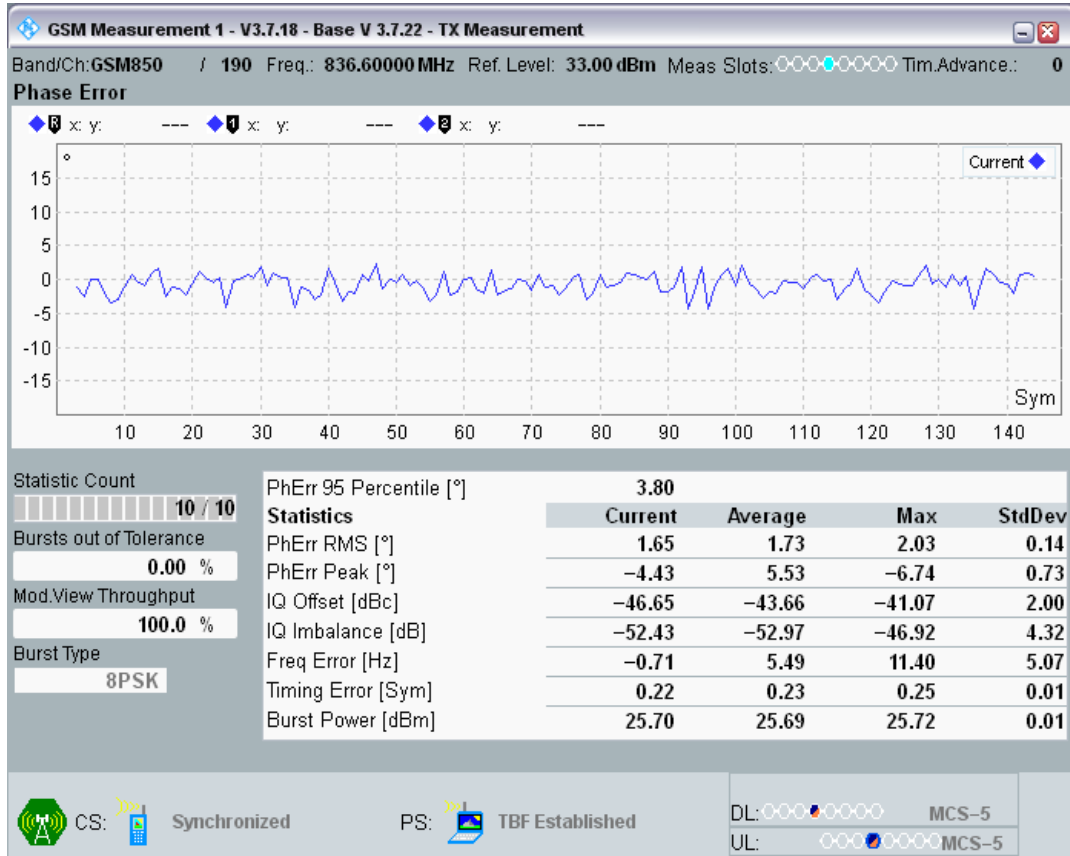

EGPRS850 Channel=190 Gamma=6;6;6 TU3 @9

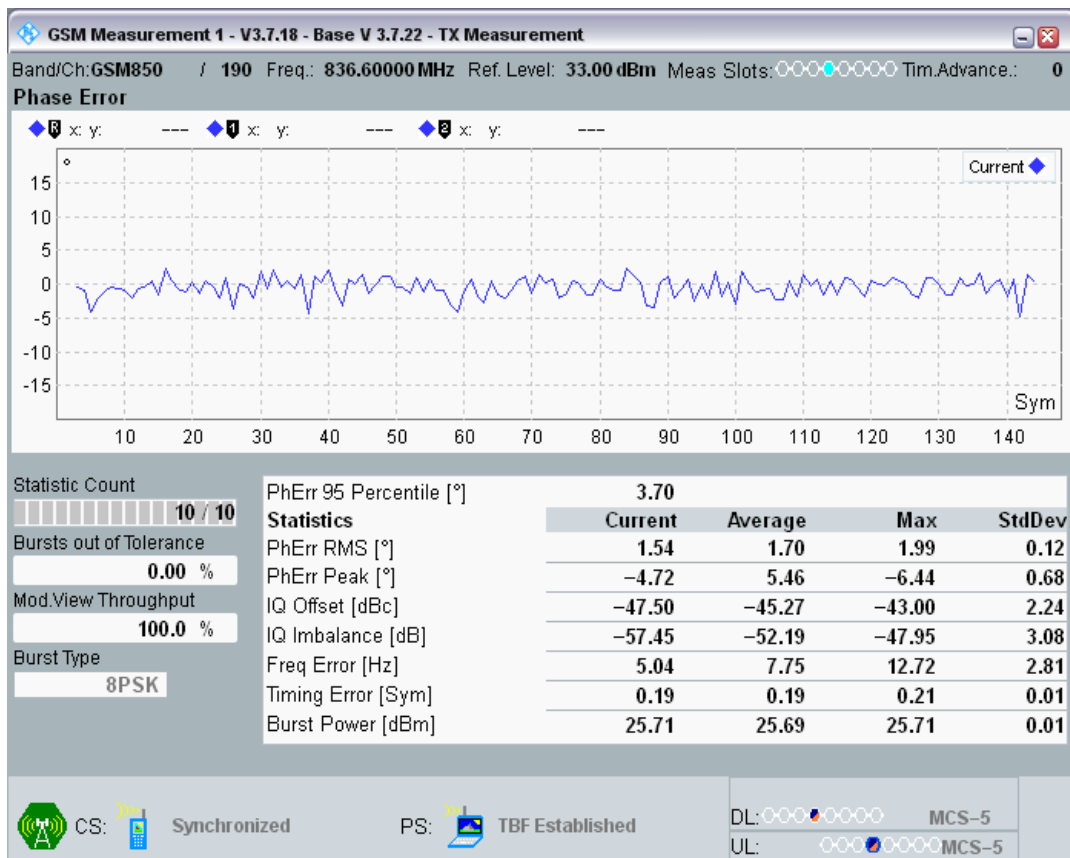


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @10

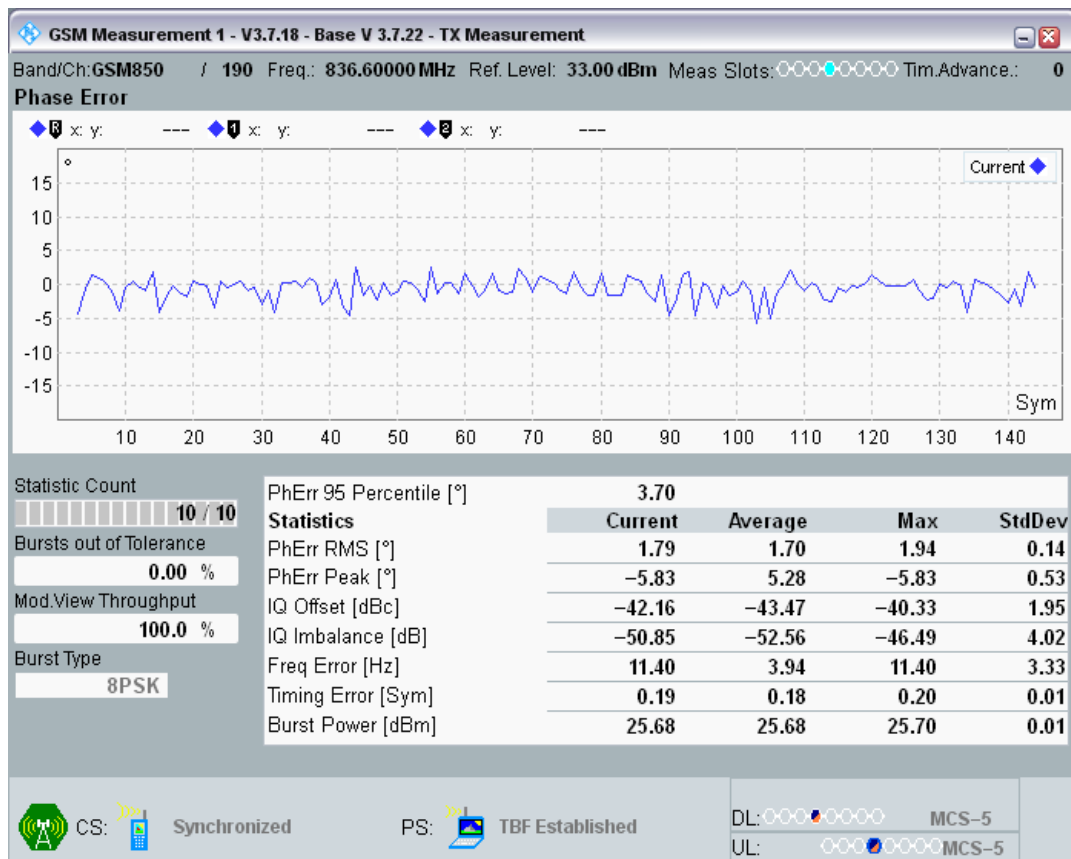


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @11




EGPRS850 Channel=190 Gamma=6;6;6 TU3 @12

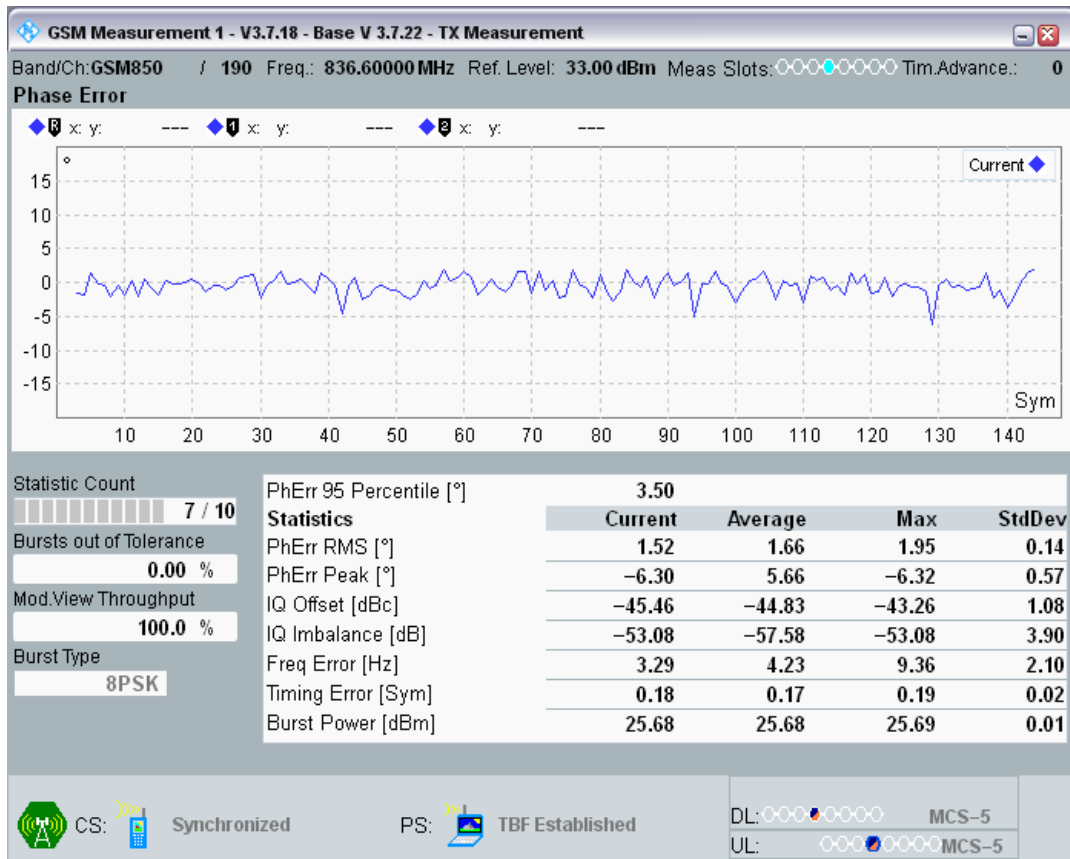


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @14

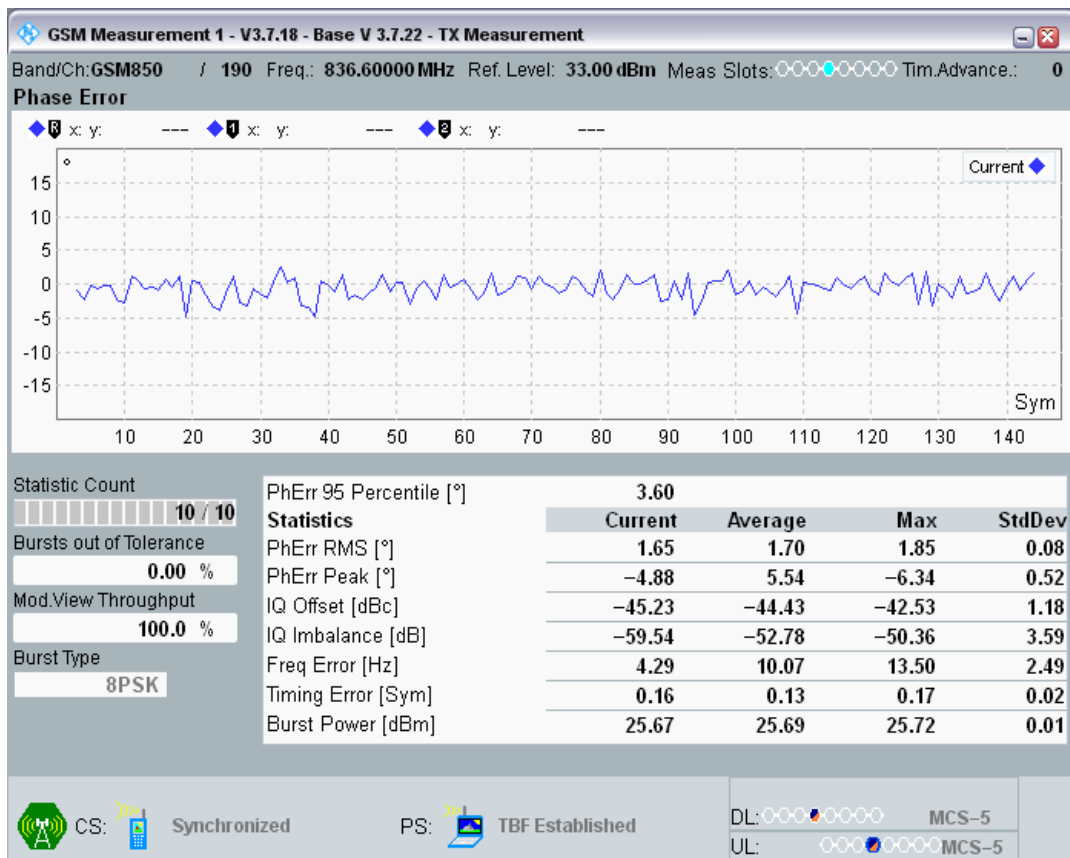


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @13

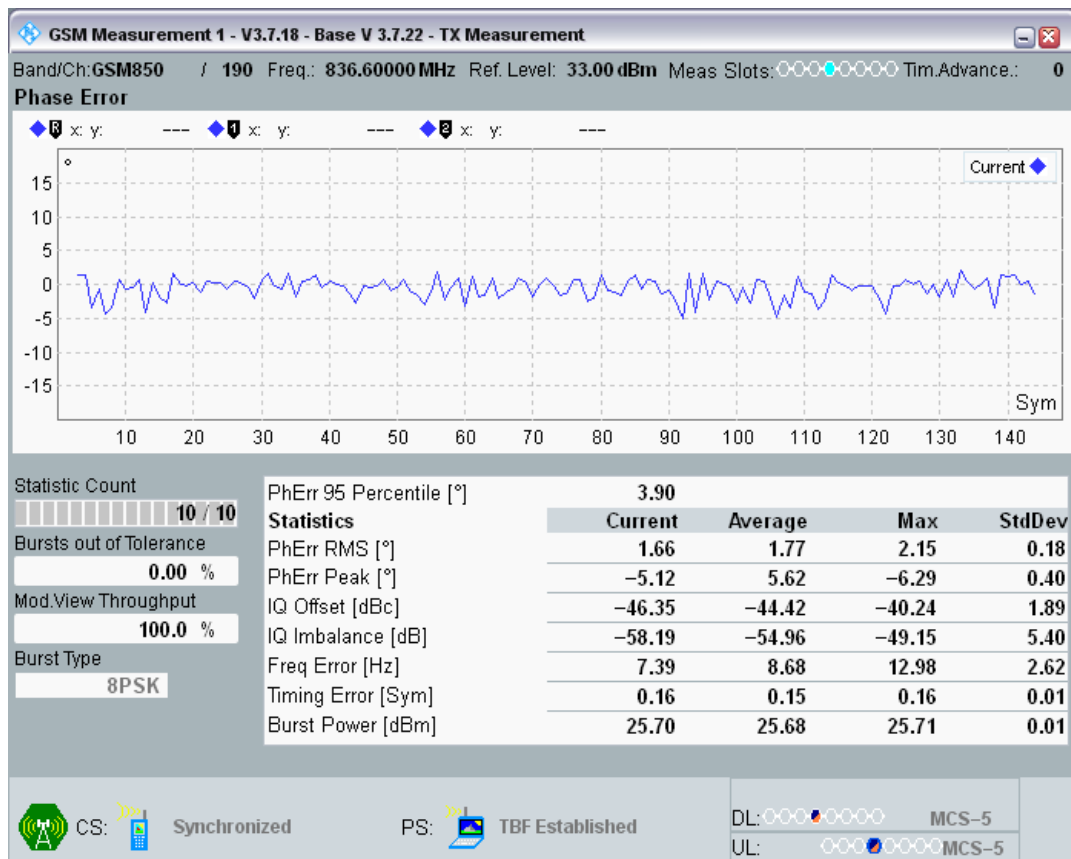


EGPRS850 Channel=190 Gamma=6;6;6;6 TU3 @15

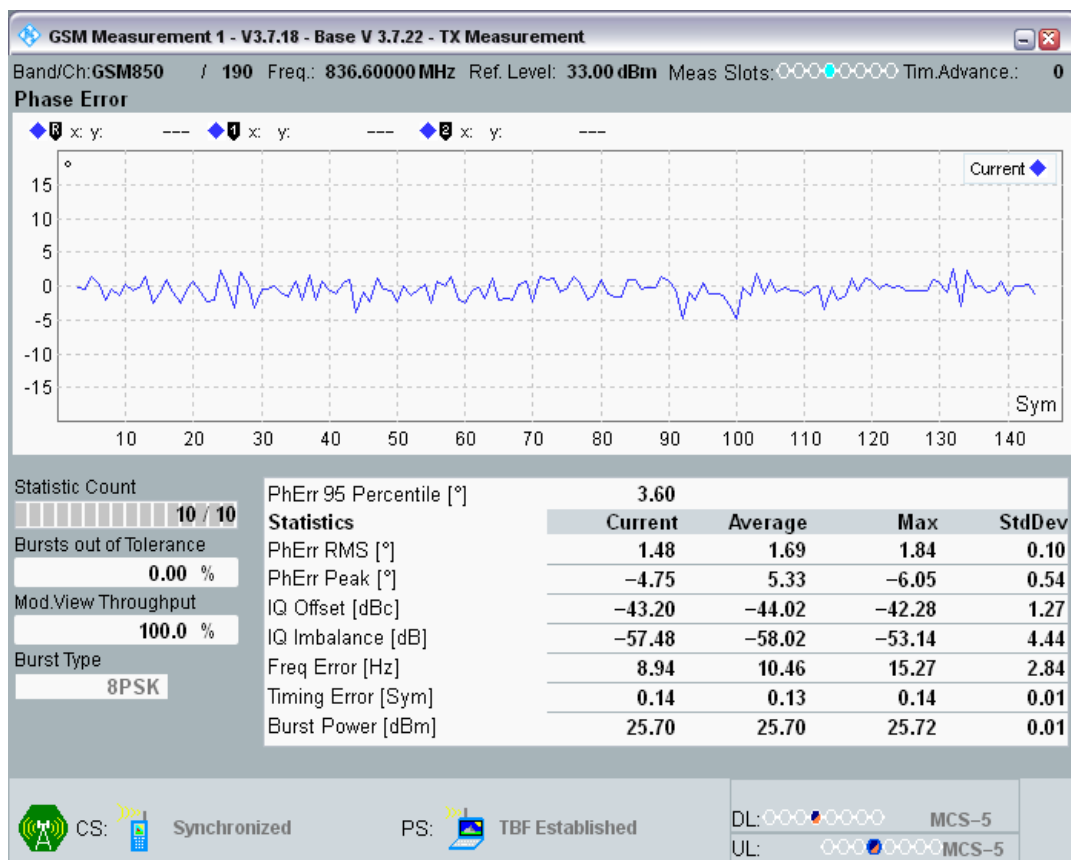


EGPRS850 Channel=190 Gamma=6;6;6;6 TU3 @16

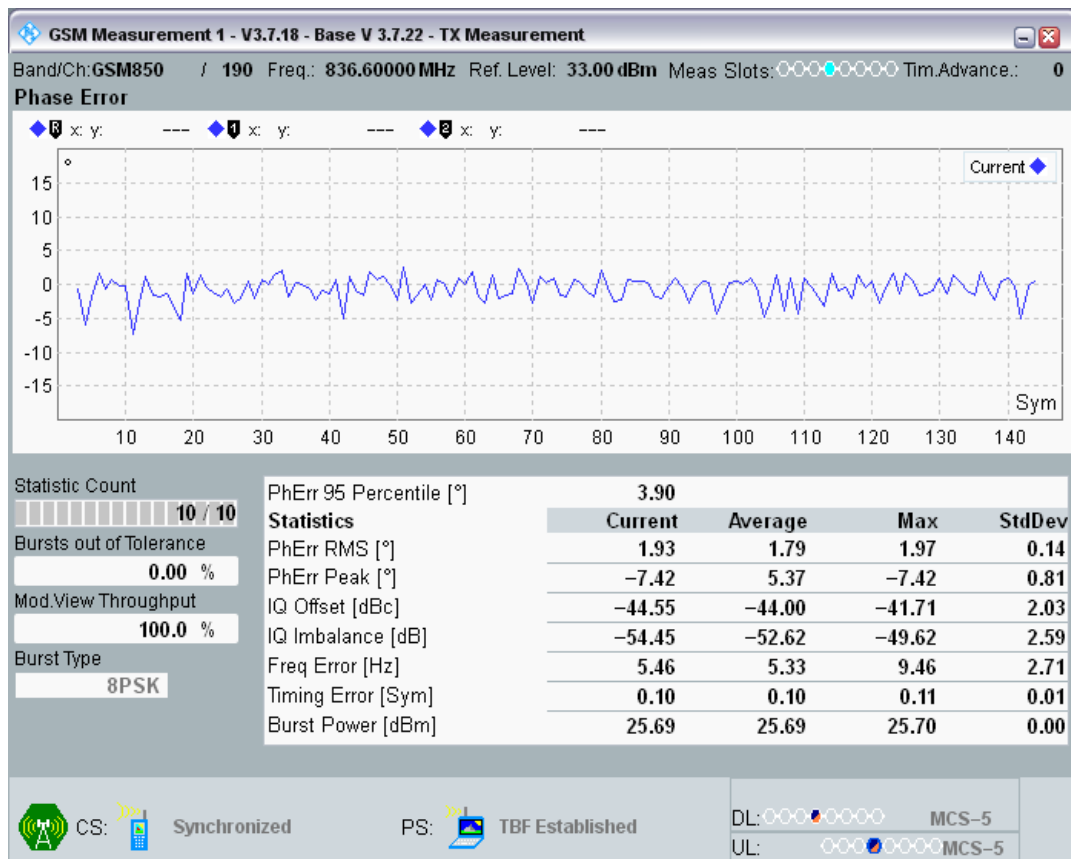


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @17

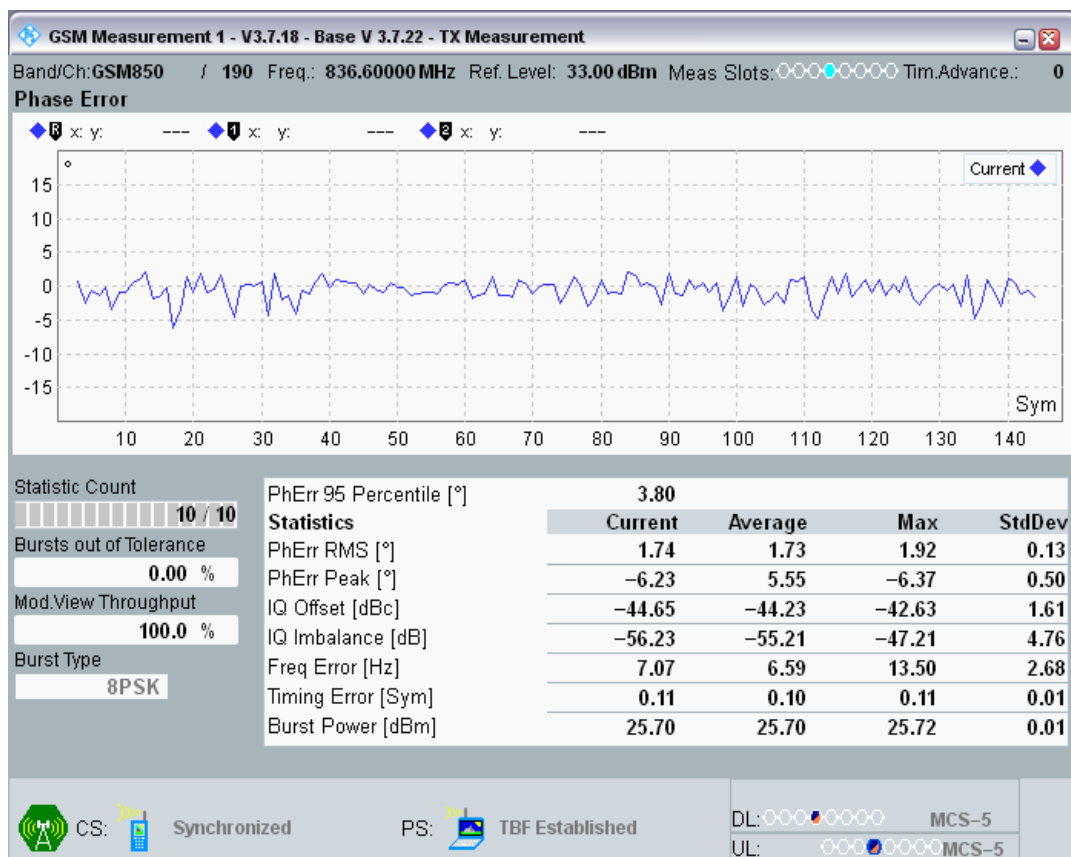


EGPRS850 Channel=190 Gamma=6;6;6 TU3 @18

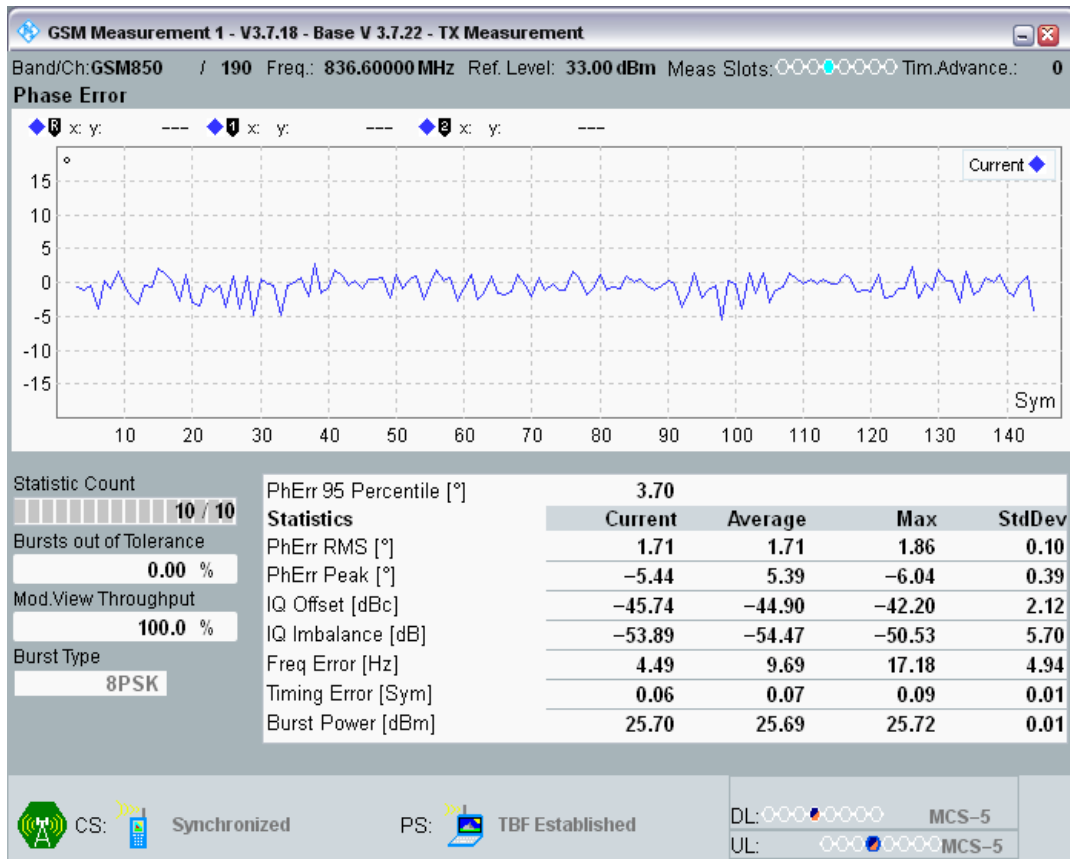


EGPRS850 Channel=190 Gamma=6;6;6;6 TU3 @19

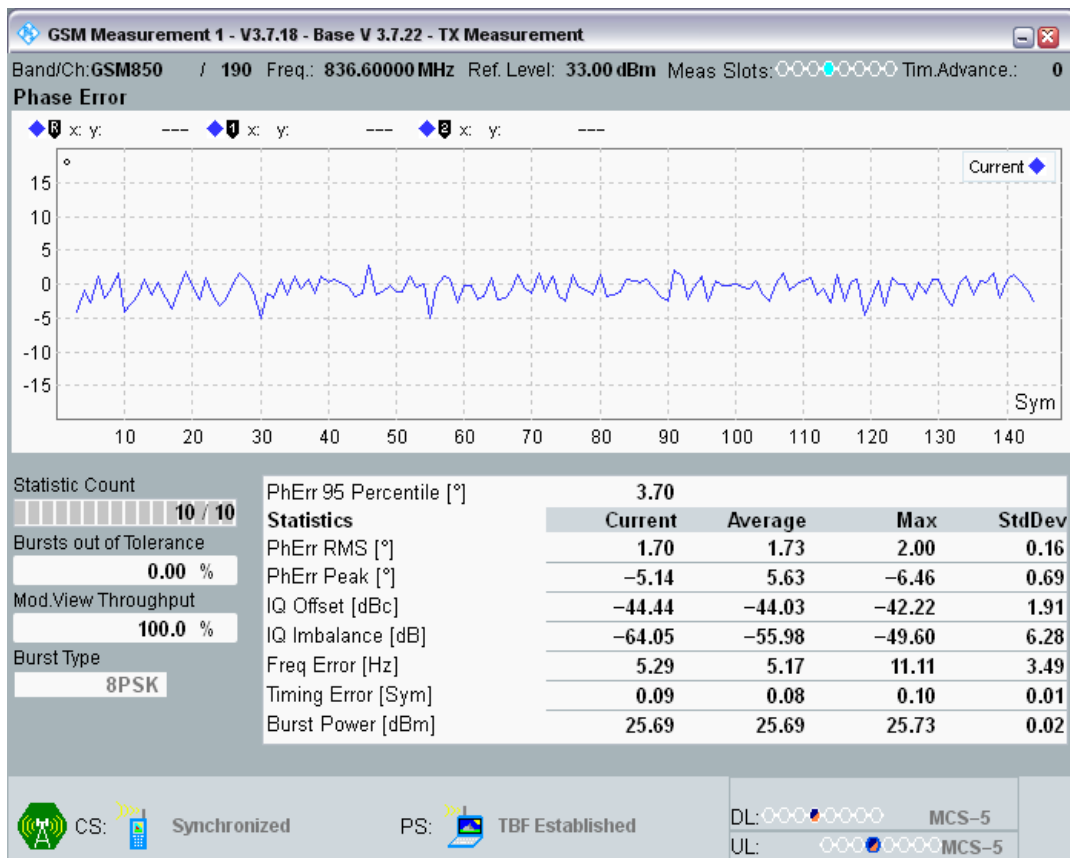


EGPRS850 Channel=190 Gamma=6;6;6;6 TU3 @20

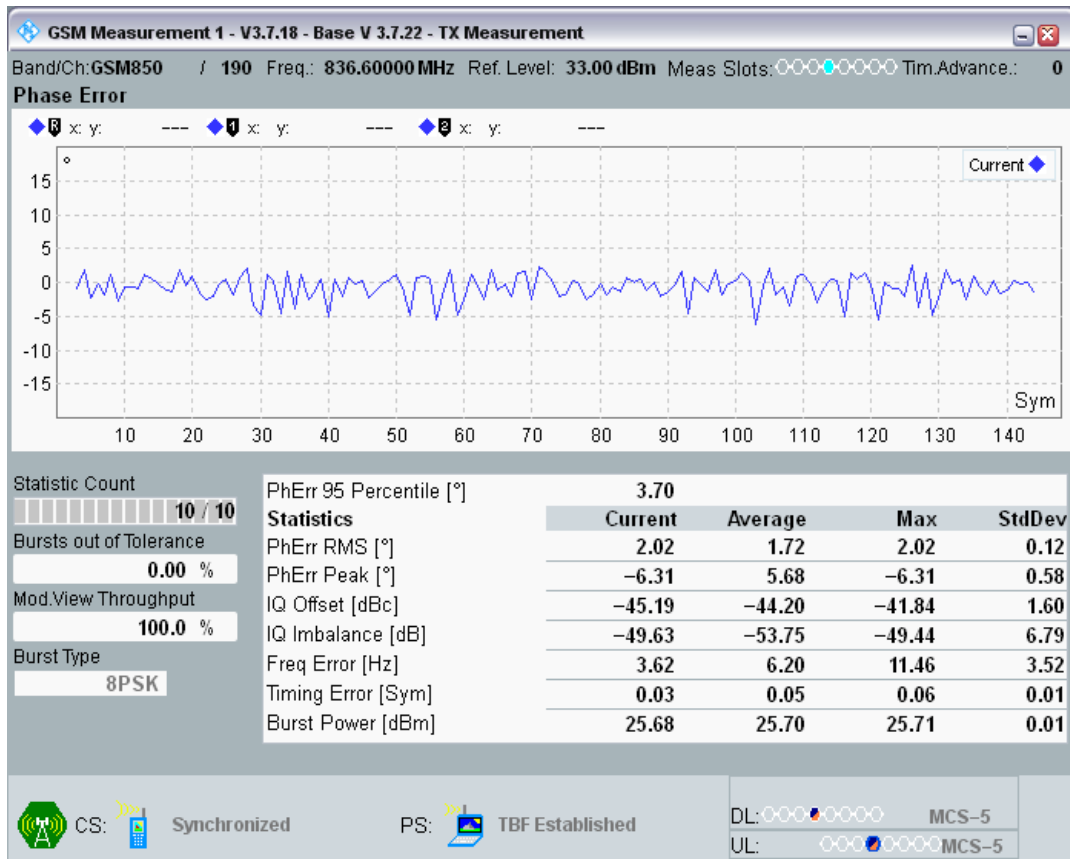


EGPRS900 Channel=38 Gamma=6;6;6;6 RA250 @Connect

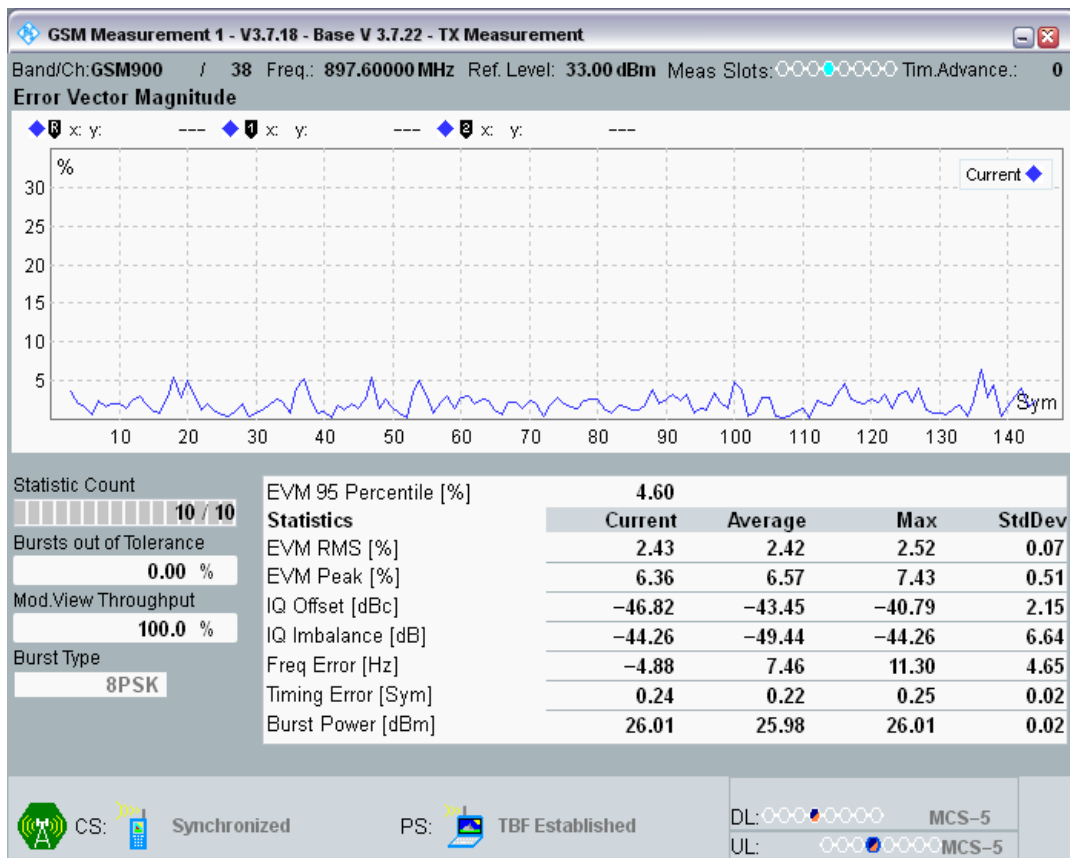


EGPRS900 Channel=38 Gamma=6;6;6;6 RA250 @Sens1

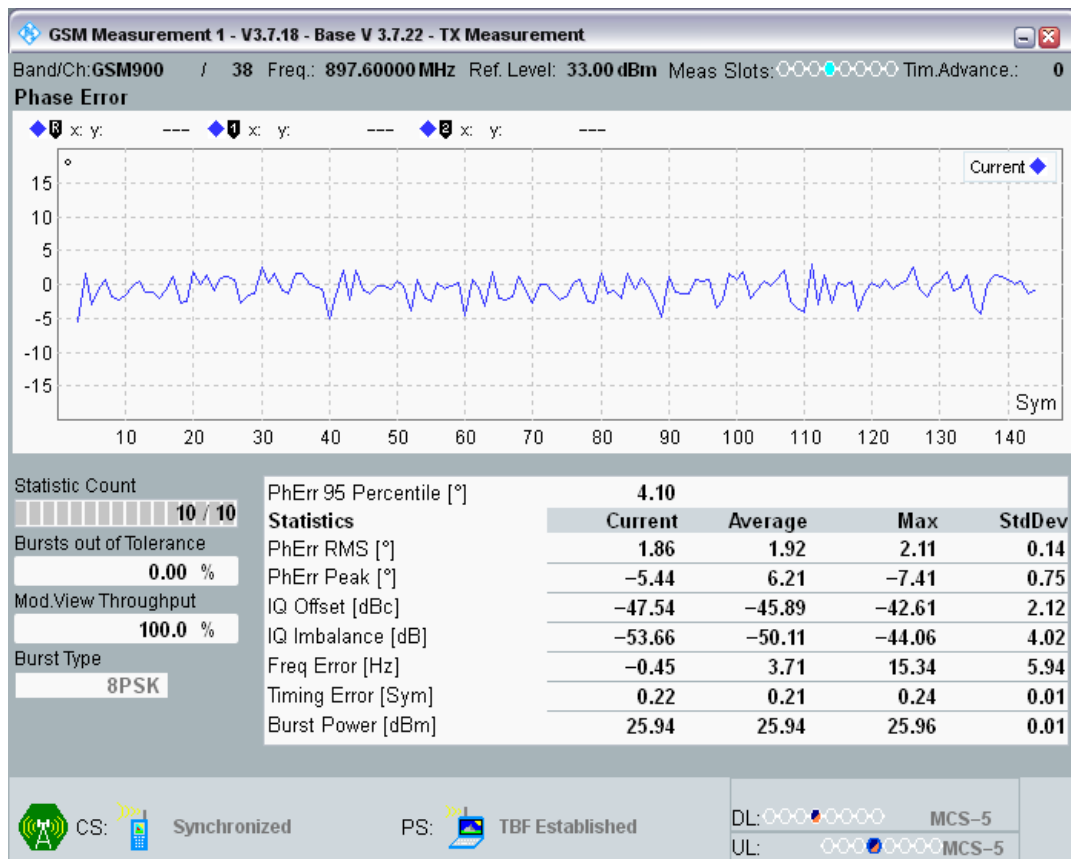


EGPRS900 Channel=38 Gamma=6;6;6;6 RA250 @Sens2

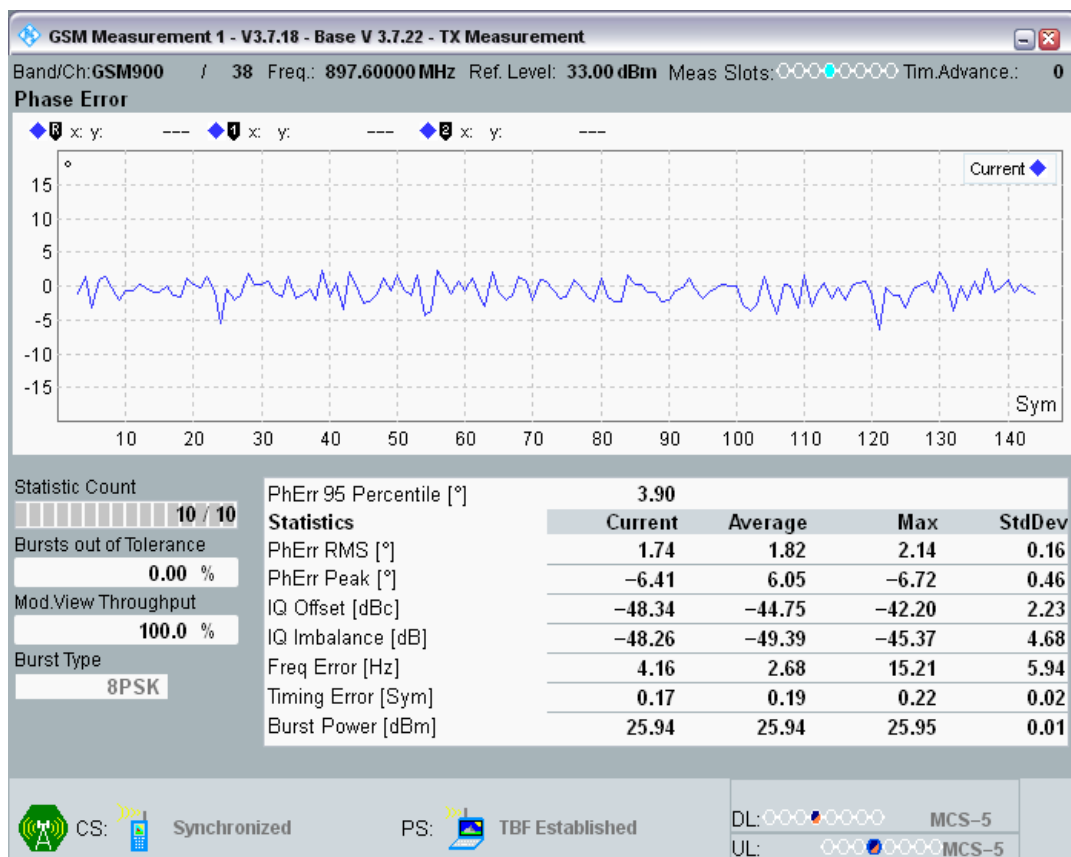


EGPRS900 Channel=38 Gamma=6;6;6;6 RA250 @Sens3

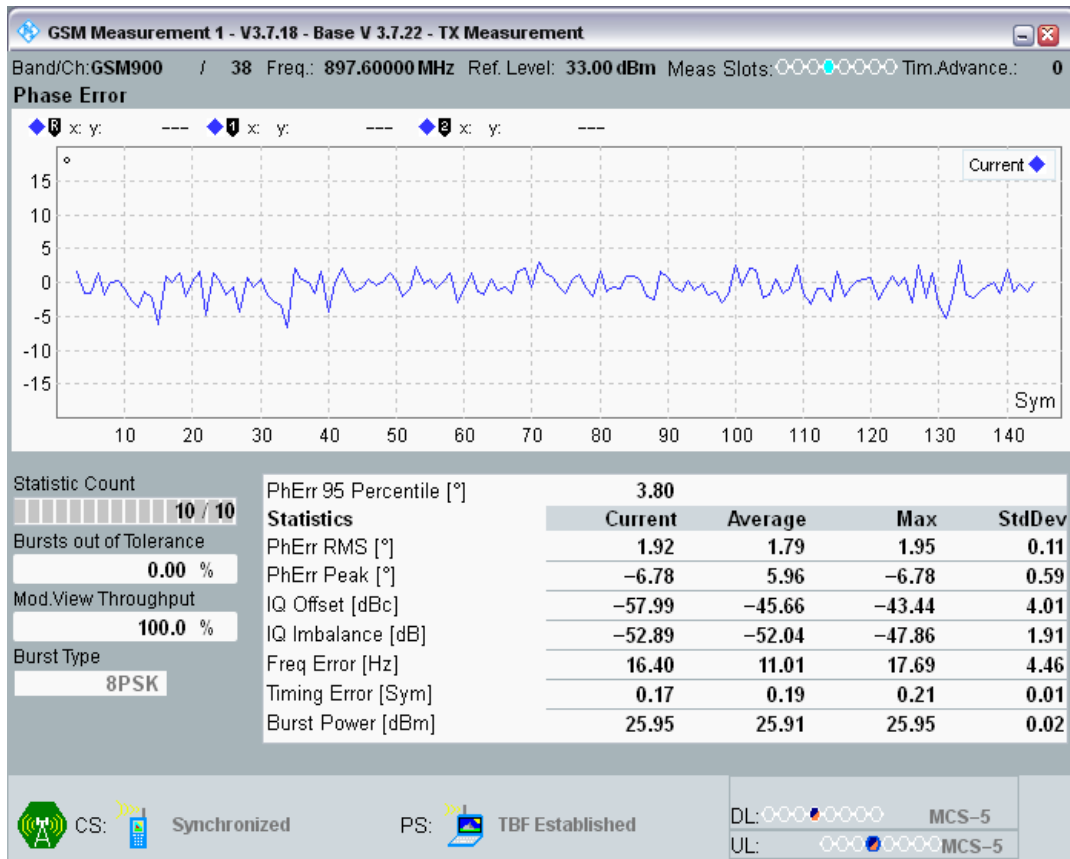


EGPRS900 Channel=38 Gamma=6;6;6;6 RA250 @Sens4

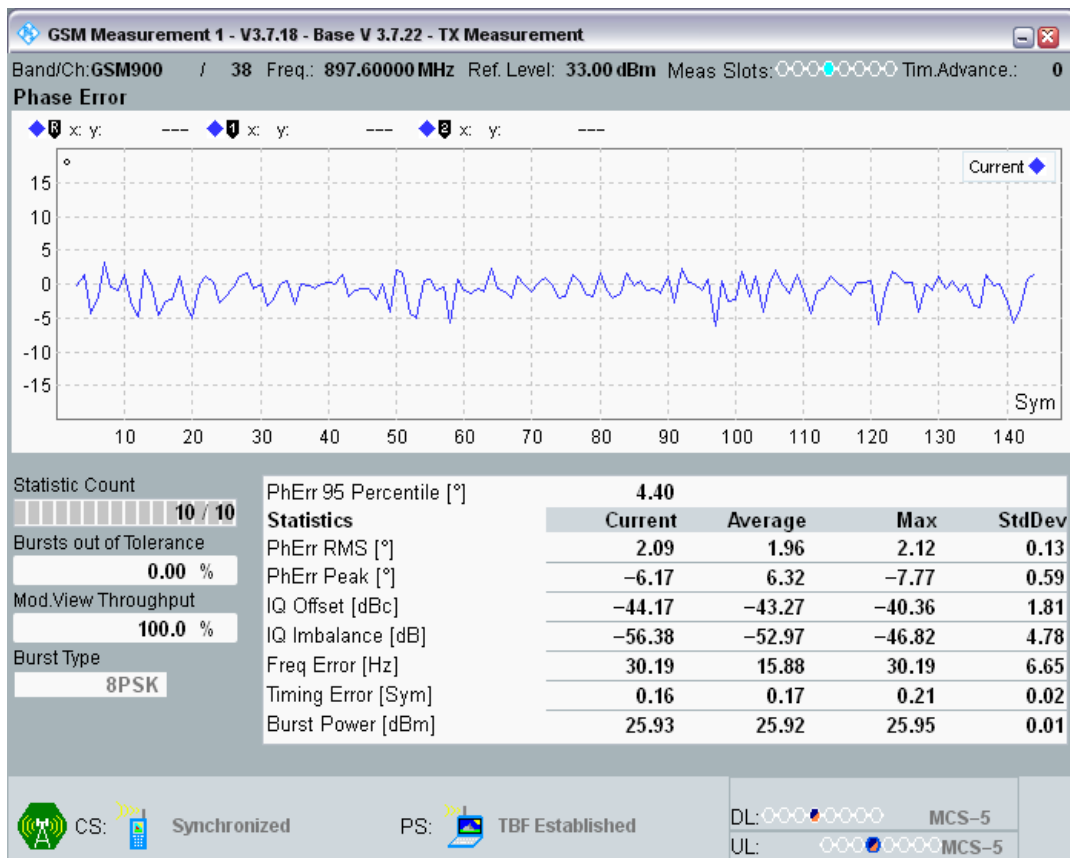


EGPRS900 Channel=38 Gamma=6;6;6;6 RA250 @Sens5

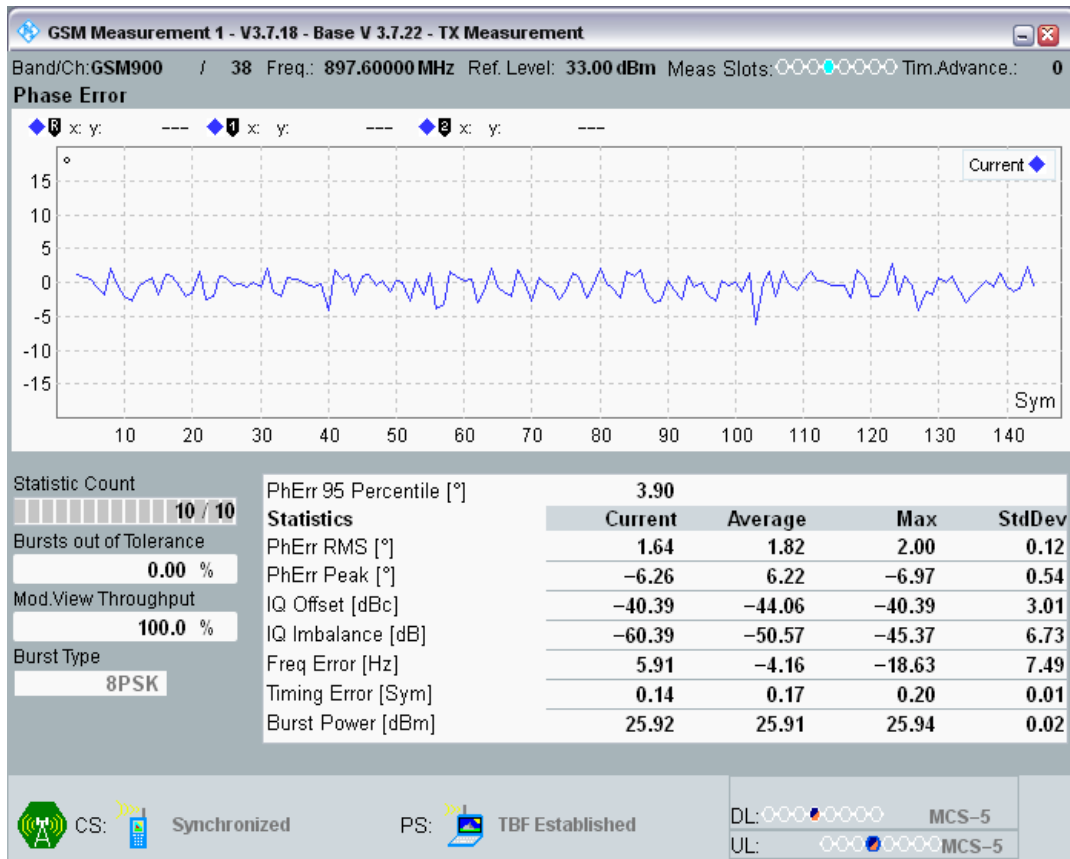

EGPRS900 Channel=38 Gamma=6;6;6;6 HT100 @Connect

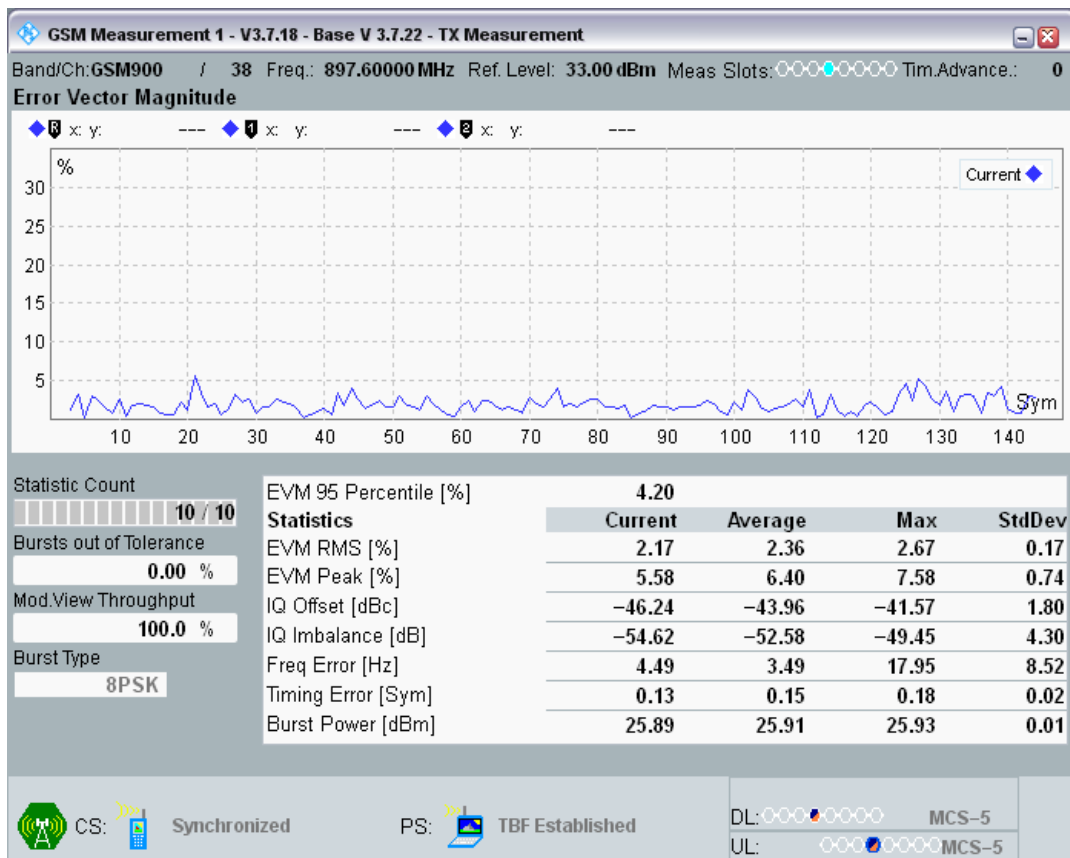


EGPRS900 Channel=38 Gamma=6;6;6;6 HT100 @Sens1

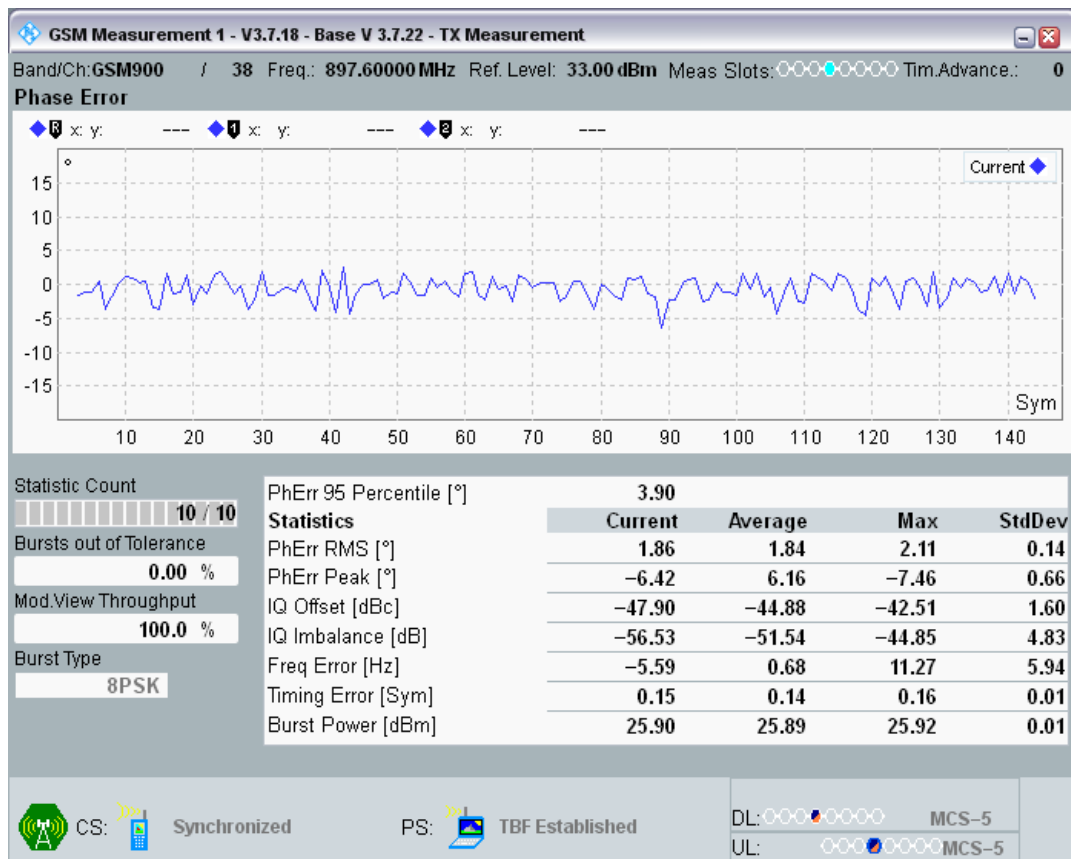


EGPRS900 Channel=38 Gamma=6;6;6;6 HT100 @Sens2




EGPRS900 Channel=38 Gamma=6;6;6;6 HT100 @Sens3

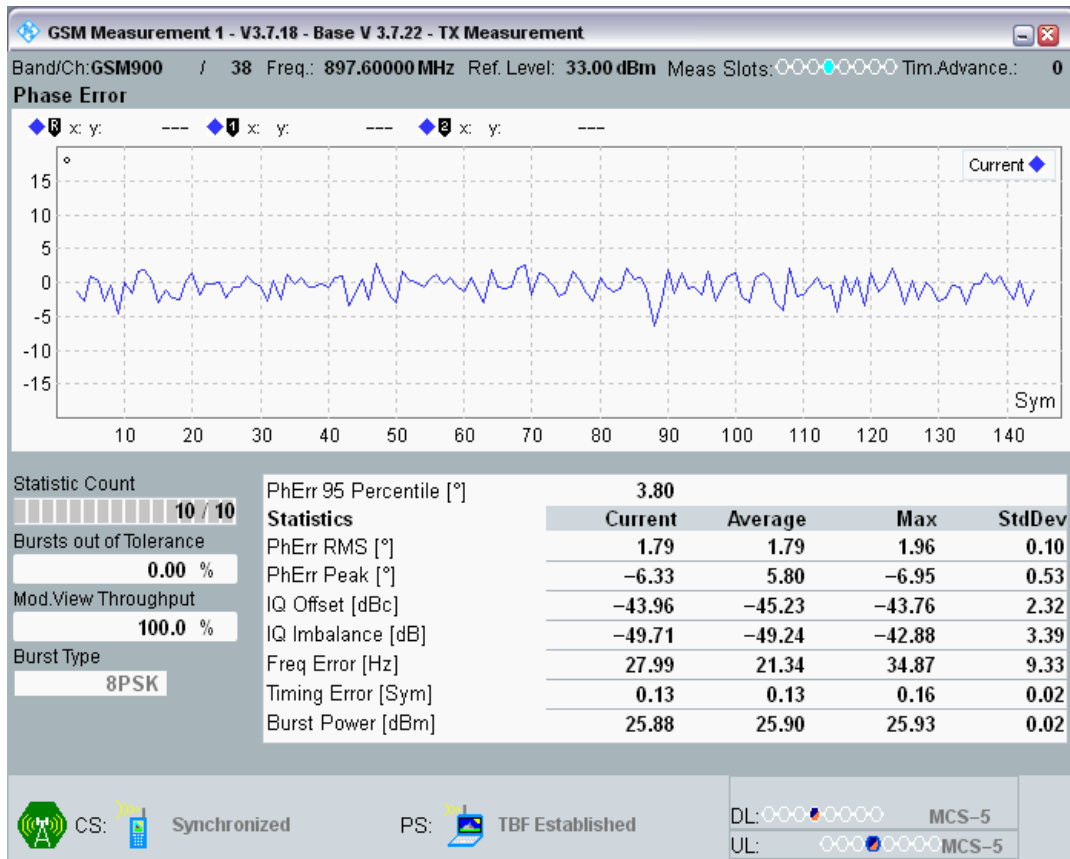


EGPRS900 Channel=38 Gamma=6;6;6;6 HT100 @Sens4

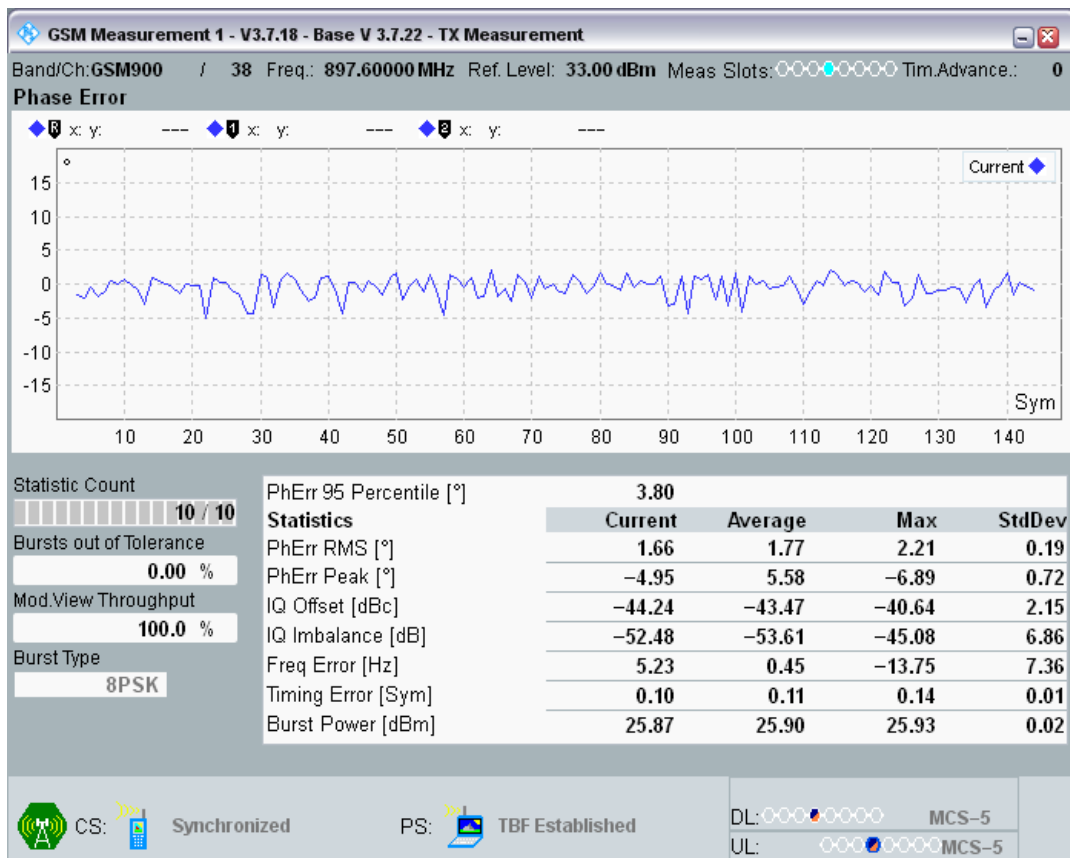


EGPRS900 Channel=38 Gamma=6;6;6;6 TU50 @Connect

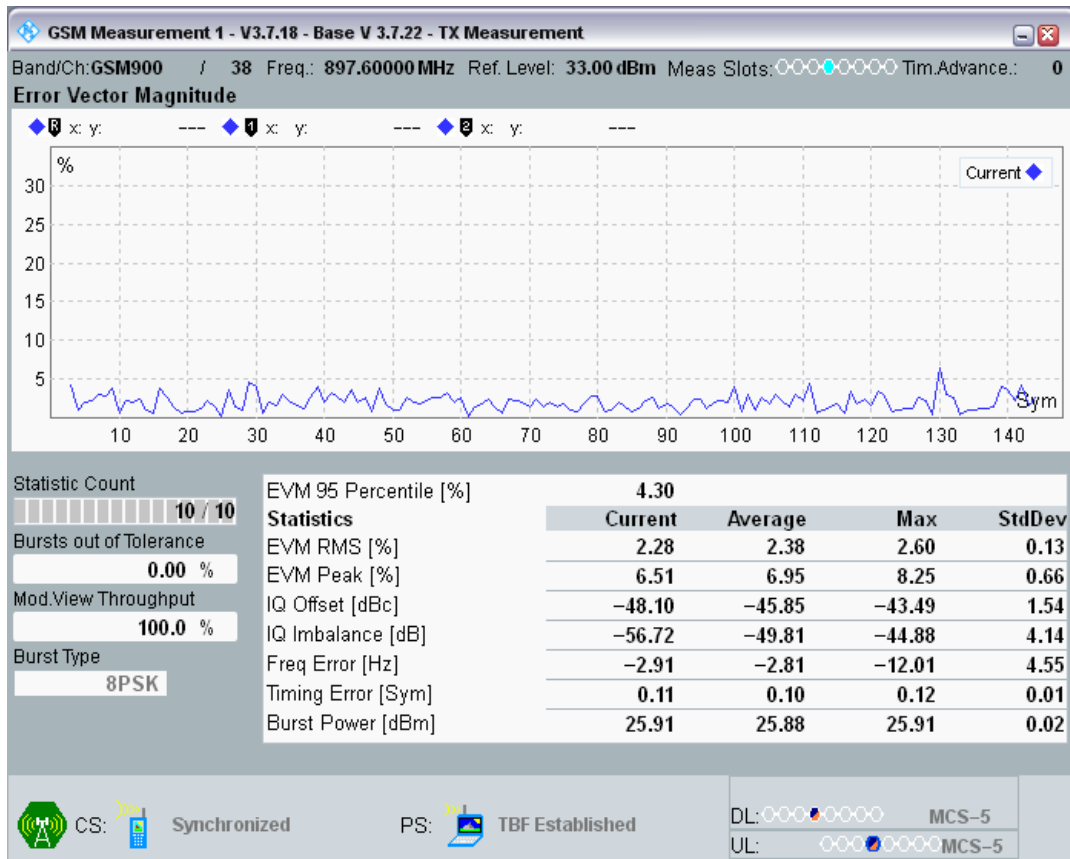


EGPRS900 Channel=38 Gamma=6;6;6;6 HT100 @Sens5

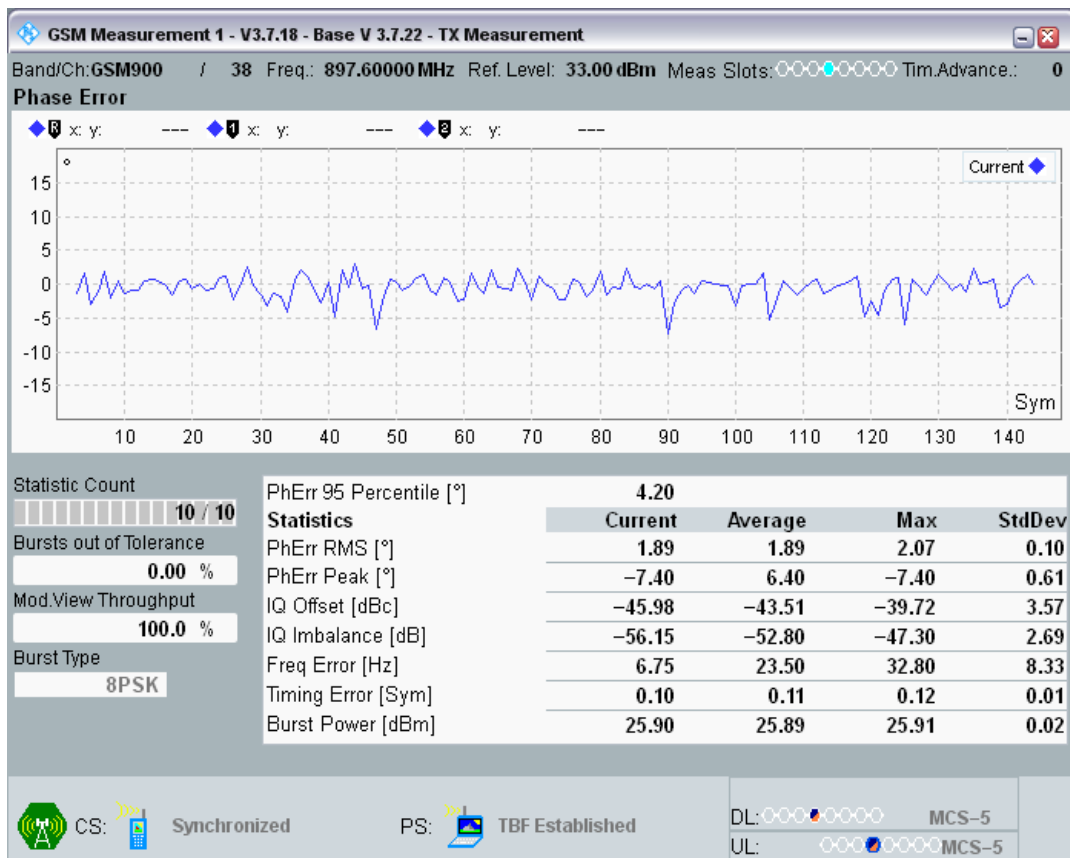


EGPRS900 Channel=38 Gamma=6;6;6;6 TU50 @Sens1

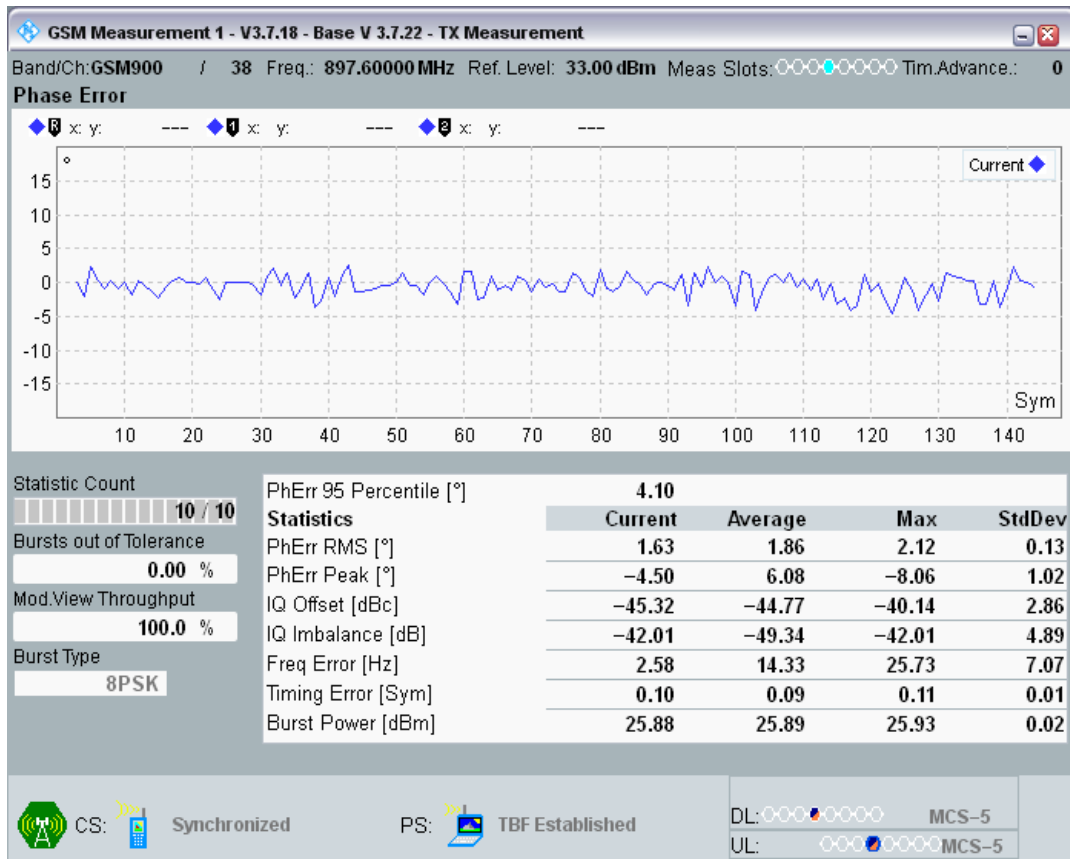


EGPRS900 Channel=38 Gamma=6;6;6;6 TU50 @Sens3

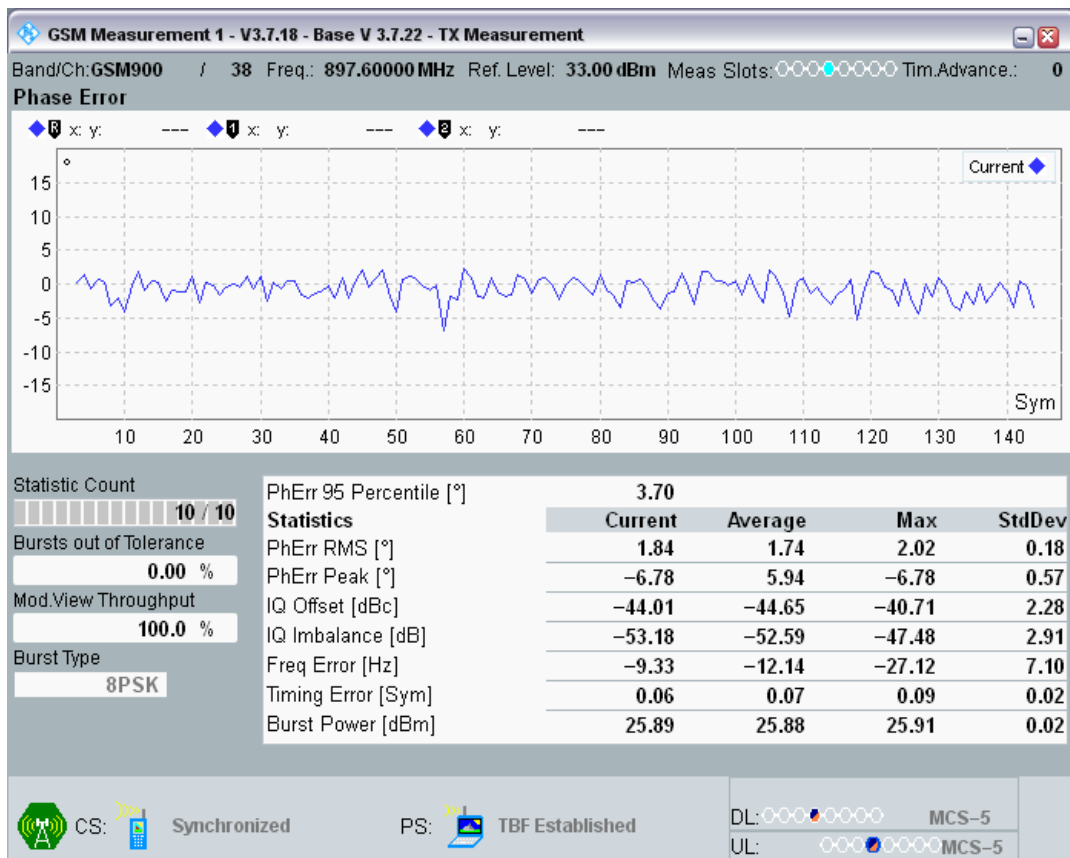


EGPRS900 Channel=38 Gamma=6;6;6;6 TU50 @Sens2

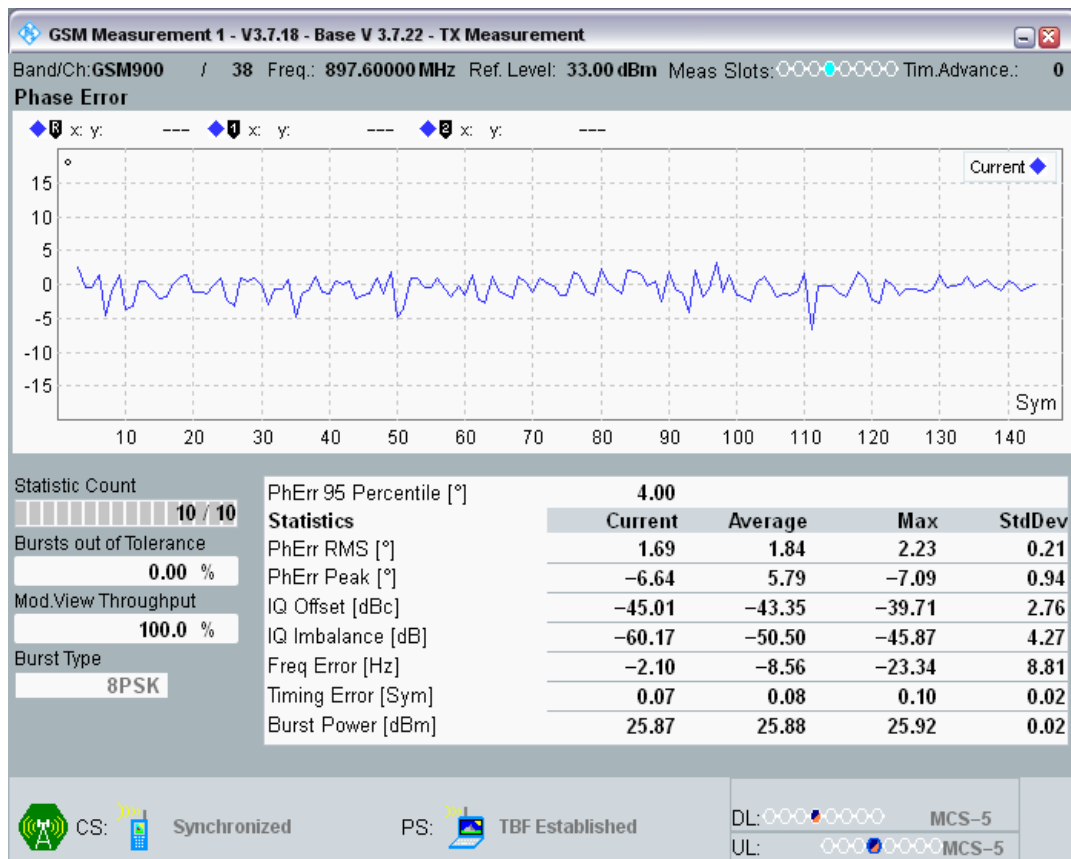


EGPRS900 Channel=38 Gamma=6;6;6;6 TU50 @Sens4

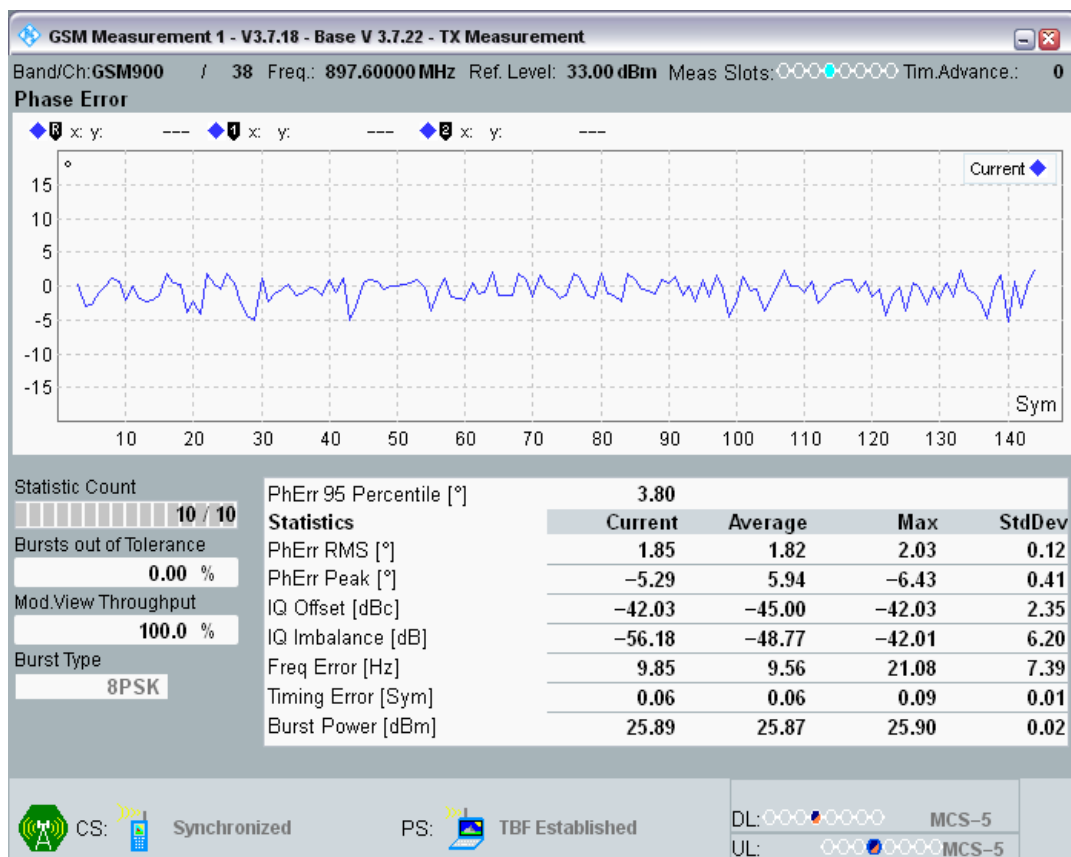


EGPRS900 Channel=38 Gamma=6;6;6;6 TU50 @Sens5

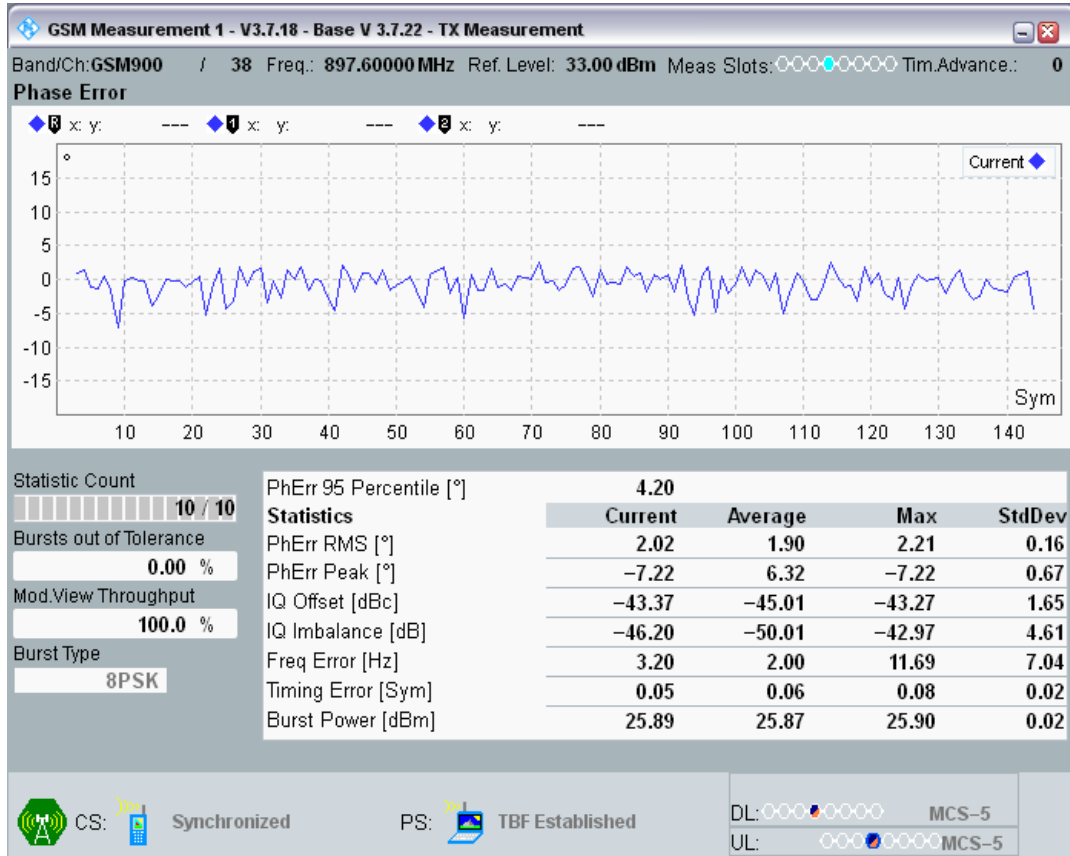


EGPRS900 Channel=38 Gamma=6;6;6 TU3 @Connect

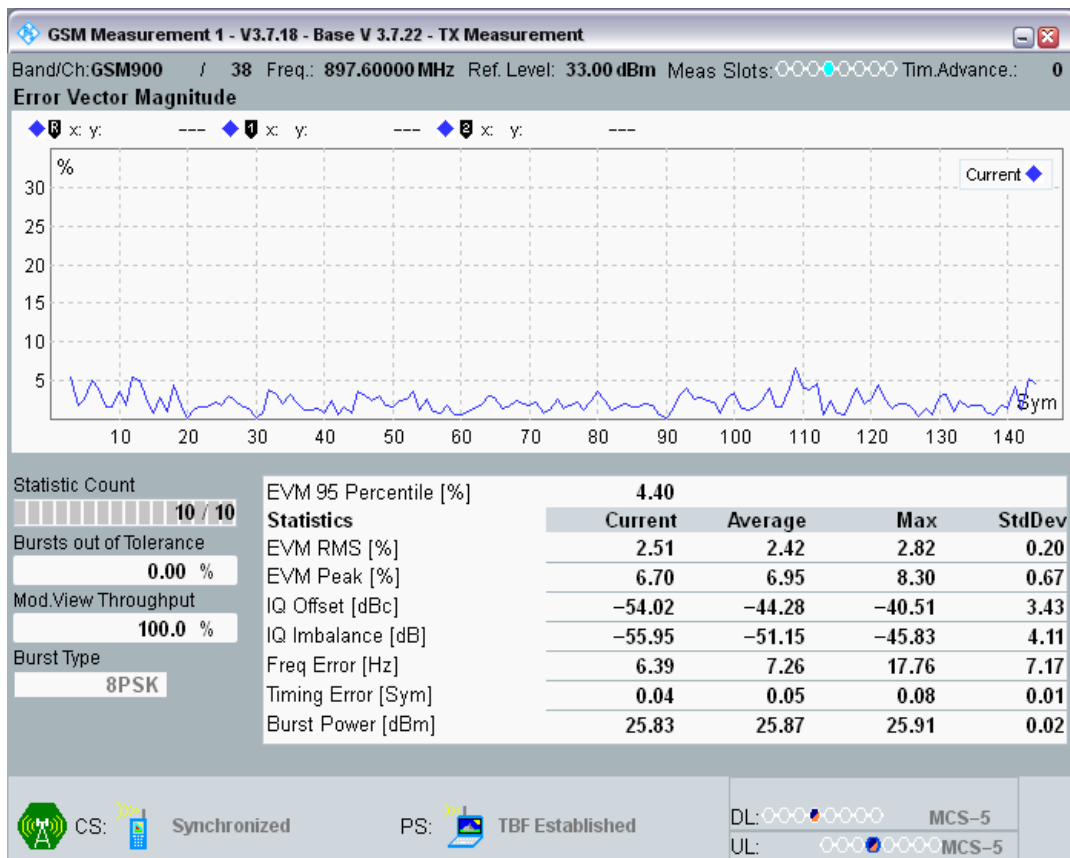


EGPRS900 Channel=38 Gamma=6;6;6 TU3 @1

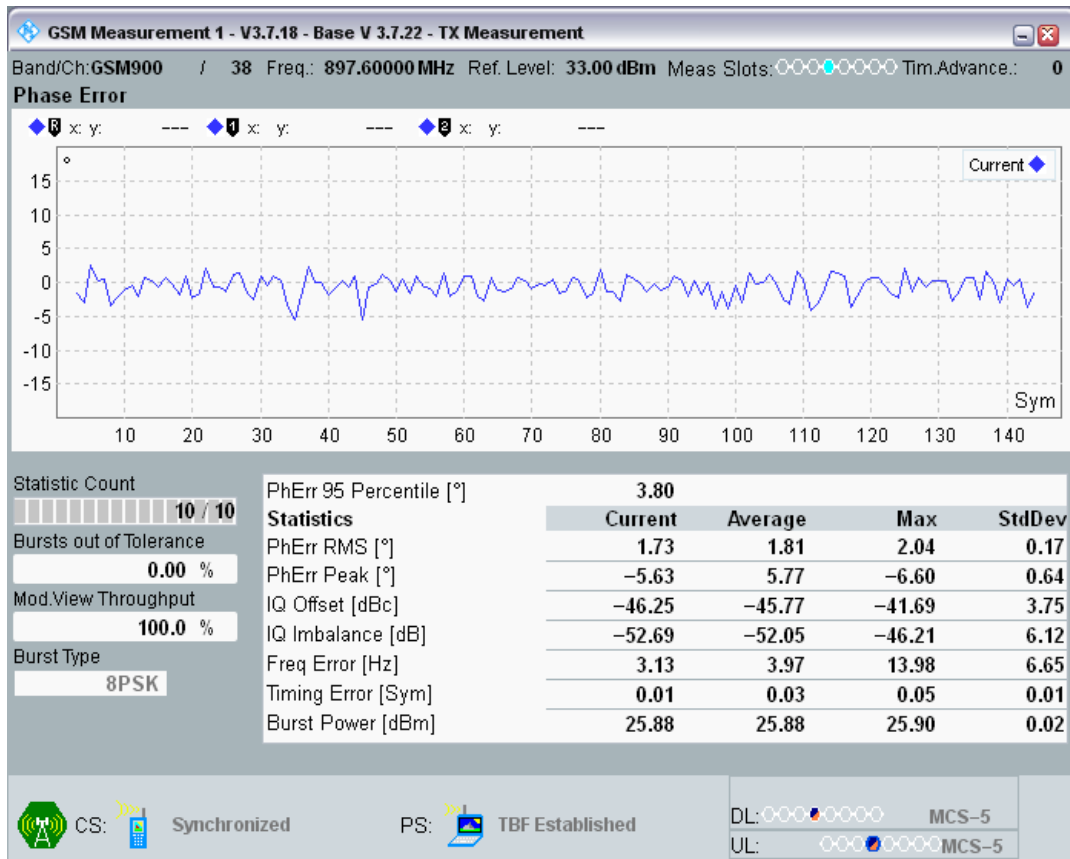


EGPRS900 Channel=38 Gamma=6;6;6 TU3 @2

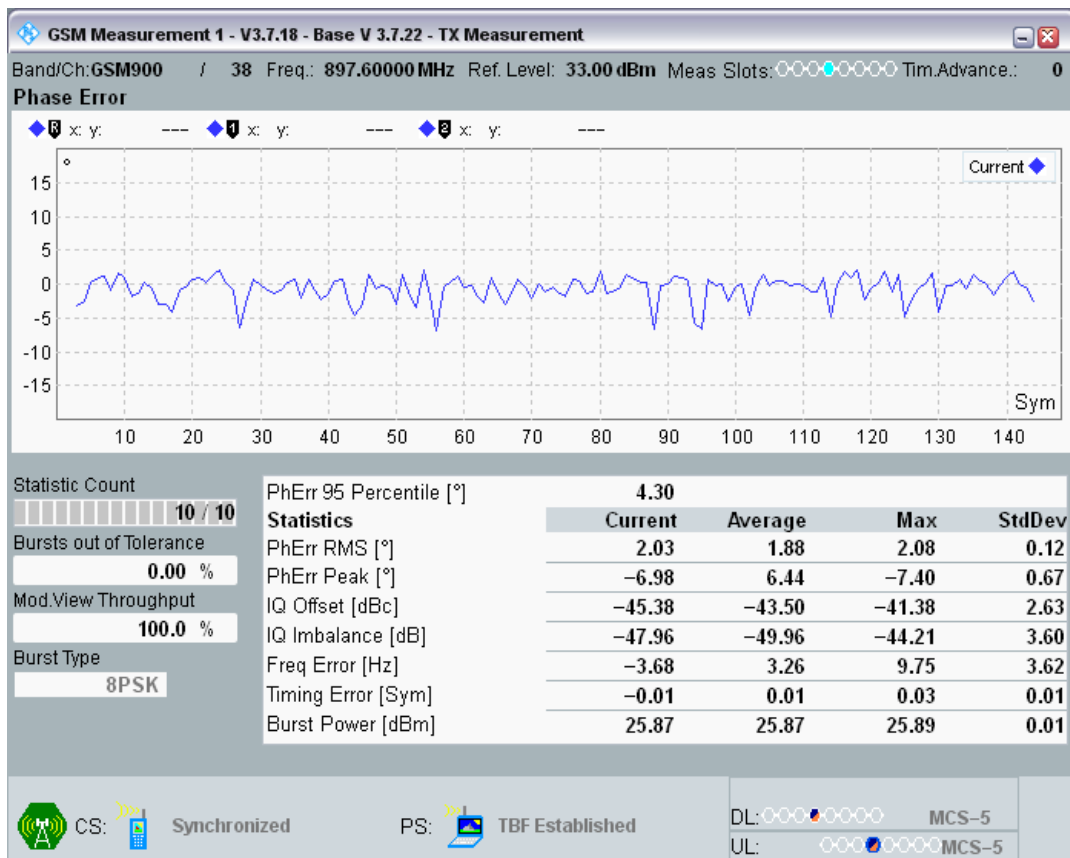


EGPRS900 Channel=38 Gamma=6;6;6 TU3 @3

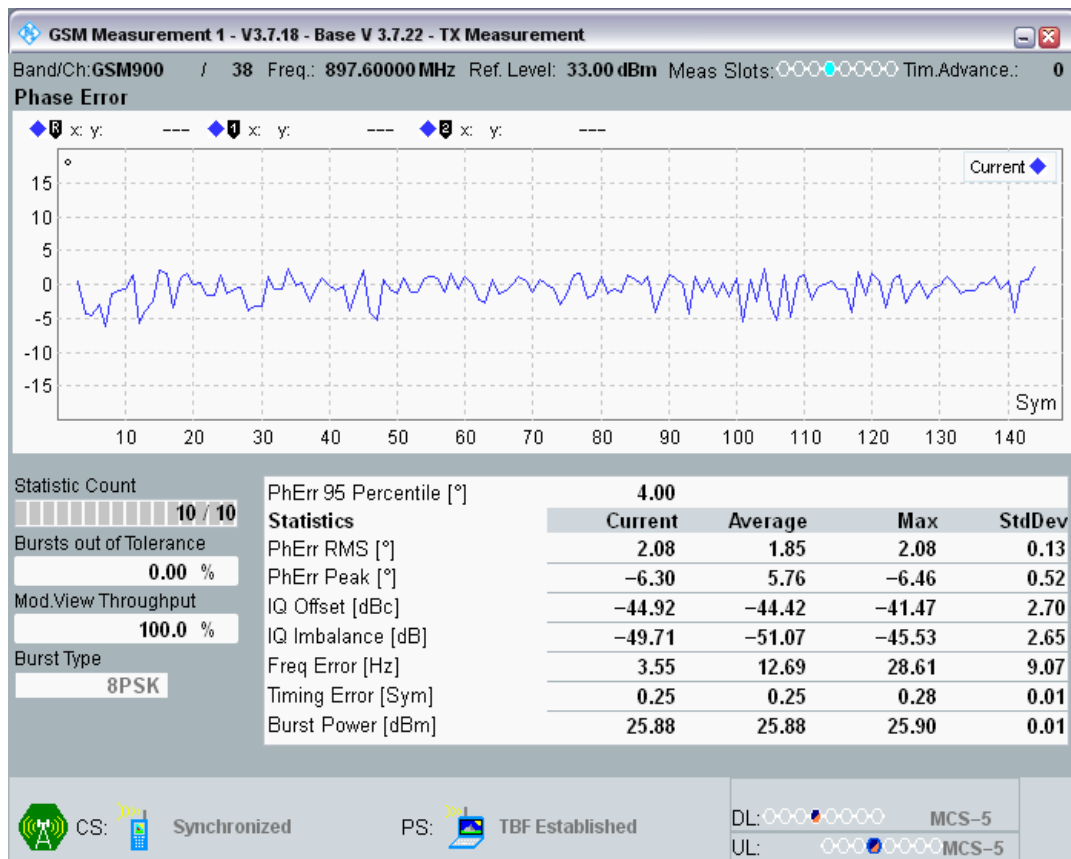


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @4

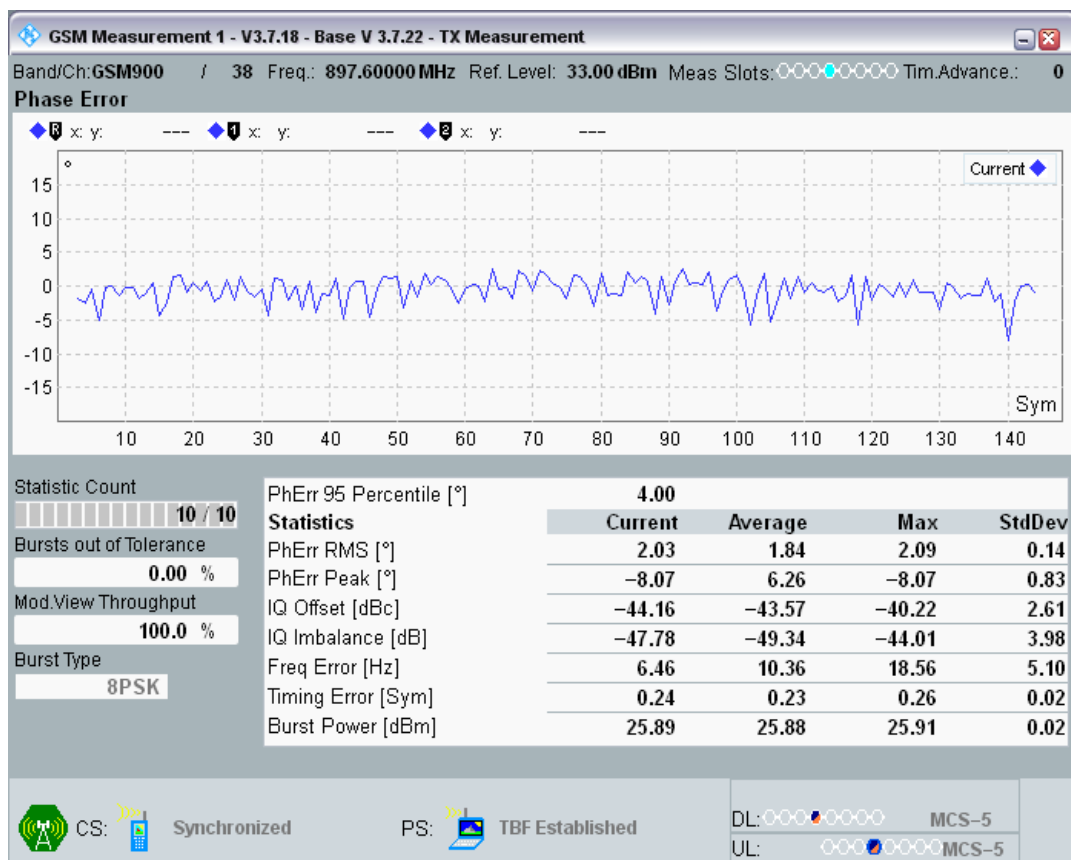


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @6

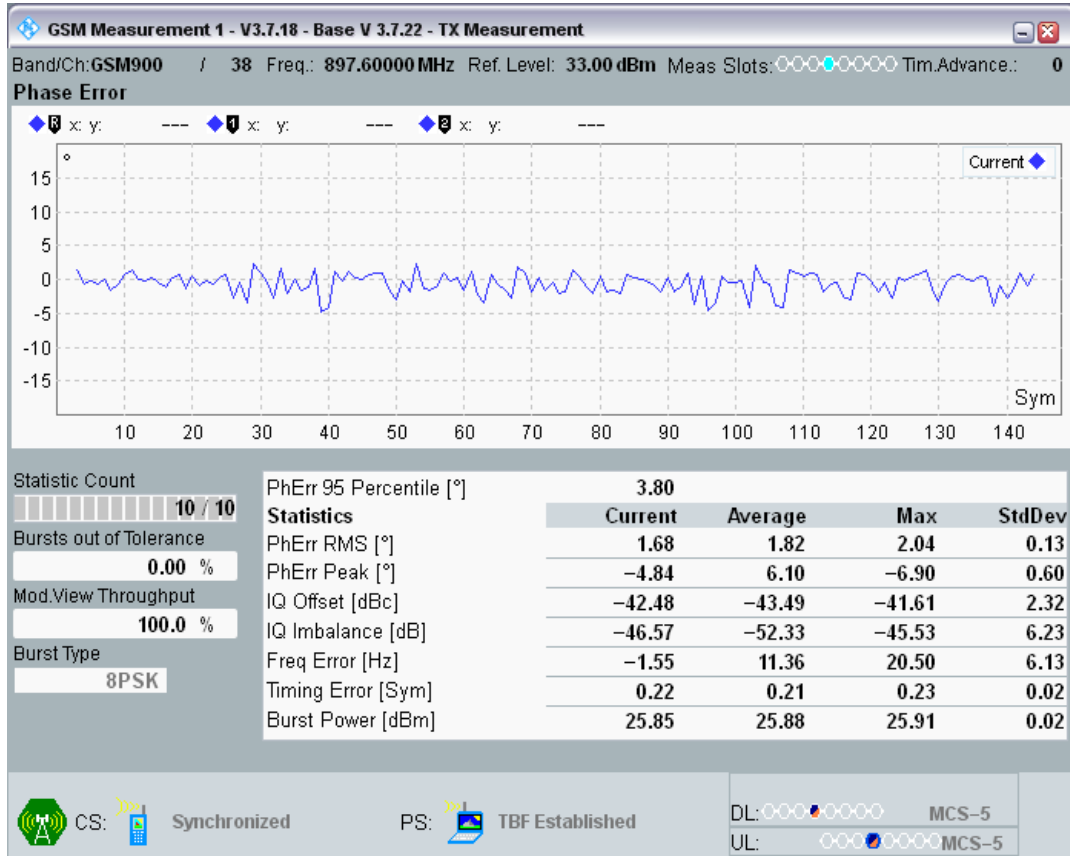


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @5

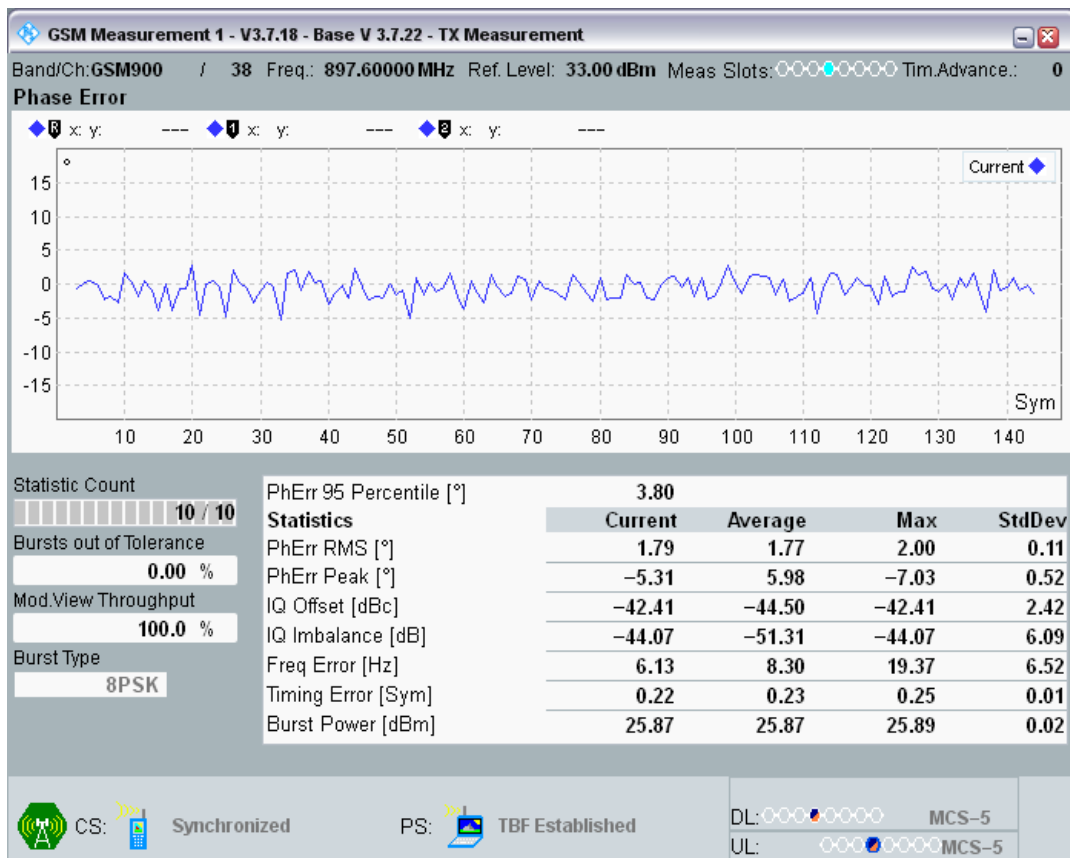


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @7

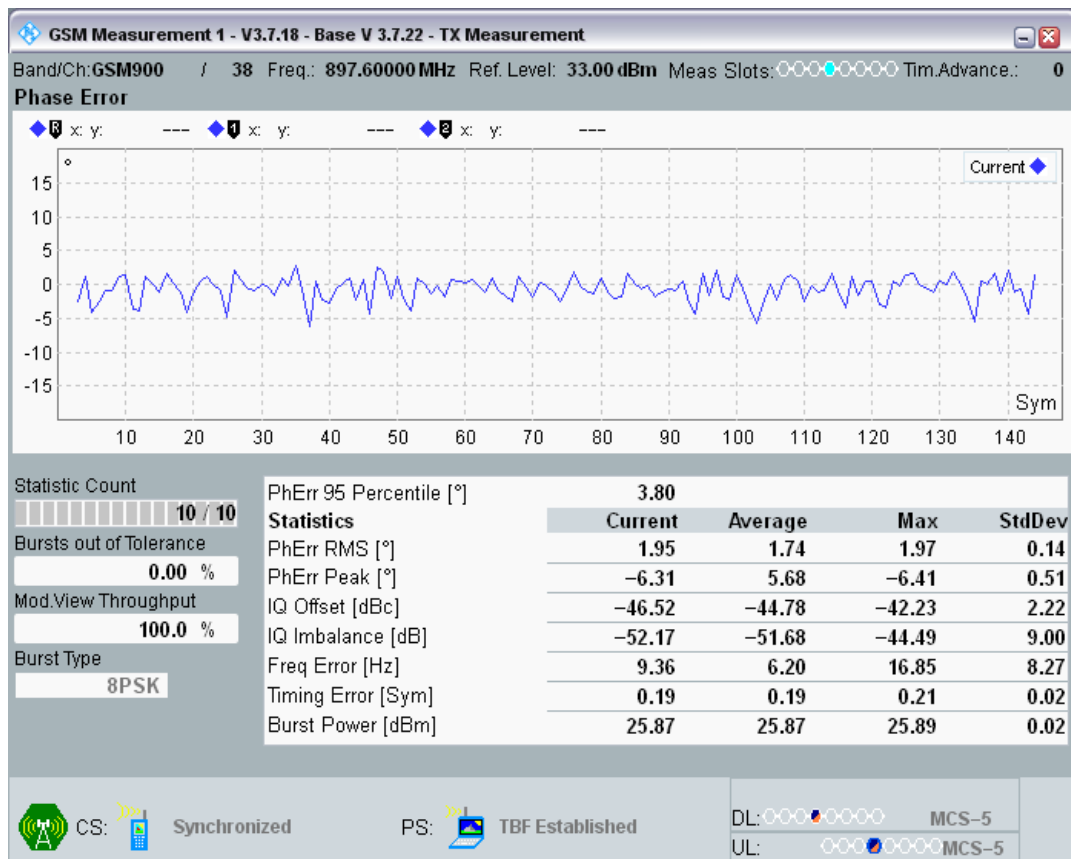


EGPRS900 Channel=38 Gamma=6;6;6 TU3 @9

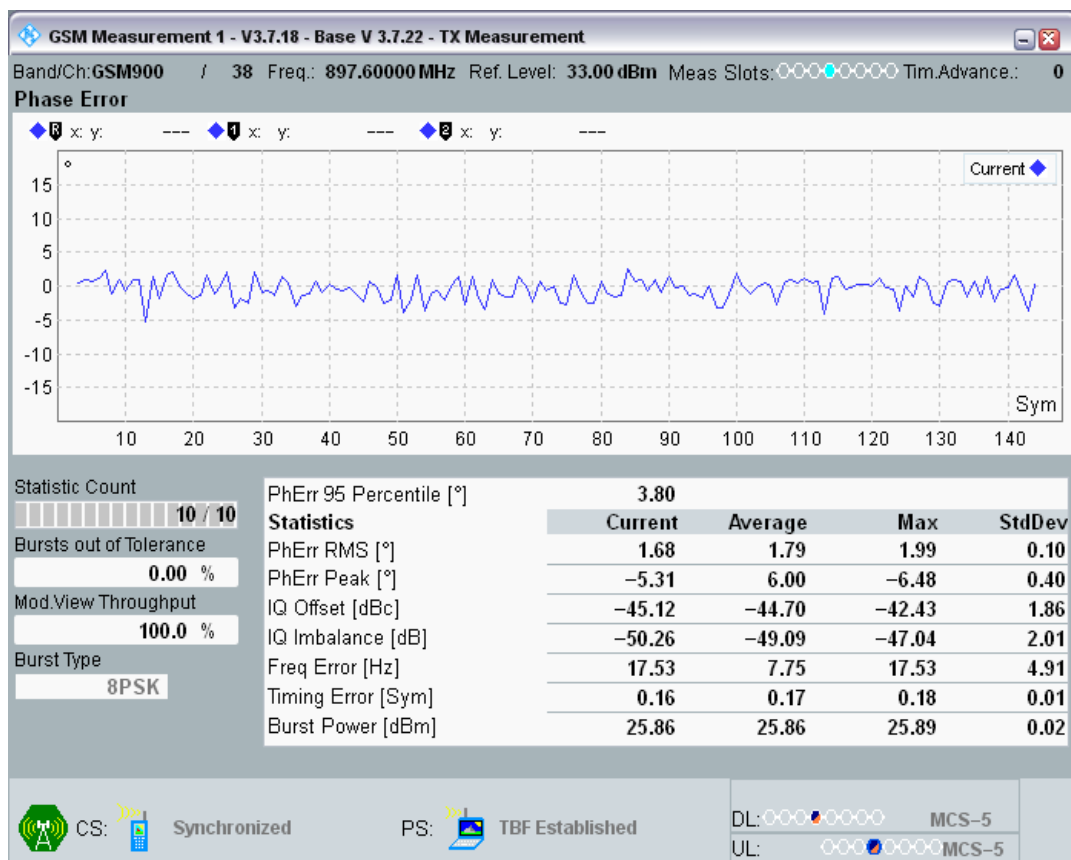


EGPRS900 Channel=38 Gamma=6;6;6 TU3 @8

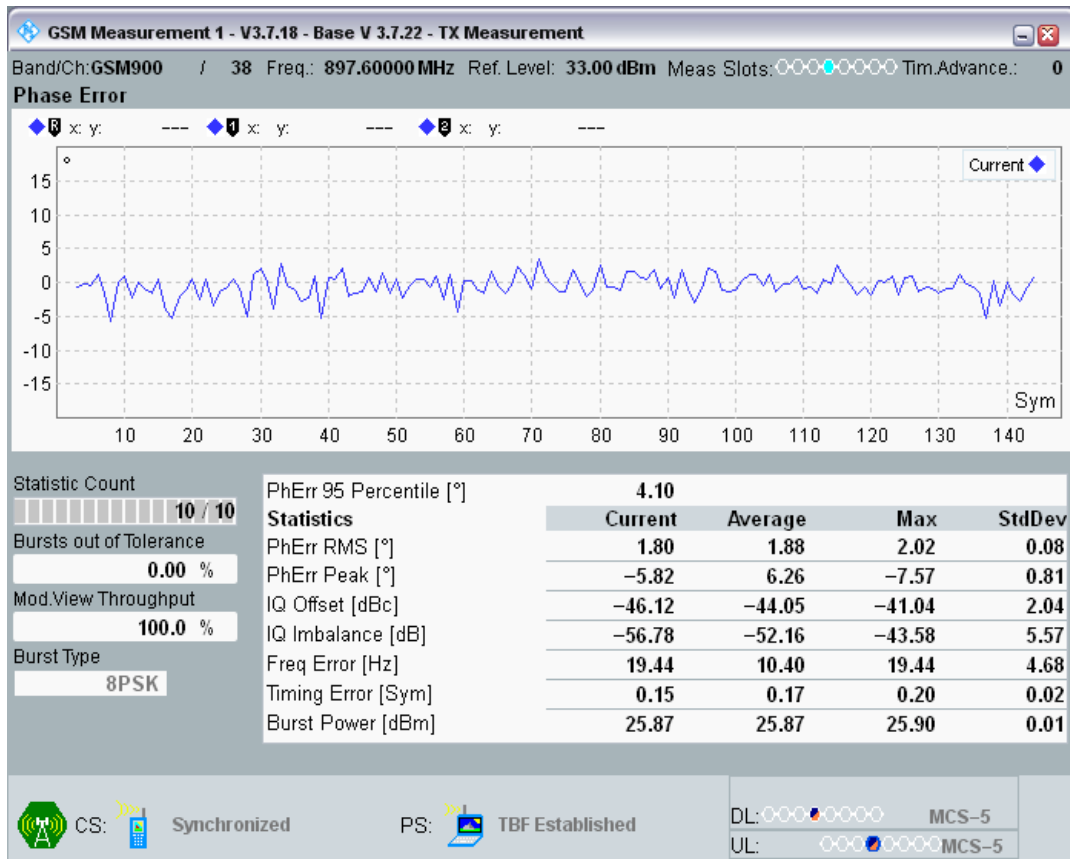


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @10

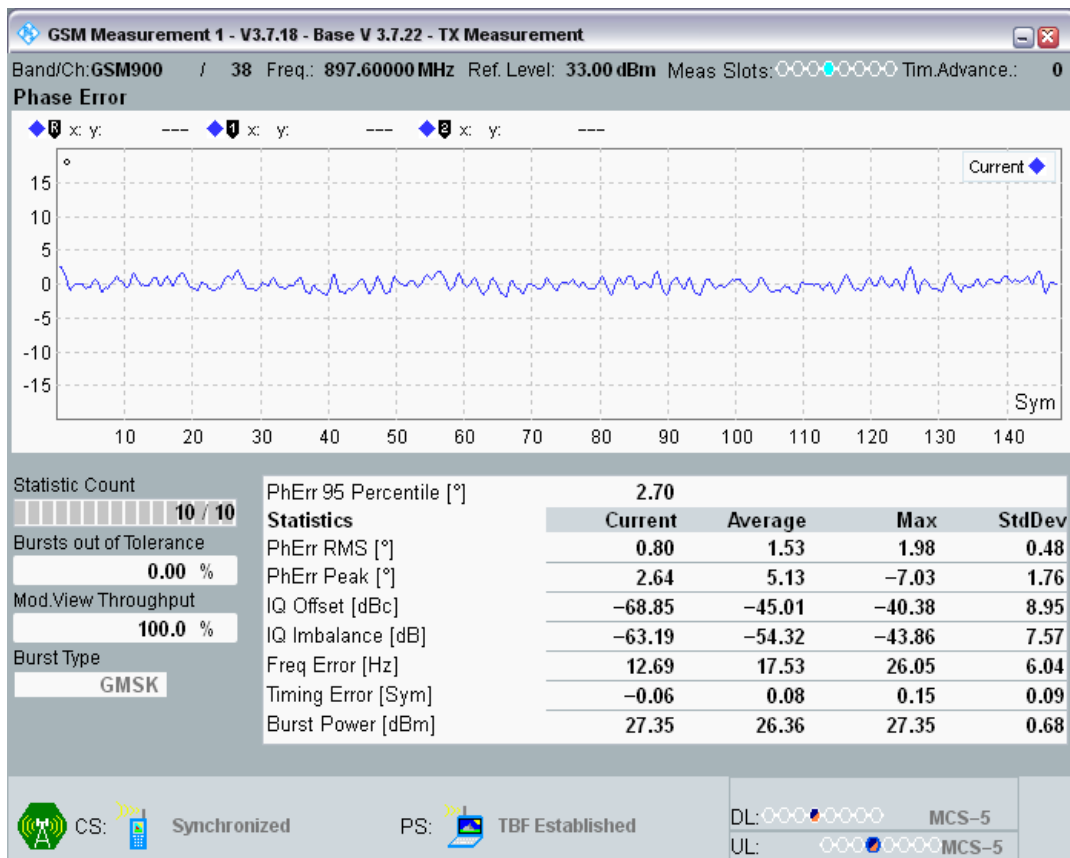


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @11

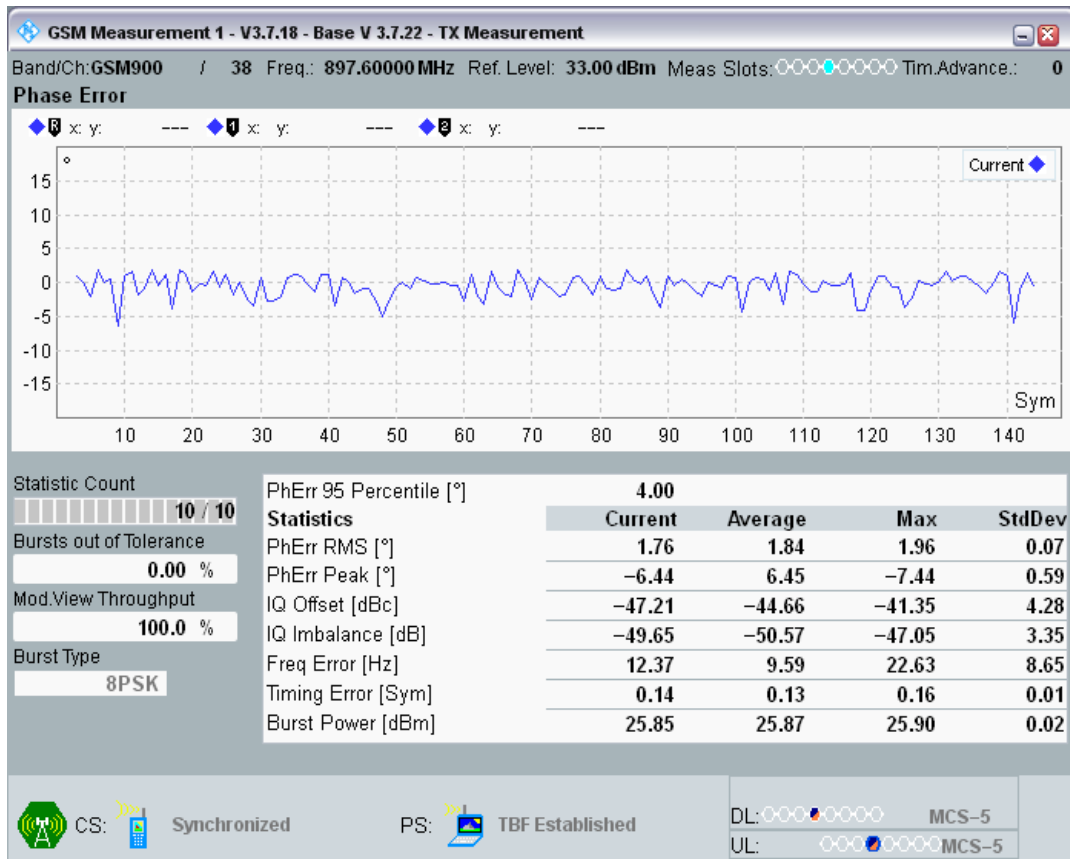


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @12

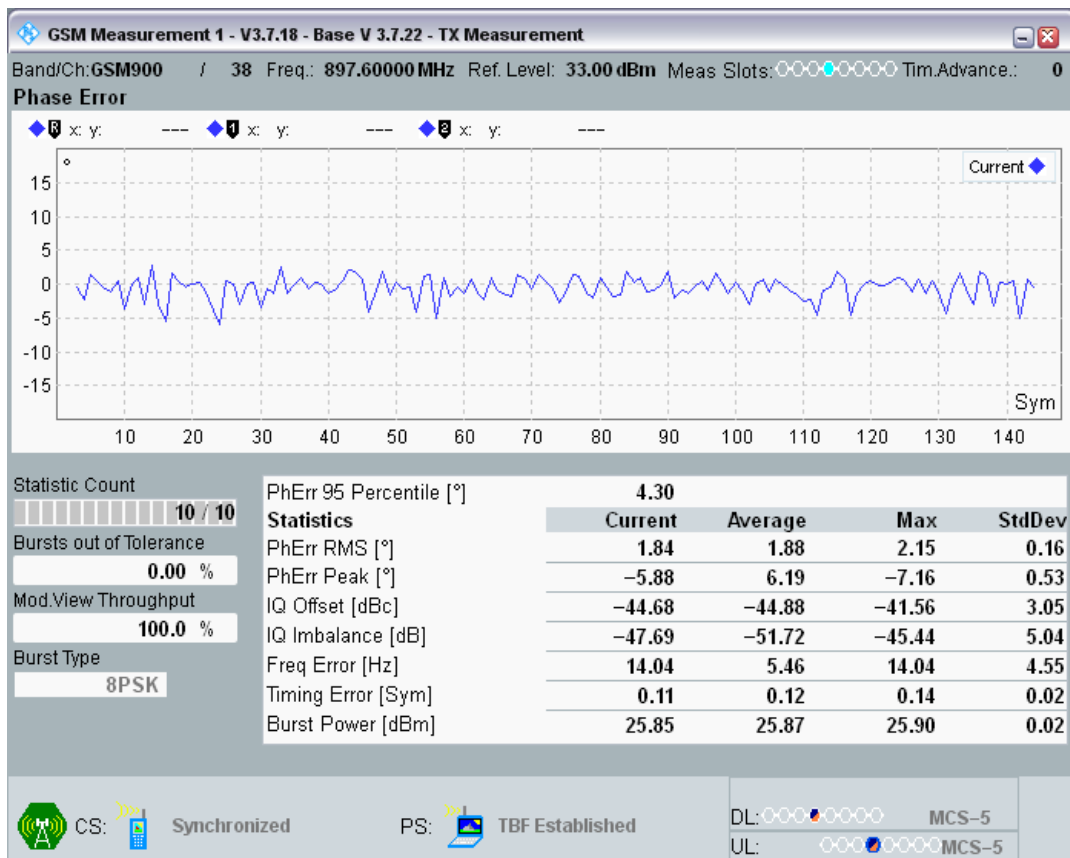


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @14

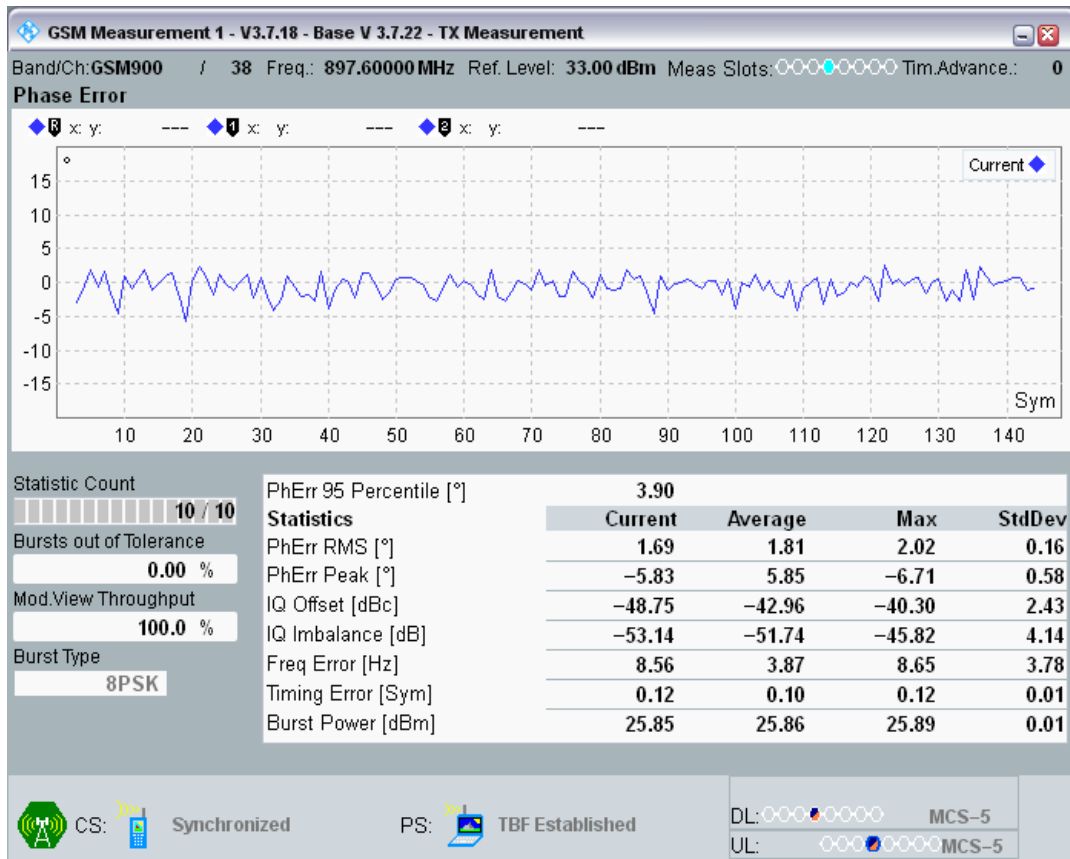


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @13

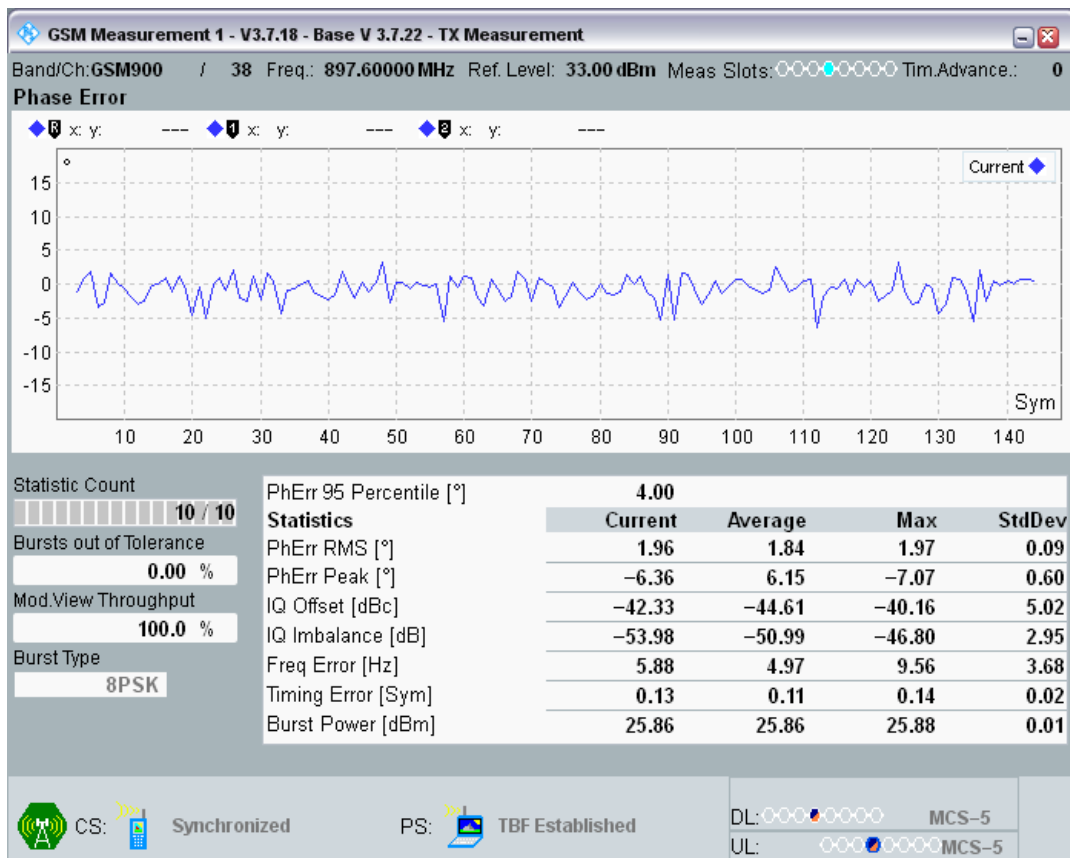


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @15

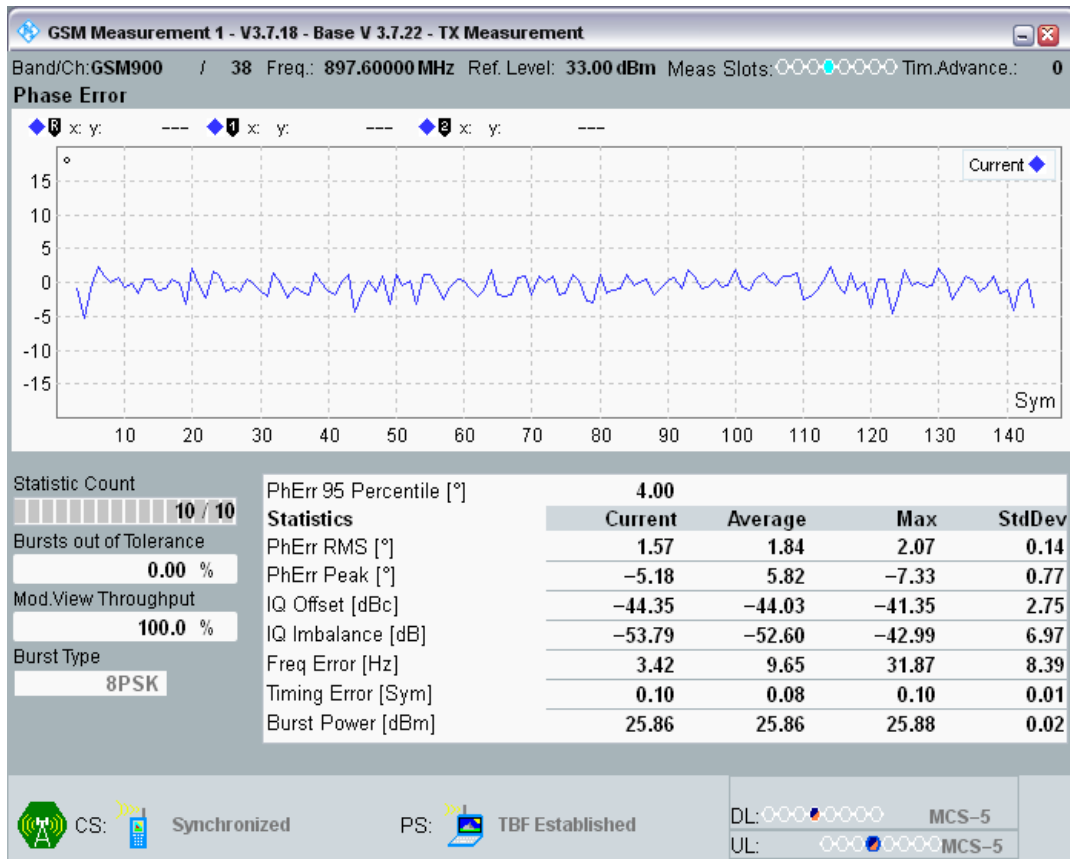


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @16

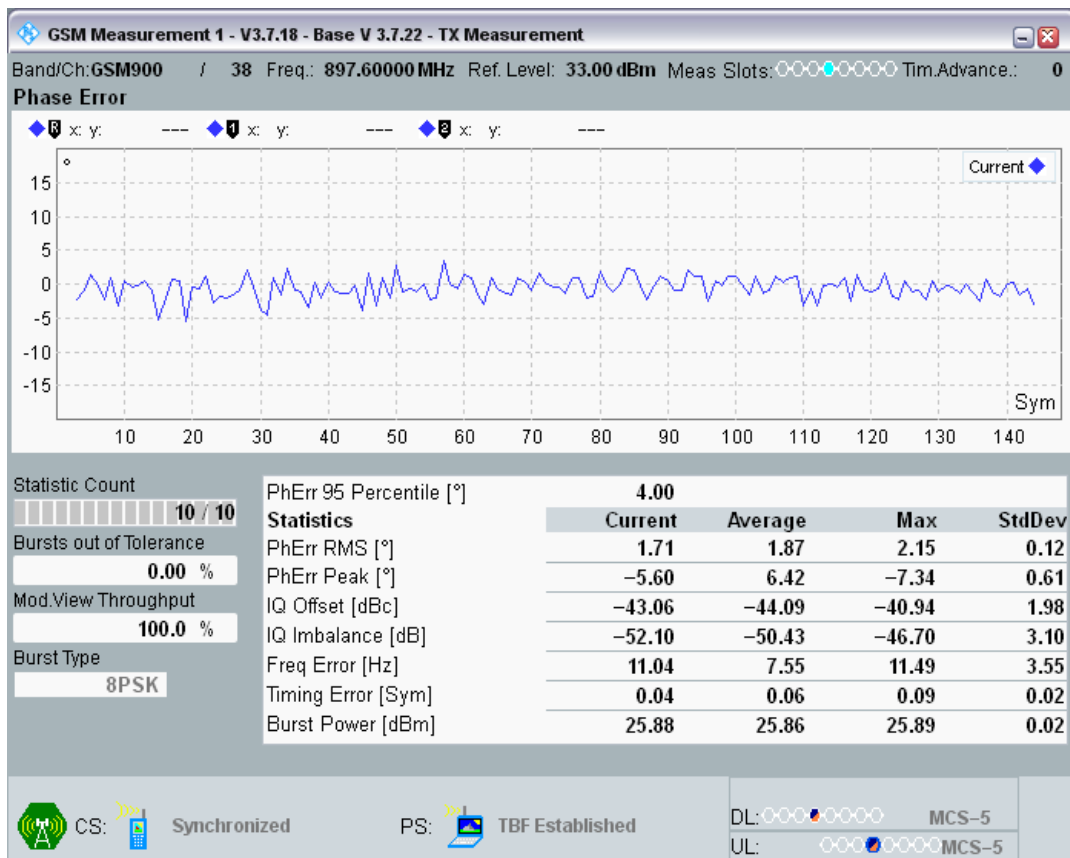


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @17

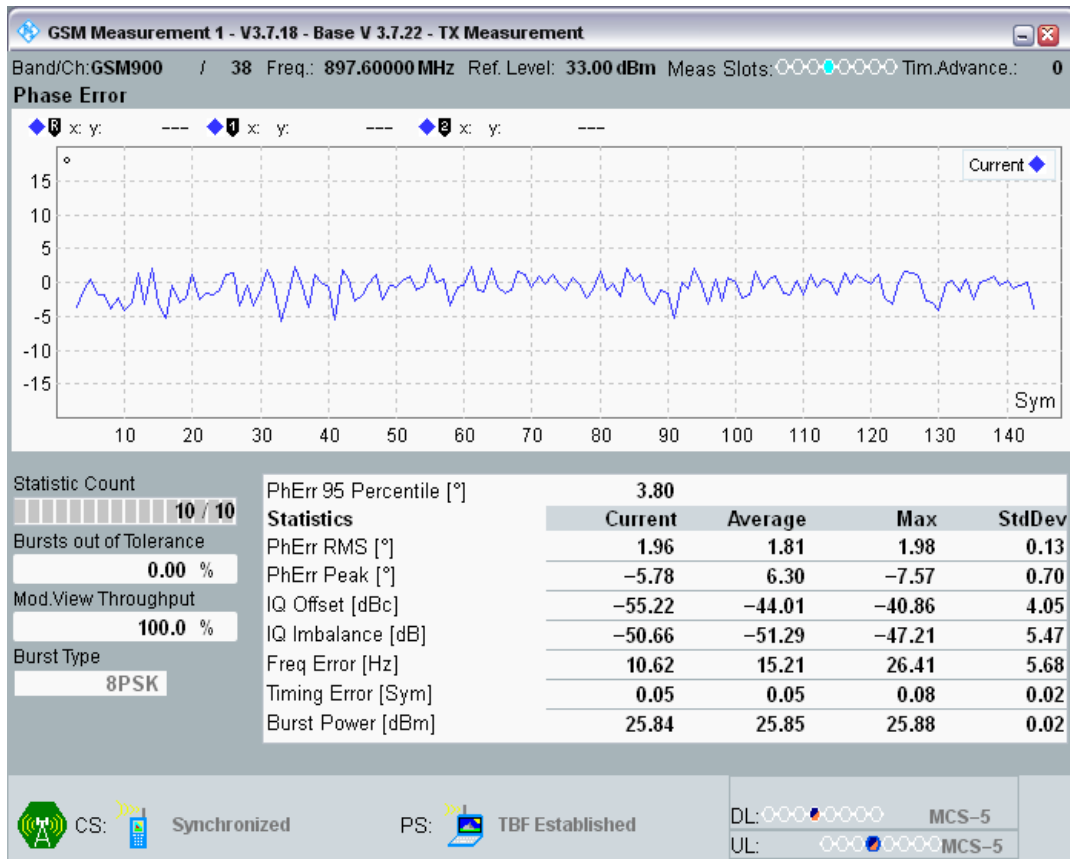


EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @18

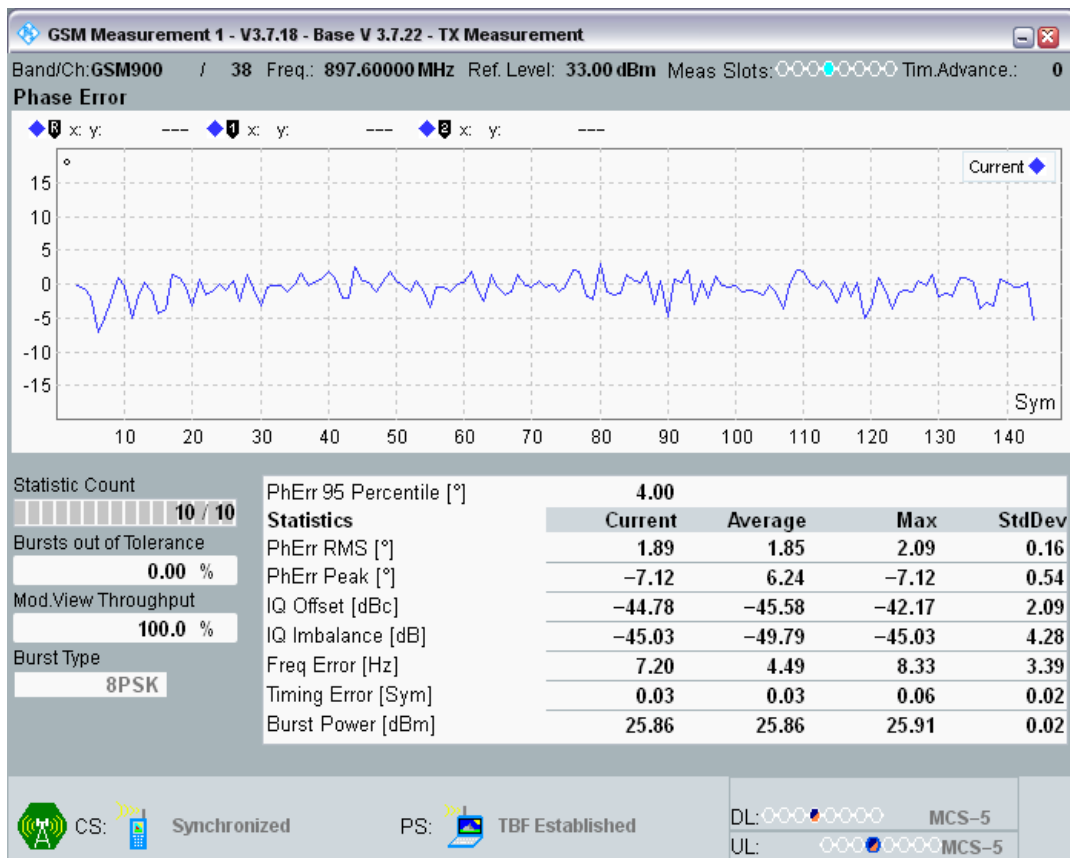

EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @19

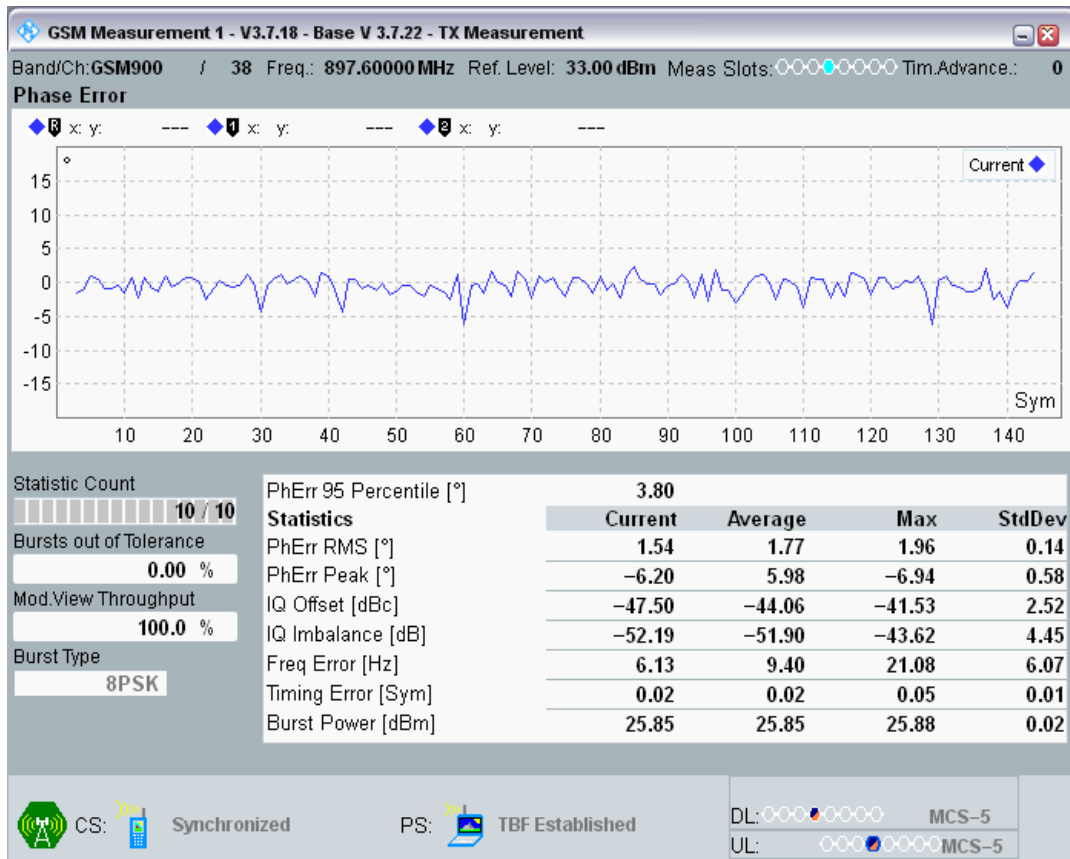

EGPRS900 Channel=38 Gamma=6;6;6;6 TU3 @20

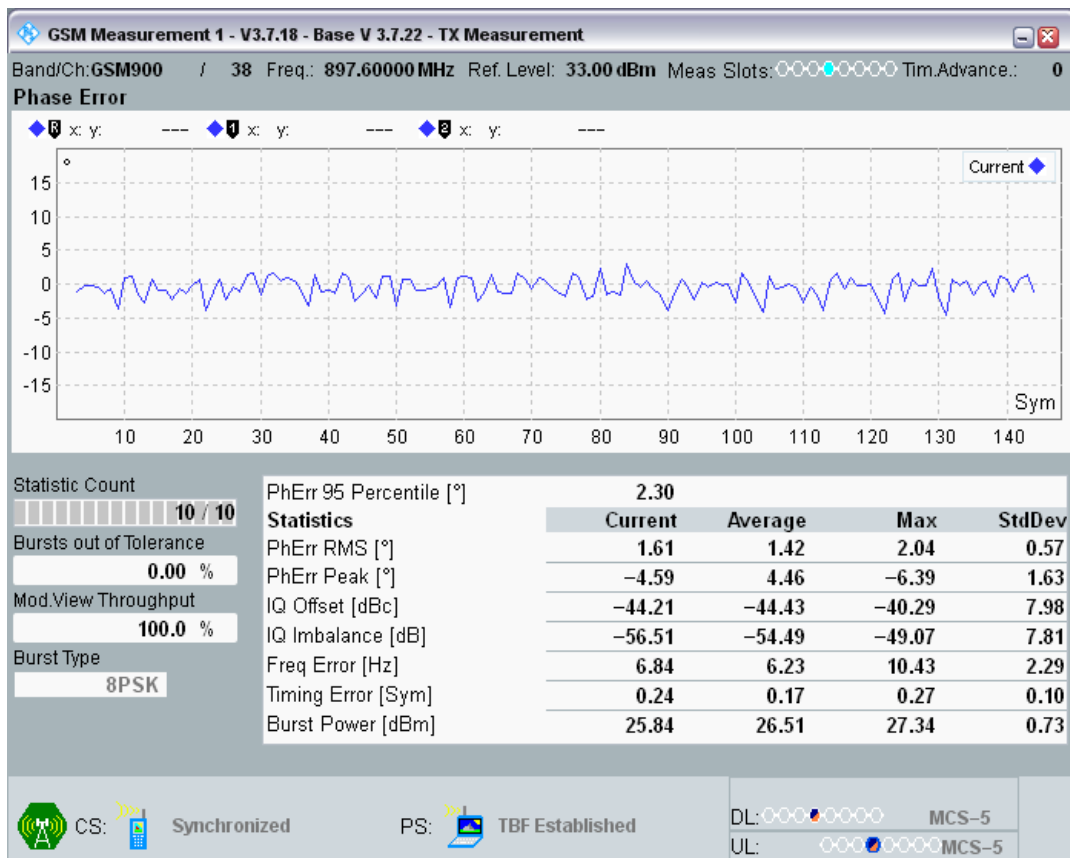

Clause 4.2.28 EGPRS Transmitter output power

Band	Channel	Frequency (MHz)	Gamma	Slot	Result	Low Limit	high Limit	Verdict
EGPRS1800	512	1710.2	5;5;5;5	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	5;5;5;5	slot1	26.67	22	29	PASS
EGPRS1800	512	1710.2	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	6;6;6;6	slot1	25.17	21	27	PASS
EGPRS1800	512	1710.2	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	7;7;7;7	slot1	23.70	19	25	PASS
EGPRS1800	512	1710.2	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	8;8;8;8	slot1	21.78	17	23	PASS
EGPRS1800	512	1710.2	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	9;9;9;9	slot1	20.02	15	21	PASS
EGPRS1800	512	1710.2	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	10;10;10;10	slot1	17.74	13	19	PASS
EGPRS1800	512	1710.2	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	11;11;11;11	slot1	16.24	10	18	PASS
EGPRS1800	512	1710.2	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	12;12;12;12	slot1	14.55	8	16	PASS
EGPRS1800	512	1710.2	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	13;13;13;13	slot1	10.98	6	14	PASS
EGPRS1800	512	1710.2	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	14;14;14;14	slot1	8.56	4	12	PASS
EGPRS1800	512	1710.2	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	15;15;15;15	slot1	6.67	2	10	PASS
EGPRS1800	512	1710.2	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	16;16;16;16	slot1	5.12	-1	9	PASS
EGPRS1800	512	1710.2	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	17;17;17;17	slot1	2.55	-3	7	PASS
EGPRS1800	512	1710.2	18;18;18;18	PvT(%)	0.00	0	0	PASS
EGPRS1800	512	1710.2	18;18;18;18	slot1	0.98	-5	5	PASS
EGPRS1800	698	1747.4	5;5;5;5	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	5;5;5;5	slot1	25.76	22	29	PASS
EGPRS1800	698	1747.4	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	6;6;6;6	slot1	24.81	21	27	PASS
EGPRS1800	698	1747.4	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	7;7;7;7	slot1	23.30	19	25	PASS
EGPRS1800	698	1747.4	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	8;8;8;8	slot1	21.42	17	23	PASS
EGPRS1800	698	1747.4	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	9;9;9;9	slot1	18.74	15	21	PASS
EGPRS1800	698	1747.4	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	10;10;10;10	slot1	17.84	13	19	PASS
EGPRS1800	698	1747.4	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	12;12;12;12	slot1	14.08	8	16	PASS

EGPRS1800	698	1747.4	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	13;13;13;13	slot1	10.22	6	14	PASS
EGPRS1800	698	1747.4	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	14;14;14;14	slot1	8.14	4	12	PASS
EGPRS1800	698	1747.4	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	15;15;15;15	slot1	6.11	2	10	PASS
EGPRS1800	698	1747.4	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	16;16;16;16	slot1	3.98	-1	9	PASS
EGPRS1800	698	1747.4	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	17;17;17;17	slot1	1.82	-3	7	PASS
EGPRS1800	698	1747.4	18;18;18;18	PvT(%)	0.00	0	0	PASS
EGPRS1800	698	1747.4	18;18;18;18	slot1	0.28	-5	5	PASS
EGPRS1800	885	1784.8	5;5;5;5	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	5;5;5;5	slot1	26.27	22	29	PASS
EGPRS1800	885	1784.8	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	6;6;6;6	slot1	24.42	21	27	PASS
EGPRS1800	885	1784.8	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	7;7;7;7	slot1	22.81	19	25	PASS
EGPRS1800	885	1784.8	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	8;8;8;8	slot1	21.43	17	23	PASS
EGPRS1800	885	1784.8	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	9;9;9;9	slot1	19.25	15	21	PASS
EGPRS1800	885	1784.8	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	10;10;10;10	slot1	17.57	13	19	PASS
EGPRS1800	885	1784.8	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	11;11;11;11	slot1	15.97	10	18	PASS
EGPRS1800	885	1784.8	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	12;12;12;12	slot1	14.54	8	16	PASS
EGPRS1800	885	1784.8	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	13;13;13;13	slot1	10.73	6	14	PASS
EGPRS1800	885	1784.8	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	14;14;14;14	slot1	7.76	4	12	PASS
EGPRS1800	885	1784.8	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	15;15;15;15	slot1	5.48	2	10	PASS
EGPRS1800	885	1784.8	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	16;16;16;16	slot1	4.36	-1	9	PASS
EGPRS1800	885	1784.8	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	17;17;17;17	slot1	2.29	-3	7	PASS
EGPRS1800	885	1784.8	18;18;18;18	PvT(%)	0.00	0	0	PASS
EGPRS1800	885	1784.8	18;18;18;18	slot1	0.76	-5	5	PASS
EGPRS1900	512	1850.2	5;5;5;5	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	5;5;5;5	slot1	26.48	22	29	PASS
EGPRS1900	512	1850.2	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	6;6;6;6	slot1	24.81	21	27	PASS

EGPRS1900	512	1850.2	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	7;7;7;7	slot1	22.30	19	25	PASS
EGPRS1900	512	1850.2	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	8;8;8;8	slot1	20.78	17	23	PASS
EGPRS1900	512	1850.2	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	9;9;9;9	slot1	18.74	15	21	PASS
EGPRS1900	512	1850.2	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	10;10;10;10	slot1	17.09	13	19	PASS
EGPRS1900	512	1850.2	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	11;11;11;11	slot1	14.20	10	18	PASS
EGPRS1900	512	1850.2	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	13;13;13;13	slot1	8.87	6	14	PASS
EGPRS1900	512	1850.2	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	14;14;14;14	slot1	6.86	4	12	PASS
EGPRS1900	512	1850.2	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	15;15;15;15	slot1	4.79	2	10	PASS
EGPRS1900	512	1850.2	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	16;16;16;16	slot1	3.37	-1	9	PASS
EGPRS1900	512	1850.2	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	17;17;17;17	slot1	2.04	-3	7	PASS
EGPRS1900	512	1850.2	18;18;18;18	PvT(%)	0.00	0	0	PASS
EGPRS1900	512	1850.2	18;18;18;18	slot1	0.42	-5	5	PASS
EGPRS1900	661	1880	5;5;5;5	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	5;5;5;5	slot1	26.48	22	29	PASS
EGPRS1900	661	1880	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	6;6;6;6	slot1	25.43	21	27	PASS
EGPRS1900	661	1880	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	7;7;7;7	slot1	23.24	19	25	PASS
EGPRS1900	661	1880	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	8;8;8;8	slot1	21.17	17	23	PASS
EGPRS1900	661	1880	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	9;9;9;9	slot1	19.87	15	21	PASS
EGPRS1900	661	1880	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	10;10;10;10	slot1	18.07	13	19	PASS
EGPRS1900	661	1880	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	11;11;11;11	slot1	15.54	10	18	PASS
EGPRS1900	661	1880	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	12;12;12;12	slot1	12.72	8	16	PASS
EGPRS1900	661	1880	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	13;13;13;13	slot1	9.85	6	14	PASS
EGPRS1900	661	1880	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	14;14;14;14	slot1	7.29	4	12	PASS
EGPRS1900	661	1880	15;15;15;15	PvT(%)	0.00	0	0	PASS

EGPRS1900	661	1880	15;15;15;15	slot1	5.02	2	10	PASS
EGPRS1900	661	1880	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	16;16;16;16	slot1	4.12	-1	9	PASS
EGPRS1900	661	1880	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	17;17;17;17	slot1	1.89	-3	7	PASS
EGPRS1900	661	1880	18;18;18;18	PvT(%)	0.00	0	0	PASS
EGPRS1900	661	1880	18;18;18;18	slot1	0.78	-5	5	PASS
EGPRS1900	810	1909.8	5;5;5;5	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	5;5;5;5	slot1	26.74	22	29	PASS
EGPRS1900	810	1909.8	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	6;6;6;6	slot1	25.20	21	27	PASS
EGPRS1900	810	1909.8	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	7;7;7;7	slot1	21.95	19	25	PASS
EGPRS1900	810	1909.8	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	8;8;8;8	slot1	20.46	17	23	PASS
EGPRS1900	810	1909.8	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	9;9;9;9	slot1	19.95	15	21	PASS
EGPRS1900	810	1909.8	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	10;10;10;10	slot1	17.52	13	19	PASS
EGPRS1900	810	1909.8	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	11;11;11;11	slot1	15.07	10	18	PASS
EGPRS1900	810	1909.8	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	12;12;12;12	slot1	13.65	8	16	PASS
EGPRS1900	810	1909.8	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	13;13;13;13	slot1	10.16	6	14	PASS
EGPRS1900	810	1909.8	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	14;14;14;14	slot1	7.68	4	12	PASS
EGPRS1900	810	1909.8	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	15;15;15;15	slot1	4.54	2	10	PASS
EGPRS1900	810	1909.8	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	16;16;16;16	slot1	3.80	-1	9	PASS
EGPRS1900	810	1909.8	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	17;17;17;17	slot1	2.28	-3	7	PASS
EGPRS1900	810	1909.8	18;18;18;18	PvT(%)	0.00	0	0	PASS
EGPRS1900	810	1909.8	18;18;18;18	slot1	0.68	-5	5	PASS
EGPRS850	128	824.2	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	6;6;6;6	slot1	25.99	24	30	PASS
EGPRS850	128	824.2	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	7;7;7;7	slot1	24.79	22	28	PASS
EGPRS850	128	824.2	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	8;8;8;8	slot1	23.03	20	26	PASS
EGPRS850	128	824.2	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	9;9;9;9	slot1	20.53	18	24	PASS
EGPRS850	128	824.2	10;10;10;10	PvT(%)	0.00	0	0	PASS


EGPRS850	128	824.2	10;10;10;10	slot1	18.87	16	22	PASS
EGPRS850	128	824.2	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	11;11;11;11	slot1	16.90	14	20	PASS
EGPRS850	128	824.2	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	12;12;12;12	slot1	15.24	12	18	PASS
EGPRS850	128	824.2	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	13;13;13;13	slot1	12.95	10	16	PASS
EGPRS850	128	824.2	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	14;14;14;14	slot1	10.92	6	16	PASS
EGPRS850	128	824.2	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	15;15;15;15	slot1	8.69	4	14	PASS
EGPRS850	128	824.2	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	16;16;16;16	slot1	7.04	2	12	PASS
EGPRS850	128	824.2	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS850	128	824.2	17;17;17;17	slot1	4.66	0	10	PASS
EGPRS850	190	836.6	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	6;6;6;6	slot1	26.03	24	30	PASS
EGPRS850	190	836.6	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	7;7;7;7	slot1	24.75	22	28	PASS
EGPRS850	190	836.6	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	8;8;8;8	slot1	22.59	20	26	PASS
EGPRS850	190	836.6	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	9;9;9;9	slot1	20.54	18	24	PASS
EGPRS850	190	836.6	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	10;10;10;10	slot1	18.62	16	22	PASS
EGPRS850	190	836.6	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	11;11;11;11	slot1	16.21	14	20	PASS
EGPRS850	190	836.6	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	12;12;12;12	slot1	15.10	12	18	PASS
EGPRS850	190	836.6	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	13;13;13;13	slot1	12.64	10	16	PASS
EGPRS850	190	836.6	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	14;14;14;14	slot1	10.81	6	16	PASS
EGPRS850	190	836.6	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	15;15;15;15	slot1	8.01	4	14	PASS
EGPRS850	190	836.6	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	16;16;16;16	slot1	6.34	2	12	PASS
EGPRS850	190	836.6	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS850	190	836.6	17;17;17;17	slot1	4.11	0	10	PASS
EGPRS850	251	848.8	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	6;6;6;6	slot1	25.40	24	30	PASS
EGPRS850	251	848.8	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	7;7;7;7	slot1	24.63	22	28	PASS
EGPRS850	251	848.8	8;8;8;8	PvT(%)	0.00	0	0	PASS

EGPRS850	251	848.8	8;8;8;8	slot1	22.67	20	26	PASS
EGPRS850	251	848.8	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	9;9;9;9	slot1	20.87	18	24	PASS
EGPRS850	251	848.8	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	10;10;10;10	slot1	18.93	16	22	PASS
EGPRS850	251	848.8	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	11;11;11;11	slot1	16.50	14	20	PASS
EGPRS850	251	848.8	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	12;12;12;12	slot1	14.63	12	18	PASS
EGPRS850	251	848.8	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	13;13;13;13	slot1	12.76	10	16	PASS
EGPRS850	251	848.8	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	14;14;14;14	slot1	10.44	6	16	PASS
EGPRS850	251	848.8	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	15;15;15;15	slot1	8.58	4	14	PASS
EGPRS850	251	848.8	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	16;16;16;16	slot1	6.34	2	12	PASS
EGPRS850	251	848.8	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS850	251	848.8	17;17;17;17	slot1	4.29	0	10	PASS
EGPRS900	975	880.2	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	6;6;6;6	slot1	25.38	24	30	PASS
EGPRS900	975	880.2	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	7;7;7;7	slot1	24.21	22	28	PASS
EGPRS900	975	880.2	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	8;8;8;8	slot1	22.66	20	26	PASS
EGPRS900	975	880.2	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	9;9;9;9	slot1	20.55	18	24	PASS
EGPRS900	975	880.2	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	10;10;10;10	slot1	18.28	16	22	PASS
EGPRS900	975	880.2	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	11;11;11;11	slot1	16.76	14	20	PASS
EGPRS900	975	880.2	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	12;12;12;12	slot1	15.46	12	18	PASS
EGPRS900	975	880.2	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	13;13;13;13	slot1	12.72	10	16	PASS
EGPRS900	975	880.2	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	14;14;14;14	slot1	10.75	6	16	PASS
EGPRS900	975	880.2	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	15;15;15;15	slot1	8.85	4	14	PASS
EGPRS900	975	880.2	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	16;16;16;16	slot1	6.70	2	12	PASS
EGPRS900	975	880.2	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS900	975	880.2	17;17;17;17	slot1	4.83	0	10	PASS
EGPRS900	38	897.6	6;6;6;6	PvT(%)	0.00	0	0	PASS


EGPRS900	38	897.6	6;6;6;6	slot1	25.65	24	30	PASS
EGPRS900	38	897.6	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	7;7;7;7	slot1	25.11	22	28	PASS
EGPRS900	38	897.6	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	8;8;8;8	slot1	22.68	20	26	PASS
EGPRS900	38	897.6	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	9;9;9;9	slot1	20.80	18	24	PASS
EGPRS900	38	897.6	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	10;10;10;10	slot1	18.99	16	22	PASS
EGPRS900	38	897.6	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	11;11;11;11	slot1	17.29	14	20	PASS
EGPRS900	38	897.6	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	12;12;12;12	slot1	15.18	12	18	PASS
EGPRS900	38	897.6	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	13;13;13;13	slot1	13.64	10	16	PASS
EGPRS900	38	897.6	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	14;14;14;14	slot1	11.06	6	16	PASS
EGPRS900	38	897.6	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	15;15;15;15	slot1	9.17	4	14	PASS
EGPRS900	38	897.6	16;16;16;16	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	16;16;16;16	slot1	7.06	2	12	PASS
EGPRS900	38	897.6	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS900	38	897.6	17;17;17;17	slot1	4.78	0	10	PASS
EGPRS900	124	914.8	6;6;6;6	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	6;6;6;6	slot1	25.80	24	30	PASS
EGPRS900	124	914.8	7;7;7;7	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	7;7;7;7	slot1	25.18	22	28	PASS
EGPRS900	124	914.8	8;8;8;8	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	8;8;8;8	slot1	23.00	20	26	PASS
EGPRS900	124	914.8	9;9;9;9	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	9;9;9;9	slot1	20.94	18	24	PASS
EGPRS900	124	914.8	10;10;10;10	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	10;10;10;10	slot1	19.25	16	22	PASS
EGPRS900	124	914.8	11;11;11;11	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	11;11;11;11	slot1	17.39	14	20	PASS
EGPRS900	124	914.8	12;12;12;12	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	12;12;12;12	slot1	15.67	12	18	PASS
EGPRS900	124	914.8	13;13;13;13	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	13;13;13;13	slot1	13.51	10	16	PASS
EGPRS900	124	914.8	14;14;14;14	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	14;14;14;14	slot1	11.03	6	16	PASS
EGPRS900	124	914.8	15;15;15;15	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	15;15;15;15	slot1	9.01	4	14	PASS
EGPRS900	124	914.8	16;16;16;16	PvT(%)	0.00	0	0	PASS

EGPRS900	124	914.8	16;16;16;16	slot1	6.83	2	12	PASS
EGPRS900	124	914.8	17;17;17;17	PvT(%)	0.00	0	0	PASS
EGPRS900	124	914.8	17;17;17;17	slot1	4.81	0	10	PASS


EGPRS1800 Channel=512 Gamma=5;5;5;5

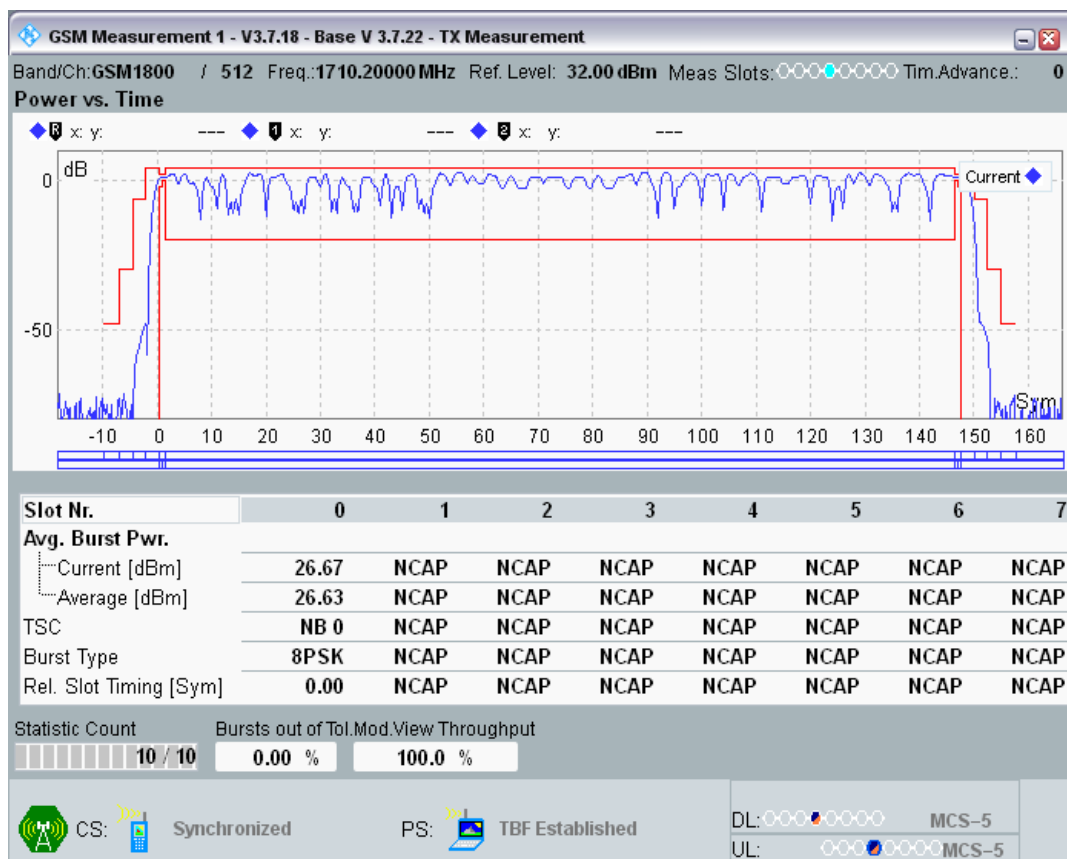


EGPRS1800 Channel=512 Gamma=6;6;6;6

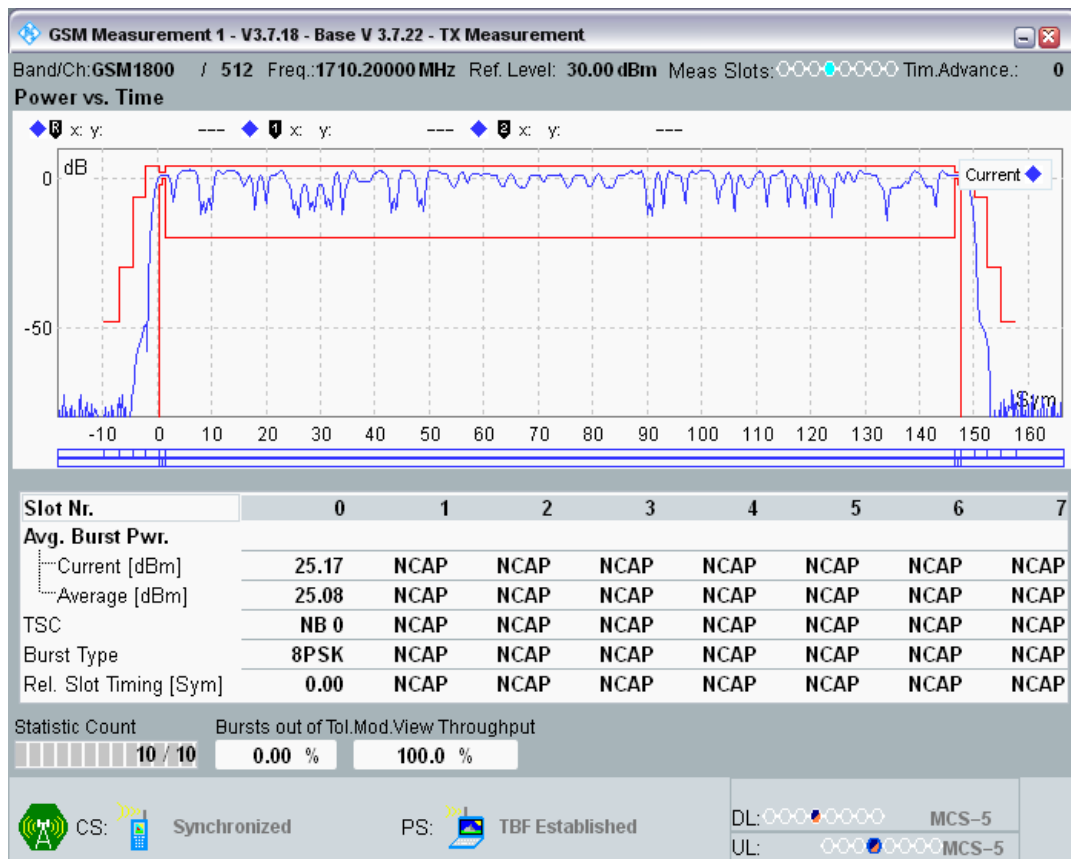


EGPRS1800 Channel=512 Gamma=7;7;7;7

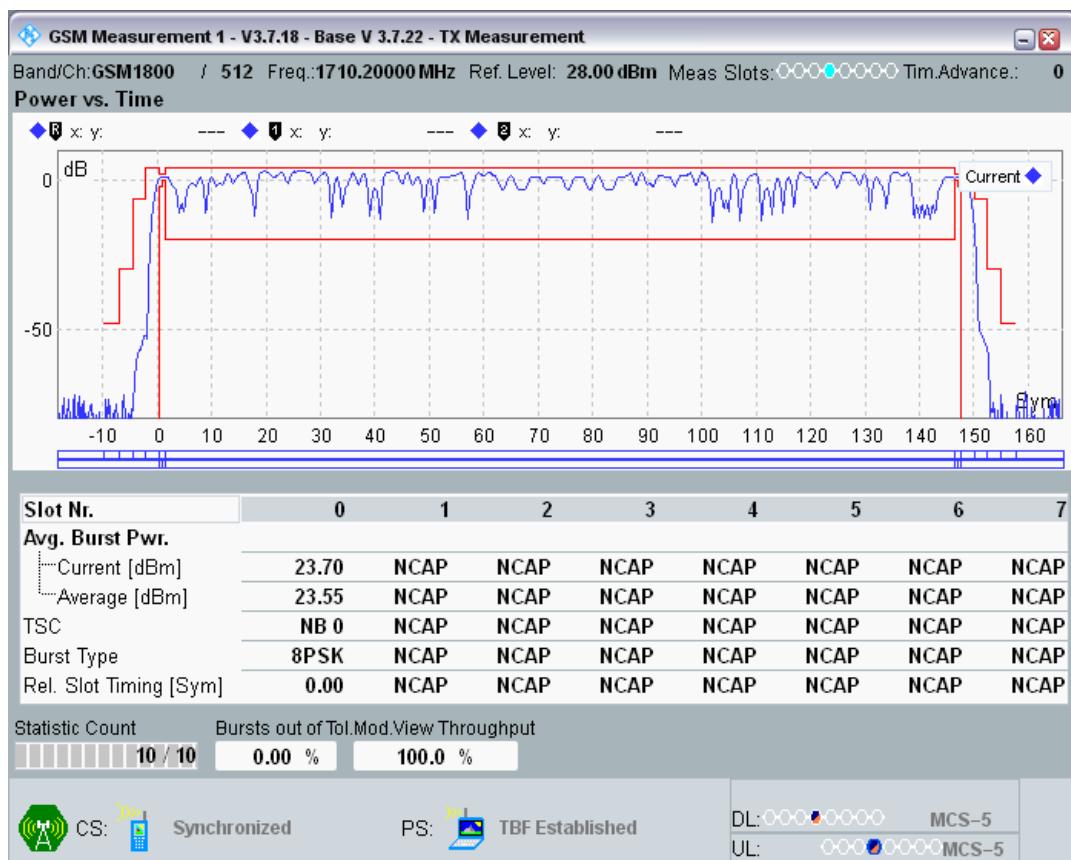


EGPRS1800 Channel=512 Gamma=8;8;8;8

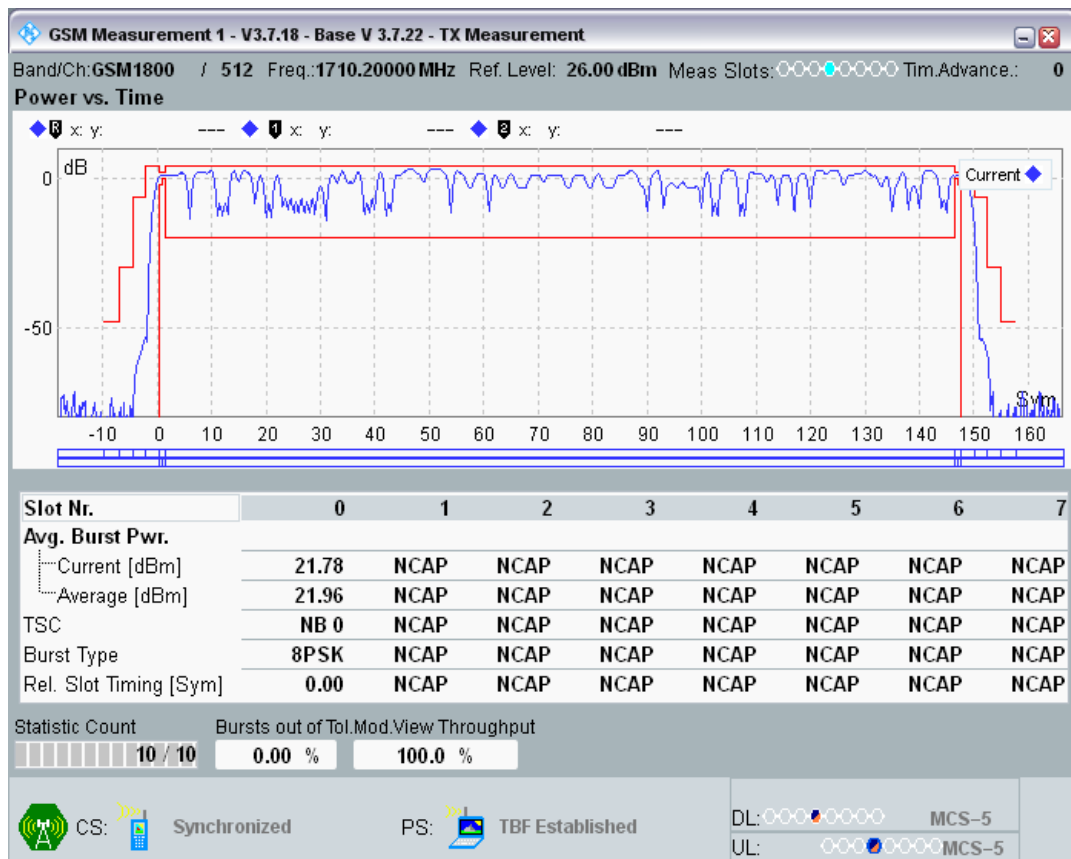


EGPRS1800 Channel=512 Gamma=9;9;9;9

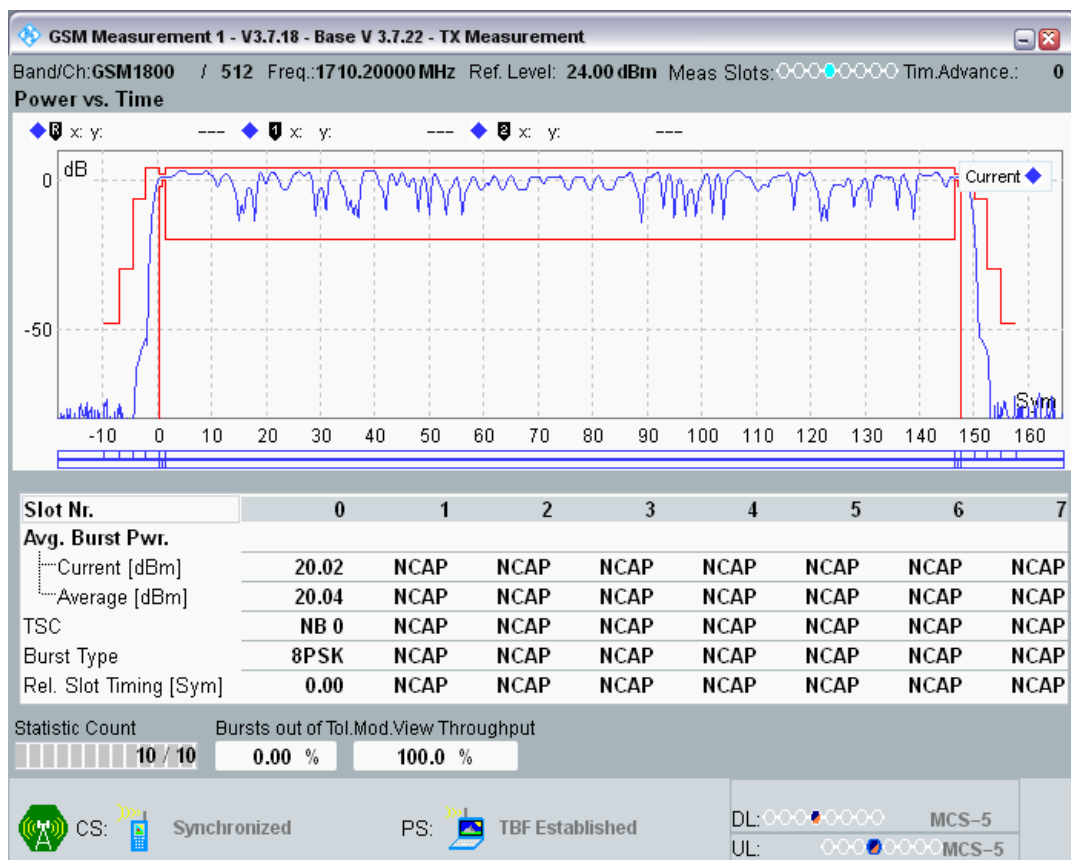


EGPRS1800 Channel=512 Gamma=10;10;10;10

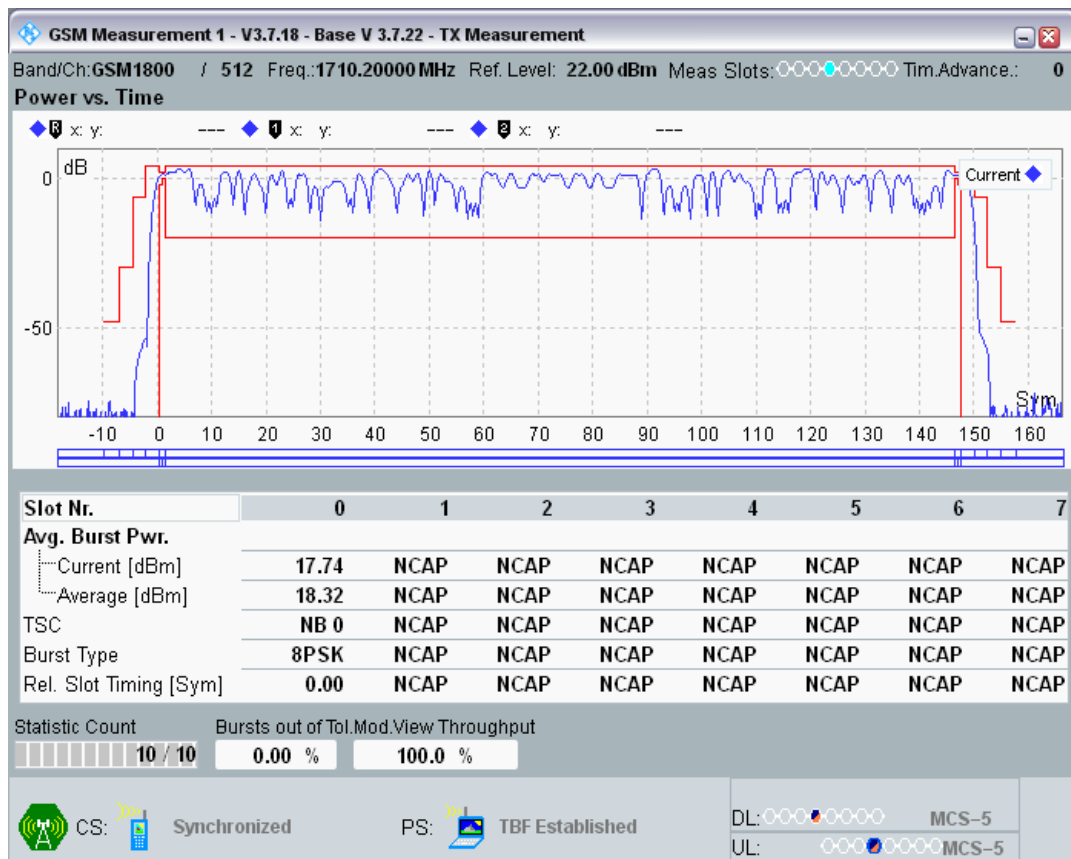


EGPRS1800 Channel=512 Gamma=11;11;11;11

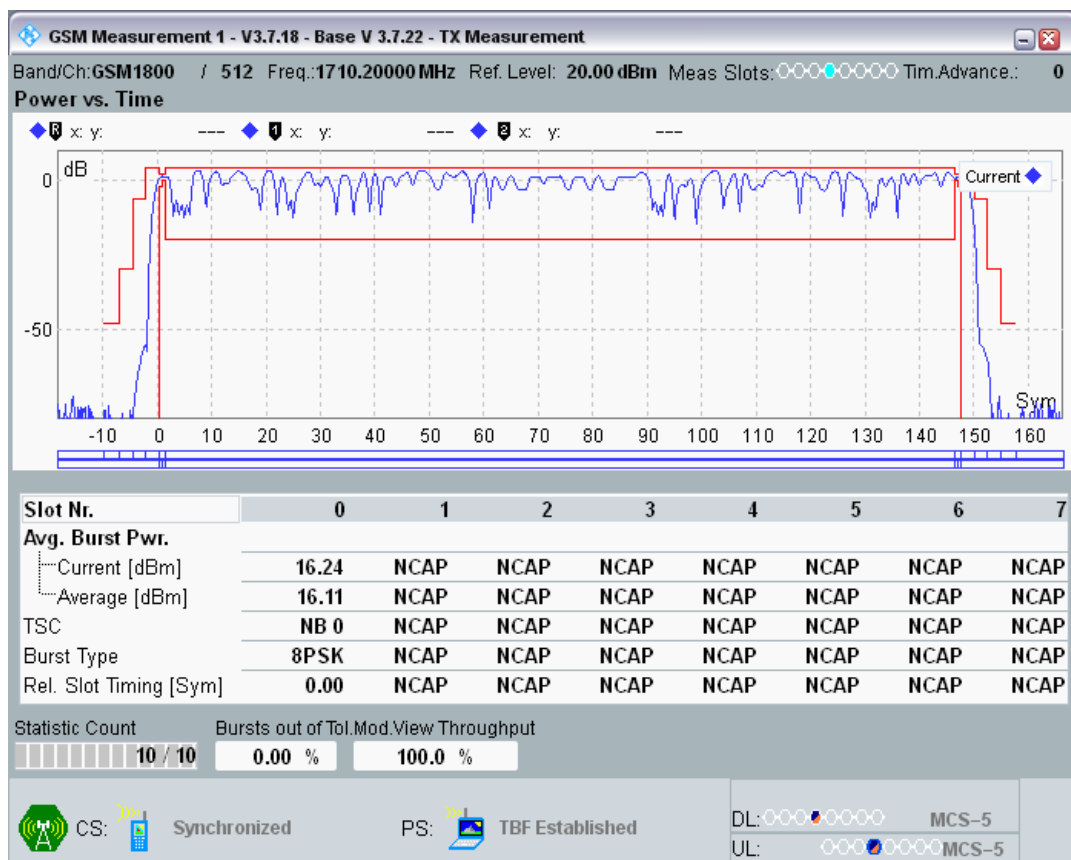


EGPRS1800 Channel=512 Gamma=12;12;12;12

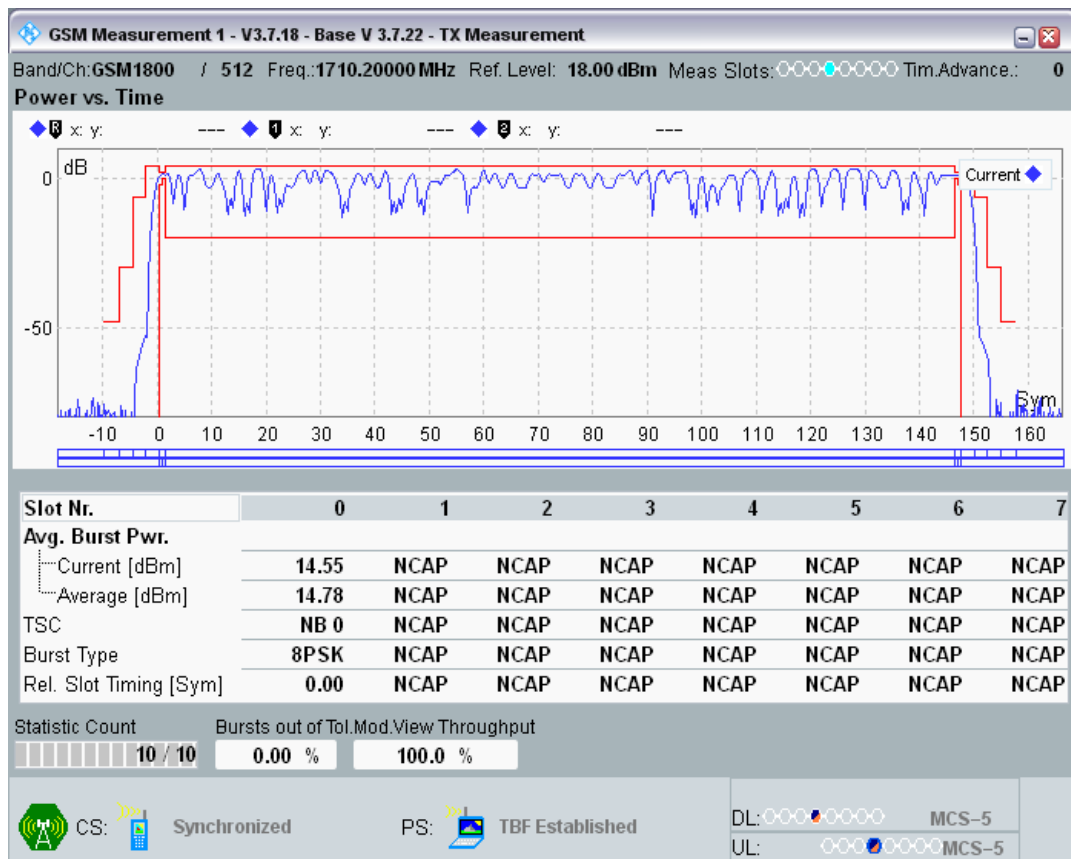


EGPRS1800 Channel=512 Gamma=13;13;13;13

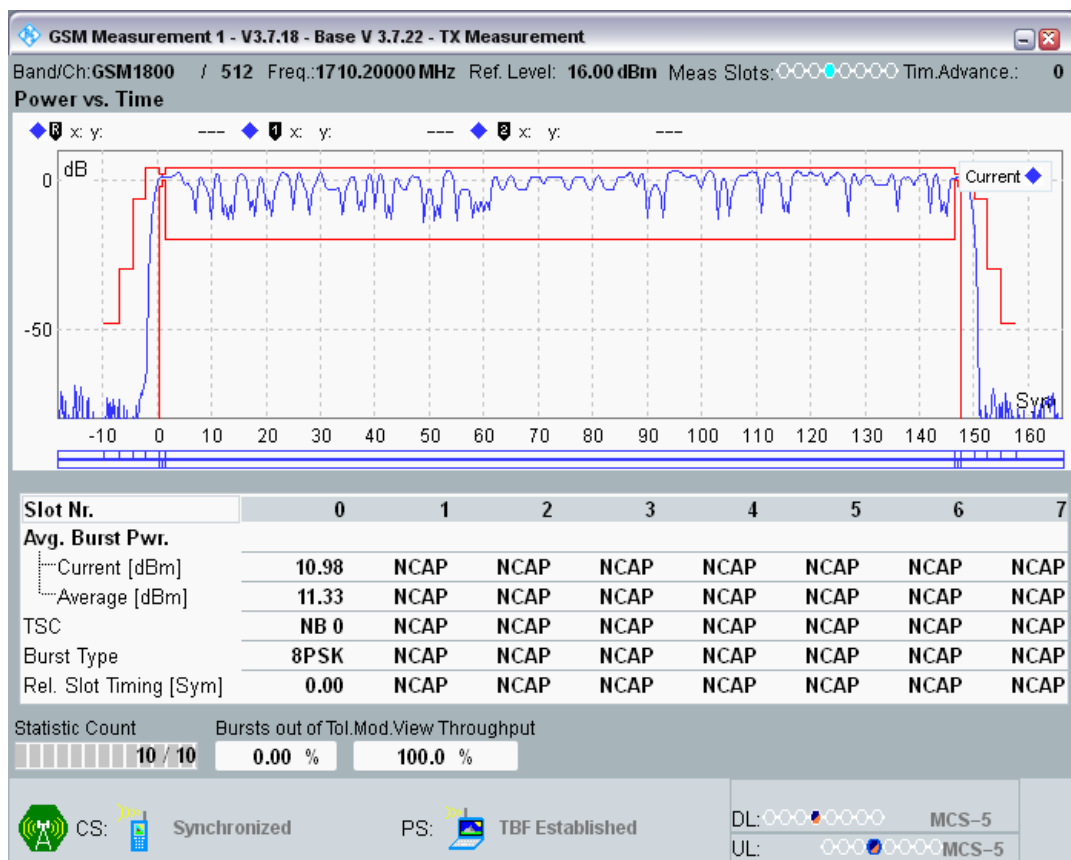

EGPRS1800 Channel=512 Gamma=14;14;14;14

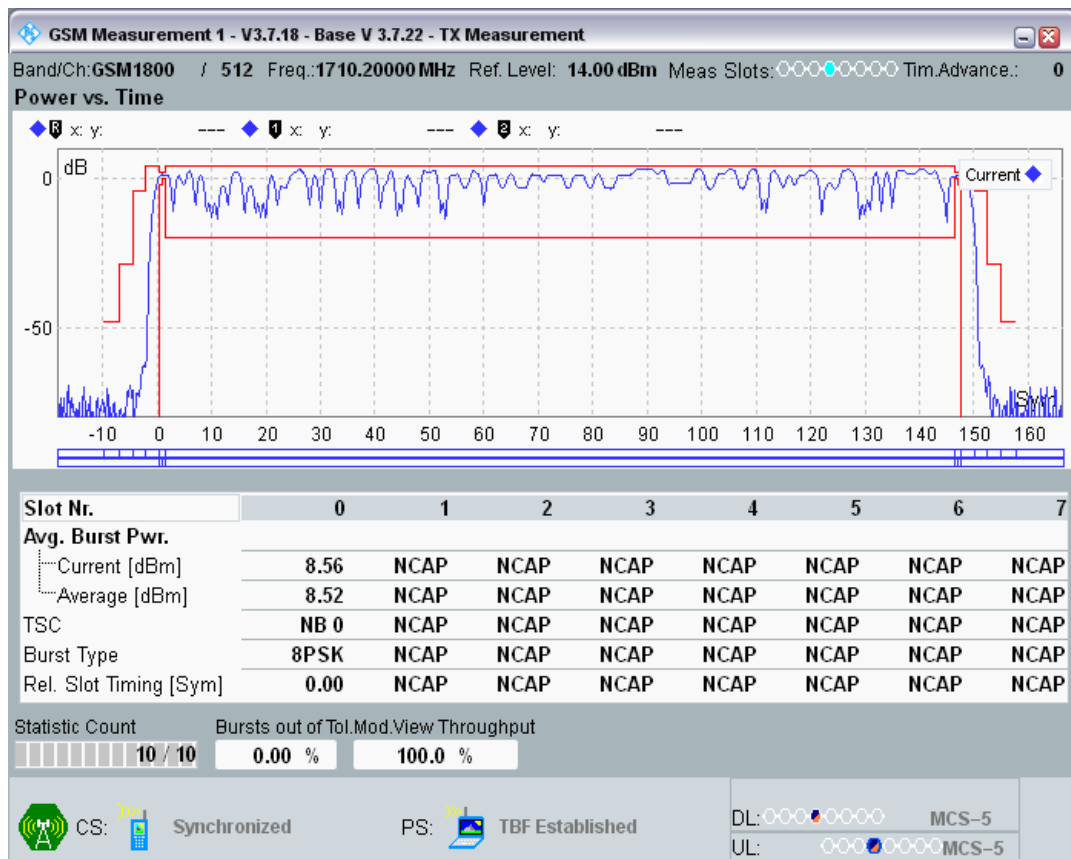


EGPRS1800 Channel=512 Gamma=15;15;15;15

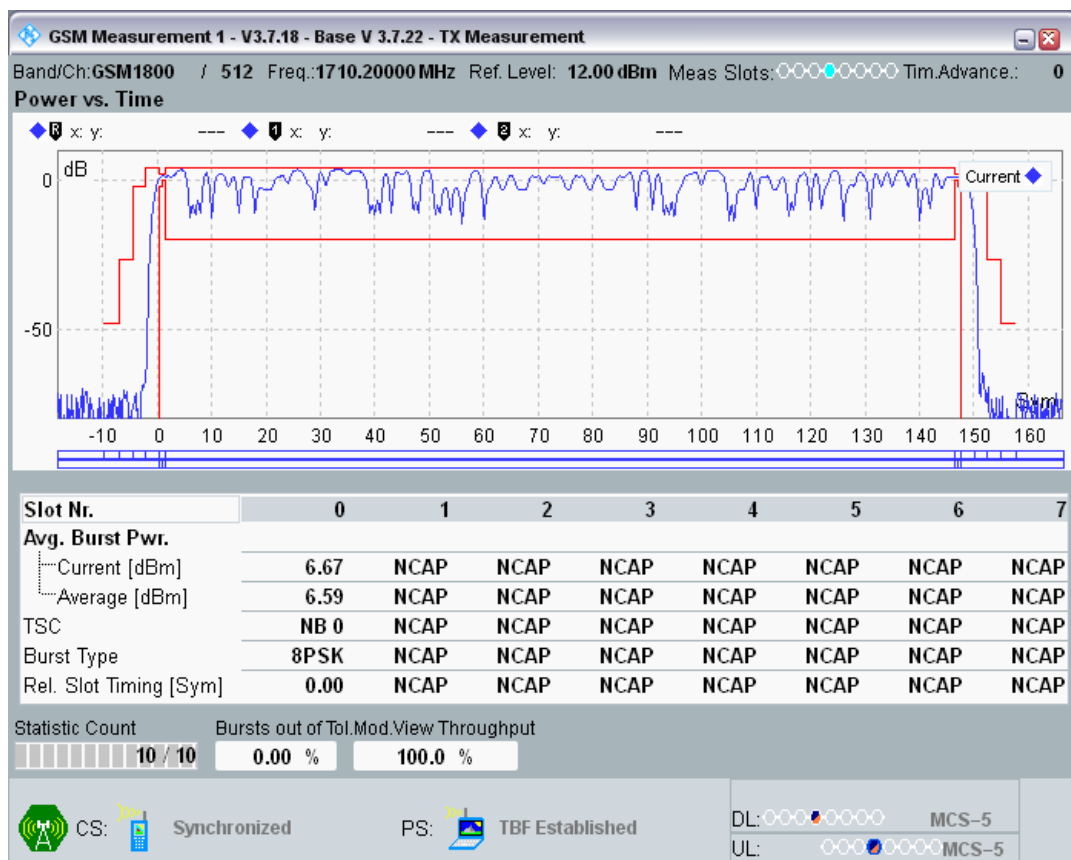

EGPRS1800 Channel=512 Gamma=16;16;16;16




EGPRS1800 Channel=512 Gamma=17;17;17;17

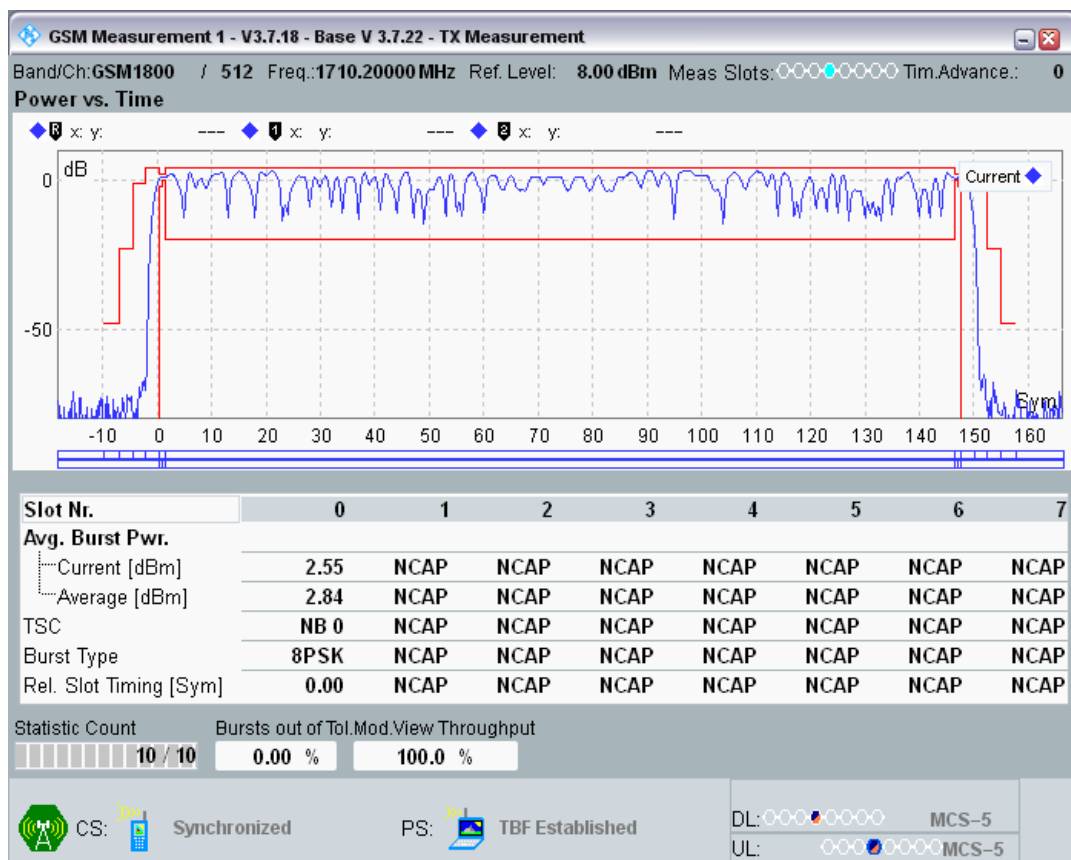

EGPRS1800 Channel=512 Gamma=18;18;18;18




EGPRS1800 Channel=698 Gamma=5;5;5;5

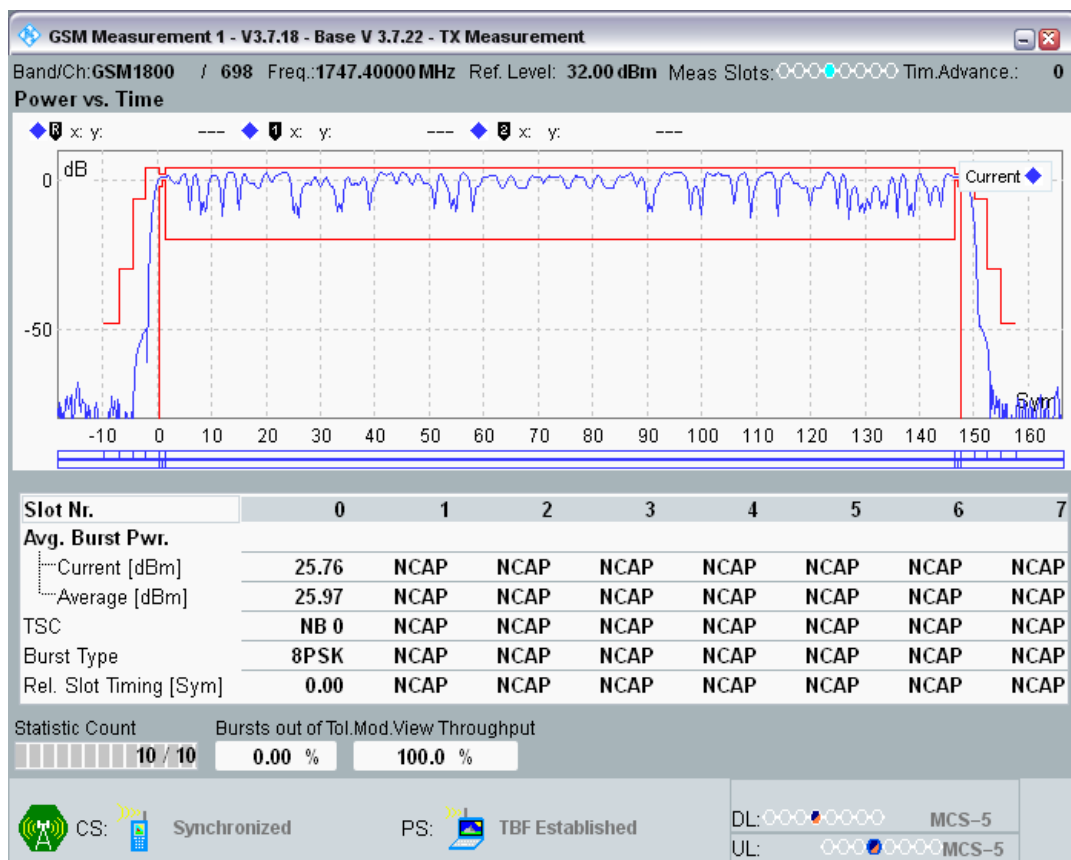


EGPRS1800 Channel=698 Gamma=6;6;6;6




EGPRS1800 Channel=698 Gamma=7;7;7;7

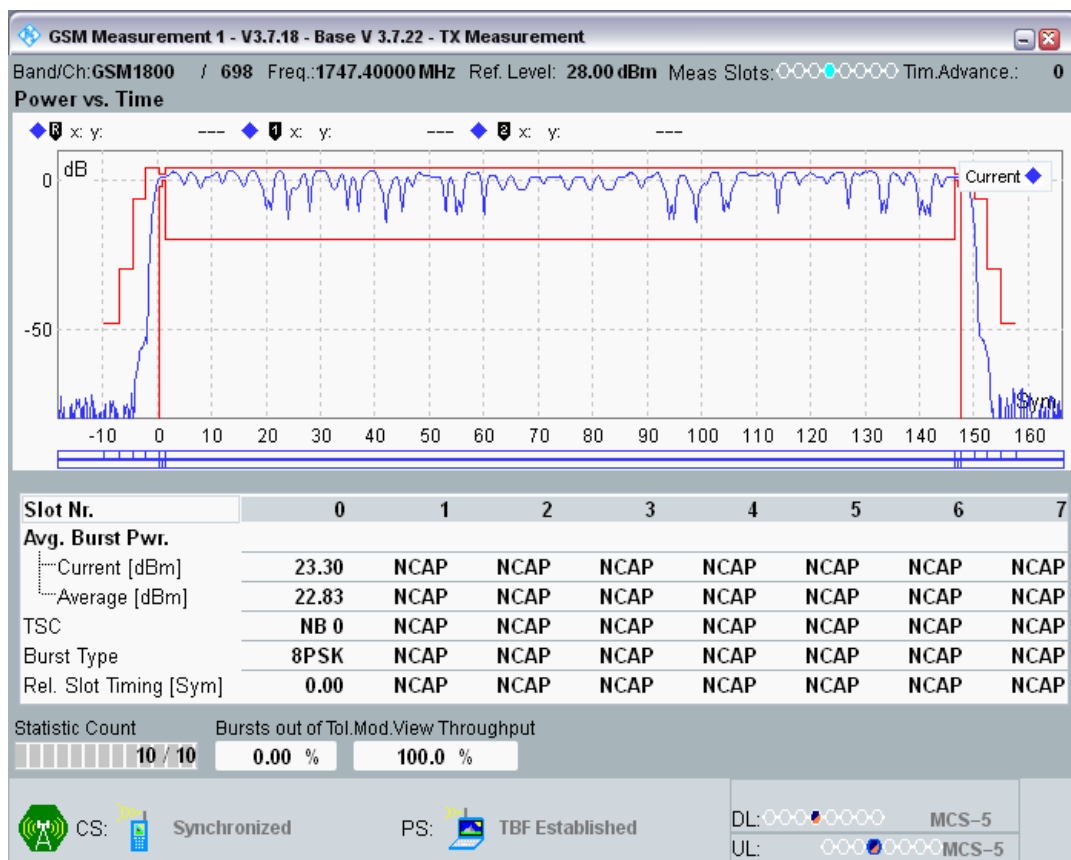


EGPRS1800 Channel=698 Gamma=8;8;8;8

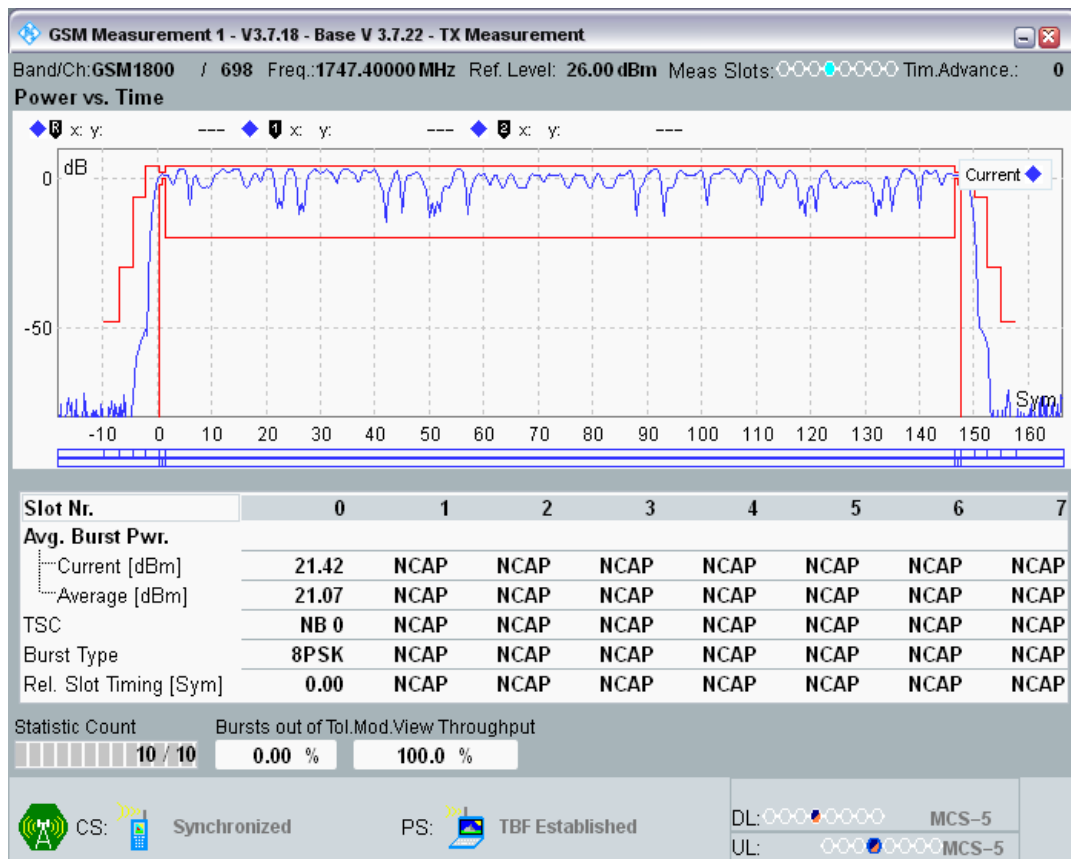


EGPRS1800 Channel=698 Gamma=9;9;9;9

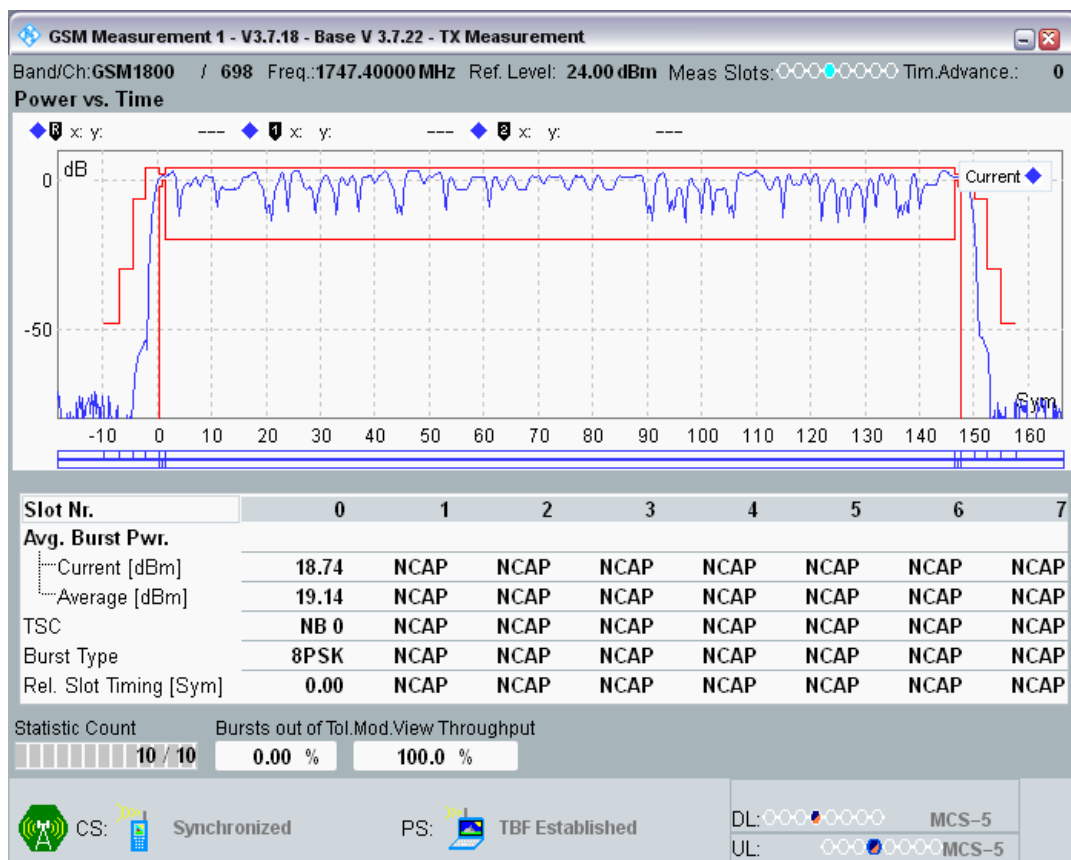


EGPRS1800 Channel=698 Gamma=10;10;10;10

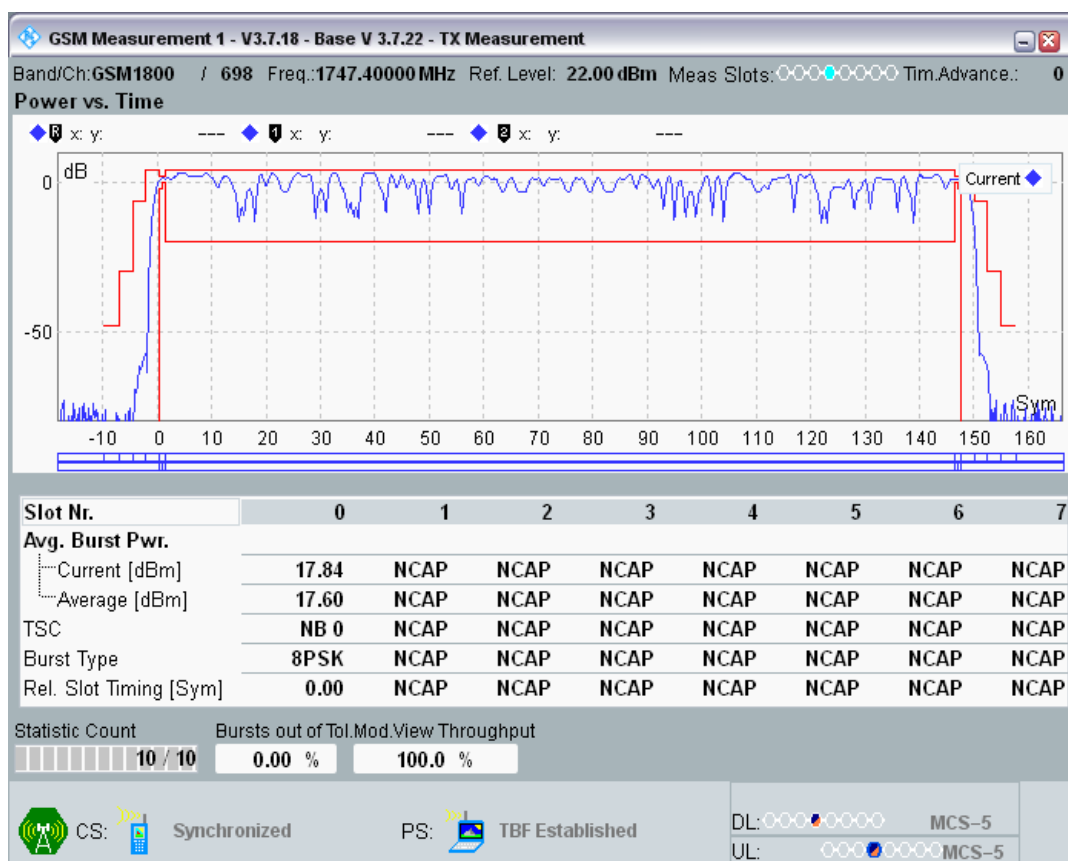


EGPRS1800 Channel=698 Gamma=11;11;11;11

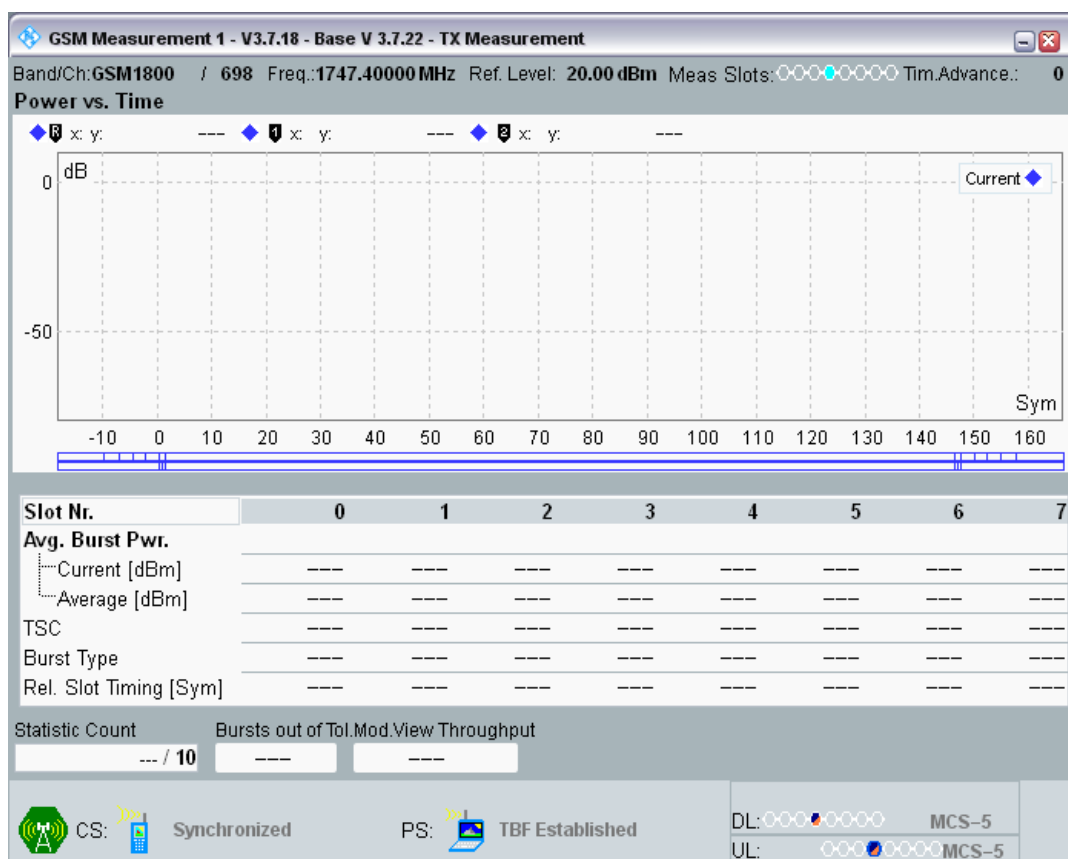

EGPRS1800 Channel=698 Gamma=12;12;12;12

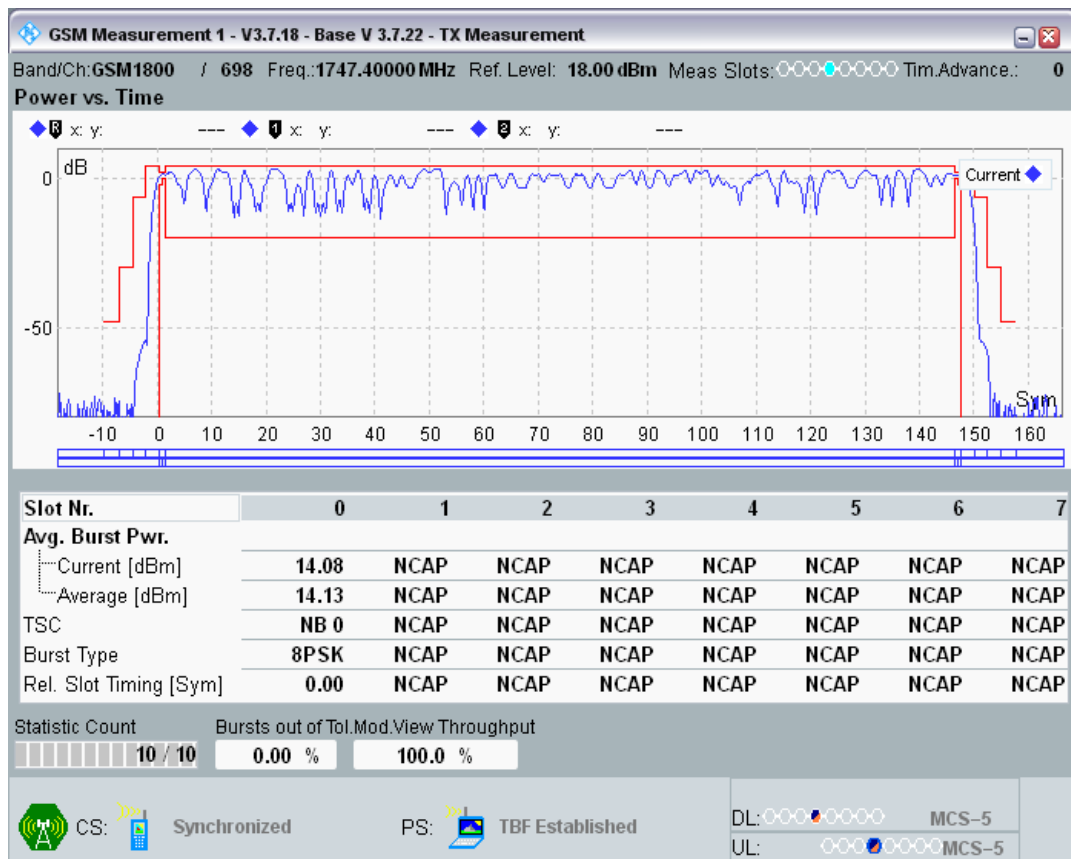


EGPRS1800 Channel=698 Gamma=13;13;13;13

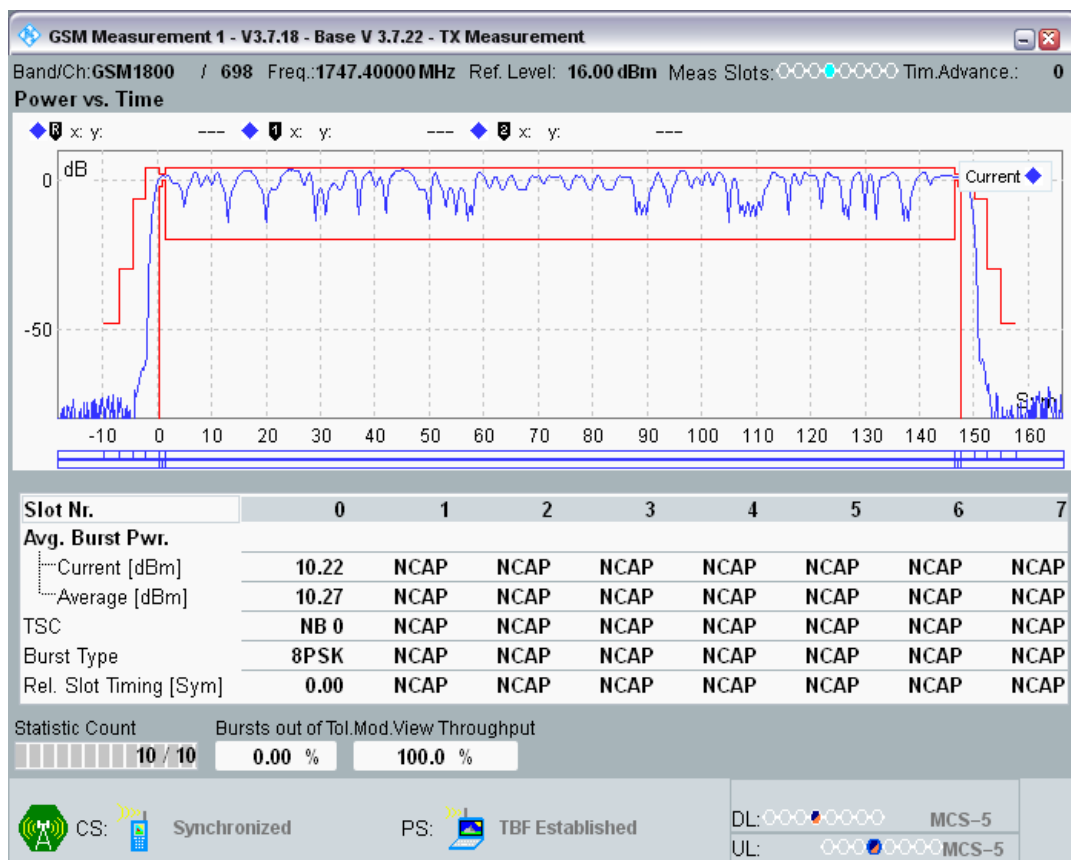

EGPRS1800 Channel=698 Gamma=14;14;14;14




EGPRS1800 Channel=698 Gamma=15;15;15;15

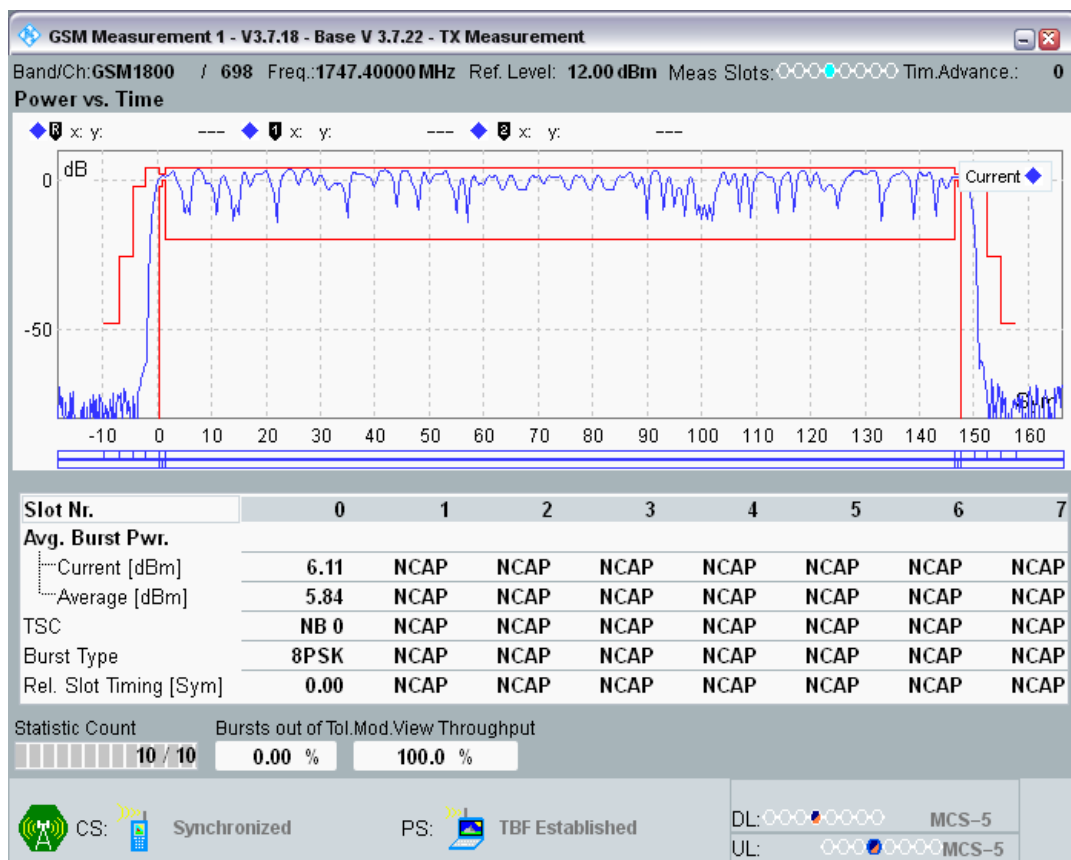


EGPRS1800 Channel=698 Gamma=16;16;16;16




EGPRS1800 Channel=698 Gamma=17;17;17;17

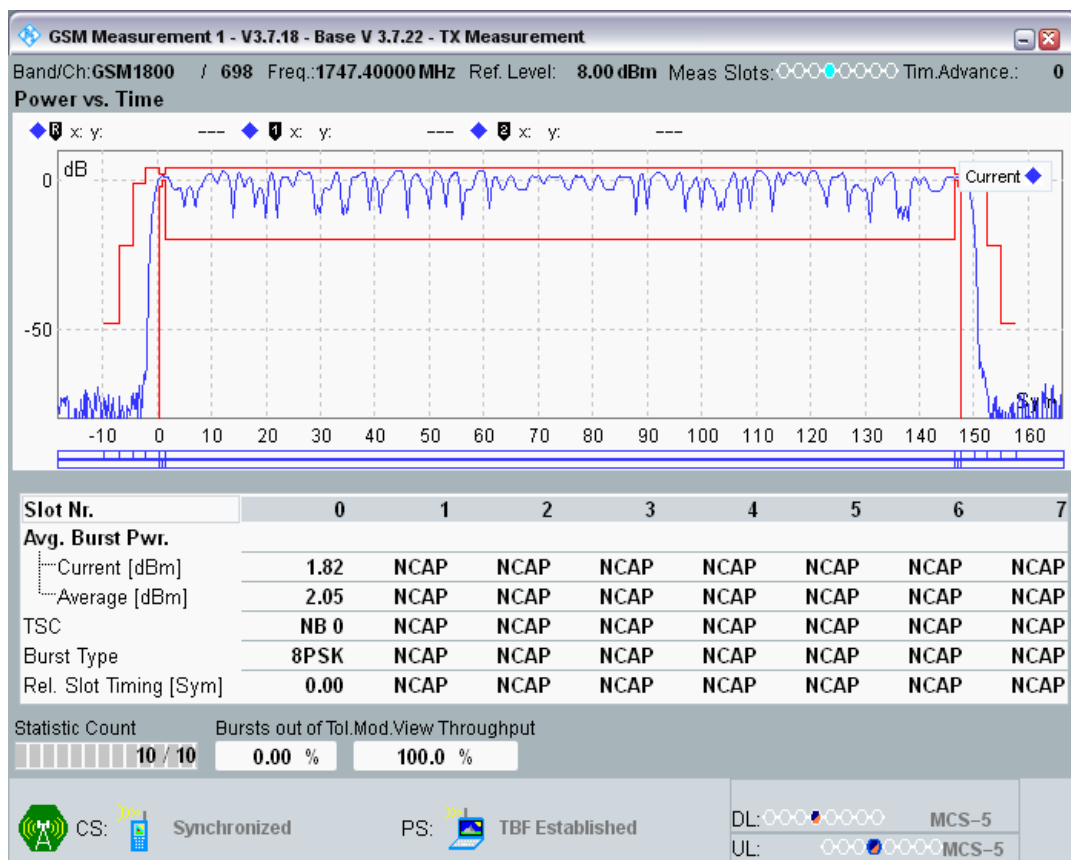

EGPRS1800 Channel=698 Gamma=18;18;18;18

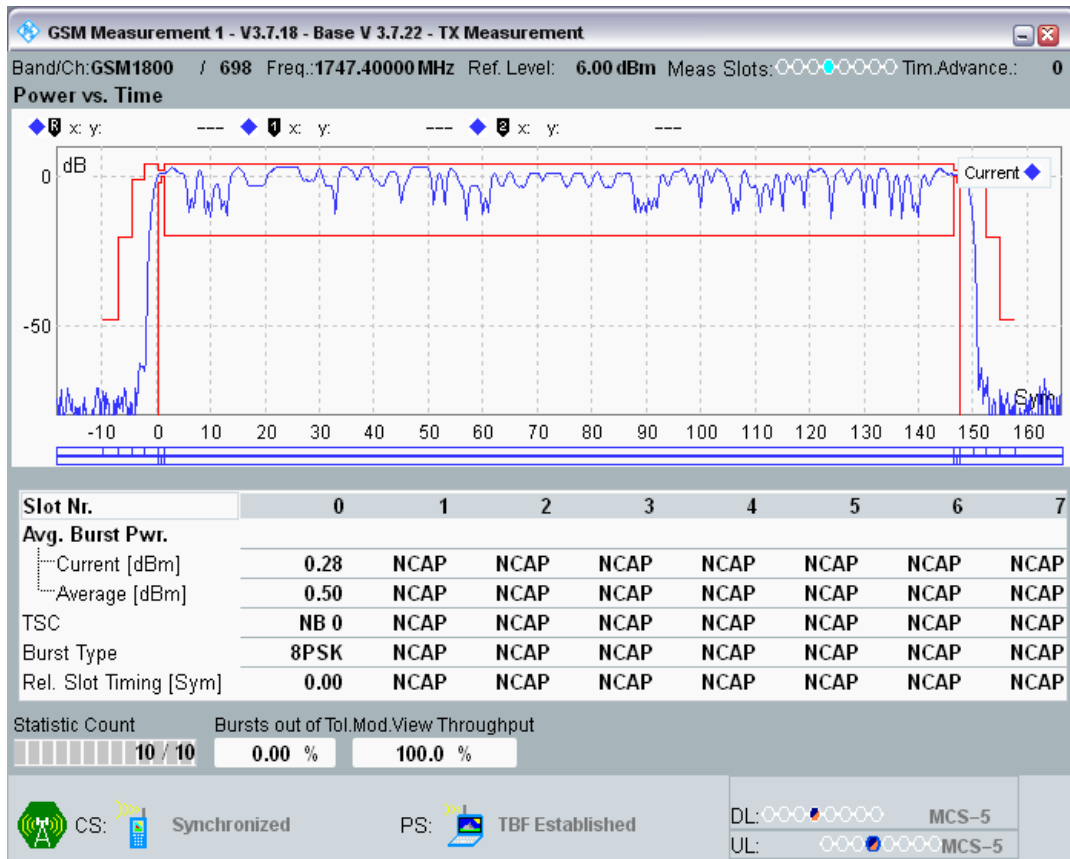


EGPRS1800 Channel=885 Gamma=5;5;5;5

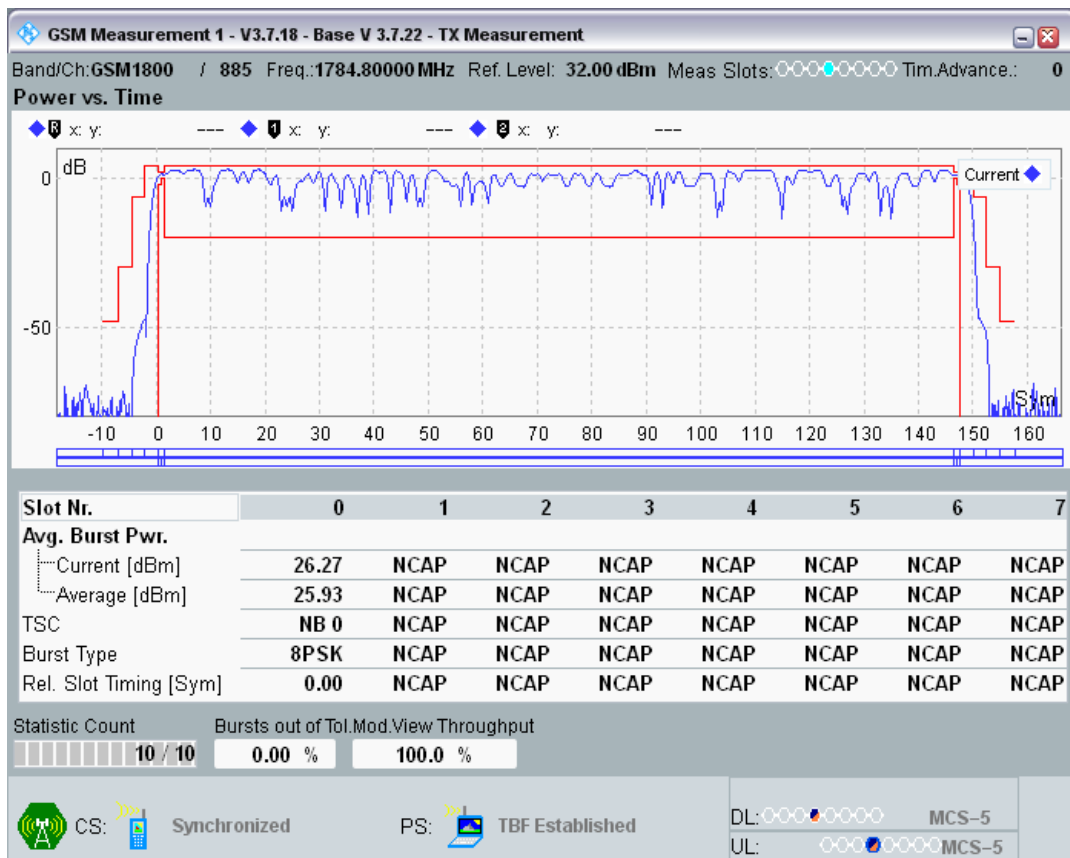

EGPRS1800 Channel=885 Gamma=6;6;6;6




EGPRS1800 Channel=885 Gamma=7;7;7;7

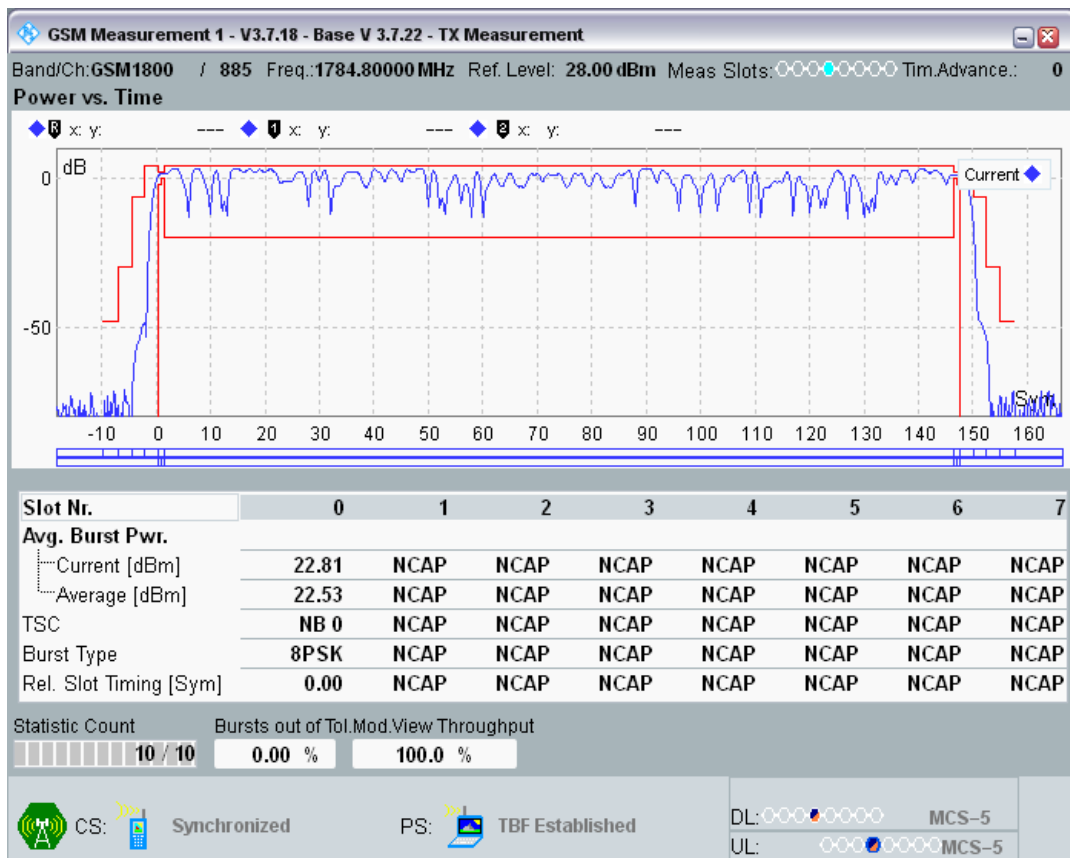


EGPRS1800 Channel=885 Gamma=8;8;8;8




EGPRS1800 Channel=885 Gamma=9;9;9;9

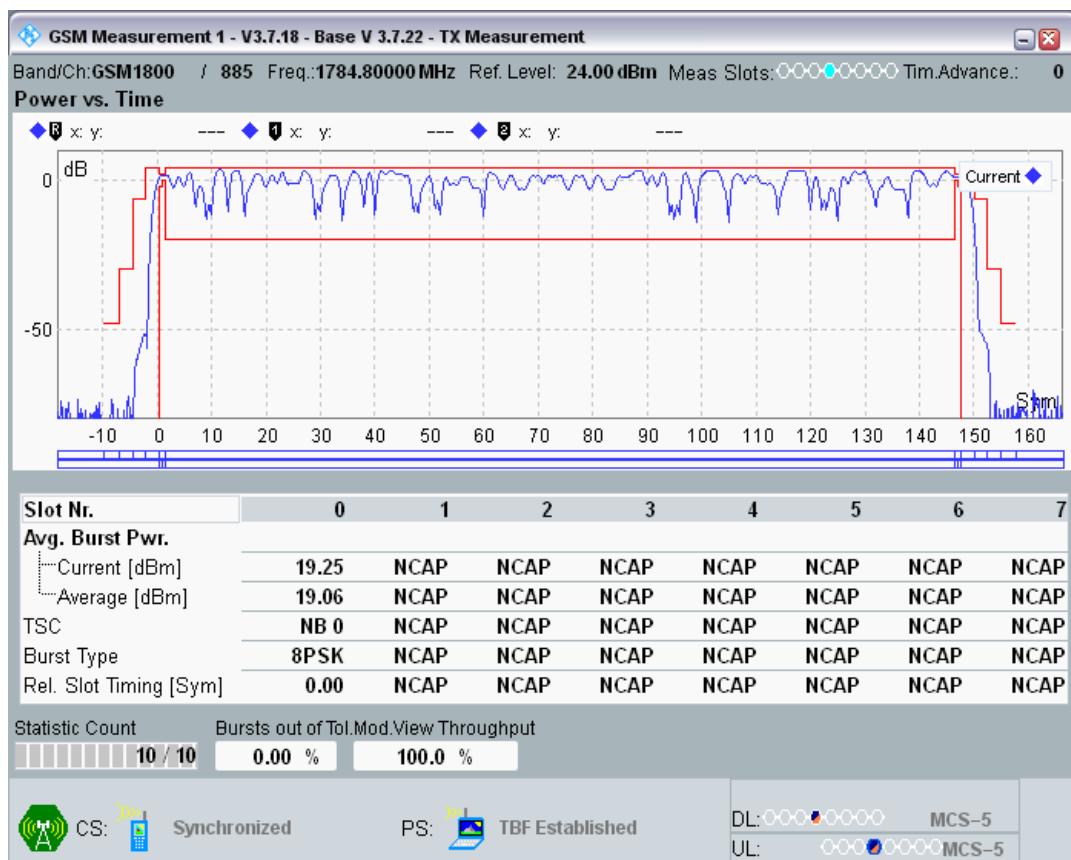


EGPRS1800 Channel=885 Gamma=10;10;10;10

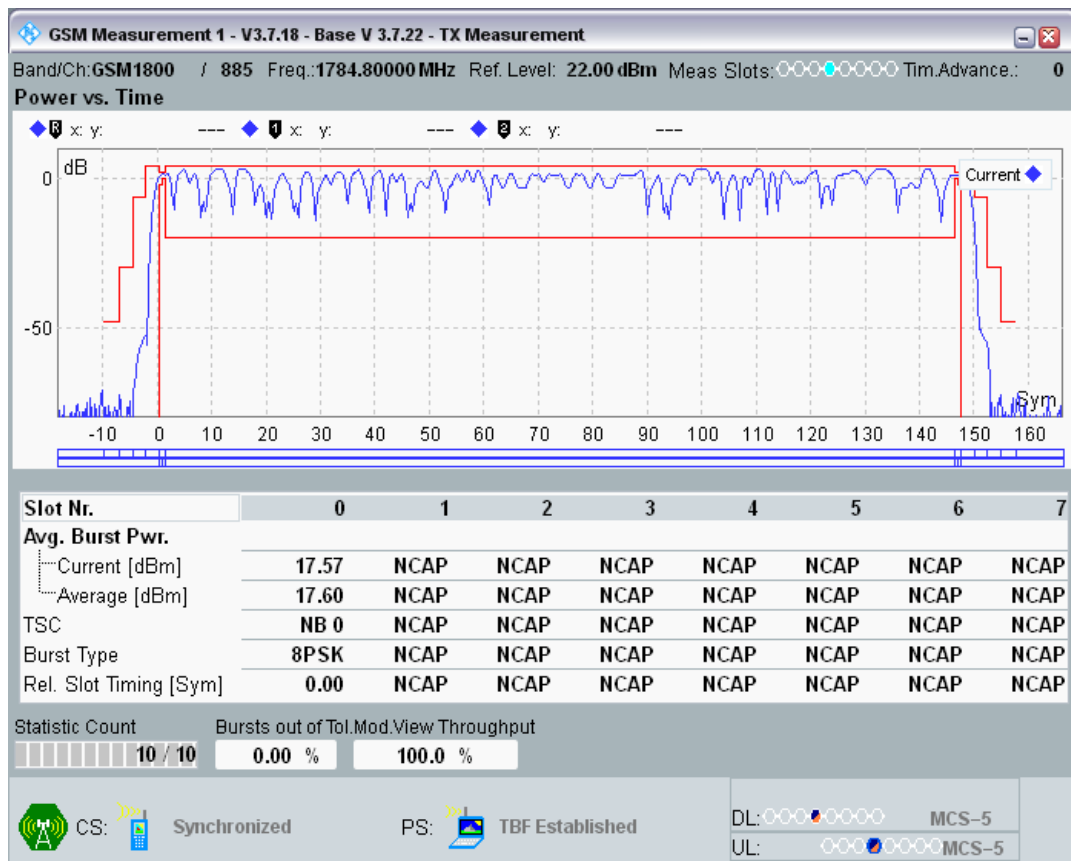


EGPRS1800 Channel=885 Gamma=11;11;11;11

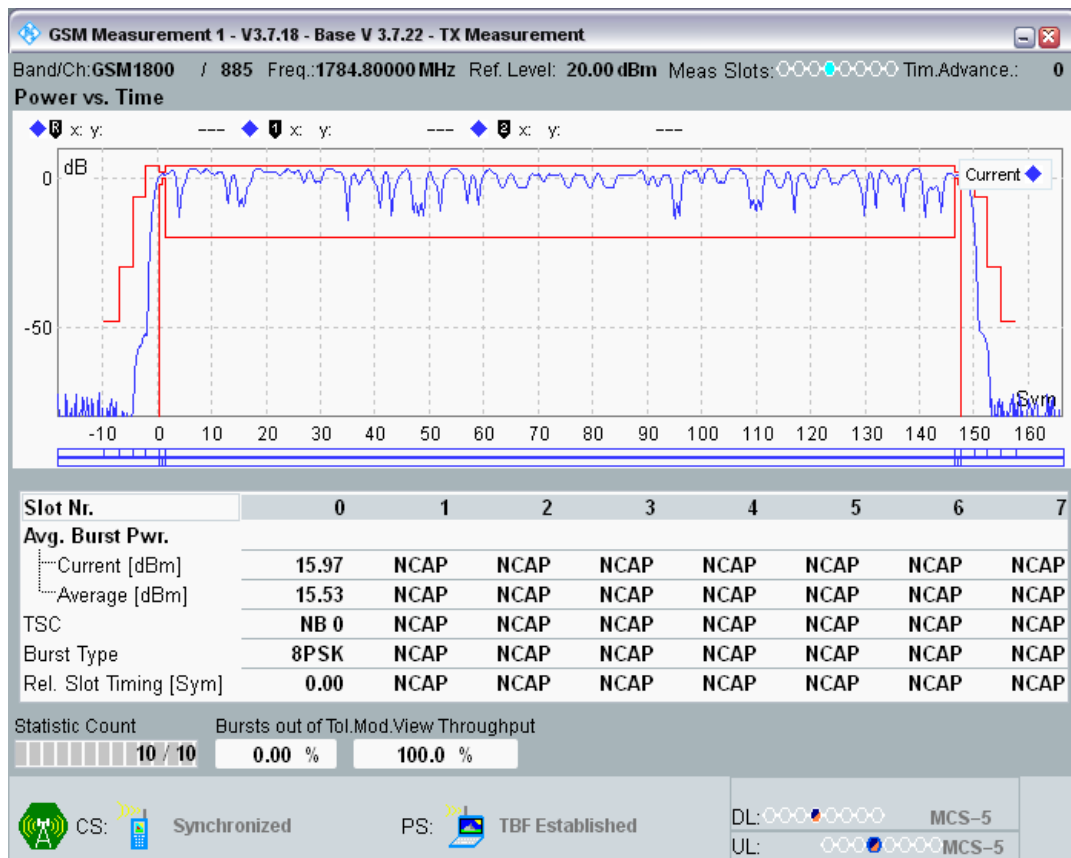


EGPRS1800 Channel=885 Gamma=12;12;12;12

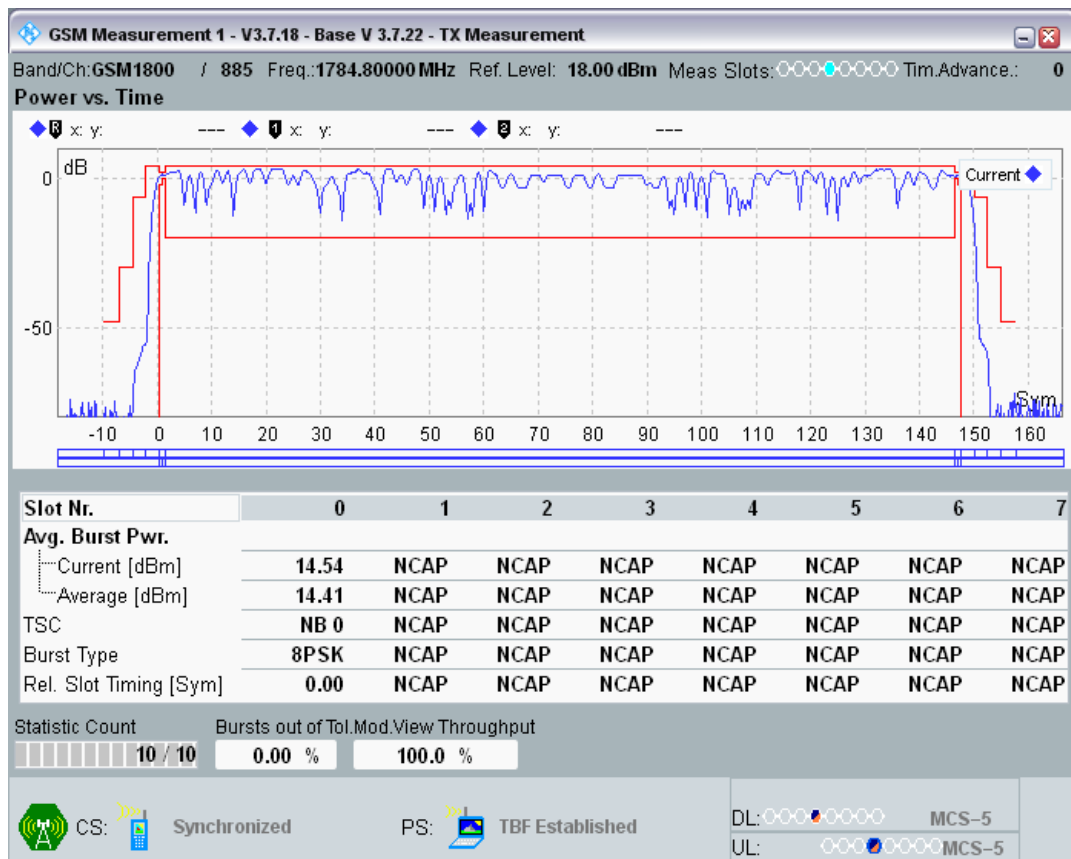


EGPRS1800 Channel=885 Gamma=13;13;13;13

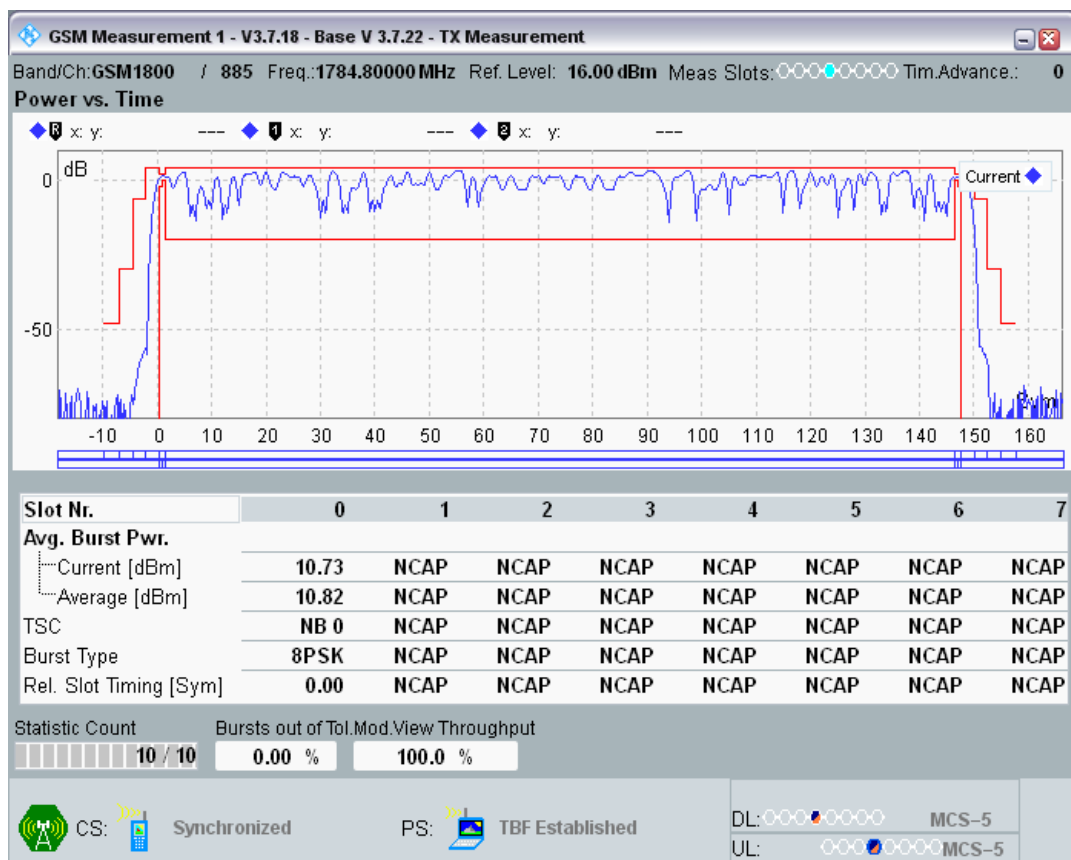

EGPRS1800 Channel=885 Gamma=14;14;14;14

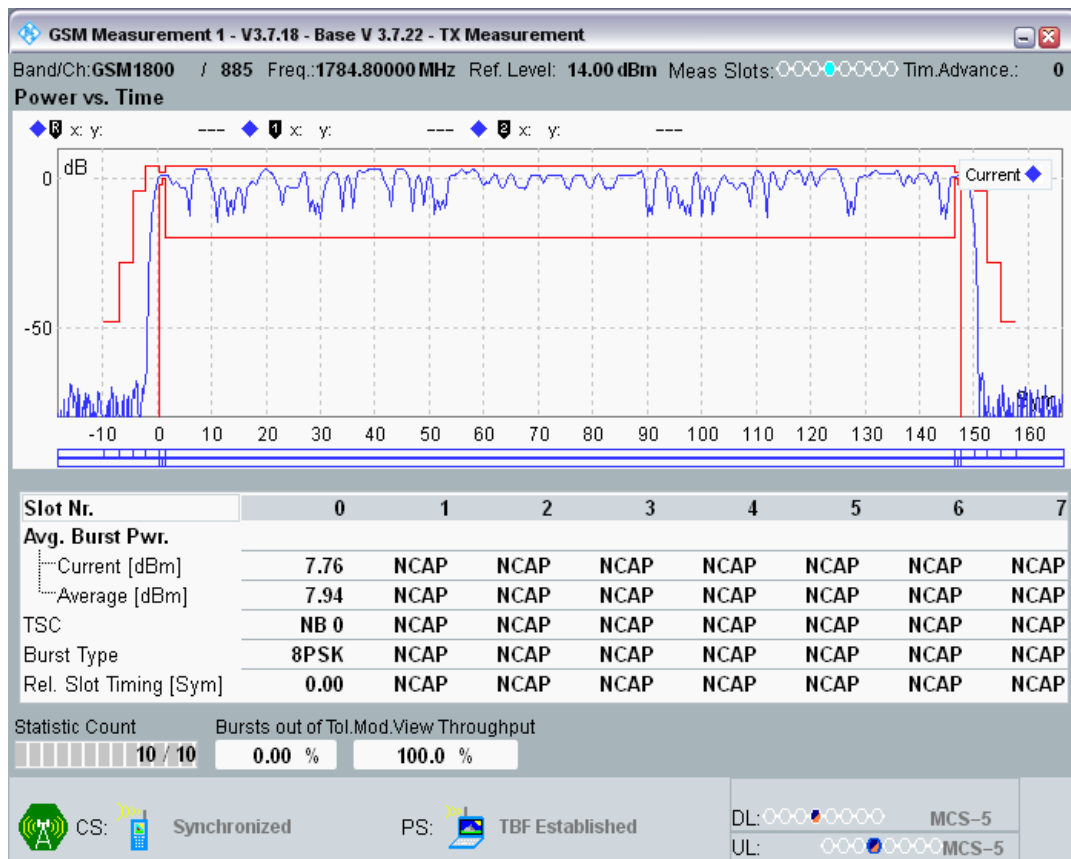


EGPRS1800 Channel=885 Gamma=15;15;15;15

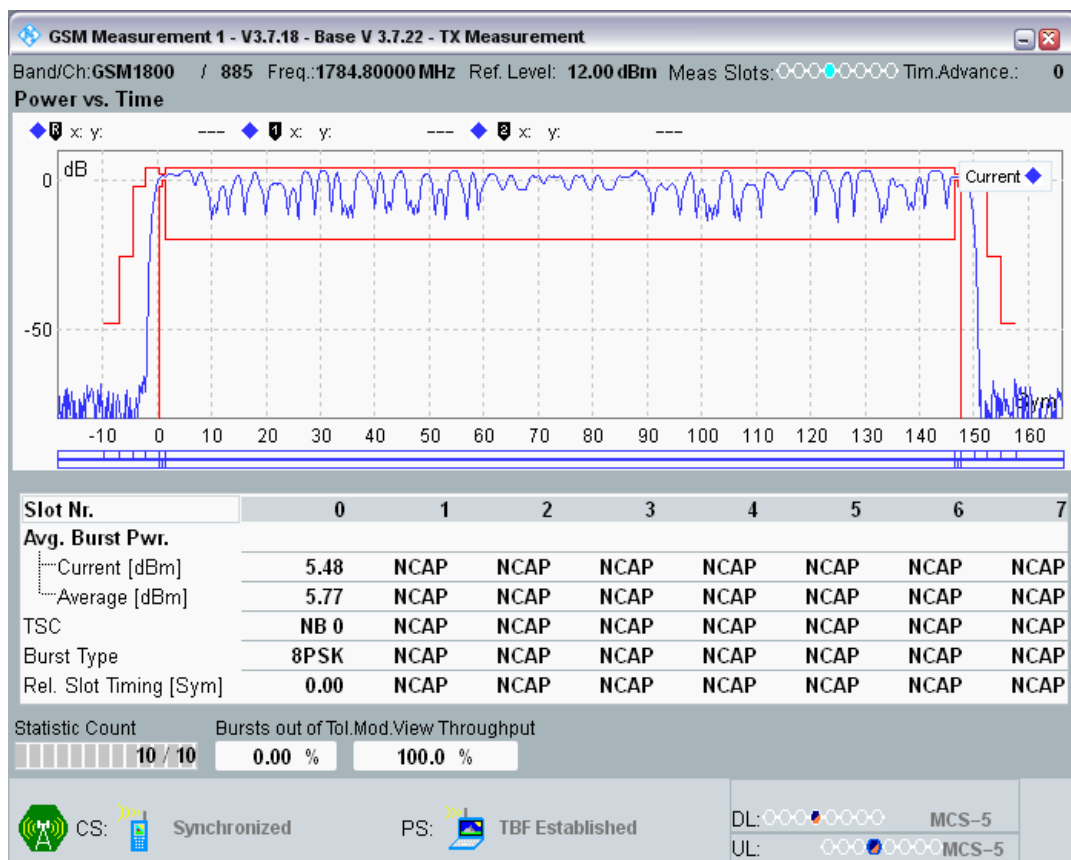

EGPRS1800 Channel=885 Gamma=16;16;16;16




EGPRS1800 Channel=885 Gamma=17;17;17;17

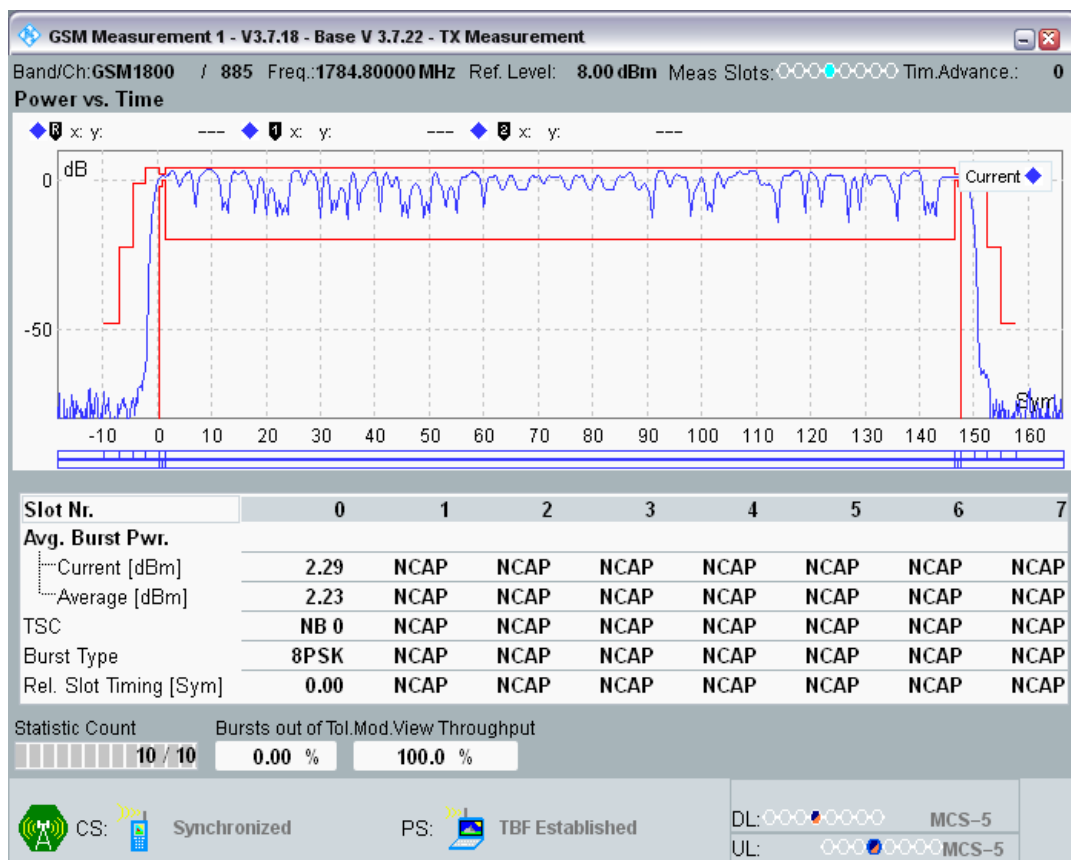


EGPRS1800 Channel=885 Gamma=18;18;18;18




EGPRS1900 Channel=512 Gamma=5;5;5;5

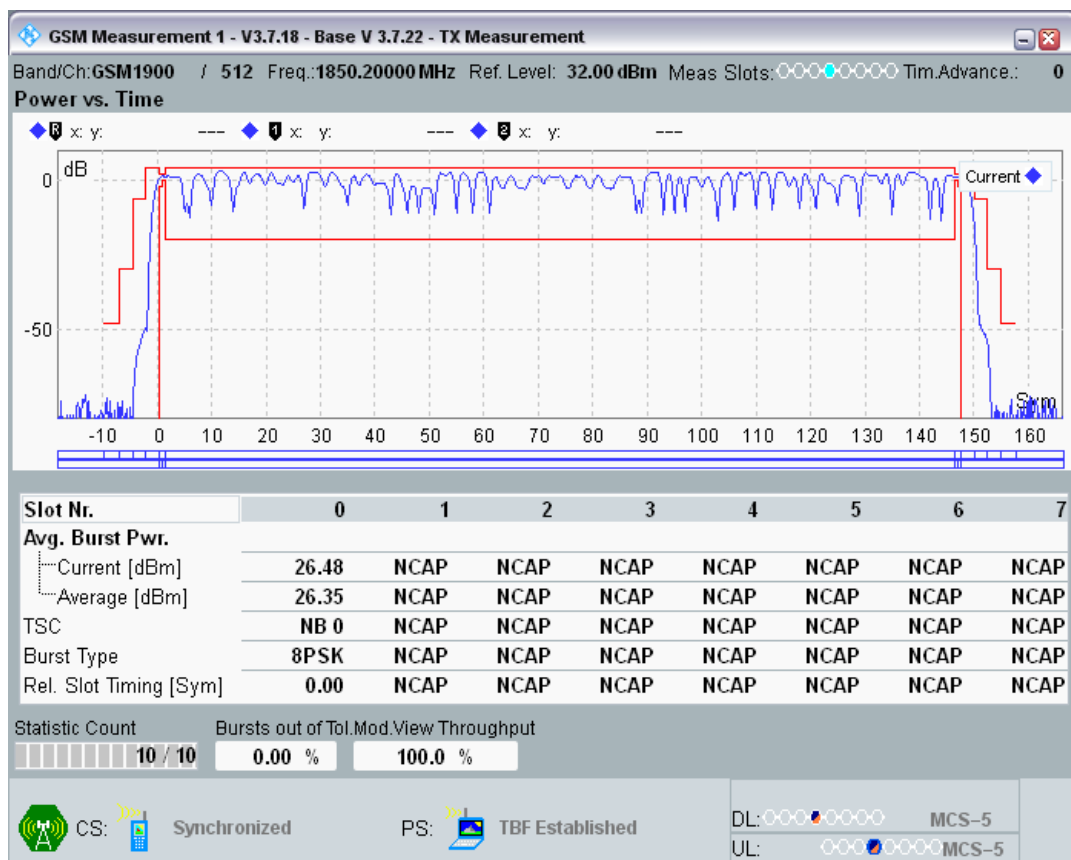


EGPRS1900 Channel=512 Gamma=6;6;6;6

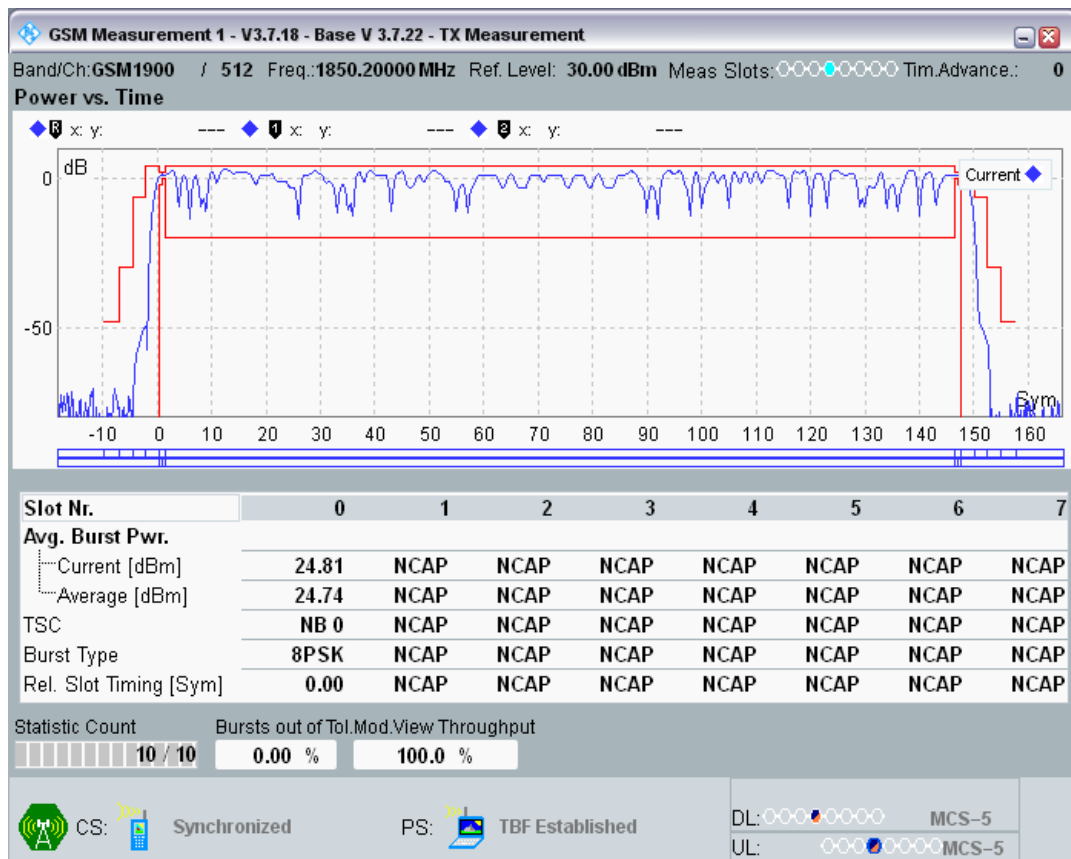


EGPRS1900 Channel=512 Gamma=7;7;7;7

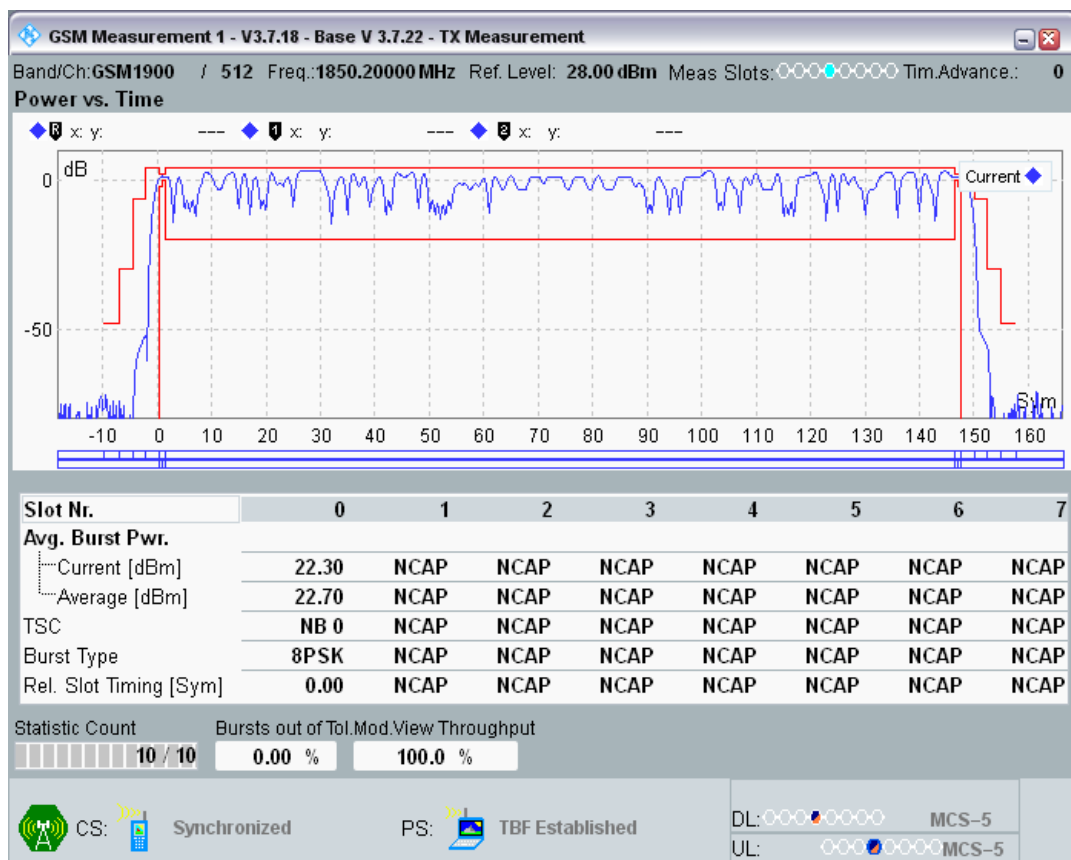


EGPRS1900 Channel=512 Gamma=8;8;8;8

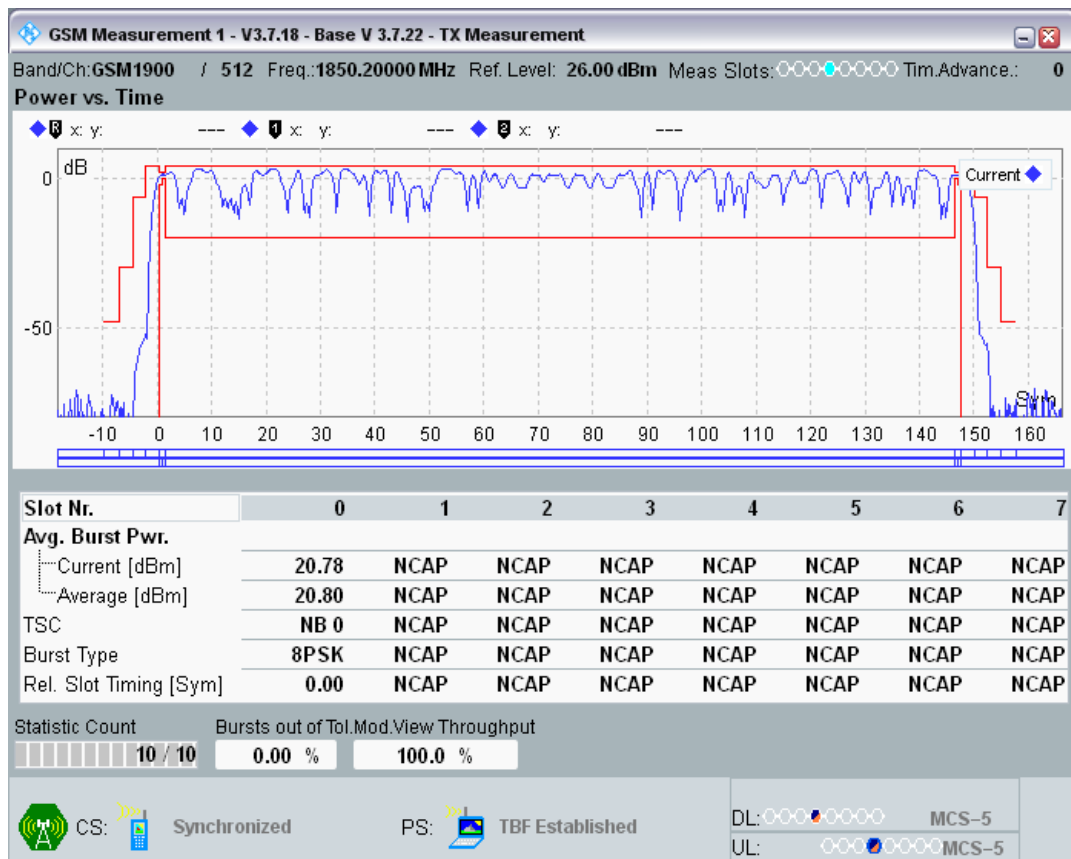


EGPRS1900 Channel=512 Gamma=9;9;9;9

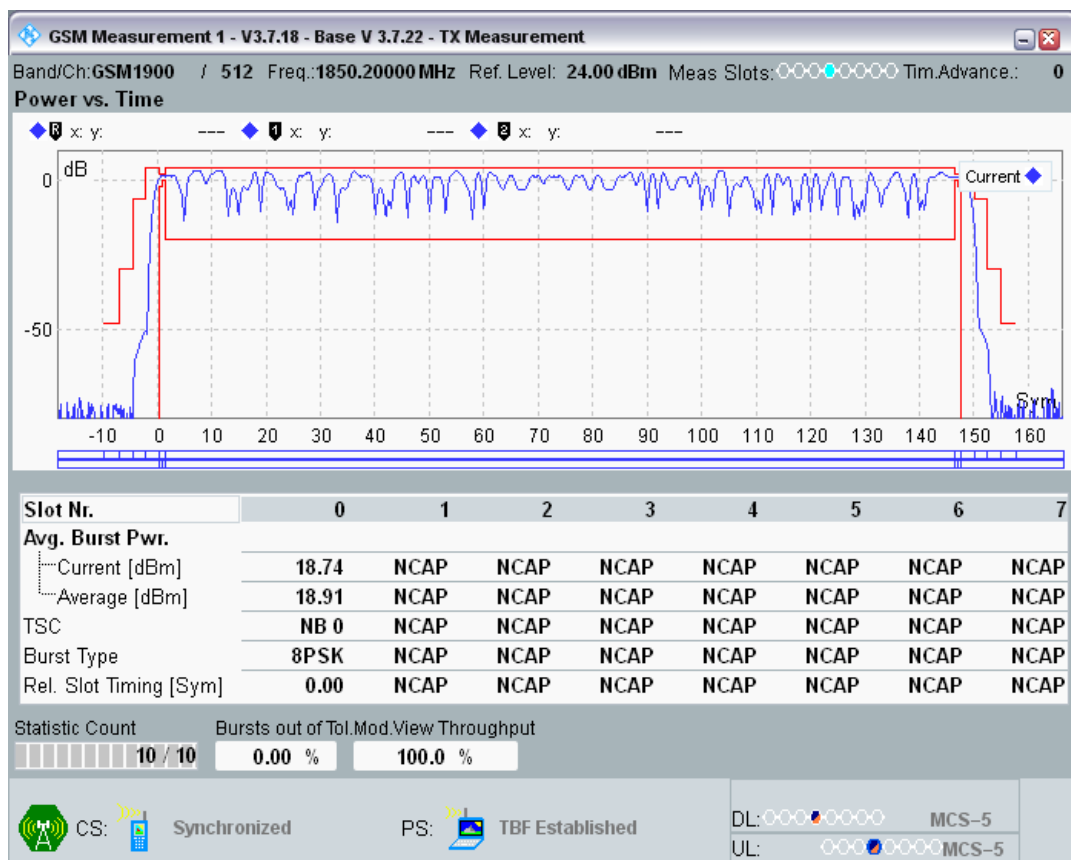


EGPRS1900 Channel=512 Gamma=10;10;10;10

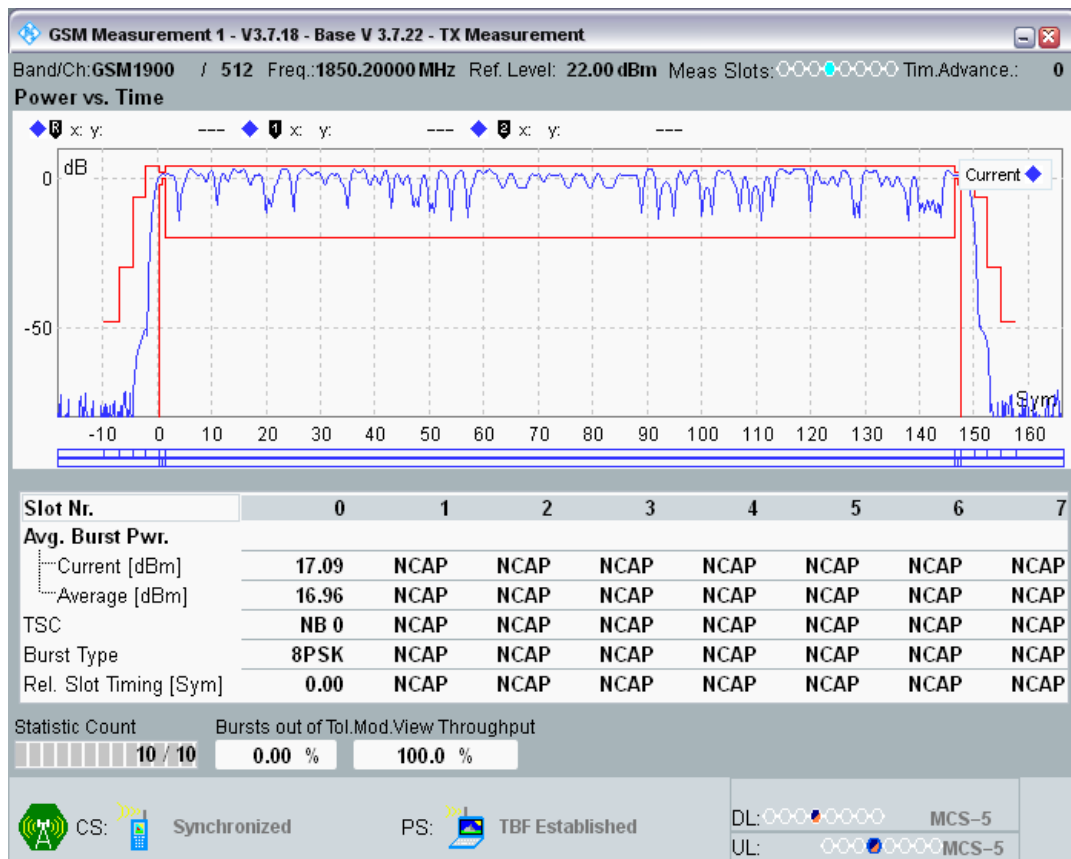


EGPRS1900 Channel=512 Gamma=11;11;11;11

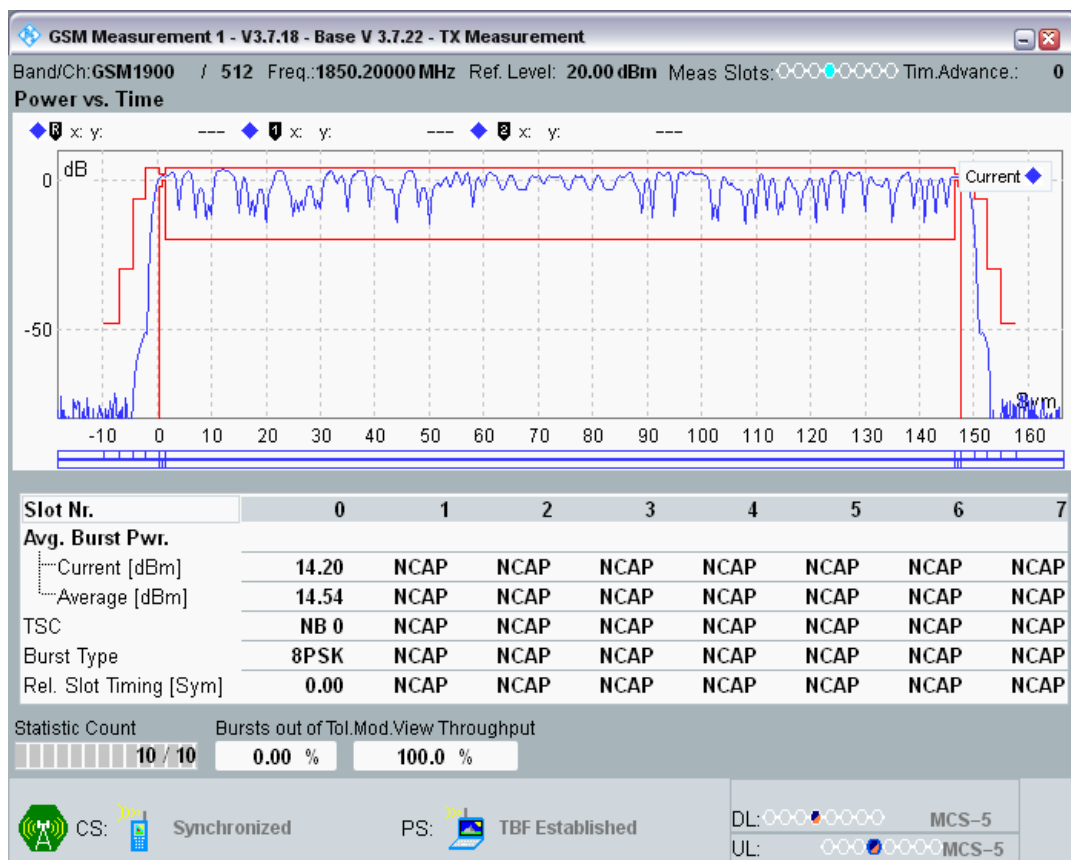


EGPRS1900 Channel=512 Gamma=12;12;12;12

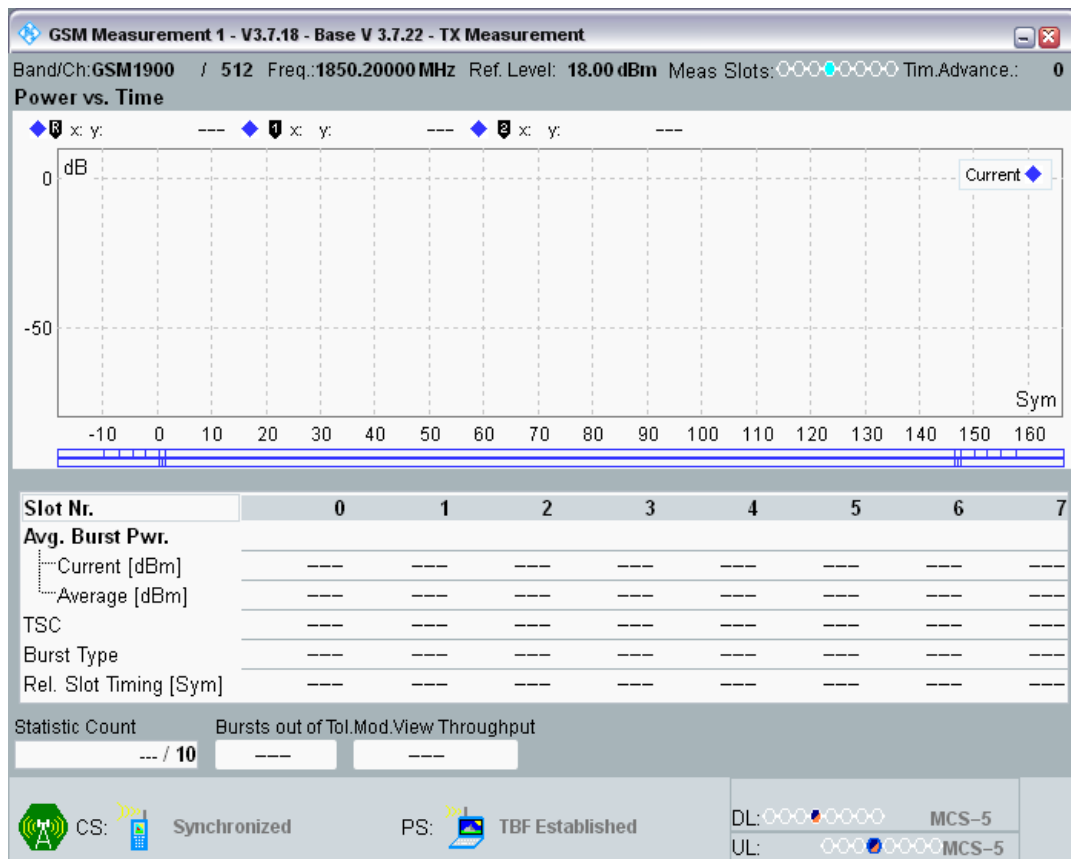


EGPRS1900 Channel=512 Gamma=13;13;13;13

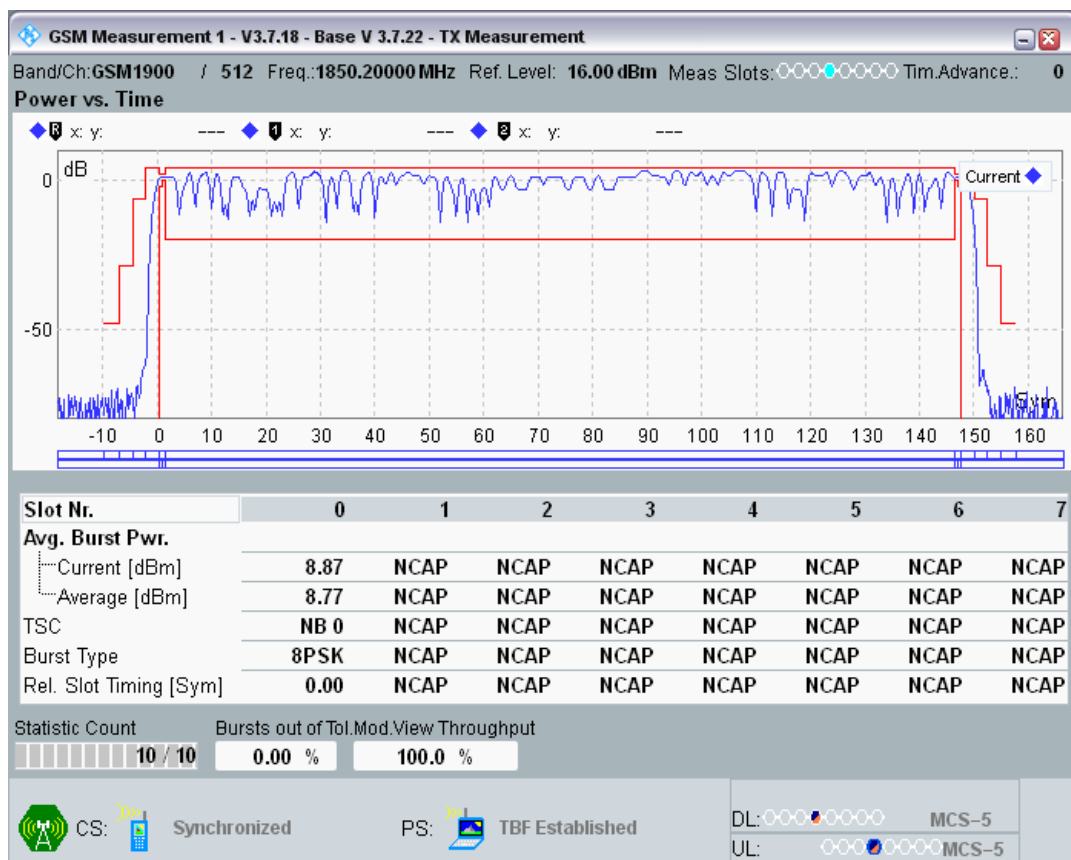

EGPRS1900 Channel=512 Gamma=14;14;14;14

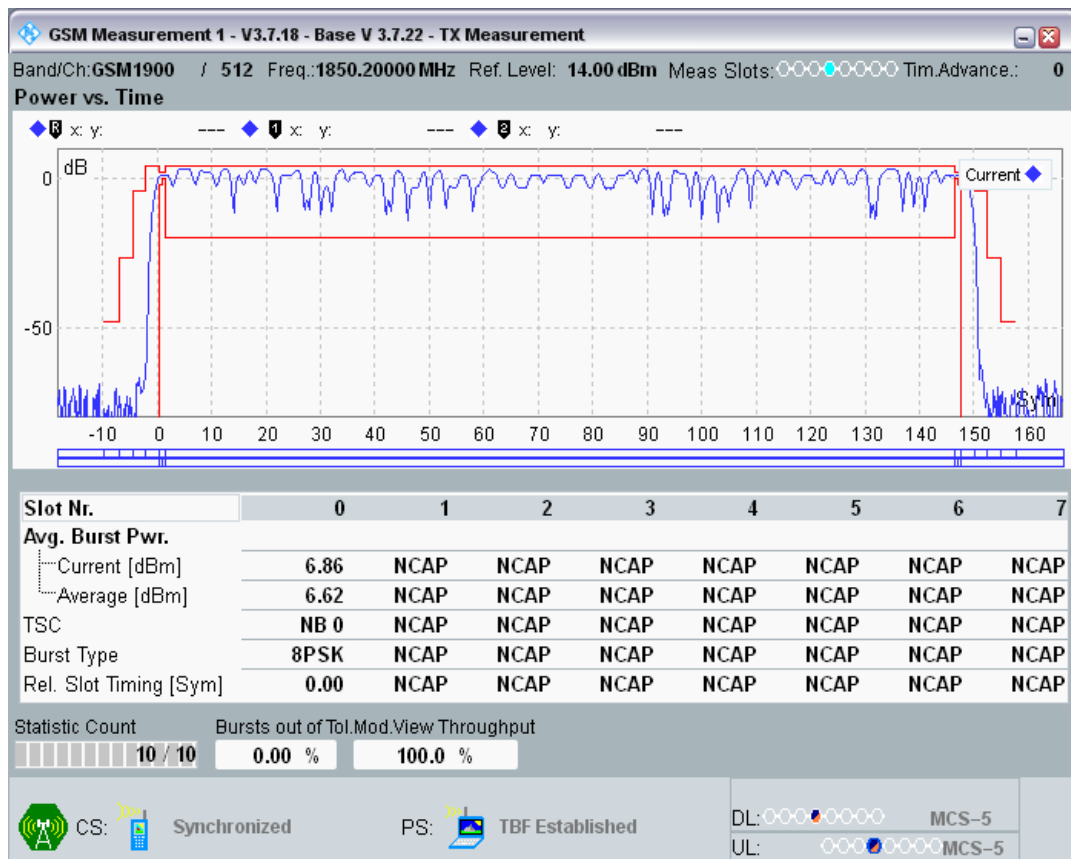


EGPRS1900 Channel=512 Gamma=15;15;15;15

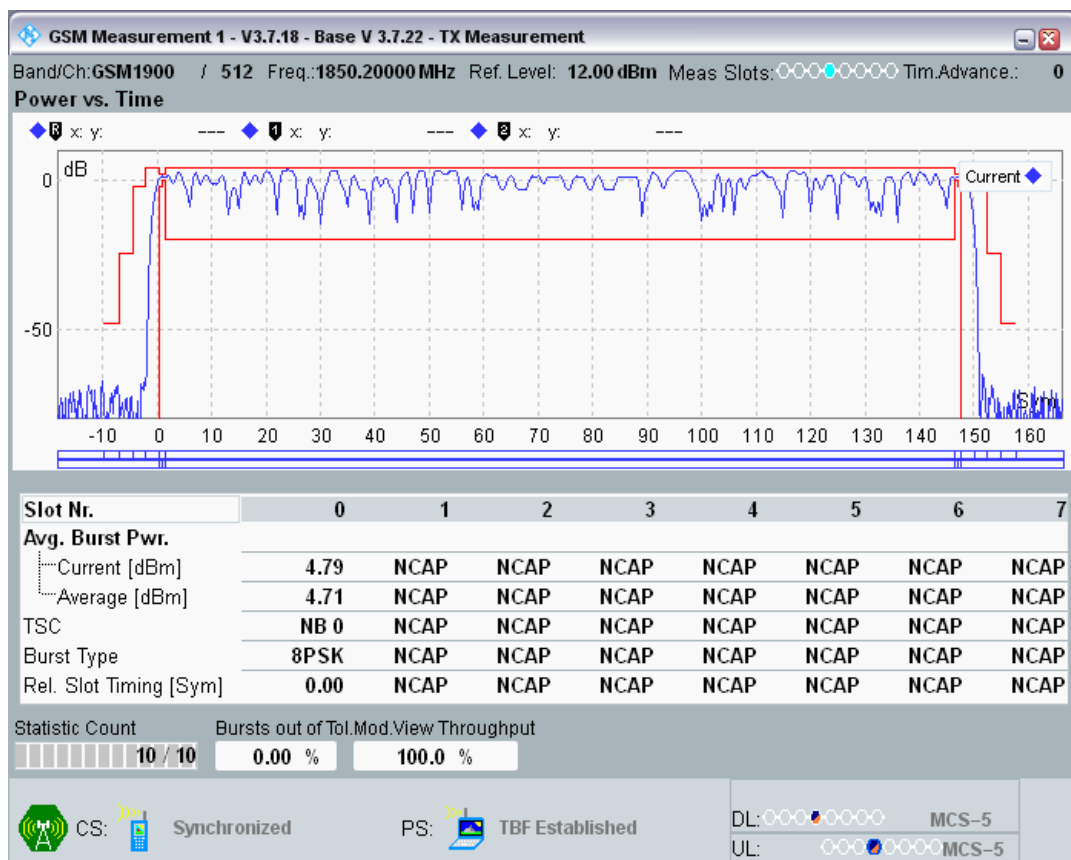

EGPRS1900 Channel=512 Gamma=16;16;16;16




EGPRS1900 Channel=512 Gamma=17;17;17;17

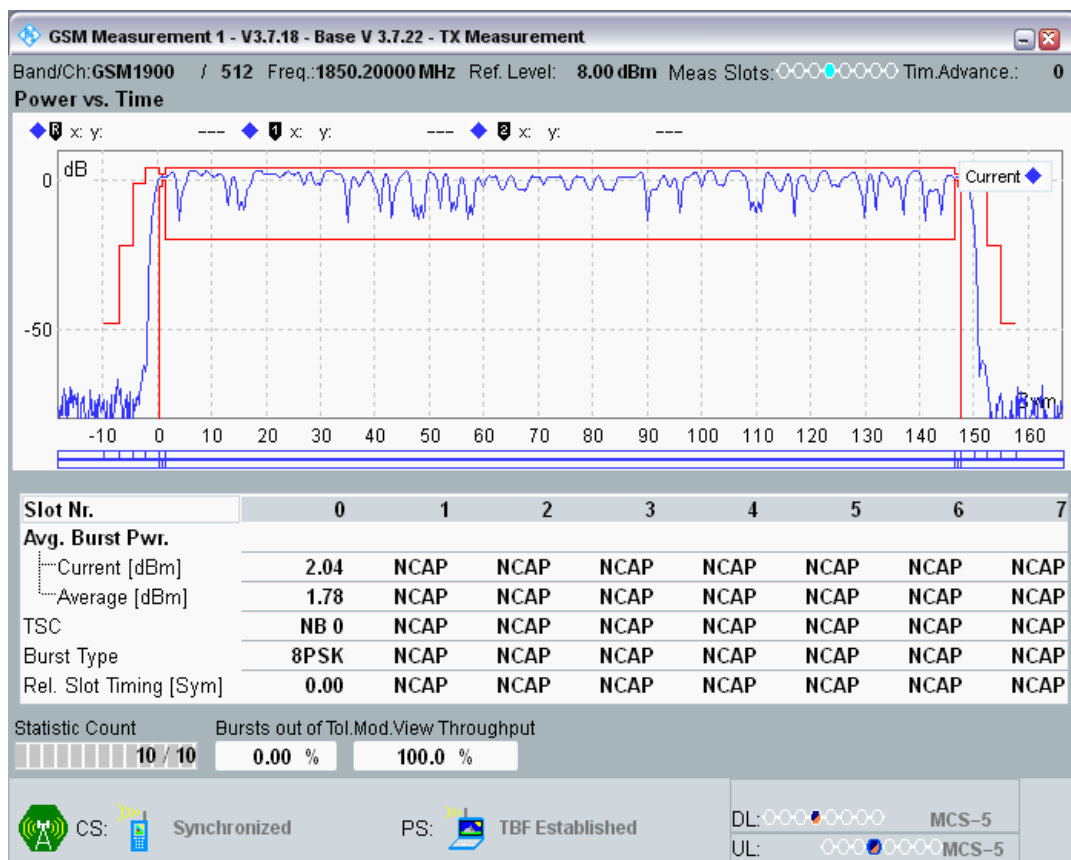


EGPRS1900 Channel=512 Gamma=18;18;18;18




EGPRS1900 Channel=661 Gamma=5;5;5;5

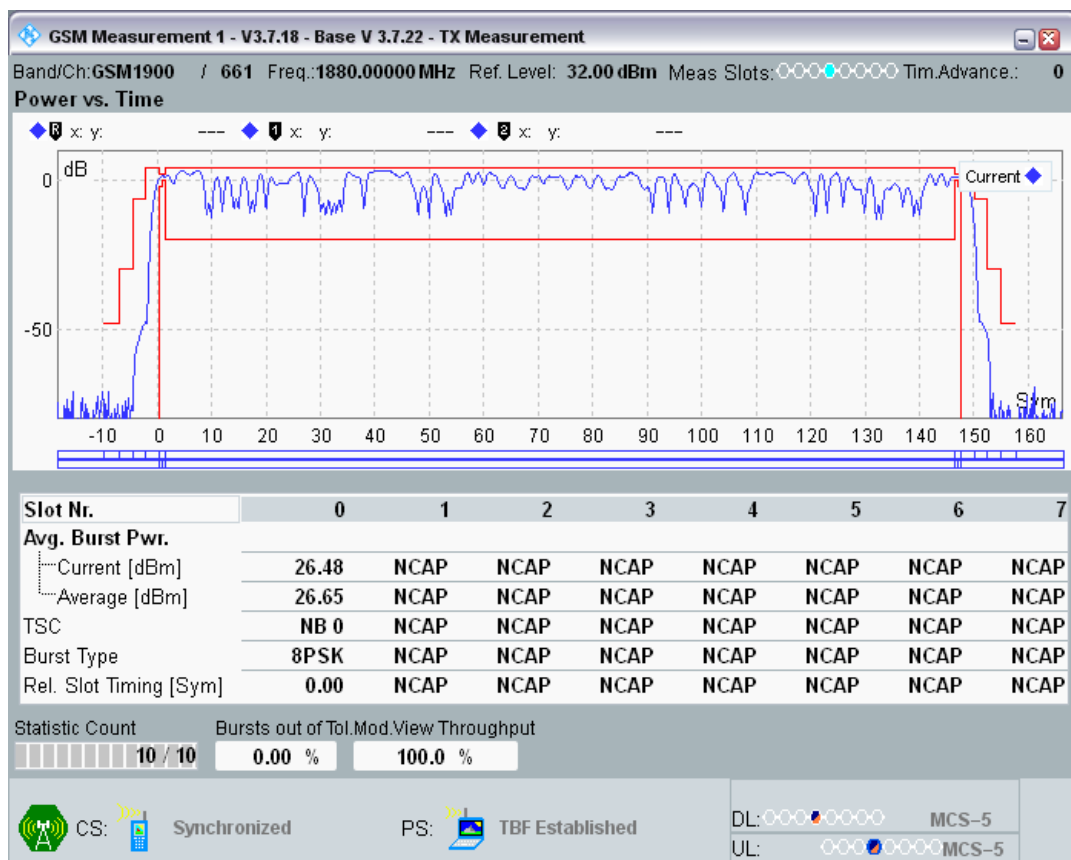

EGPRS1900 Channel=661 Gamma=6;6;6;6

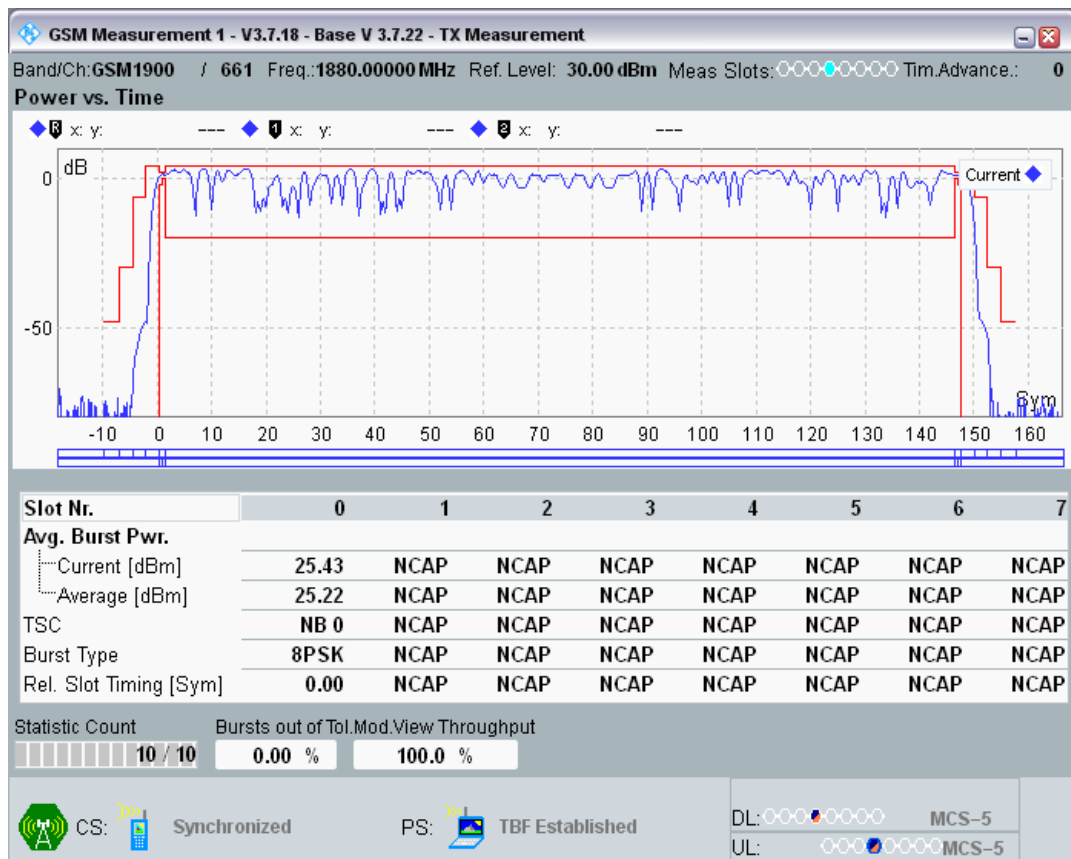


EGPRS1900 Channel=661 Gamma=7;7;7;7

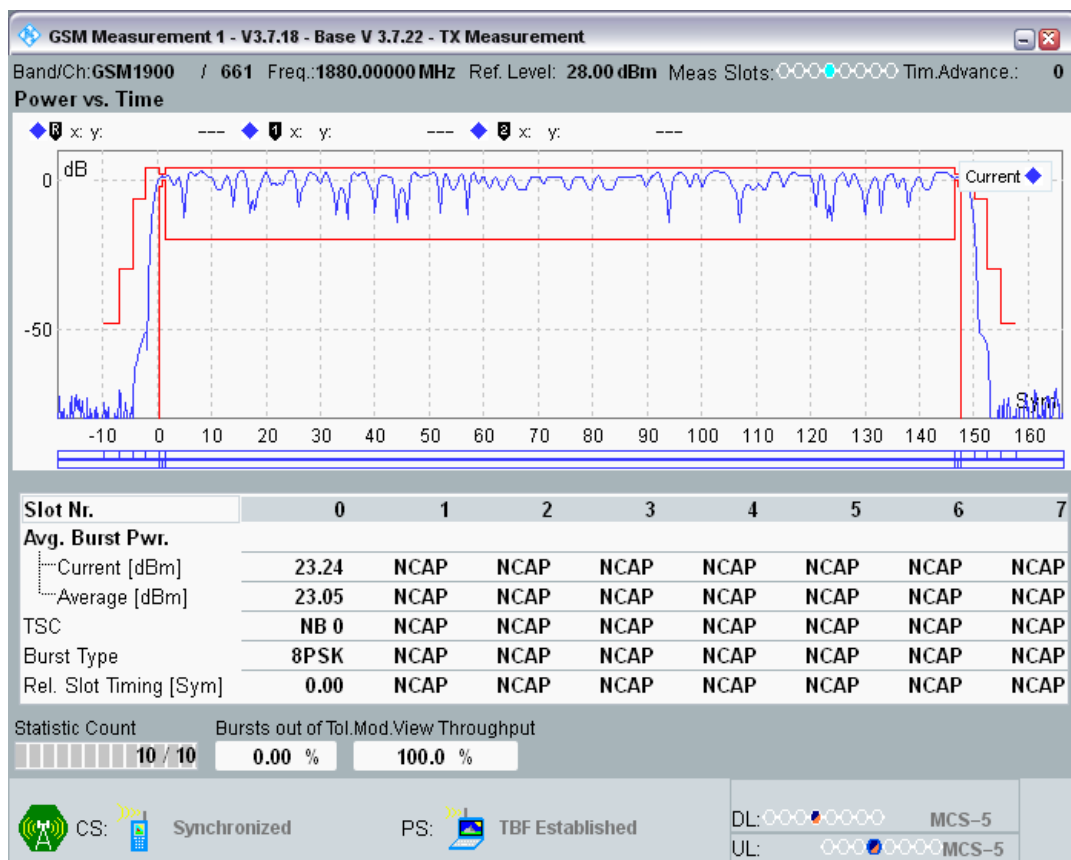

EGPRS1900 Channel=661 Gamma=8;8;8;8




EGPRS1900 Channel=661 Gamma=9;9;9;9

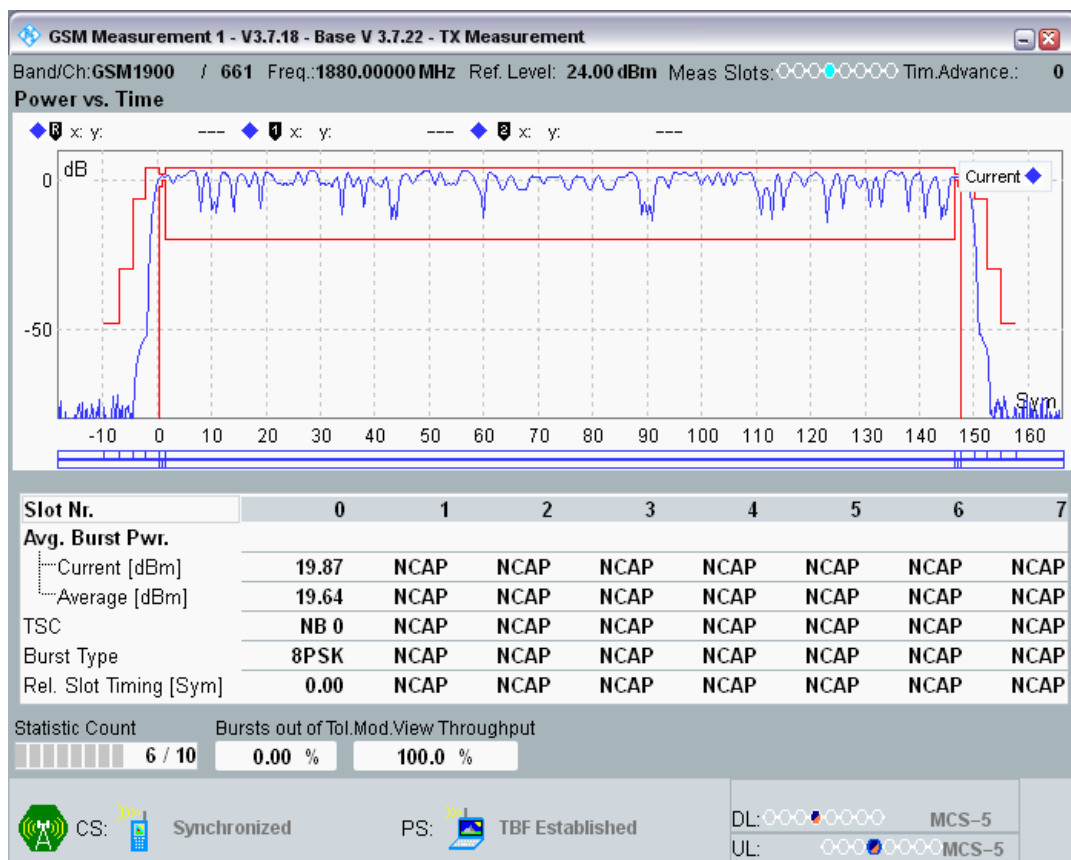


EGPRS1900 Channel=661 Gamma=10;10;10;10




EGPRS1900 Channel=661 Gamma=11;11;11;11

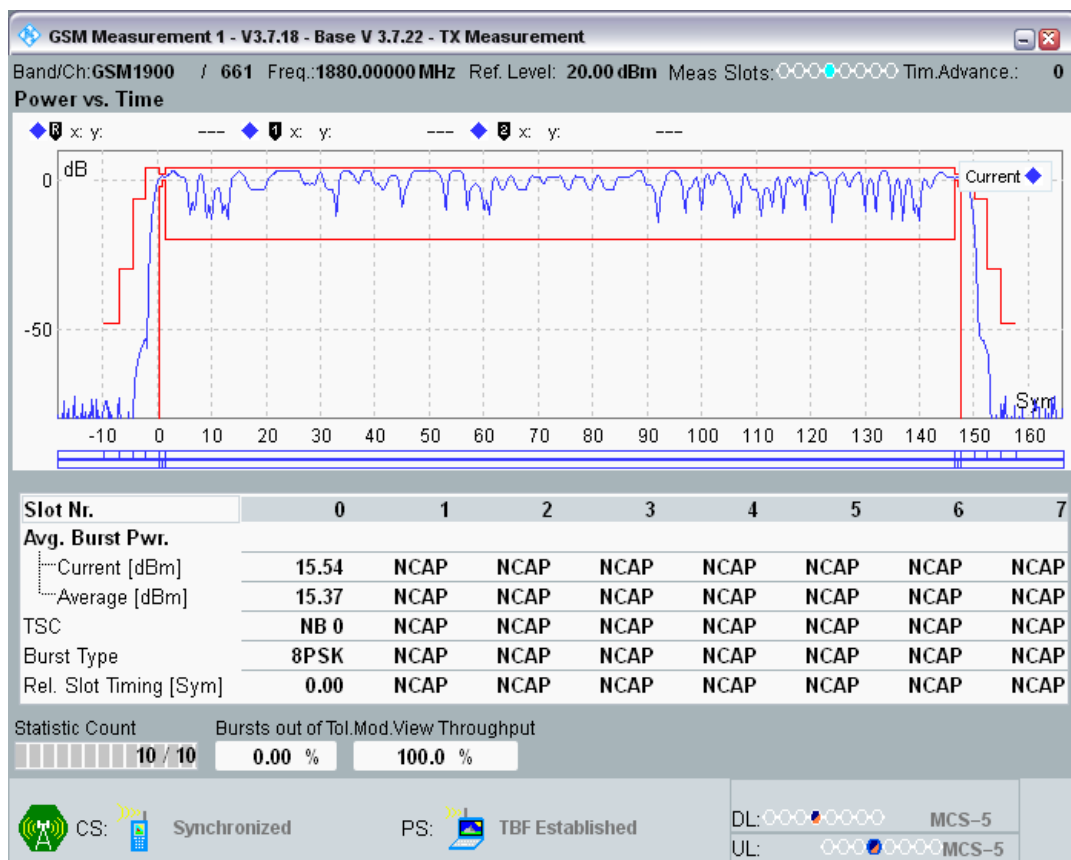

EGPRS1900 Channel=661 Gamma=12;12;12;12

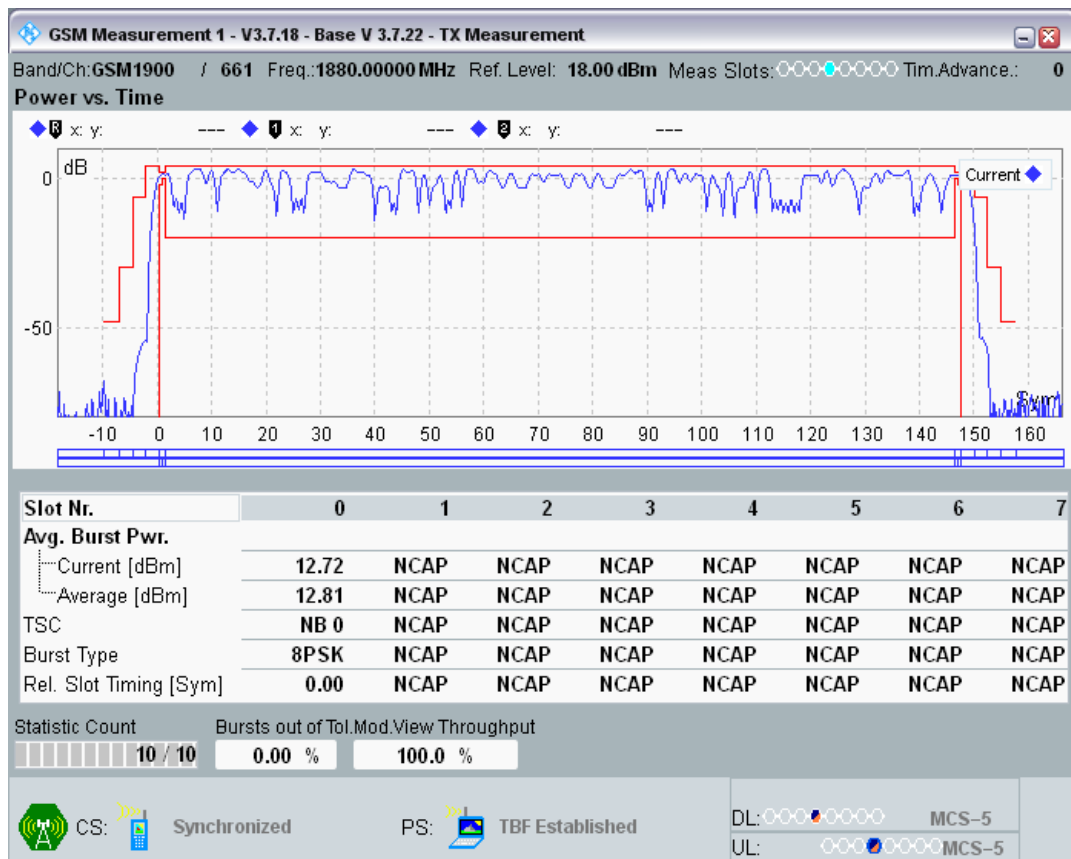


EGPRS1900 Channel=661 Gamma=13;13;13;13

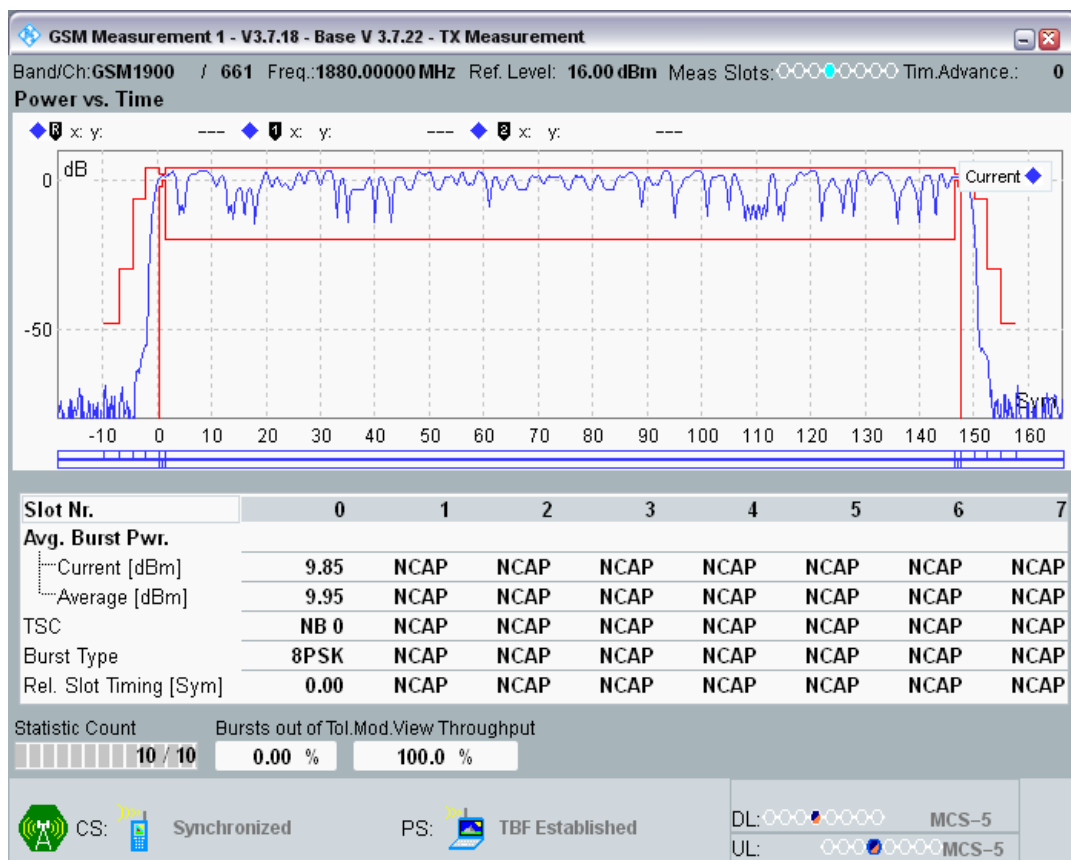

EGPRS1900 Channel=661 Gamma=14;14;14;14




EGPRS1900 Channel=661 Gamma=15;15;15;15

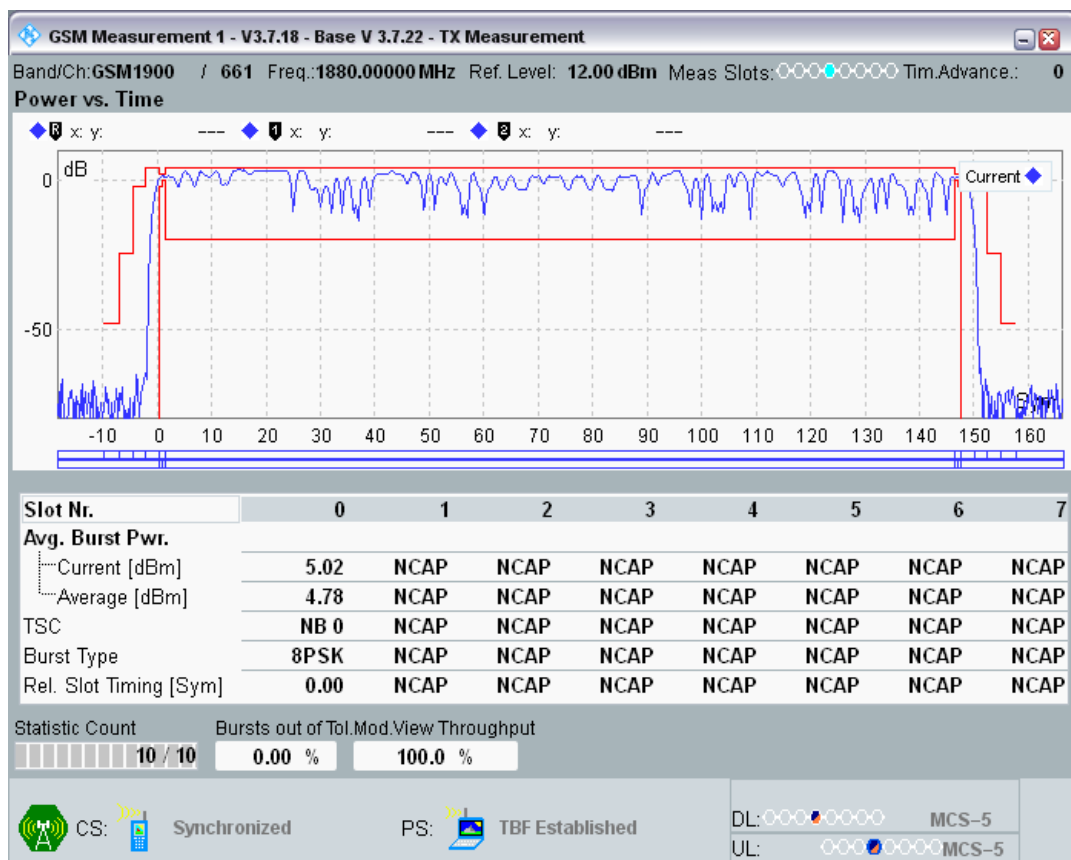

EGPRS1900 Channel=661 Gamma=16;16;16;16




EGPRS1900 Channel=661 Gamma=17;17;17;17

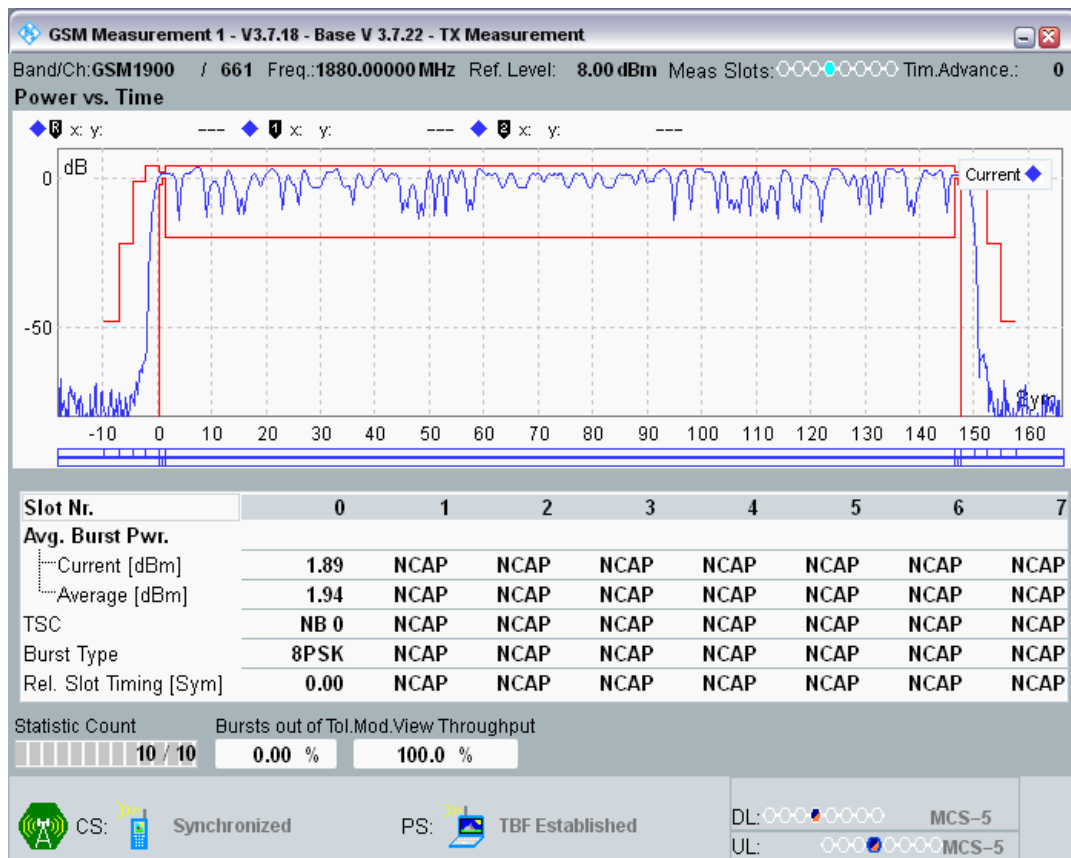

EGPRS1900 Channel=661 Gamma=18;18;18;18




EGPRS1900 Channel=810 Gamma=5;5;5;5

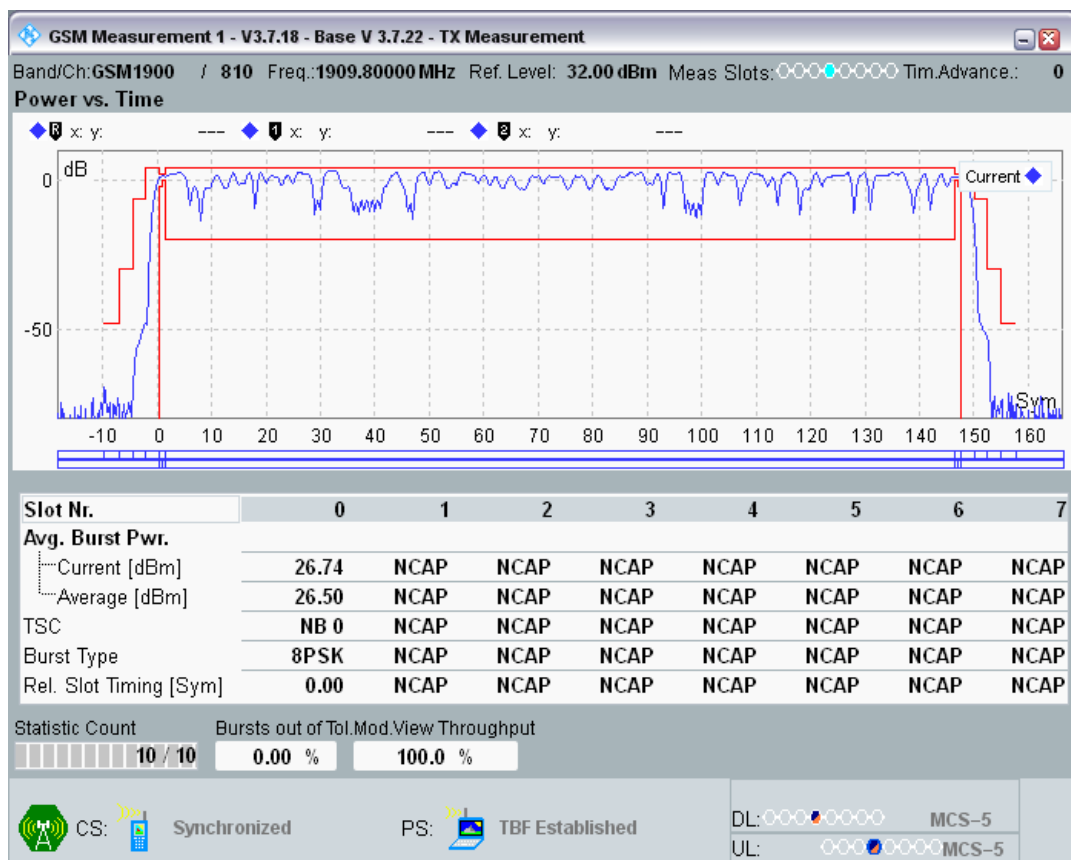


EGPRS1900 Channel=810 Gamma=6;6;6;6




EGPRS1900 Channel=810 Gamma=7;7;7;7

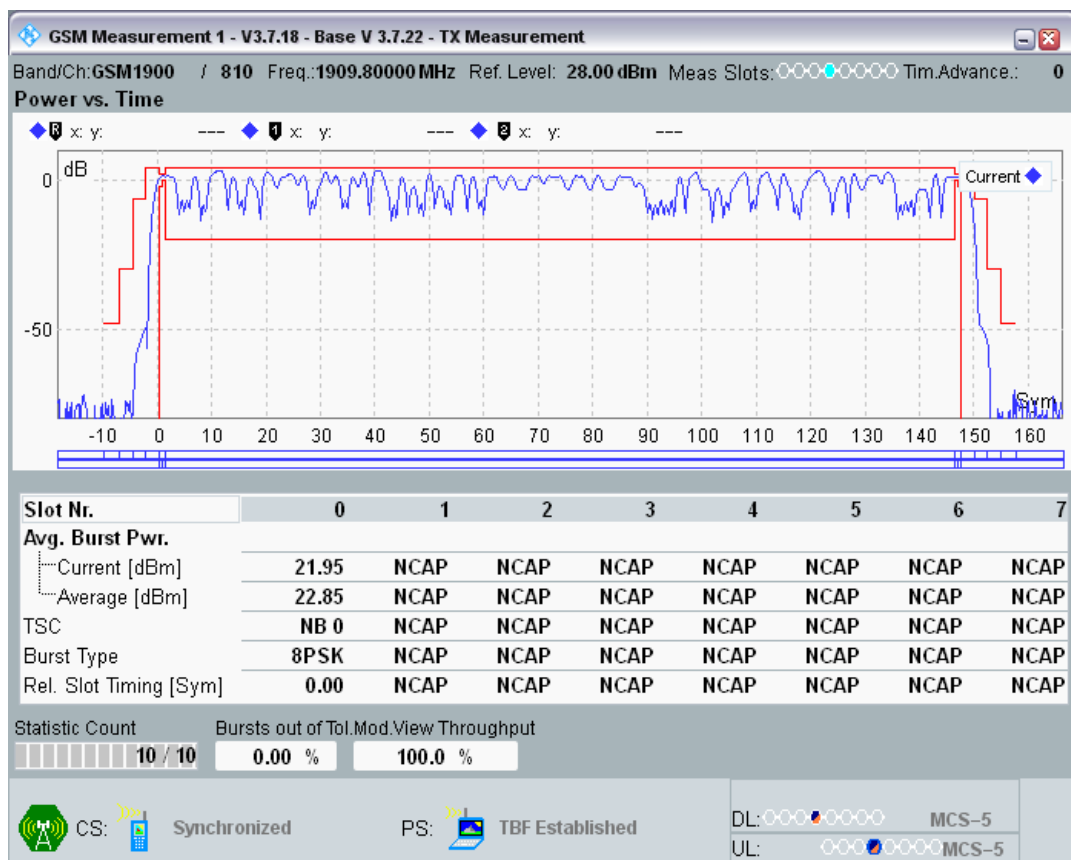


EGPRS1900 Channel=810 Gamma=8;8;8;8

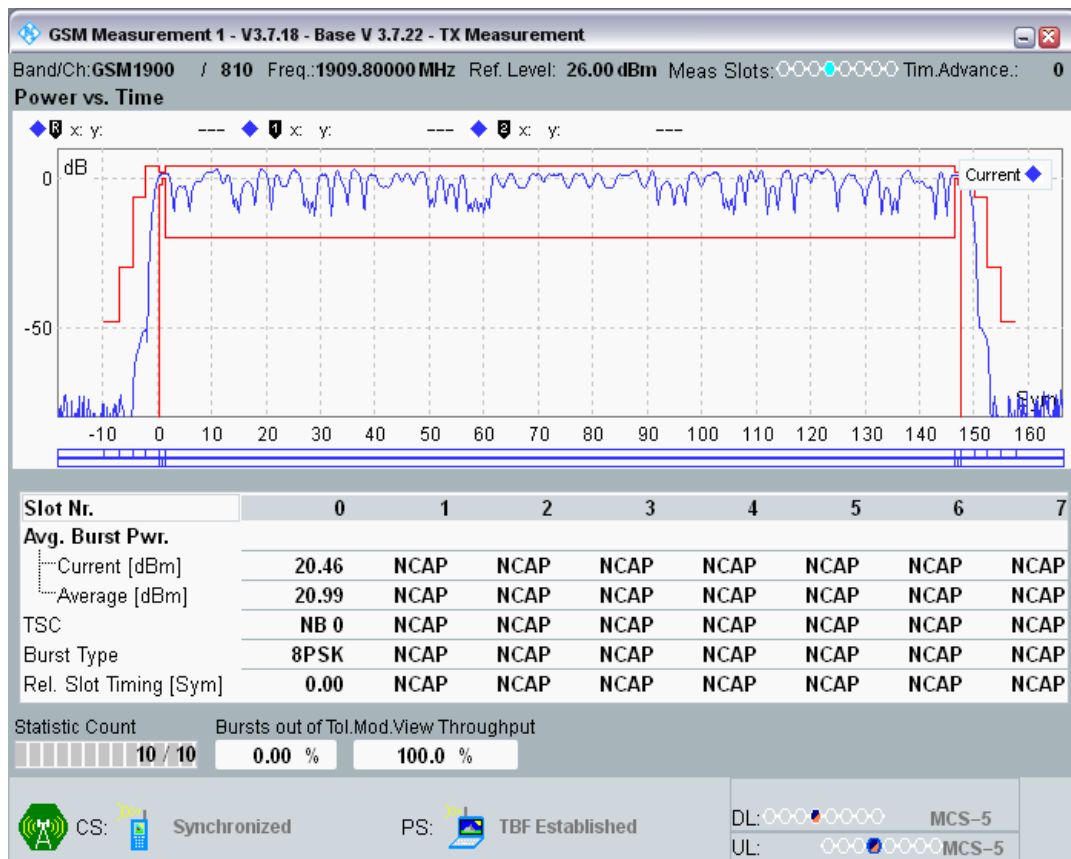


EGPRS1900 Channel=810 Gamma=9;9;9;9

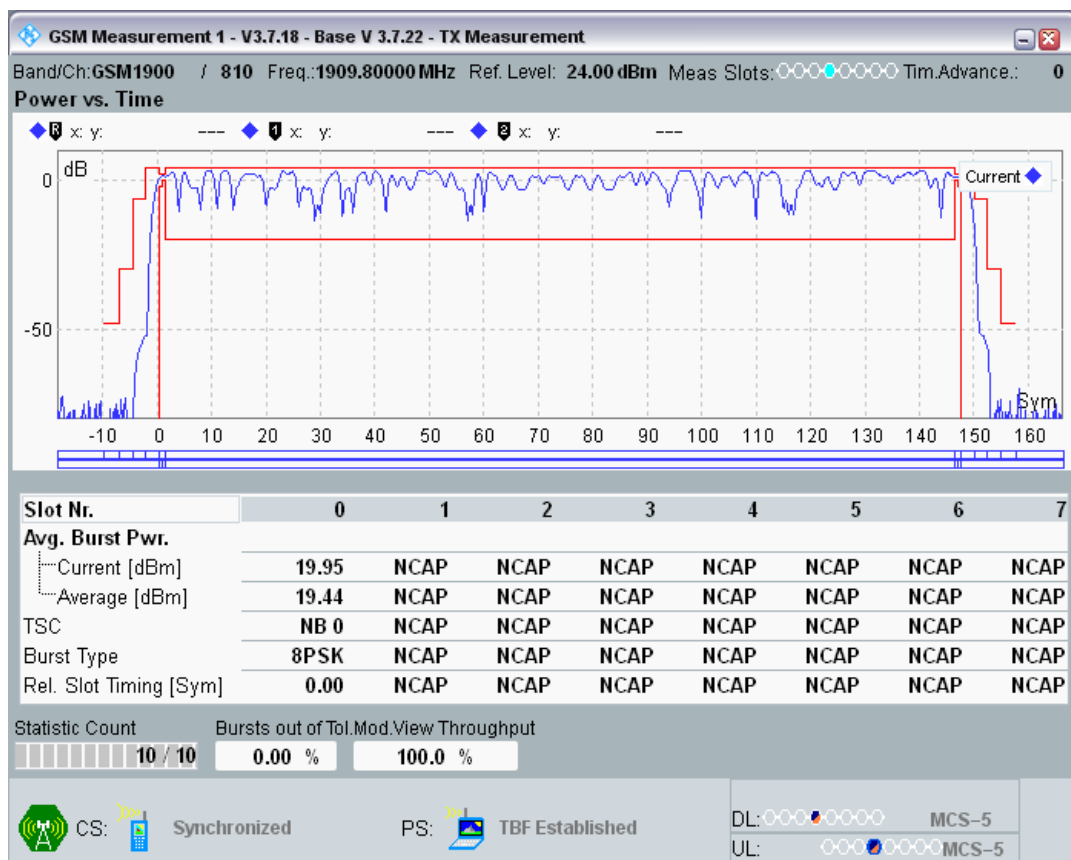


EGPRS1900 Channel=810 Gamma=10;10;10;10

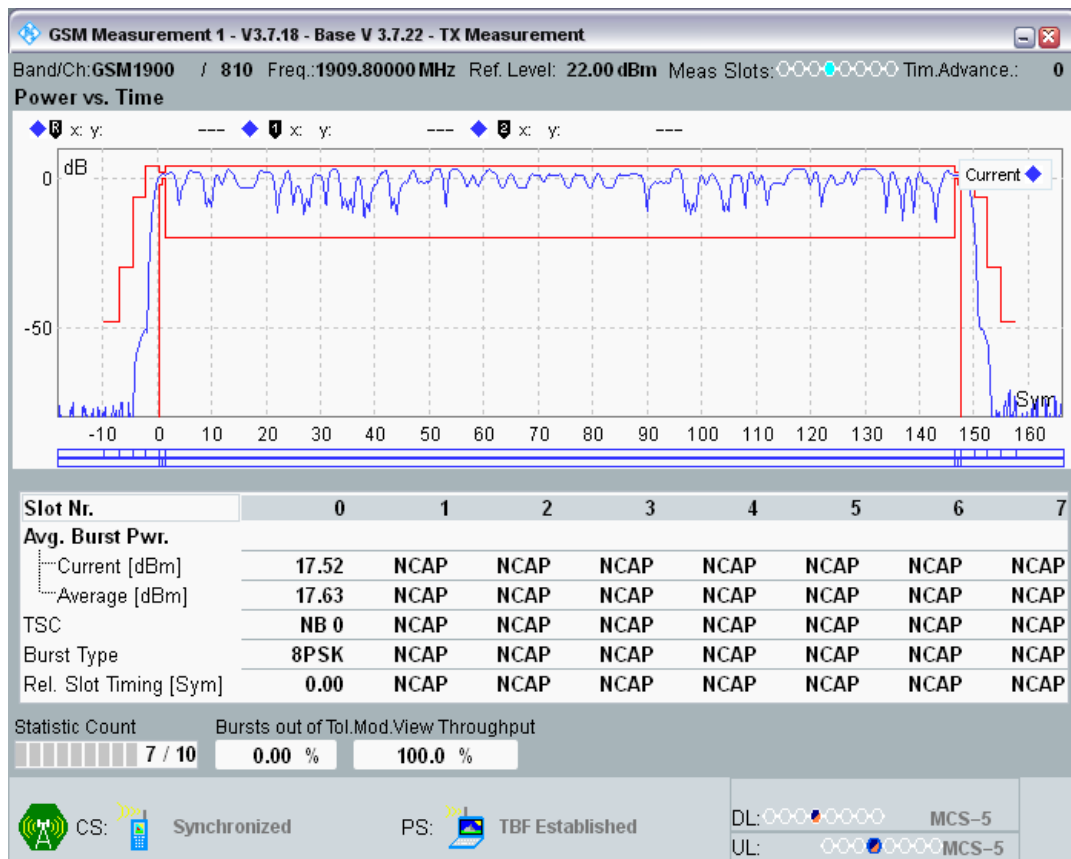


EGPRS1900 Channel=810 Gamma=11;11;11;11

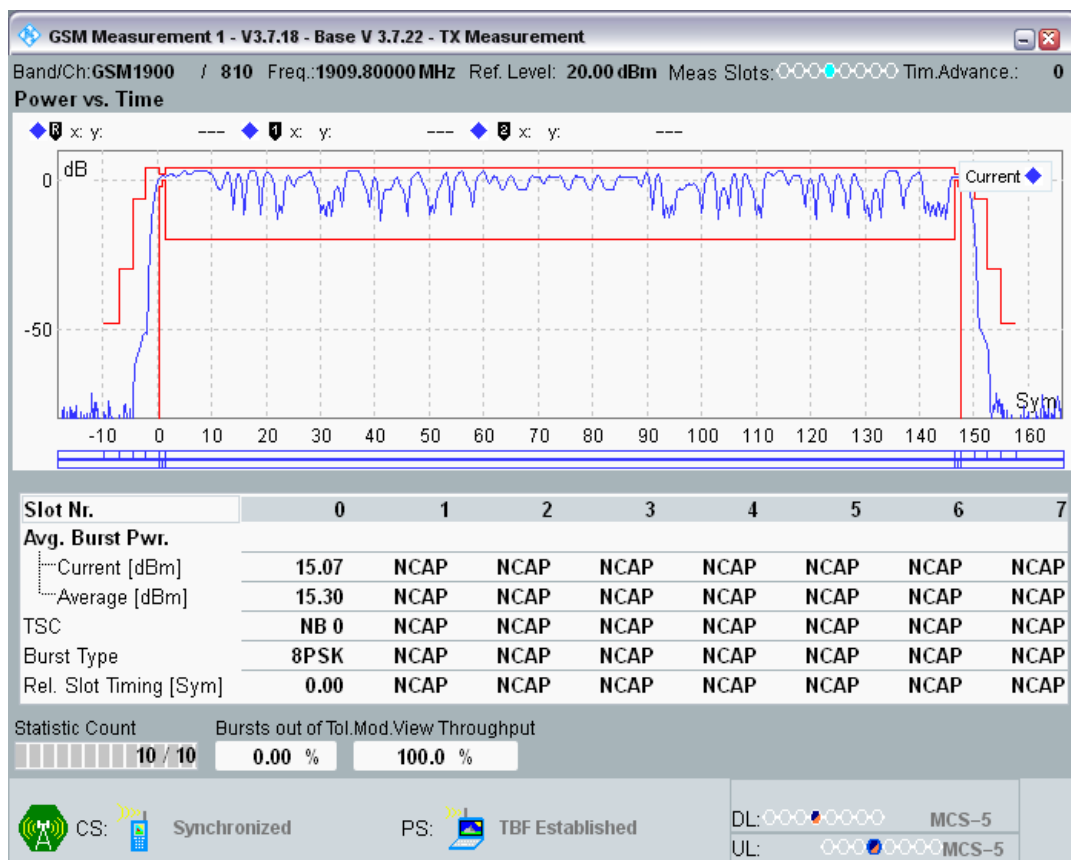

EGPRS1900 Channel=810 Gamma=12;12;12;12

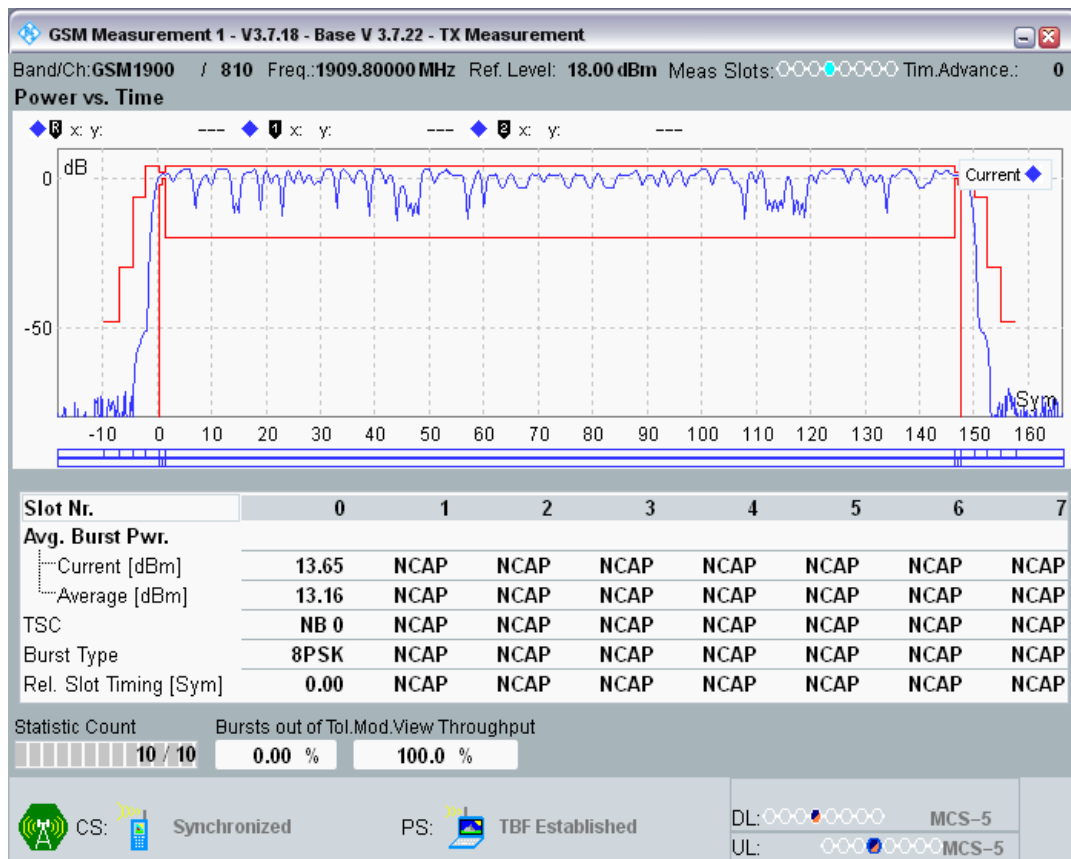


EGPRS1900 Channel=810 Gamma=13;13;13;13

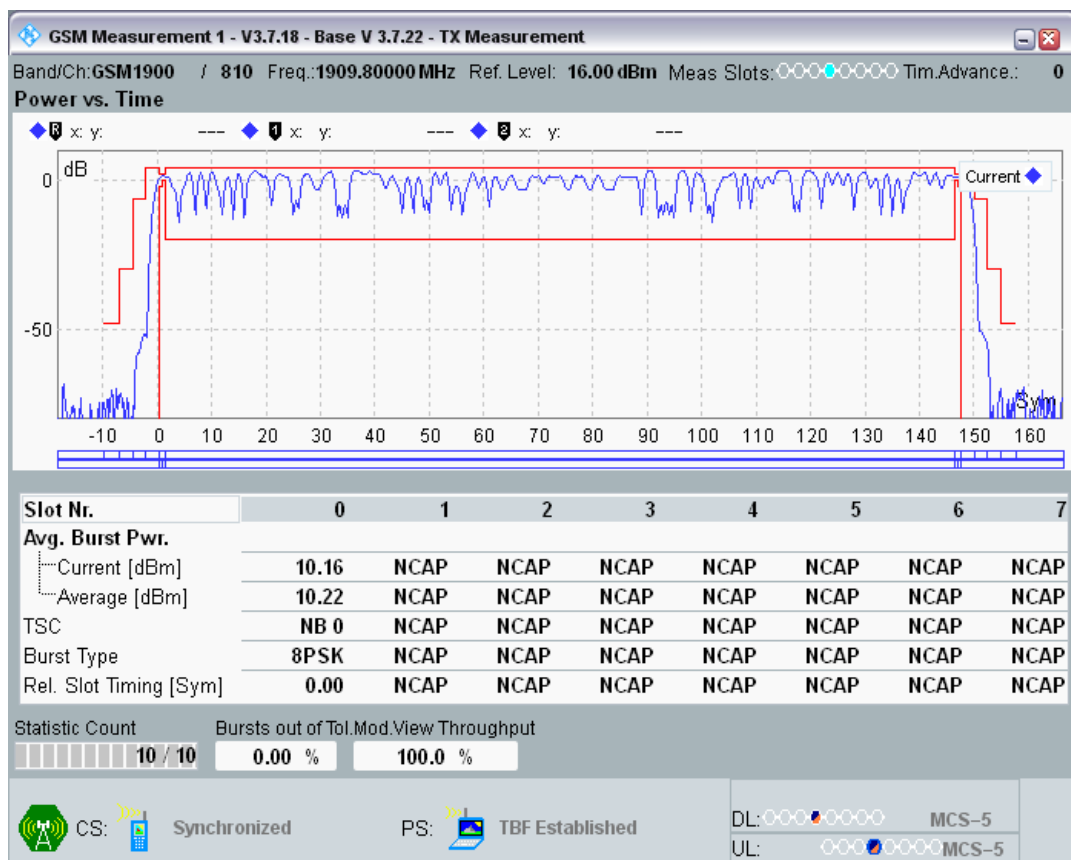

EGPRS1900 Channel=810 Gamma=14;14;14;14



EGPRS1900 Channel=810 Gamma=15;15;15;15

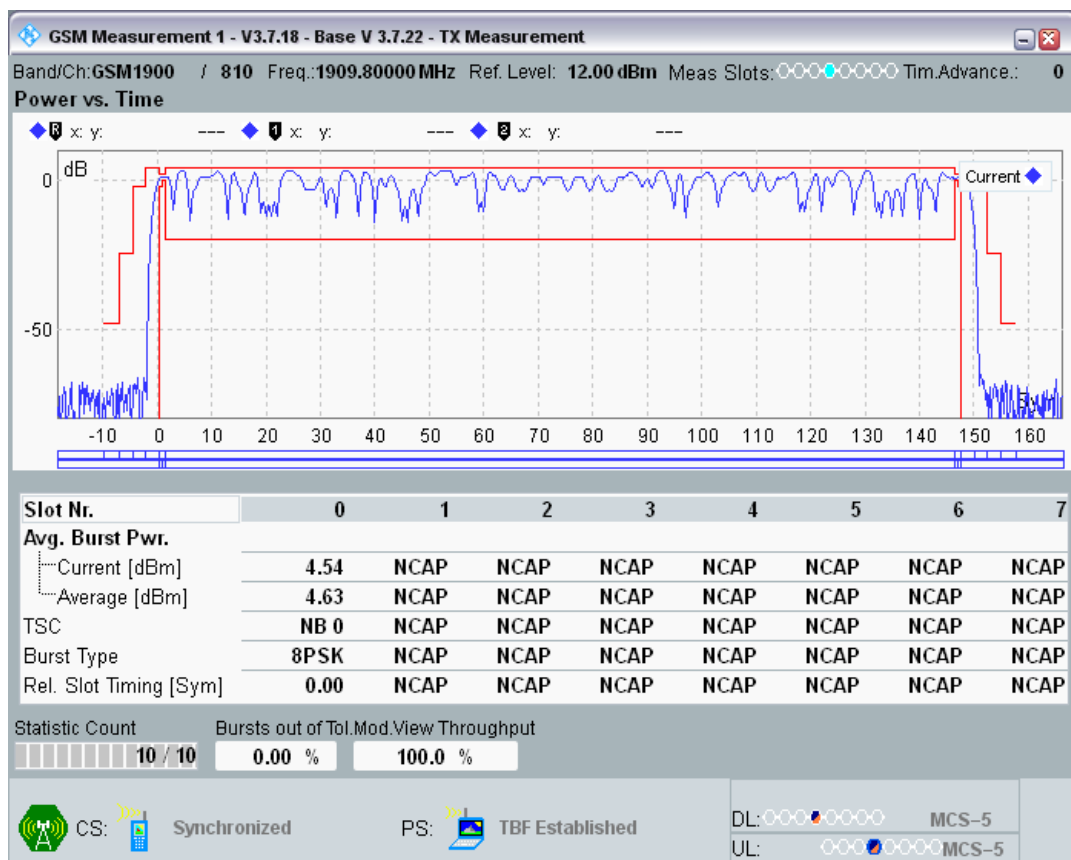

EGPRS1900 Channel=810 Gamma=16;16;16;16




EGPRS1900 Channel=810 Gamma=17;17;17;17



EGPRS1900 Channel=810 Gamma=18;18;18;18




EGPRS850 Channel=128 Gamma=6;6;6;6

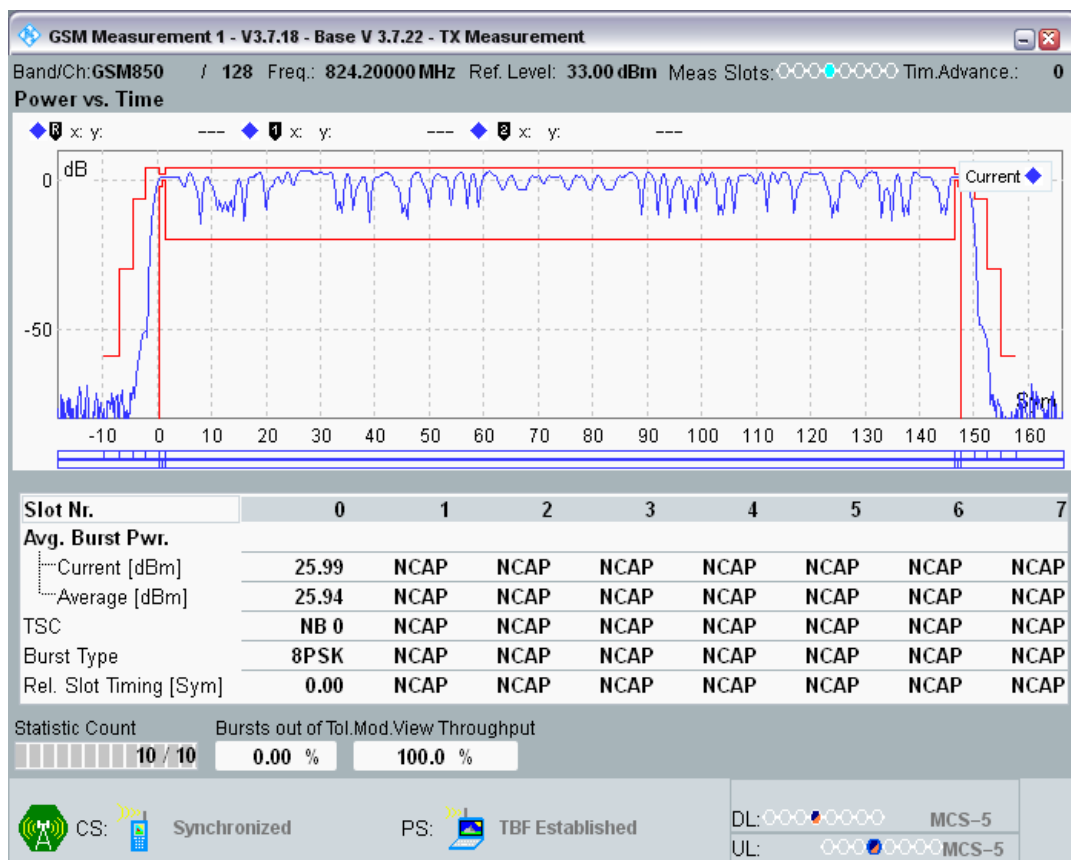


EGPRS850 Channel=128 Gamma=7;7;7;7




EGPRS850 Channel=128 Gamma=8;8;8;8

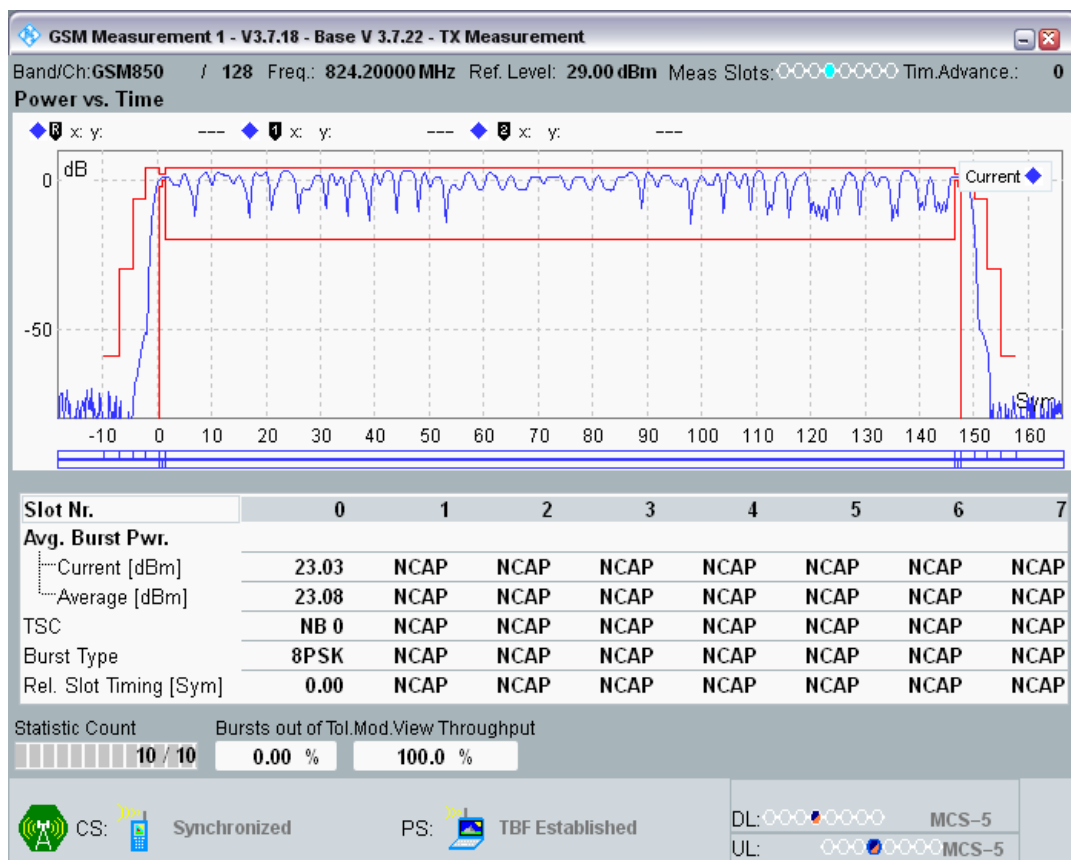

EGPRS850 Channel=128 Gamma=9;9;9;9

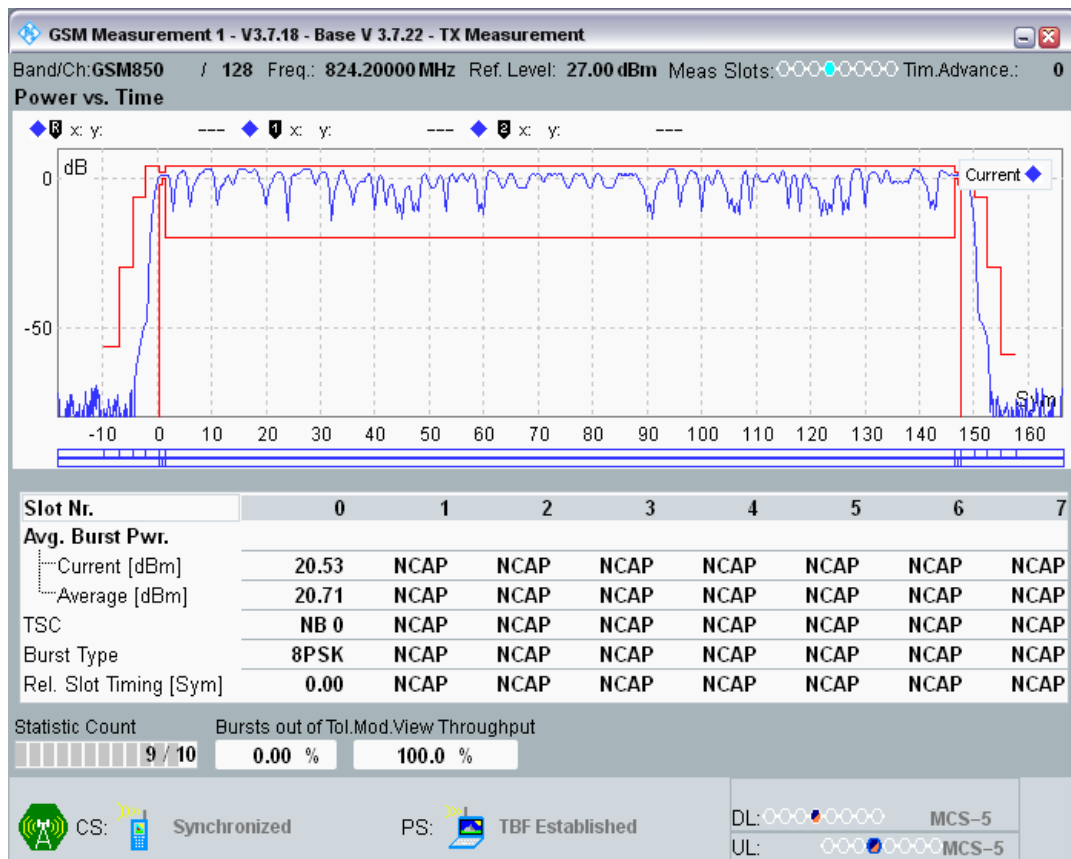


EGPRS850 Channel=128 Gamma=10;10;10;10

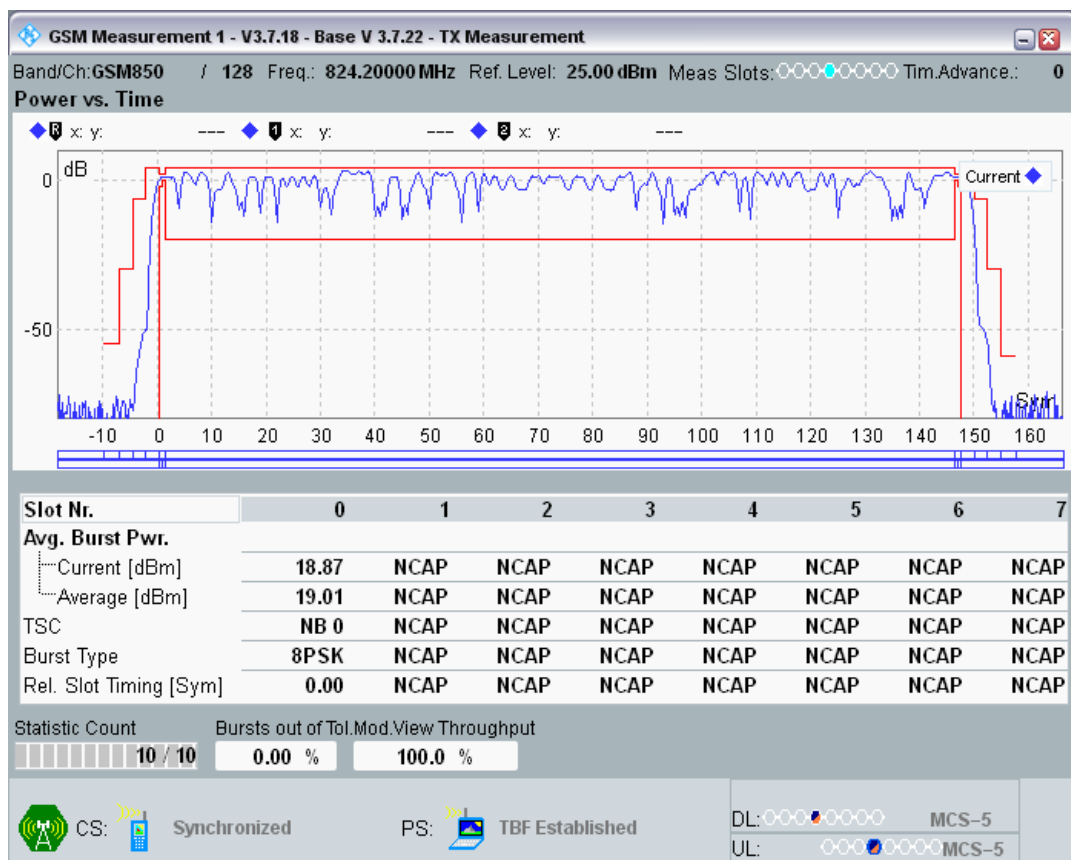


EGPRS850 Channel=128 Gamma=11;11;11;11




EGPRS850 Channel=128 Gamma=12;12;12;12

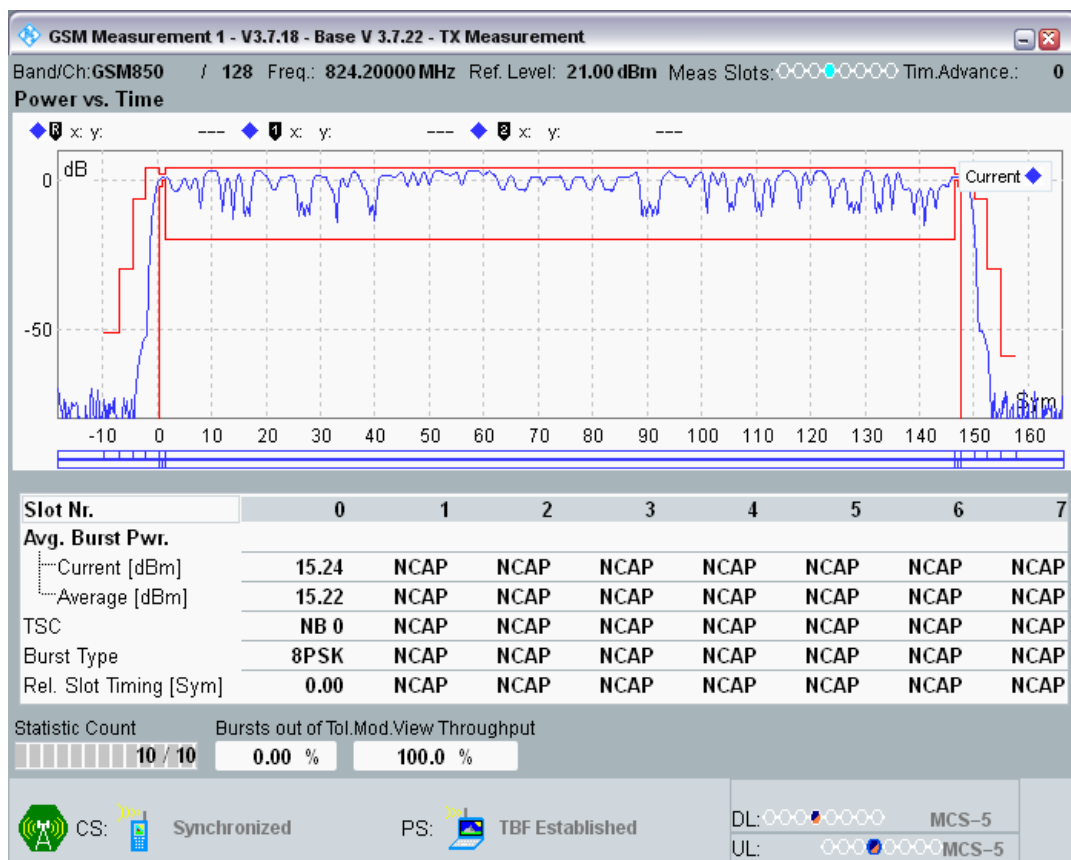

EGPRS850 Channel=128 Gamma=13;13;13;13

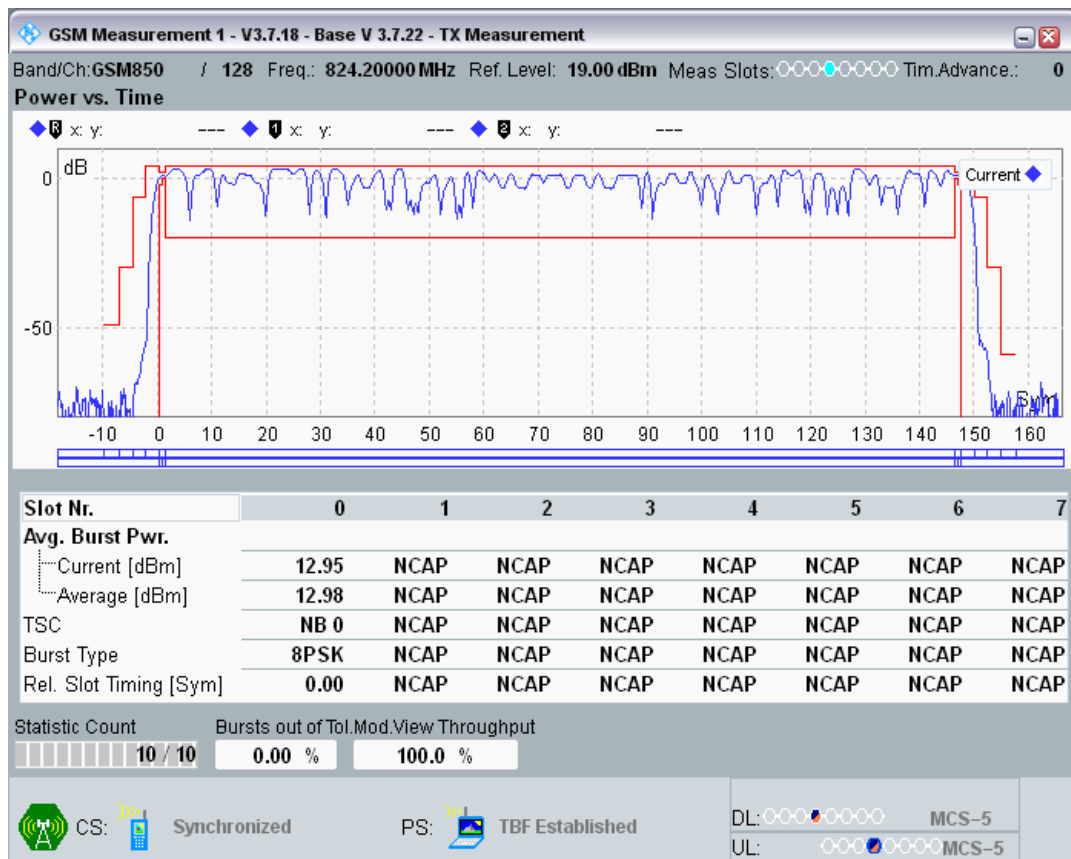


EGPRS850 Channel=128 Gamma=14;14;14;14

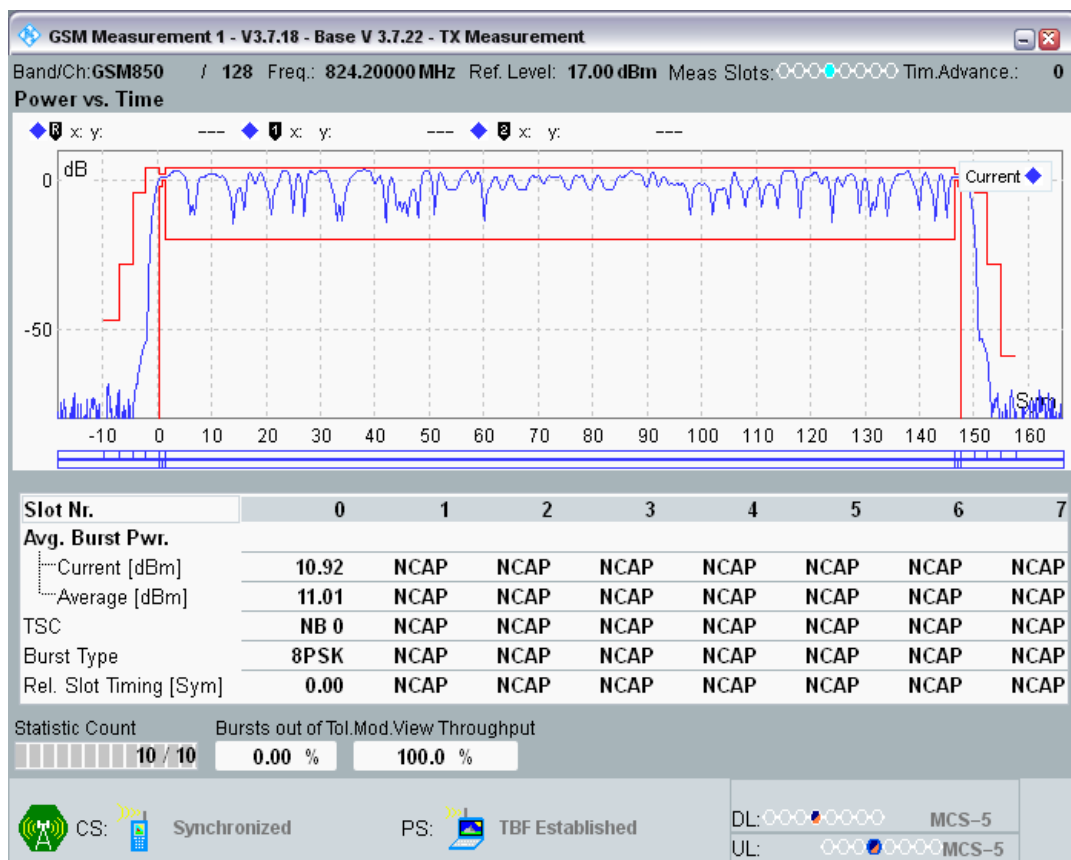


EGPRS850 Channel=128 Gamma=15;15;15;15




EGPRS850 Channel=128 Gamma=16;16;16;16

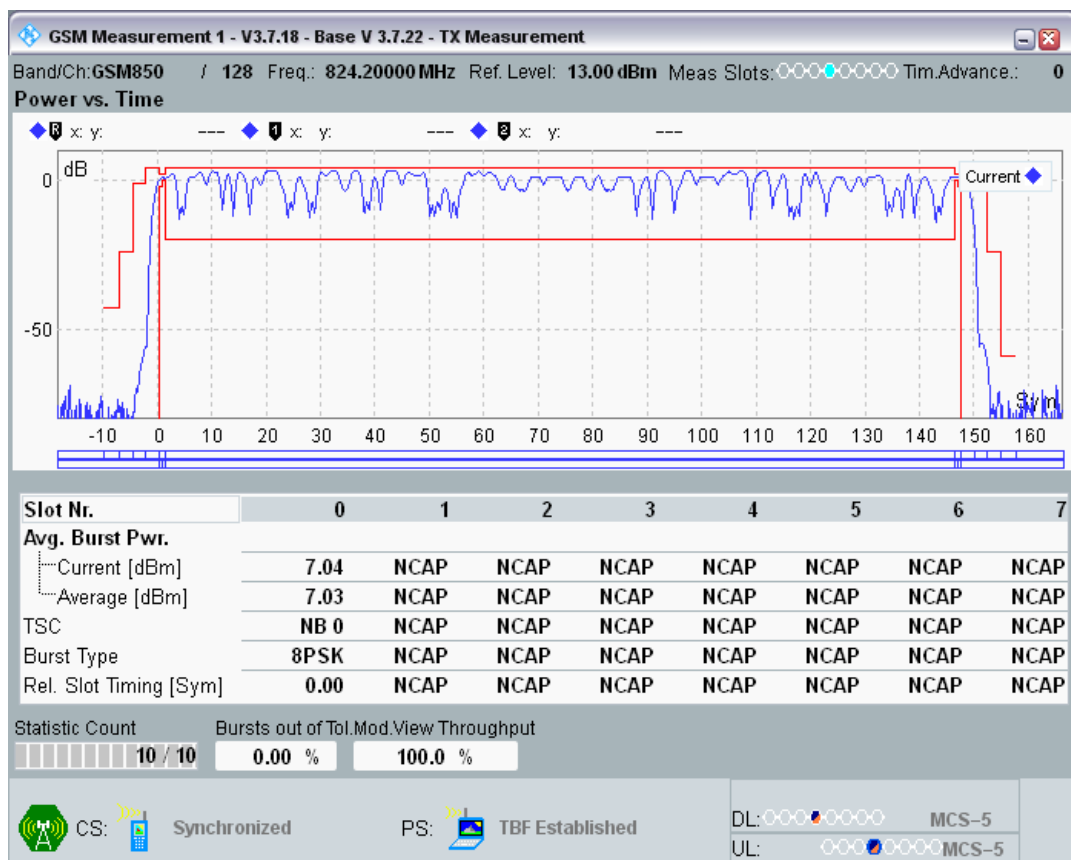

EGPRS850 Channel=128 Gamma=17;17;17;17

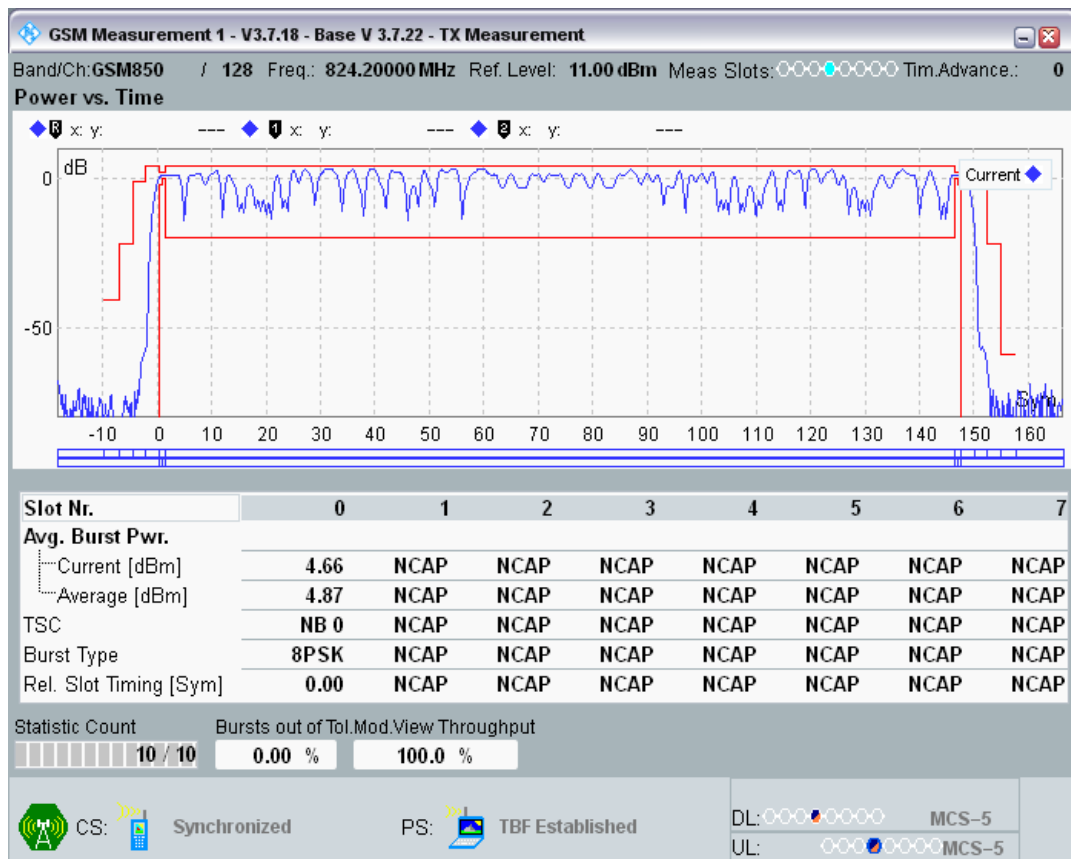


EGPRS850 Channel=190 Gamma=6;6;6;6

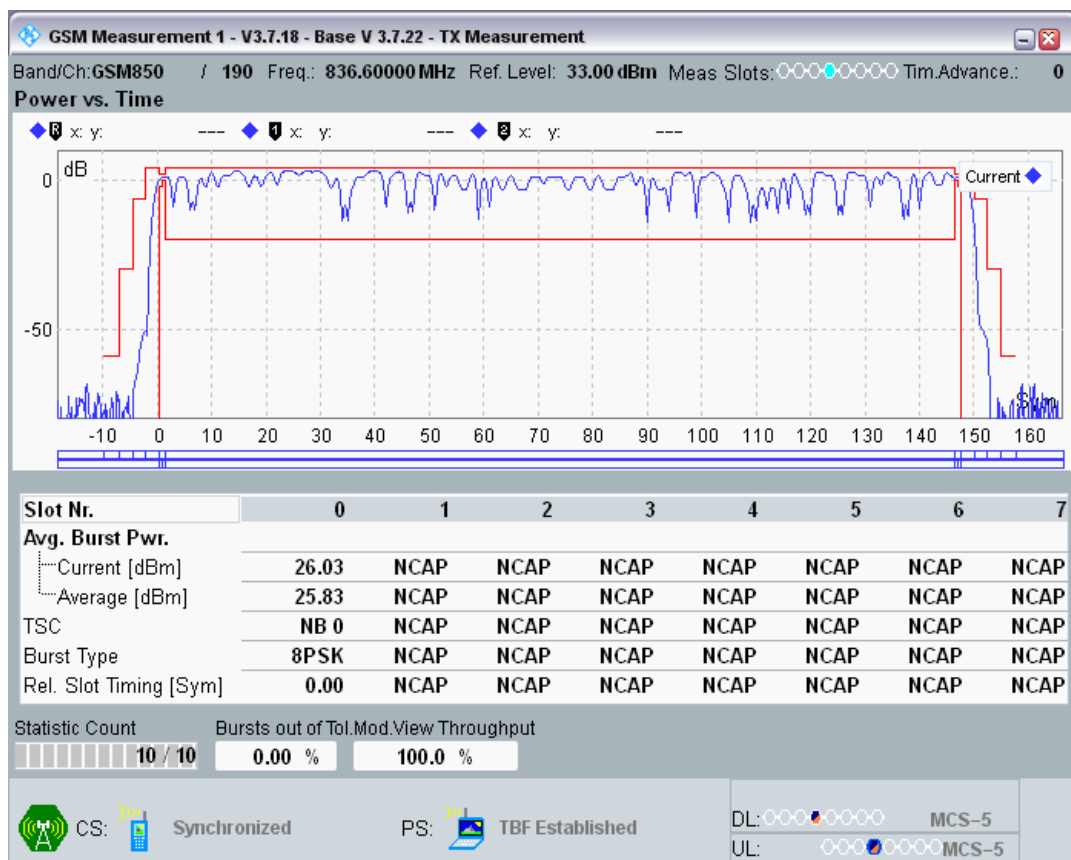


EGPRS850 Channel=190 Gamma=7;7;7;7




EGPRS850 Channel=190 Gamma=8;8;8;8

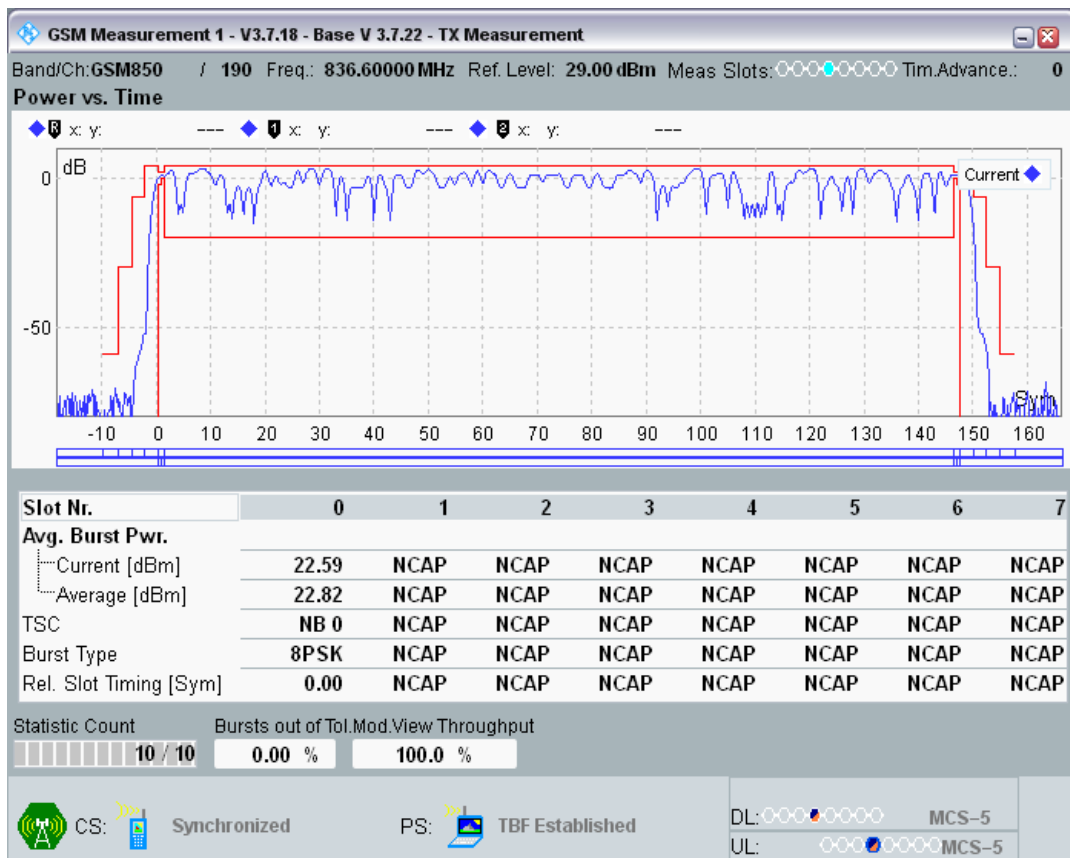

EGPRS850 Channel=190 Gamma=9;9;9;9

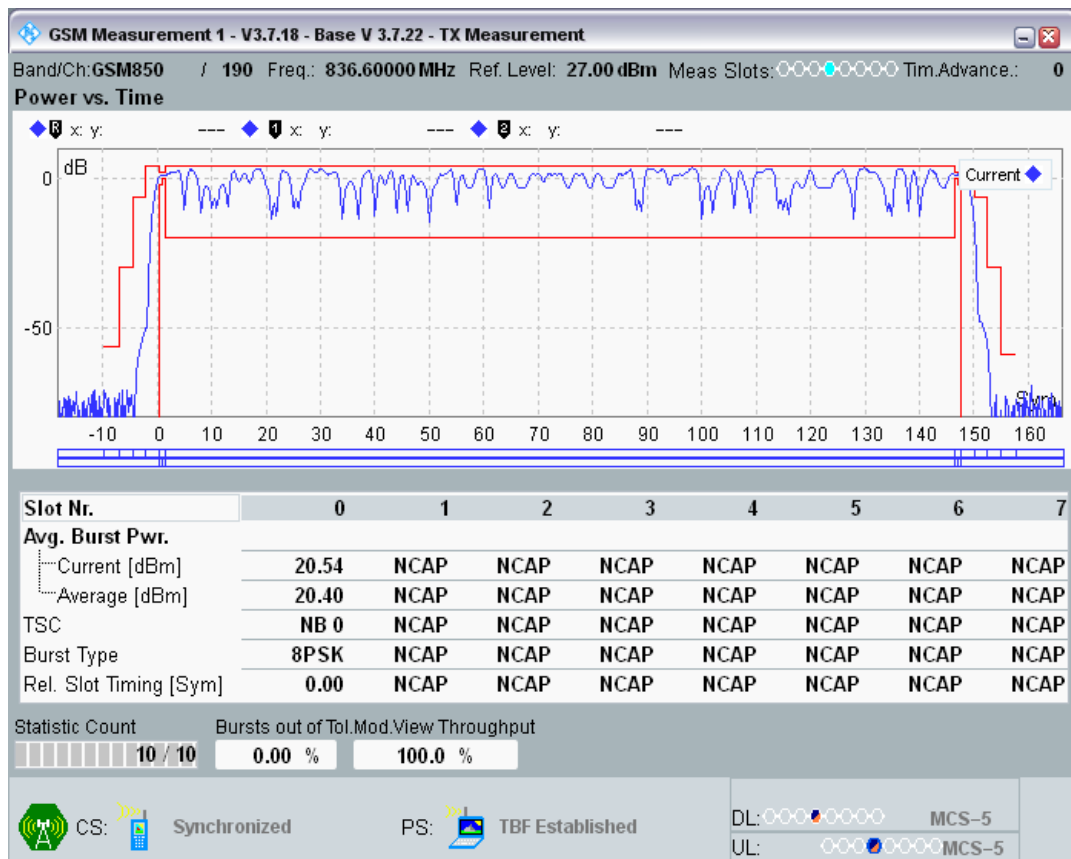


EGPRS850 Channel=190 Gamma=10;10;10;10

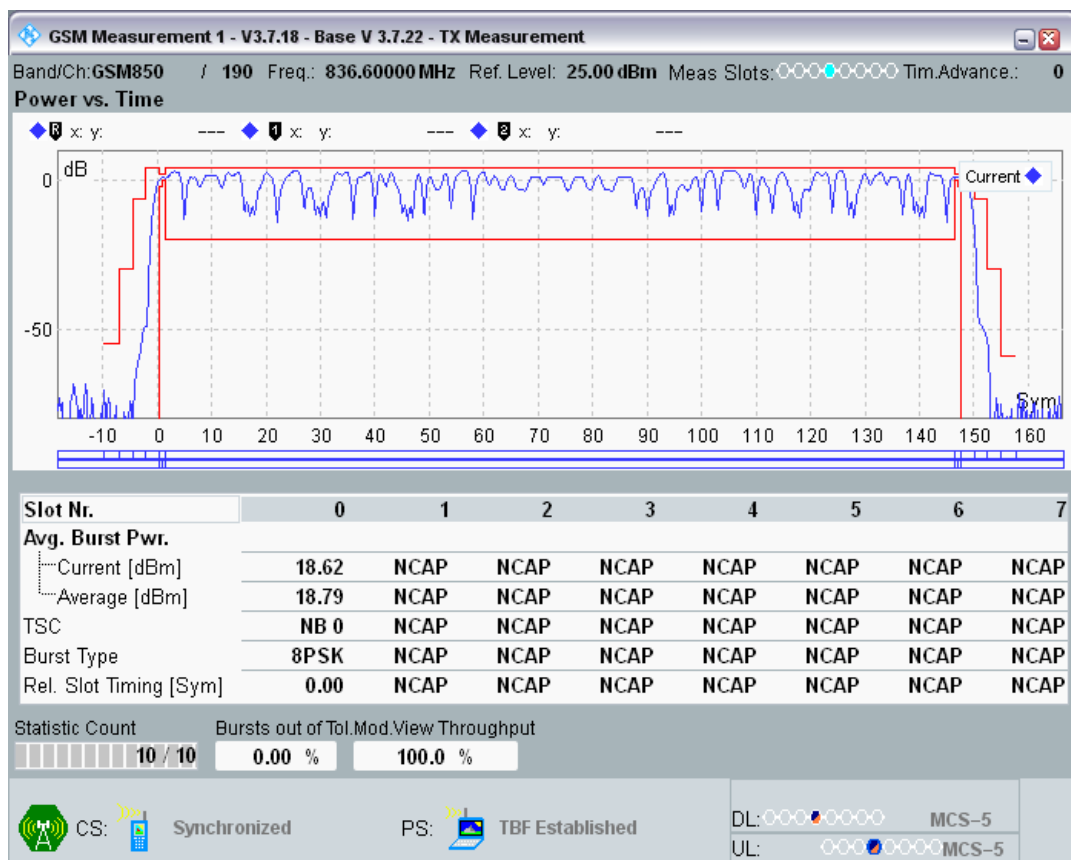


EGPRS850 Channel=190 Gamma=11;11;11;11




EGPRS850 Channel=190 Gamma=12;12;12;12

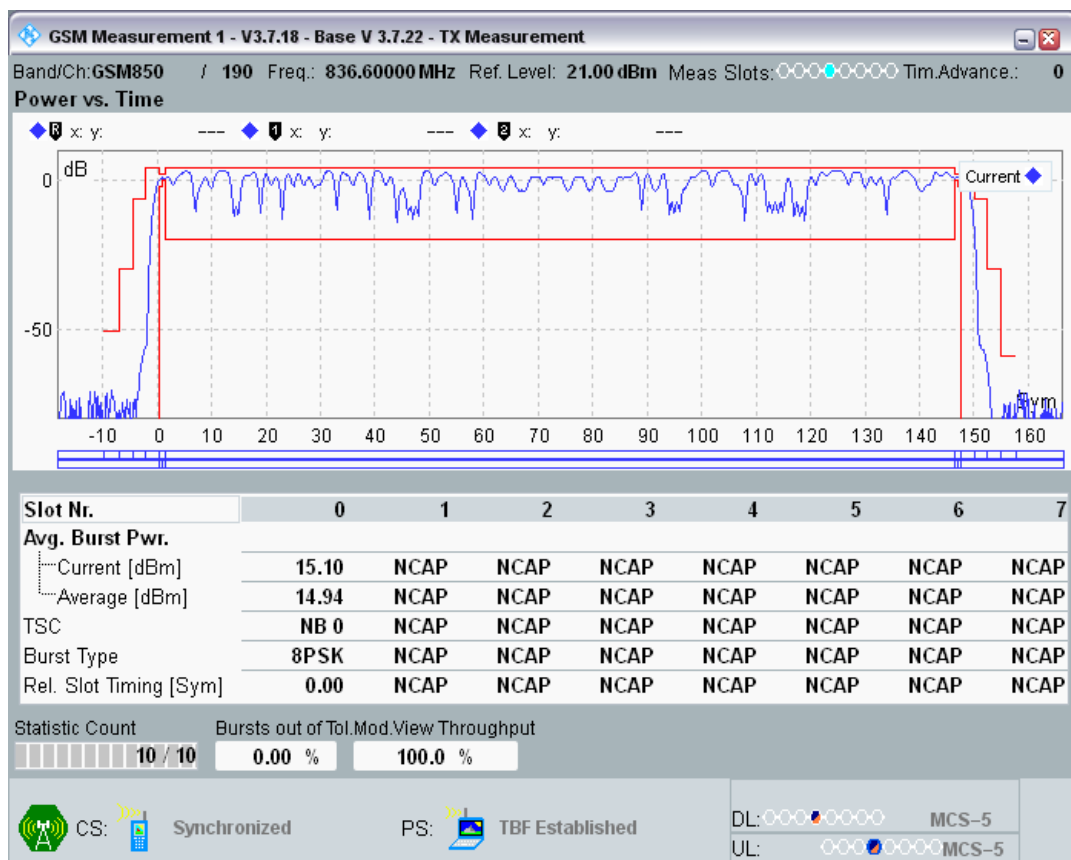


EGPRS850 Channel=190 Gamma=13;13;13;13

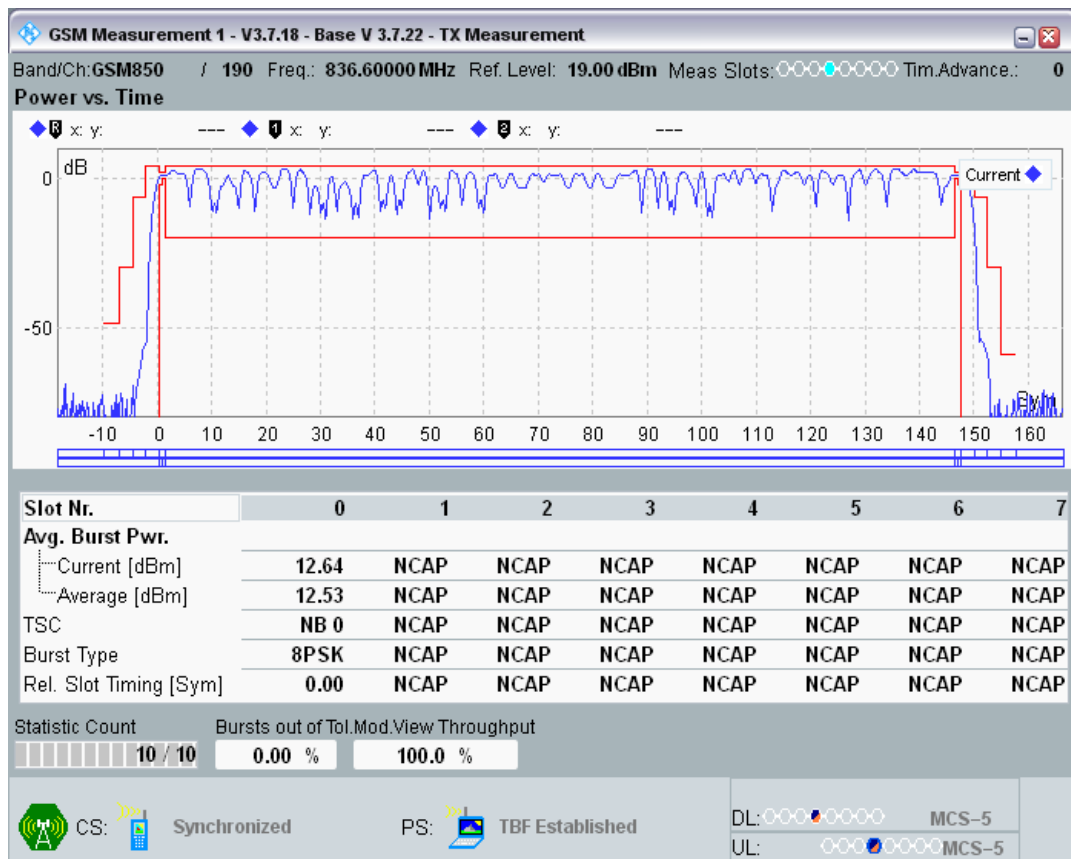


EGPRS850 Channel=190 Gamma=14;14;14;14

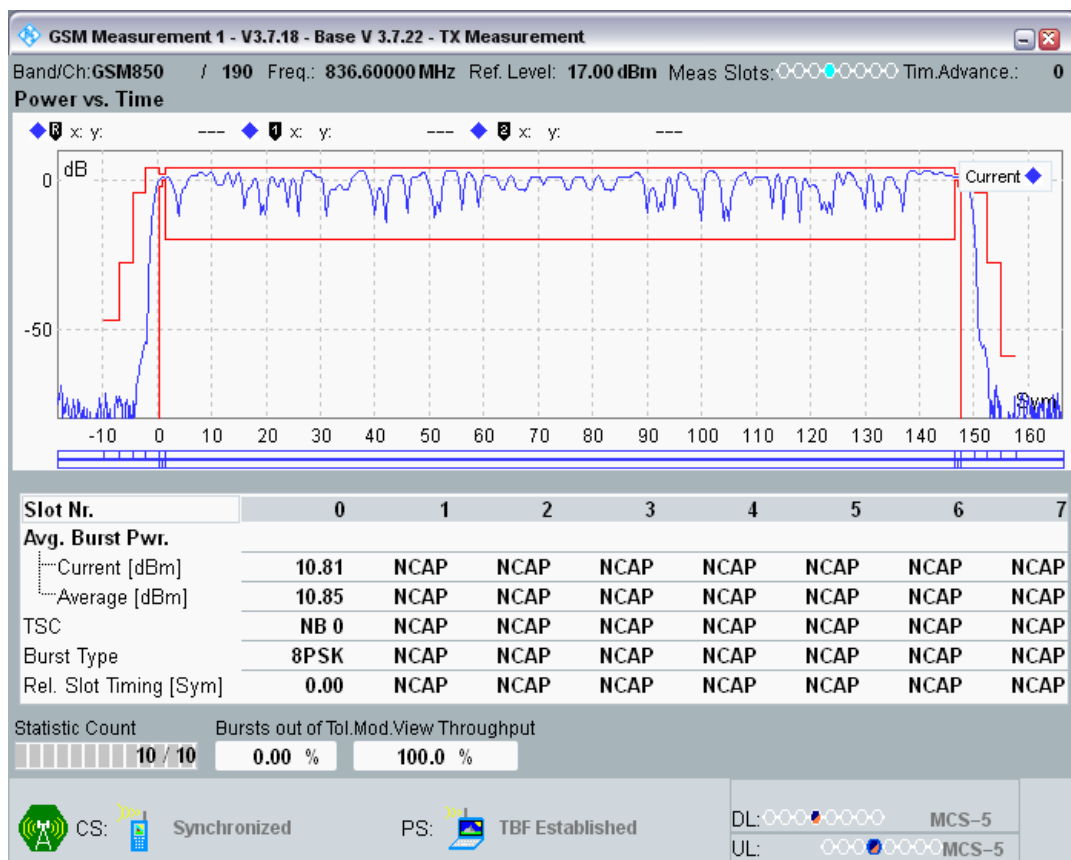


EGPRS850 Channel=190 Gamma=15;15;15;15

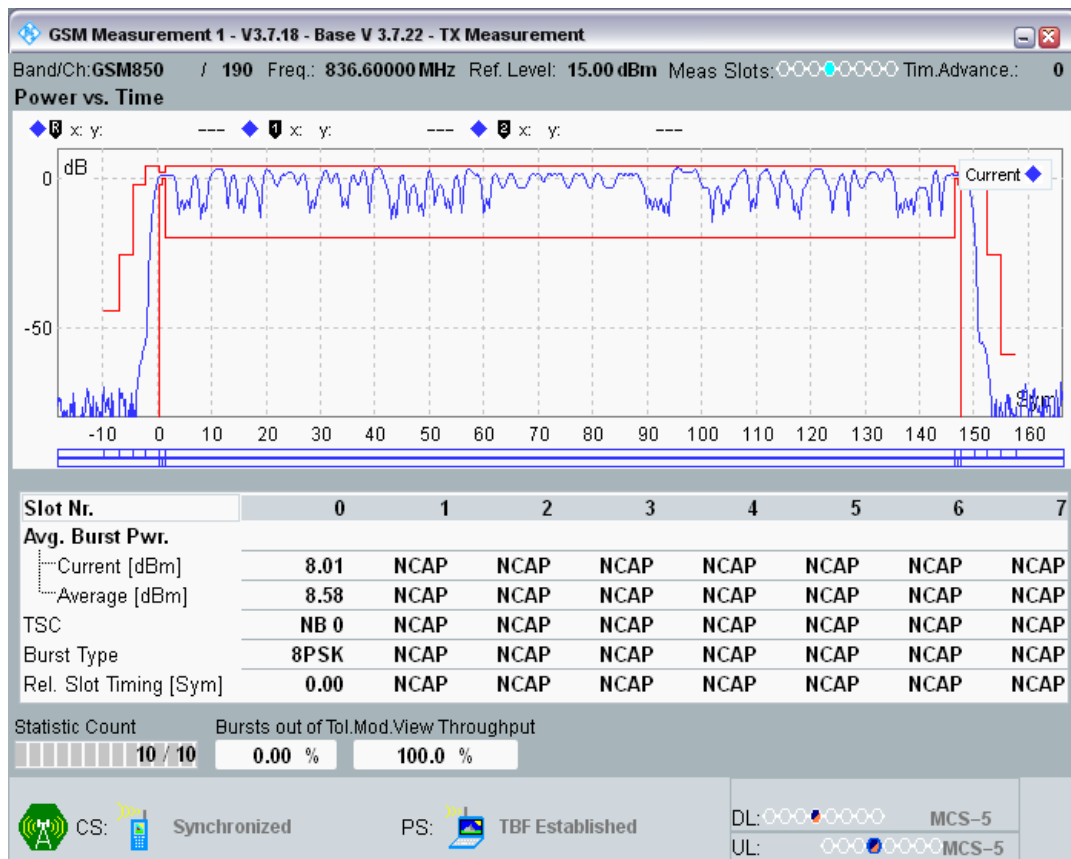


EGPRS850 Channel=190 Gamma=16;16;16;16

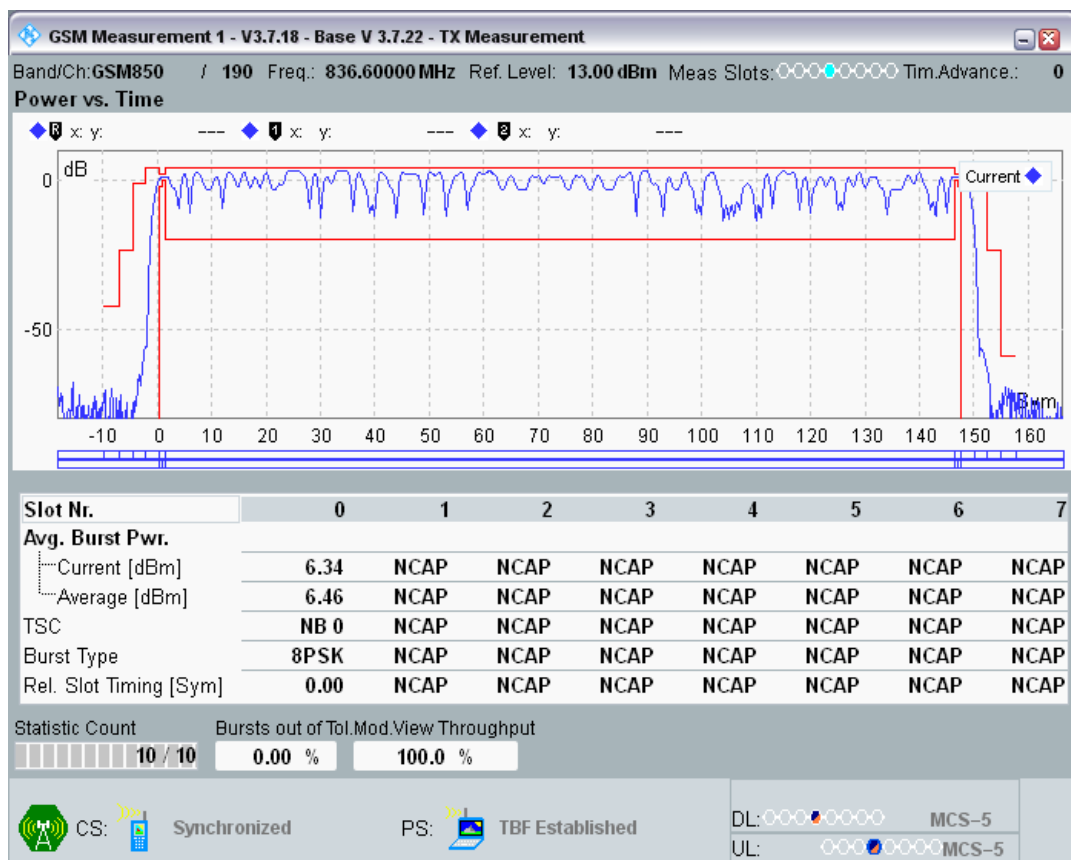

EGPRS850 Channel=190 Gamma=17;17;17;17

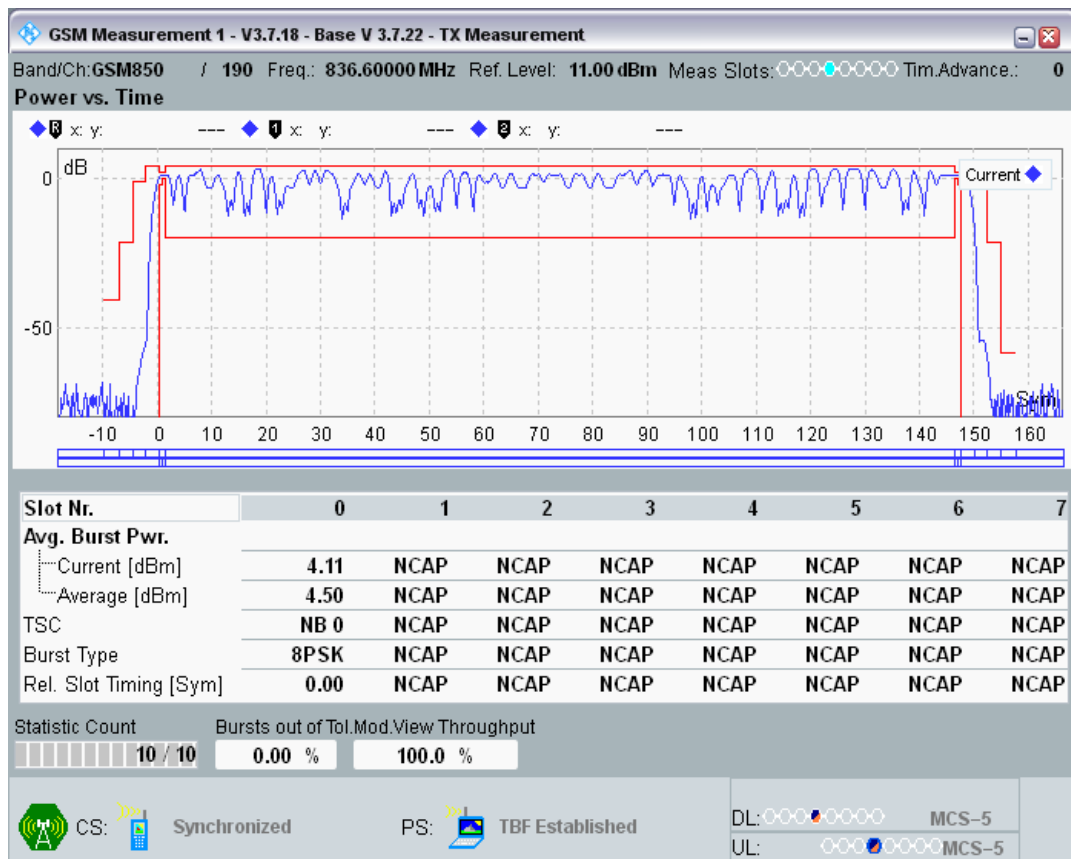


EGPRS850 Channel=251 Gamma=6;6;6;6

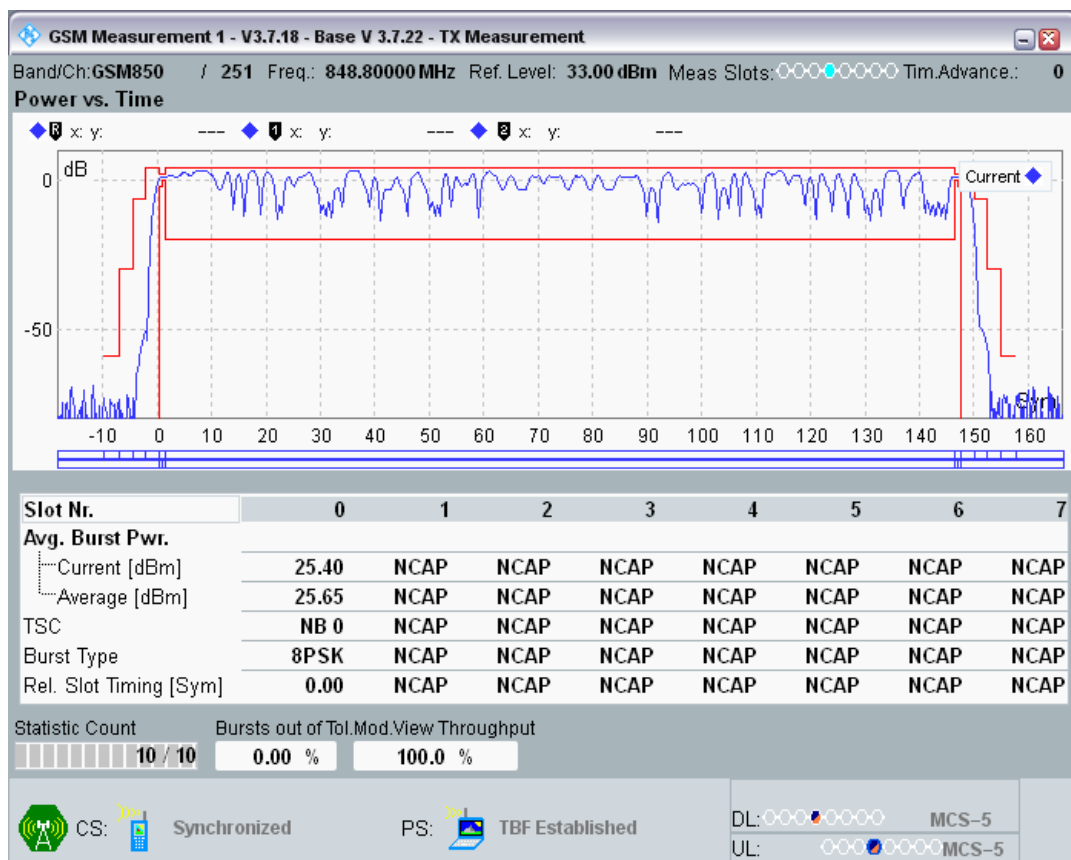


EGPRS850 Channel=251 Gamma=7;7;7;7




EGPRS850 Channel=251 Gamma=8;8;8;8

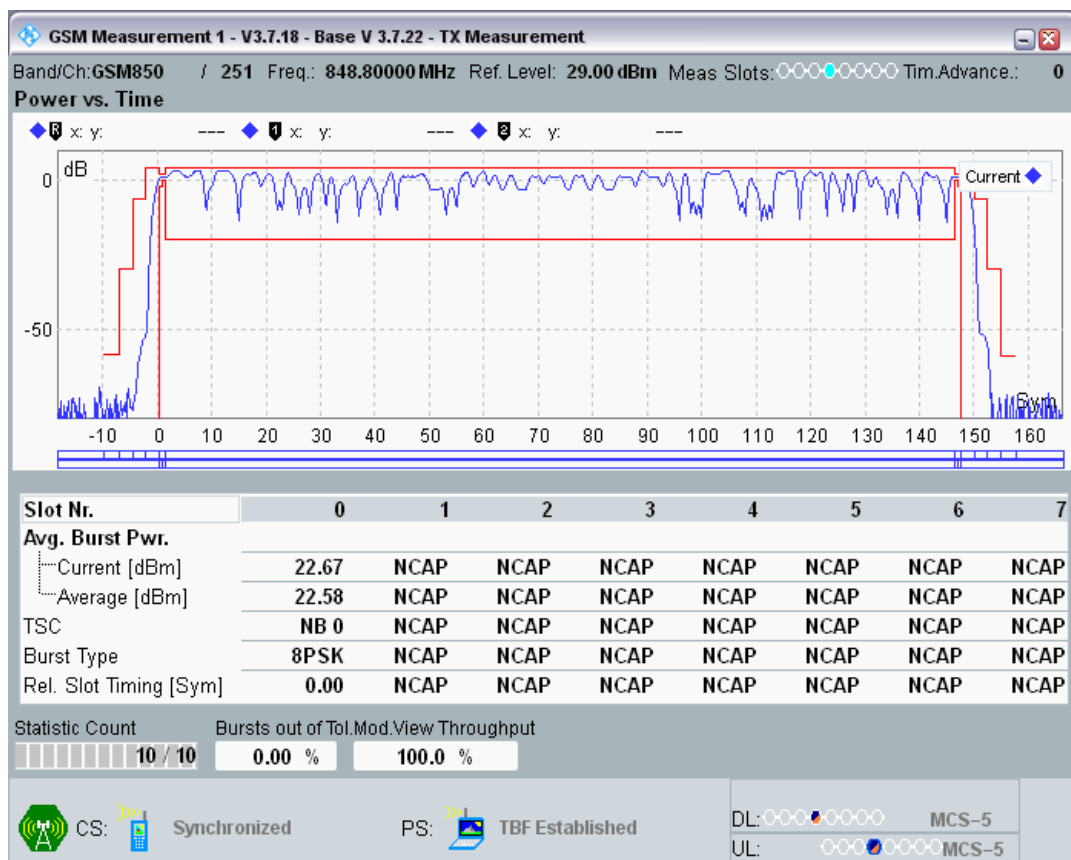


EGPRS850 Channel=251 Gamma=9;9;9;9

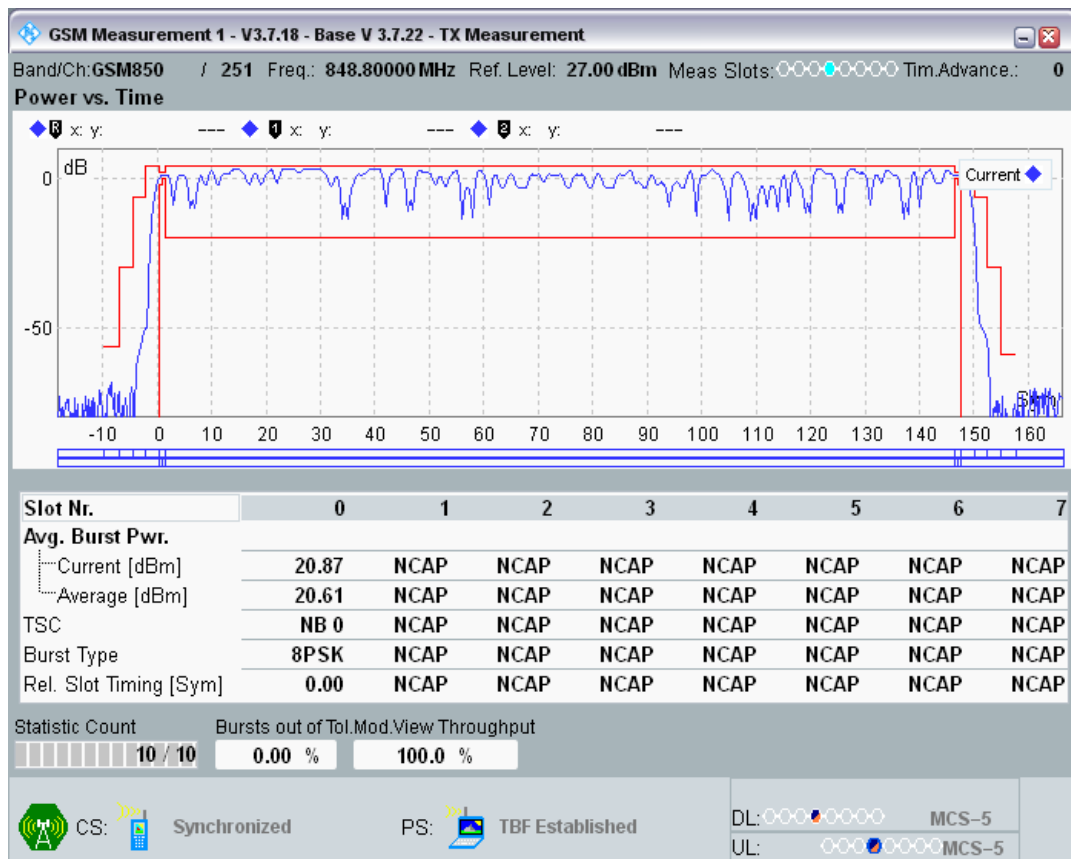


EGPRS850 Channel=251 Gamma=10;10;10;10

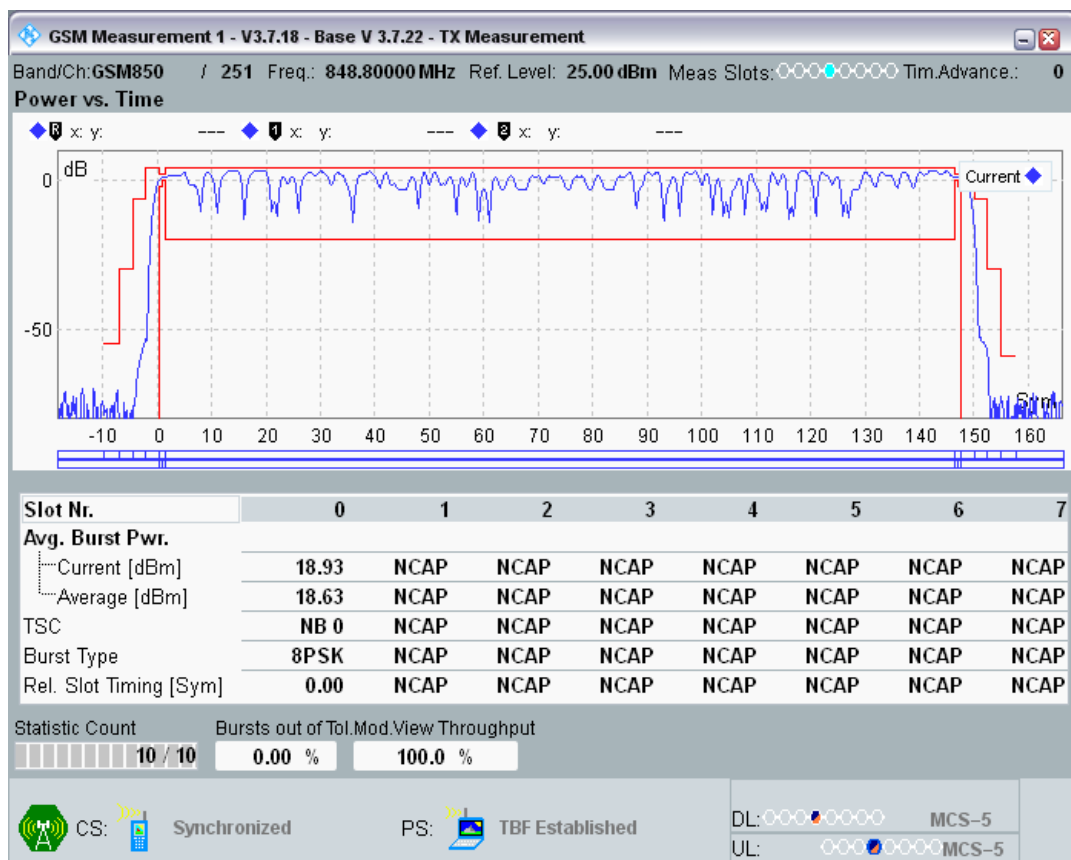


EGPRS850 Channel=251 Gamma=11;11;11;11

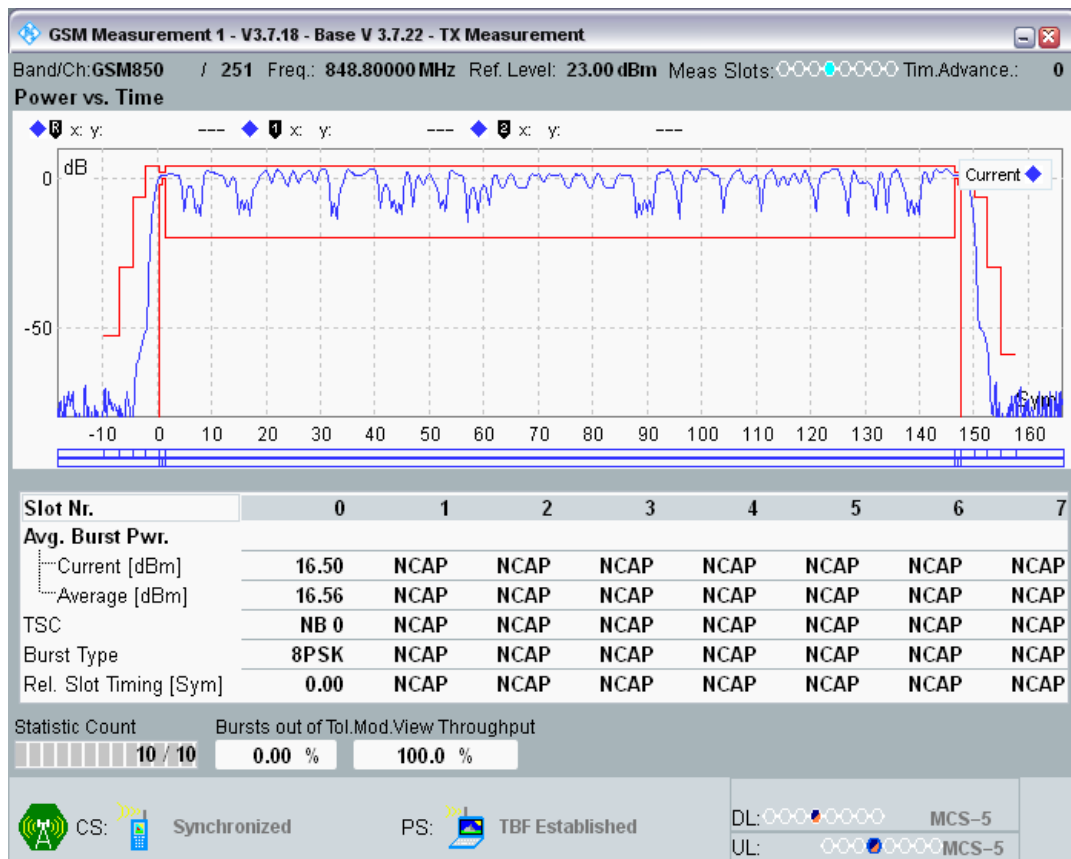


EGPRS850 Channel=251 Gamma=12;12;12;12

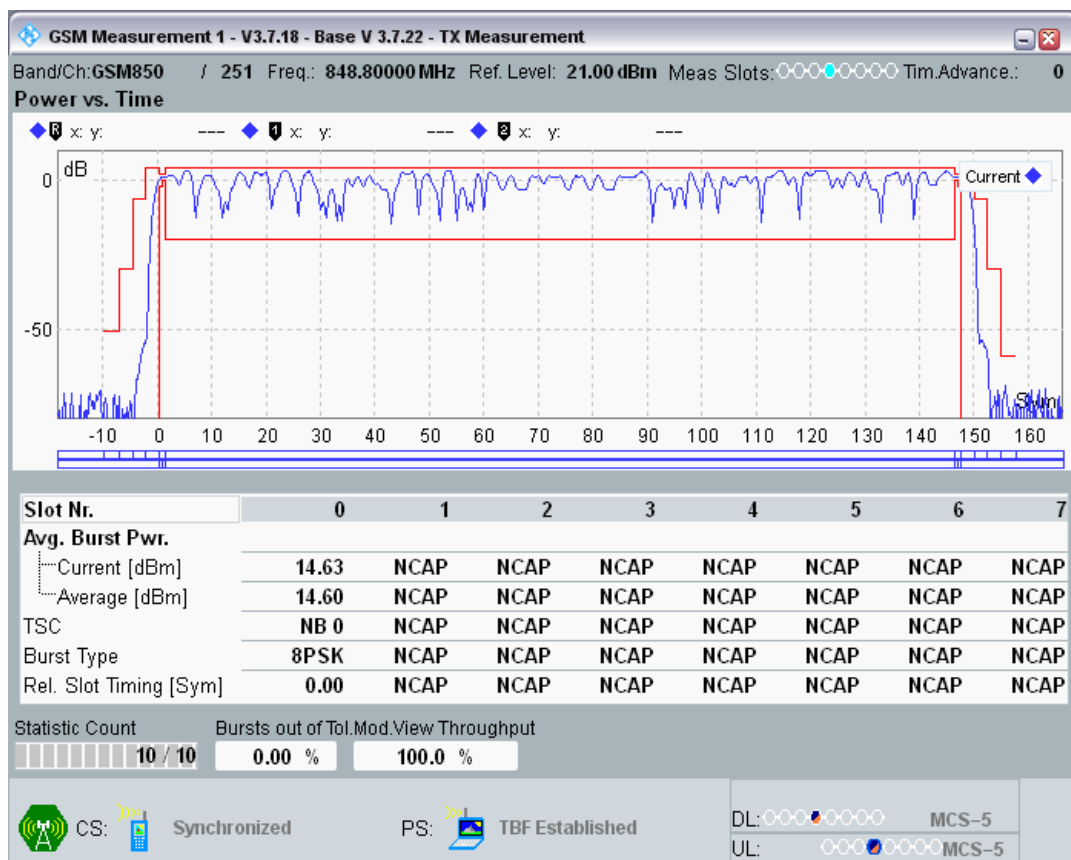

EGPRS850 Channel=251 Gamma=13;13;13;13

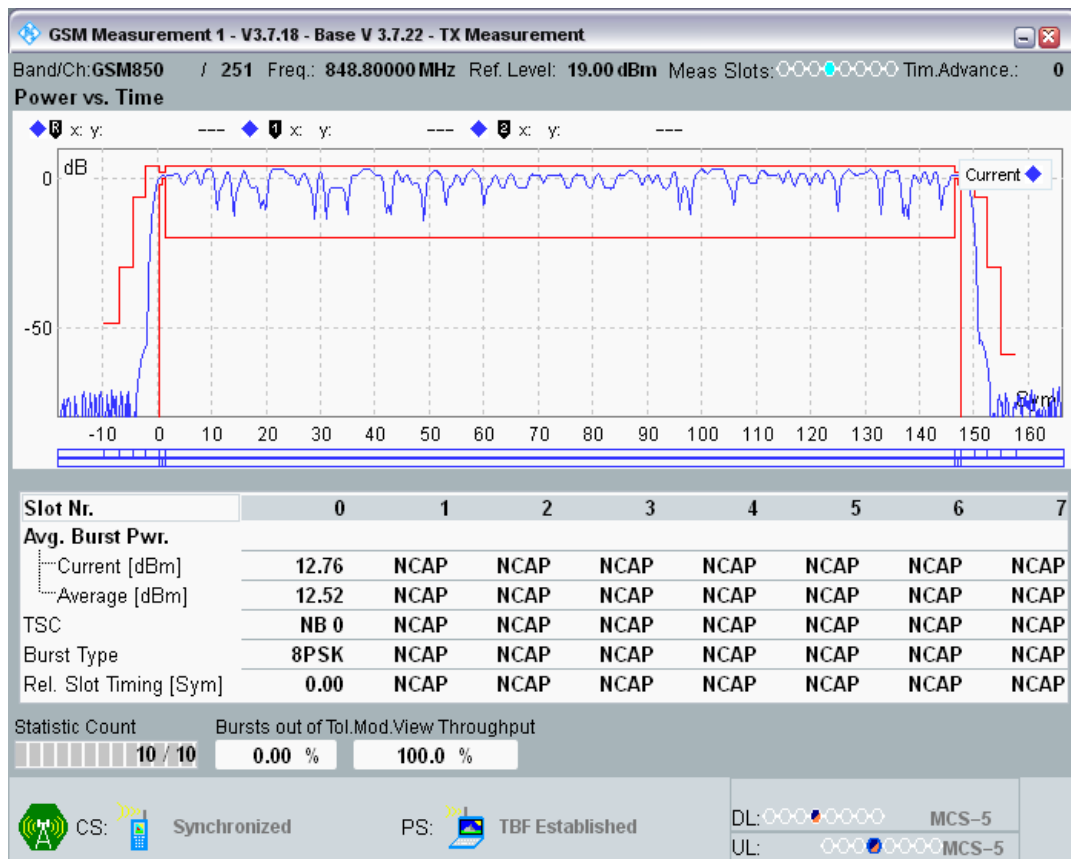


EGPRS850 Channel=251 Gamma=14;14;14;14

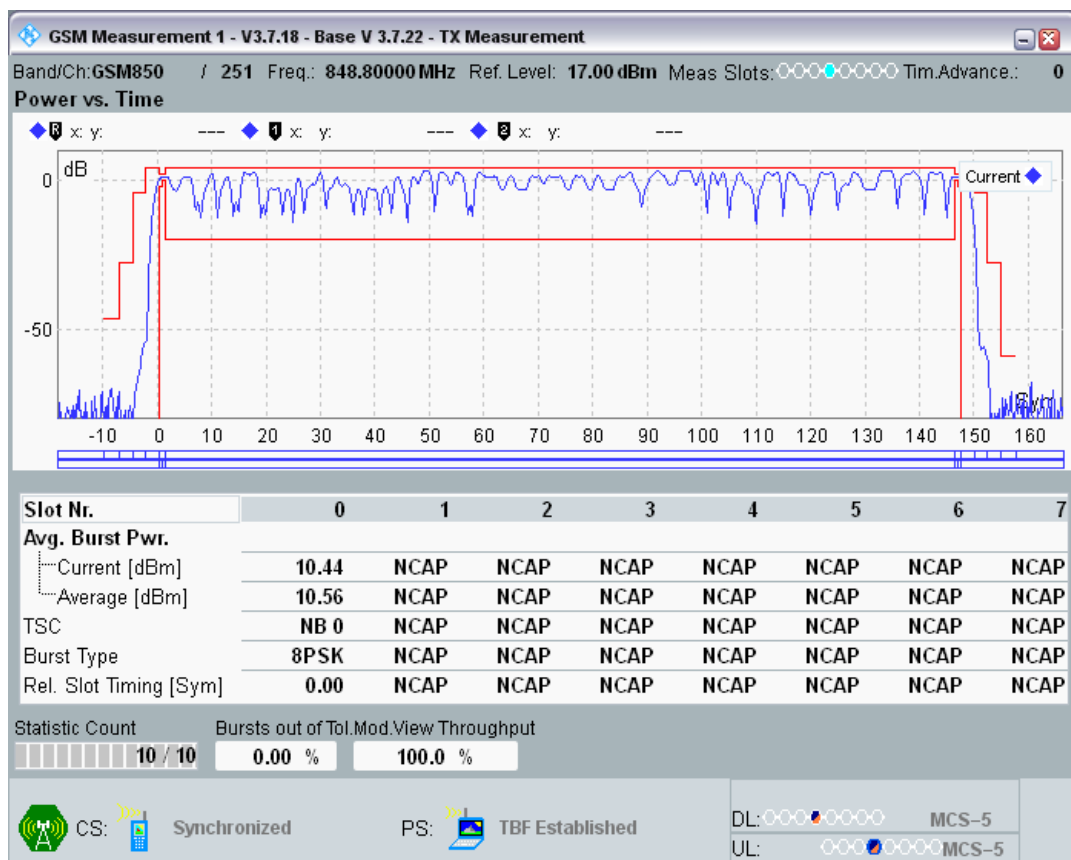


EGPRS850 Channel=251 Gamma=15;15;15;15




EGPRS850 Channel=251 Gamma=16;16;16;16

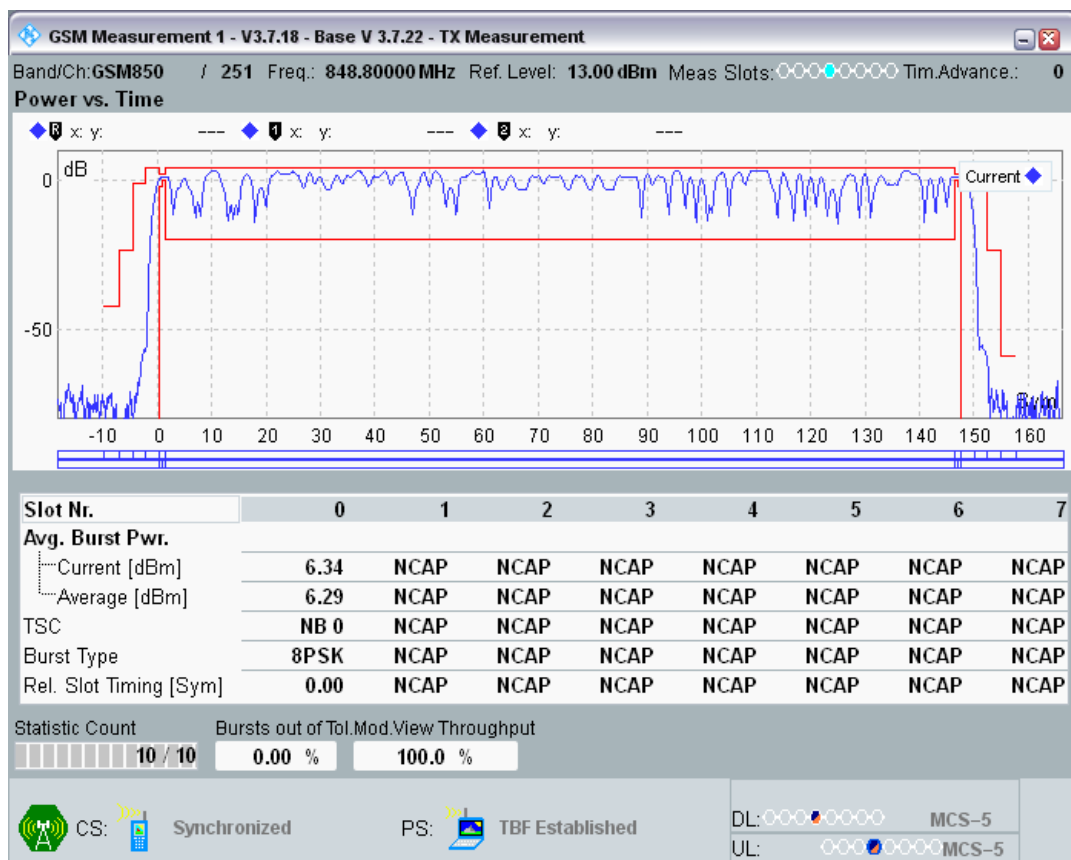


EGPRS850 Channel=251 Gamma=17;17;17;17

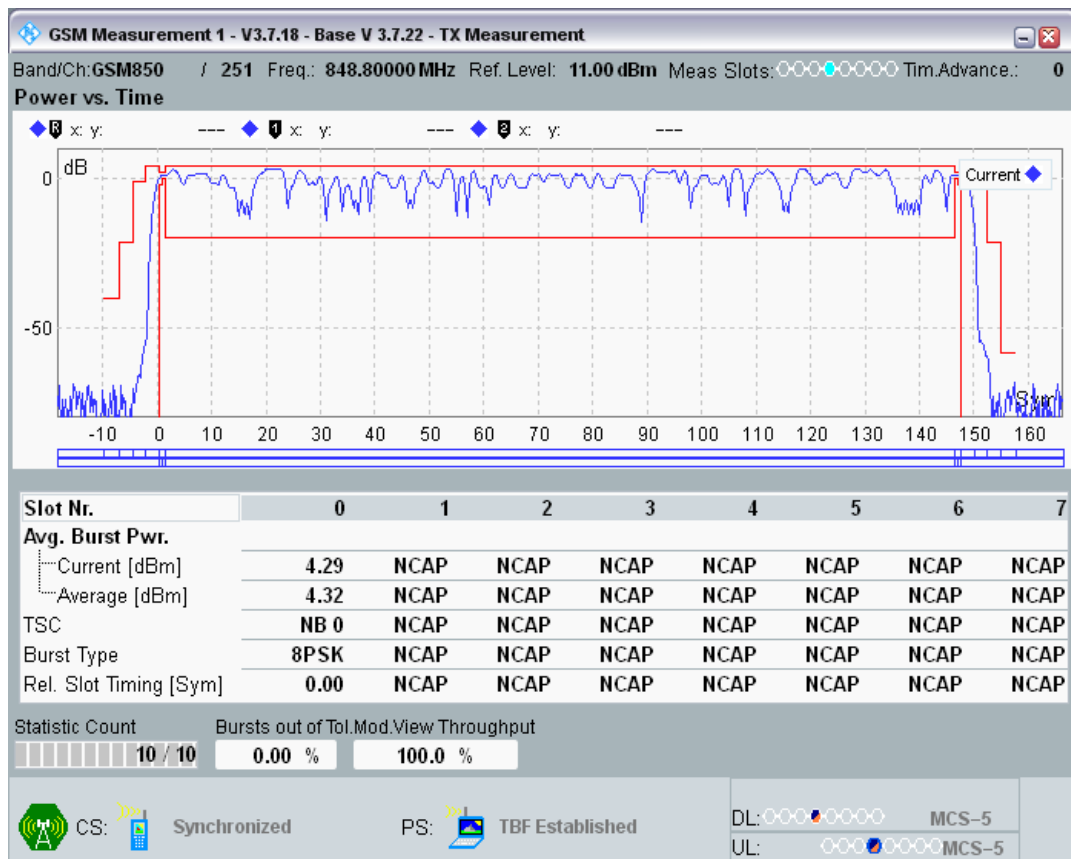


EGPRS900 Channel=975 Gamma=6;6;6;6

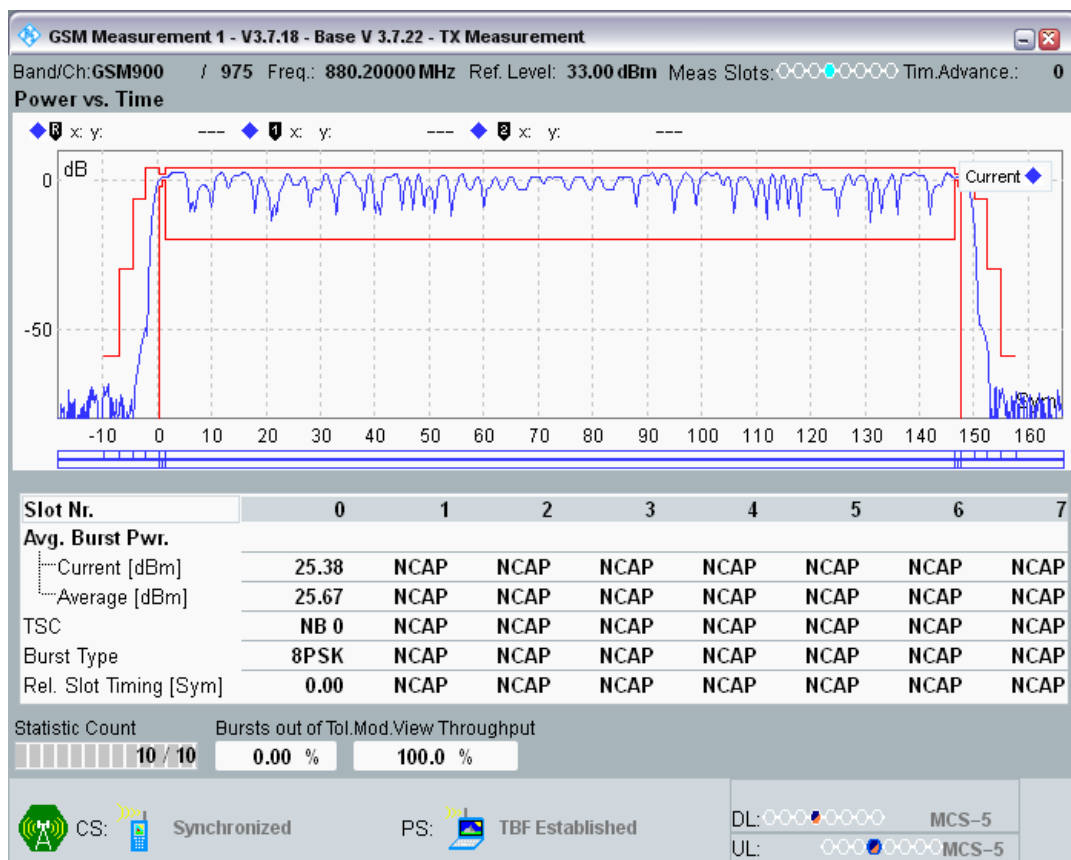


EGPRS900 Channel=975 Gamma=7;7;7;7

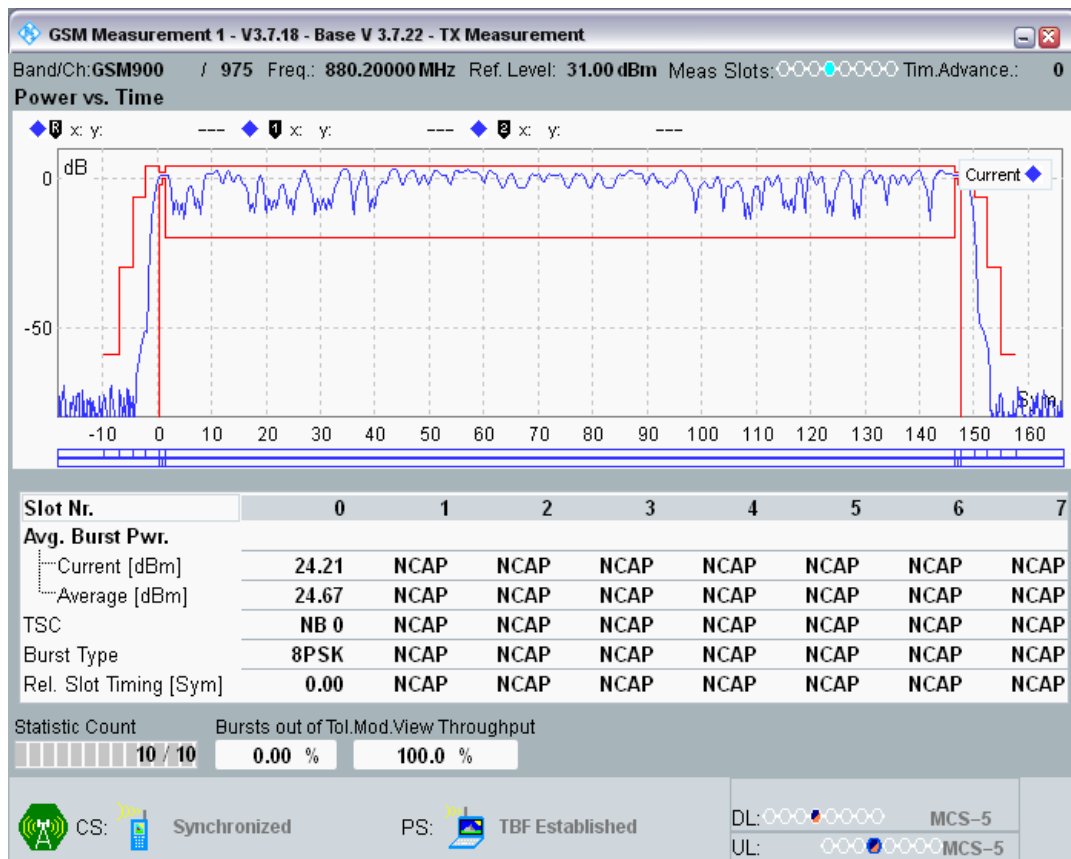


EGPRS900 Channel=975 Gamma=8;8;8;8

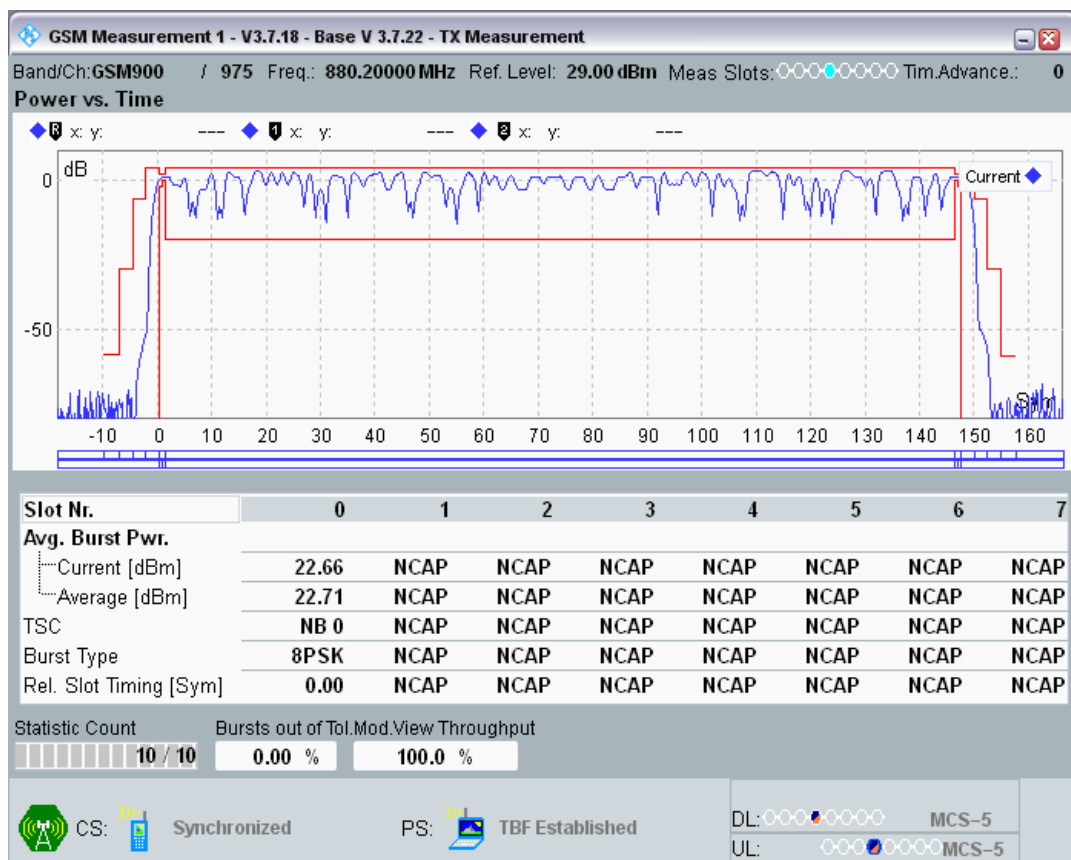


EGPRS900 Channel=975 Gamma=9;9;9;9

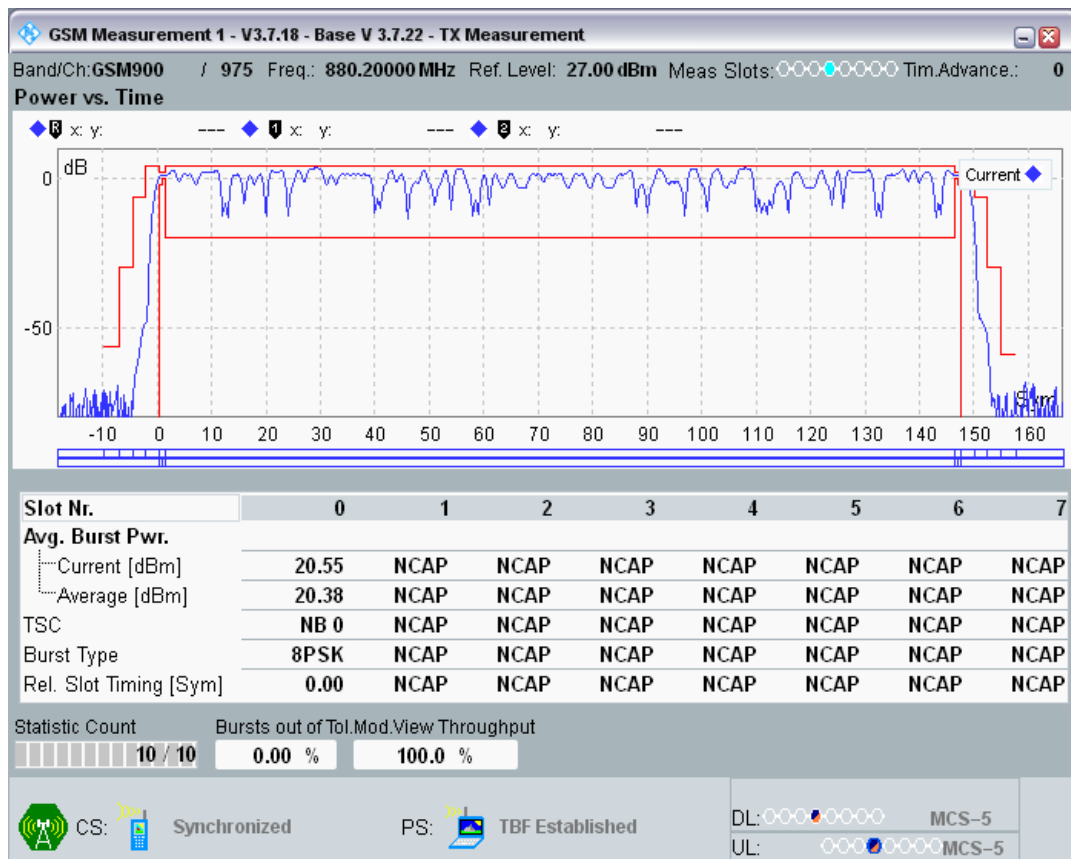


EGPRS900 Channel=975 Gamma=10;10;10;10

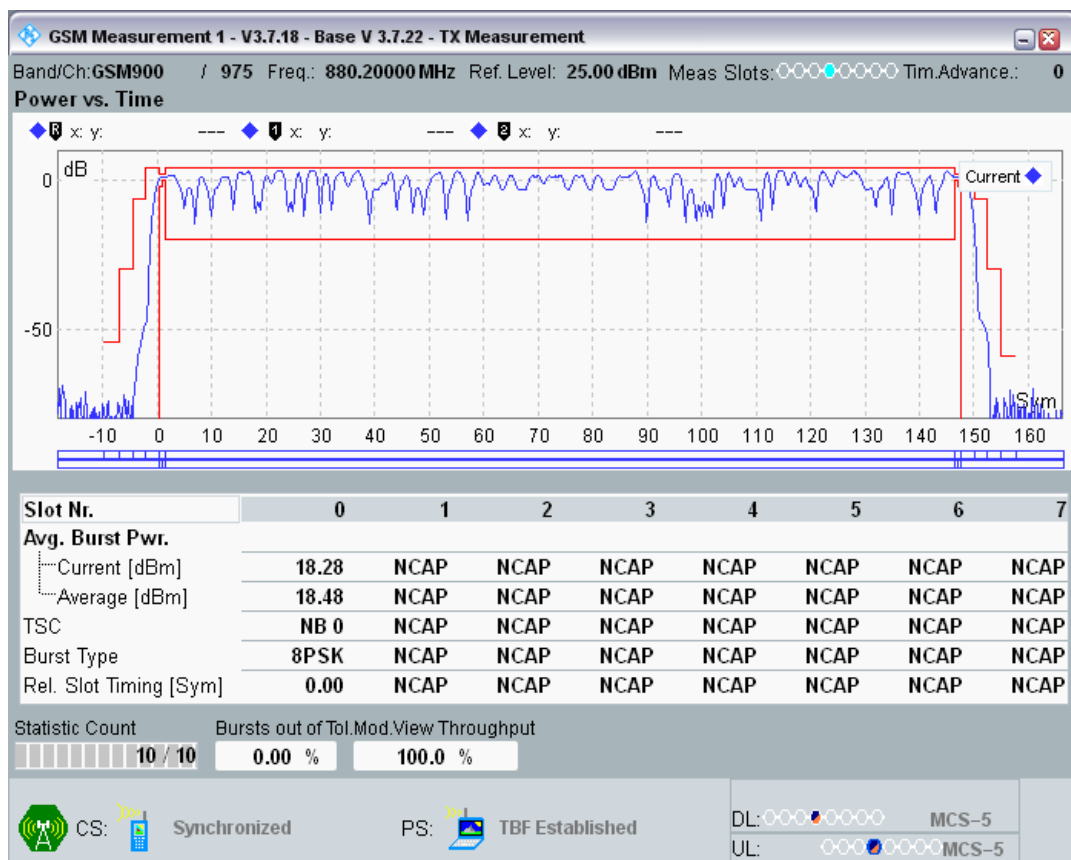

EGPRS900 Channel=975 Gamma=11;11;11;11

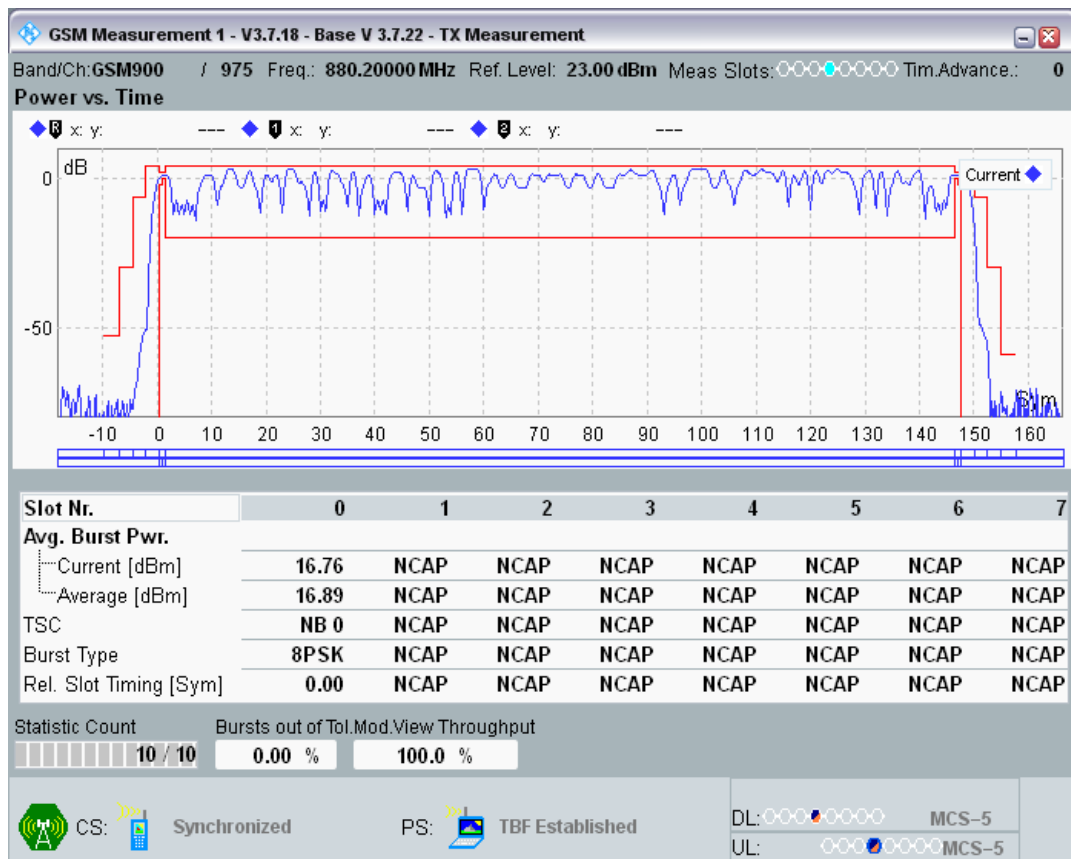


EGPRS900 Channel=975 Gamma=12;12;12;12

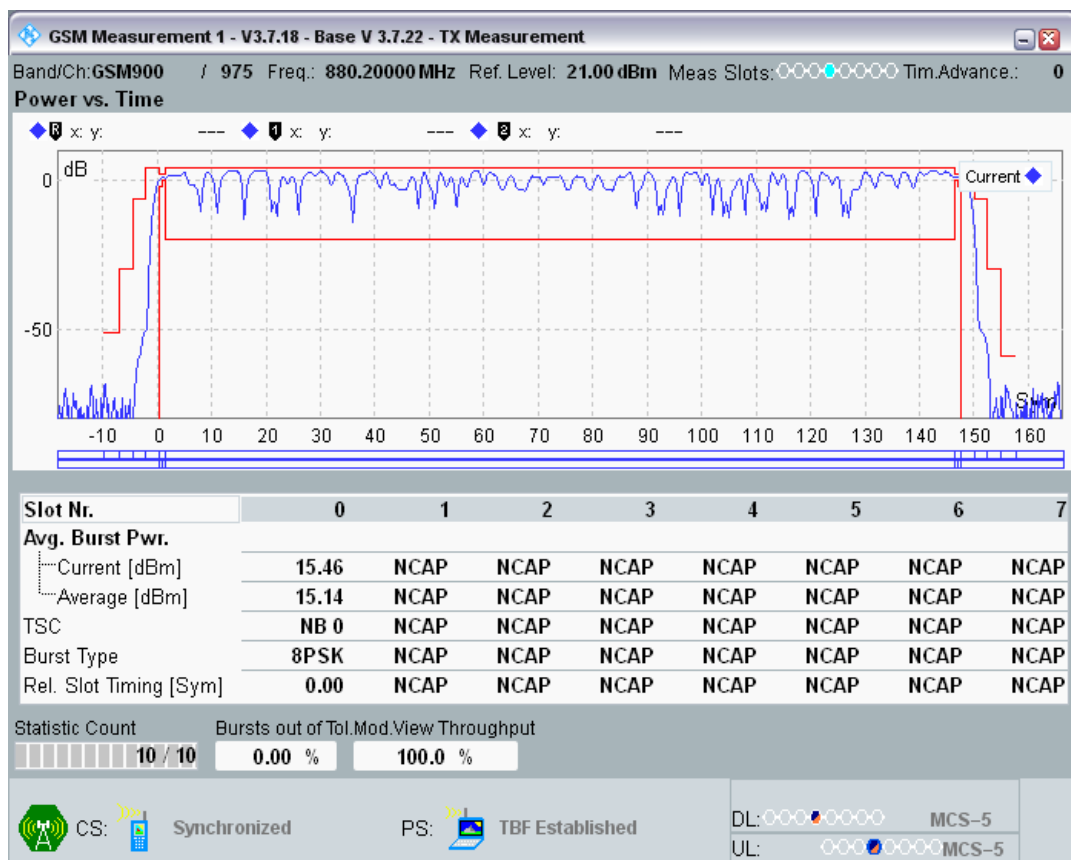

EGPRS900 Channel=975 Gamma=13;13;13;13




EGPRS900 Channel=975 Gamma=14;14;14;14

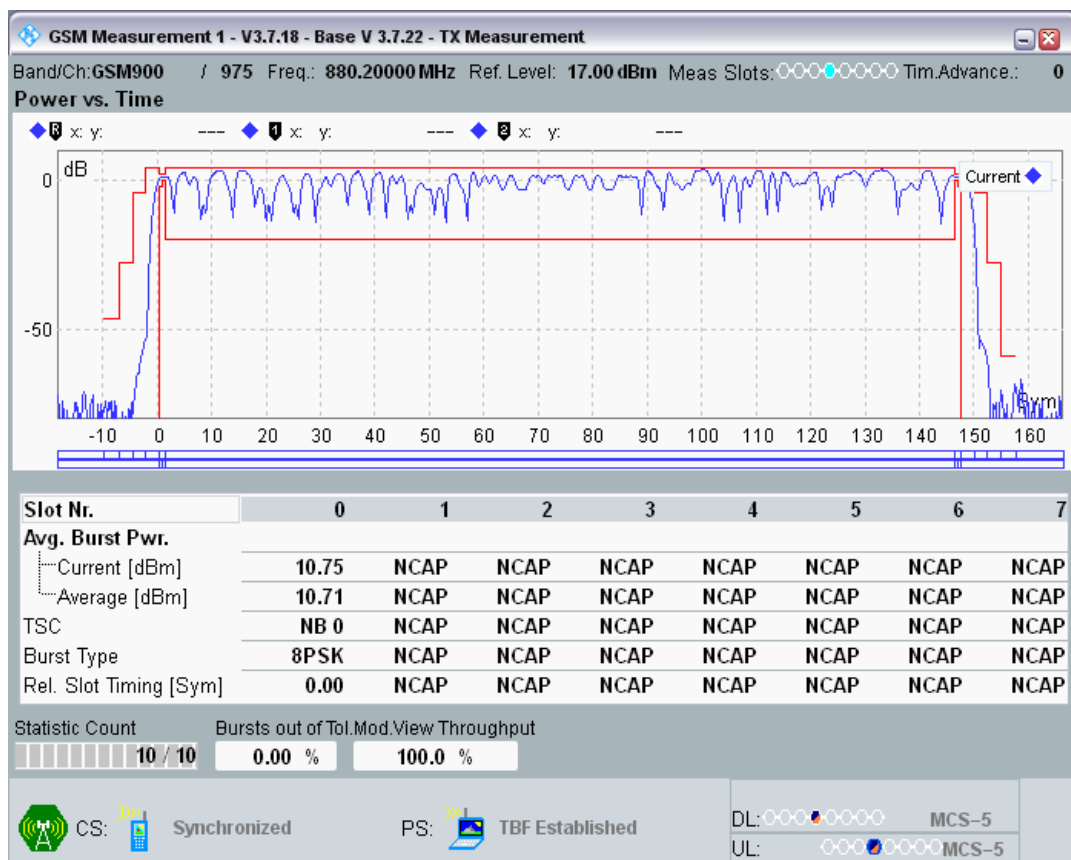


EGPRS900 Channel=975 Gamma=15;15;15;15




EGPRS900 Channel=975 Gamma=16;16;16;16

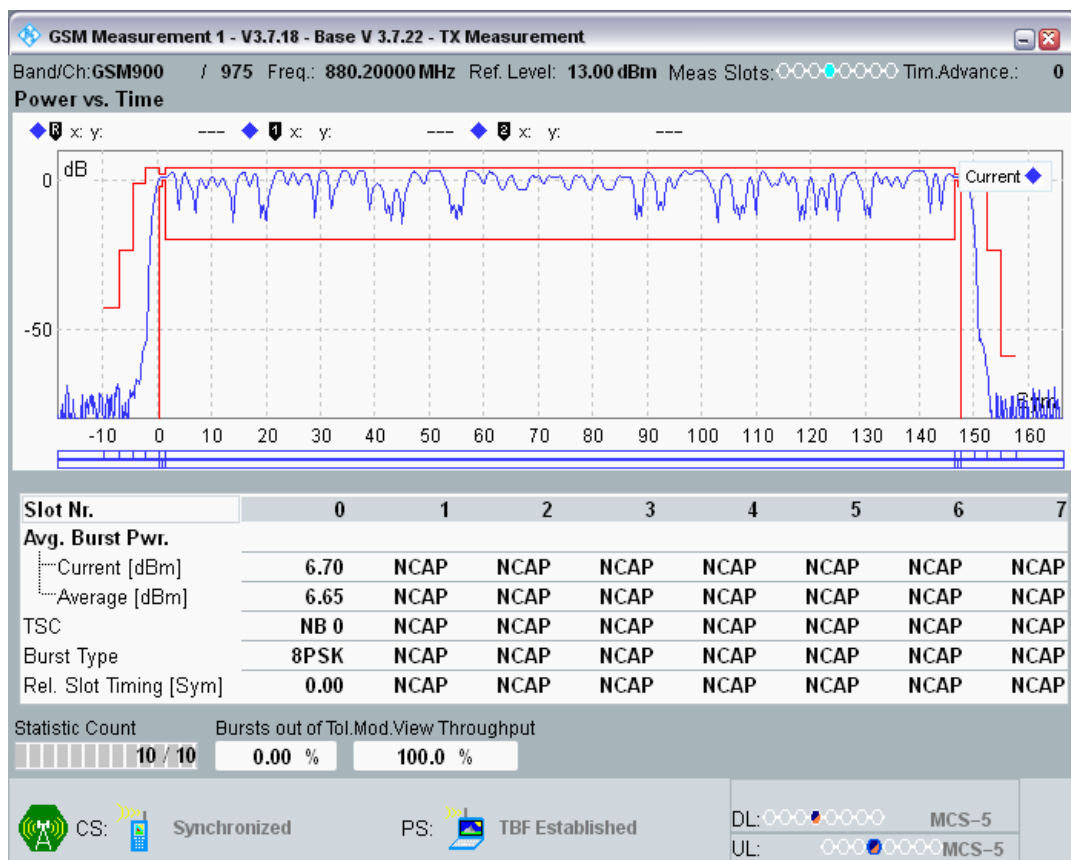


EGPRS900 Channel=975 Gamma=17;17;17;17

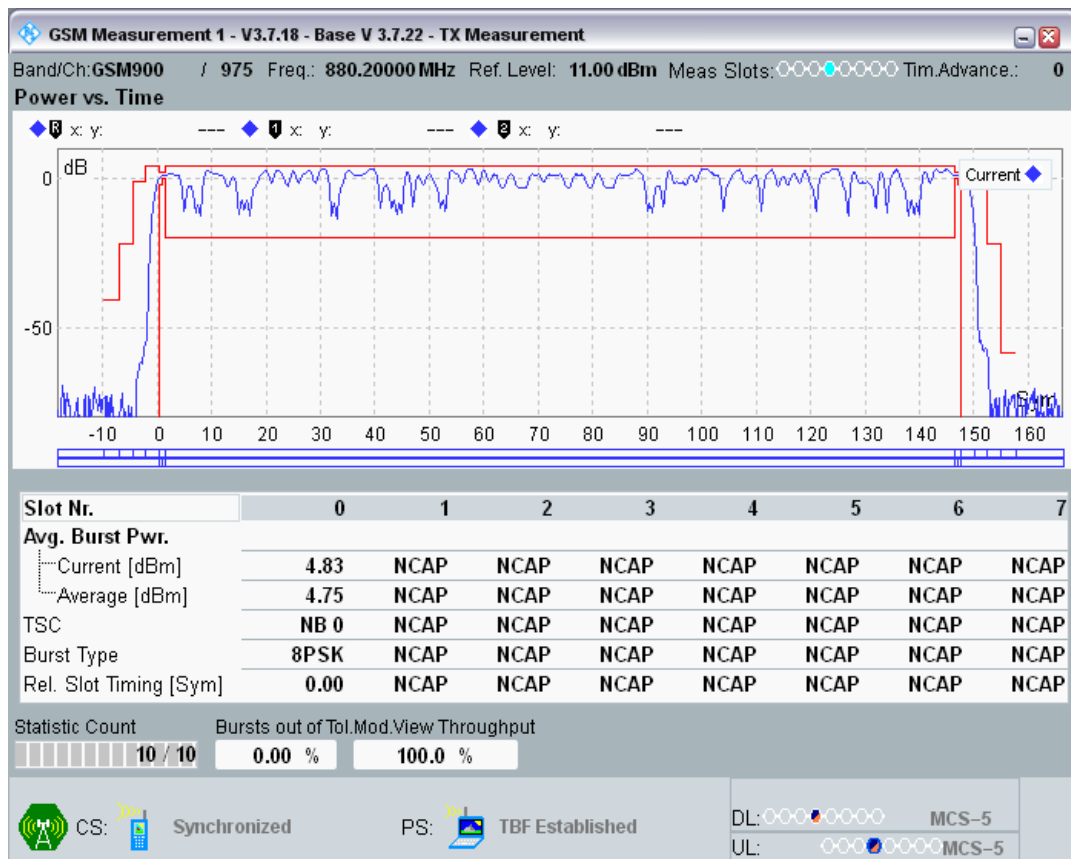


EGPRS900 Channel=38 Gamma=6;6;6;6

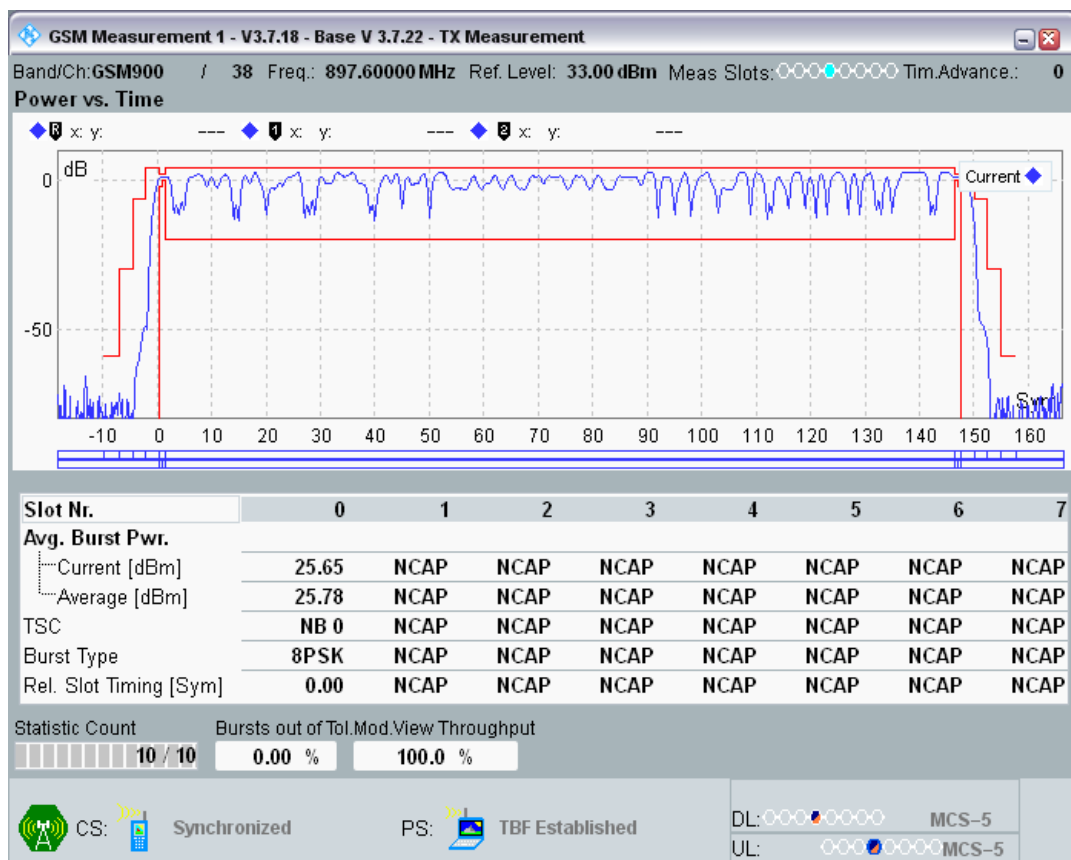


EGPRS900 Channel=38 Gamma=7;7;7;7

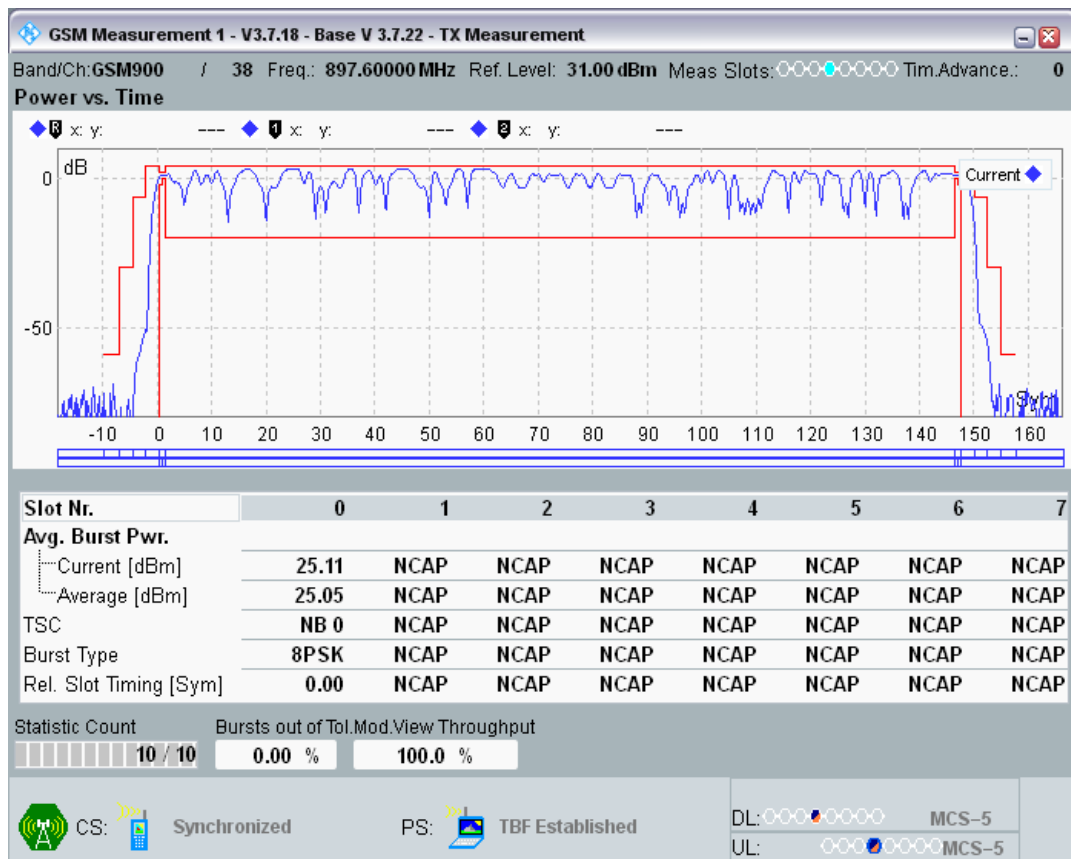


EGPRS900 Channel=38 Gamma=8;8;8;8

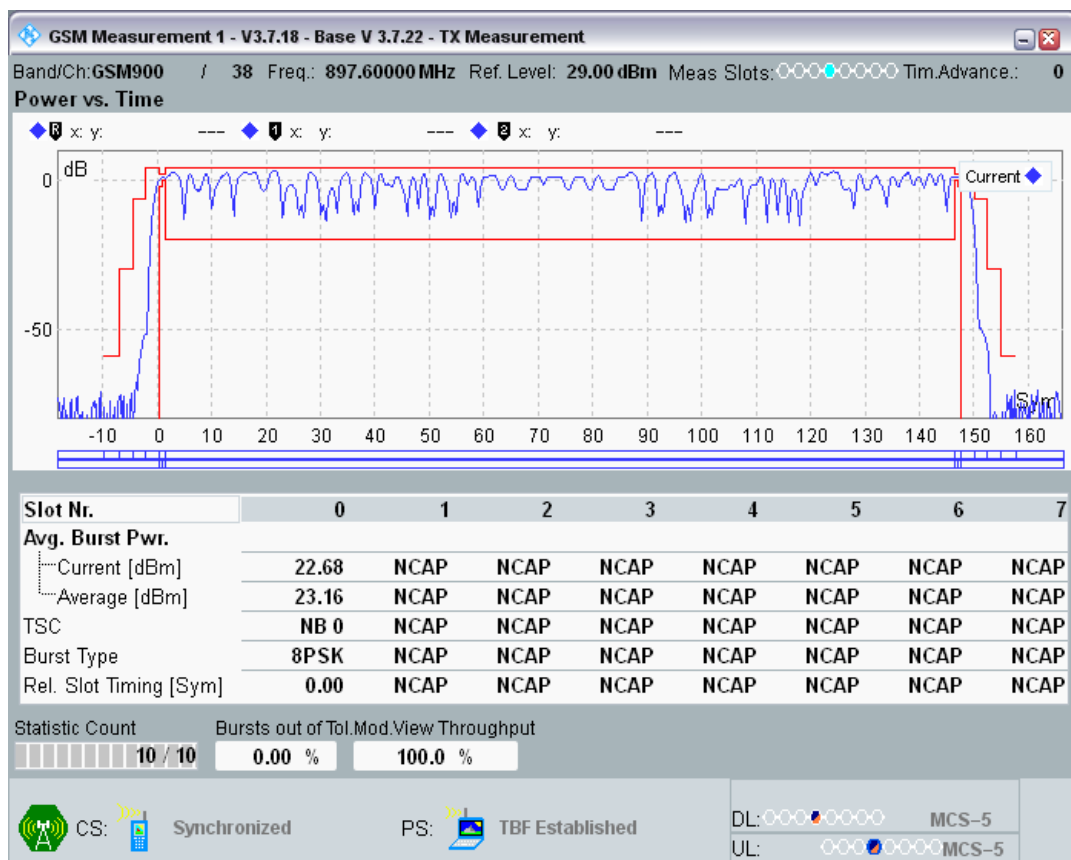


EGPRS900 Channel=38 Gamma=9;9;9;9

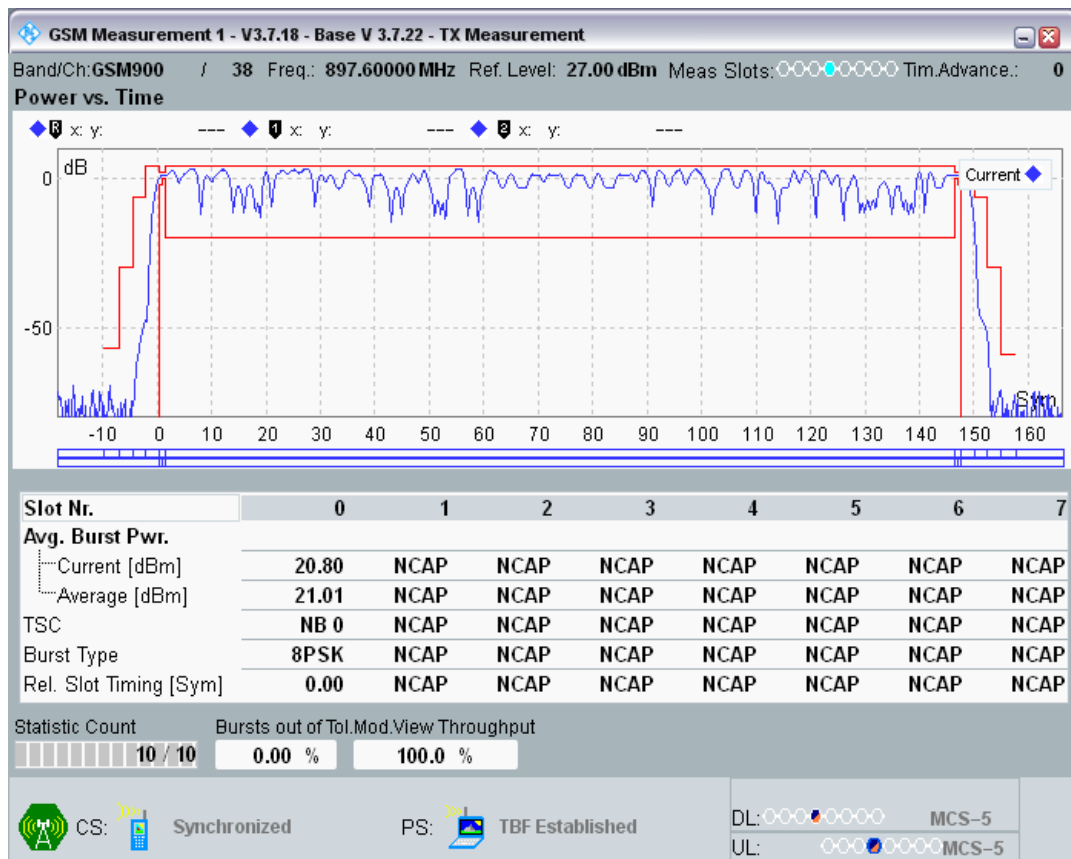


EGPRS900 Channel=38 Gamma=10;10;10;10

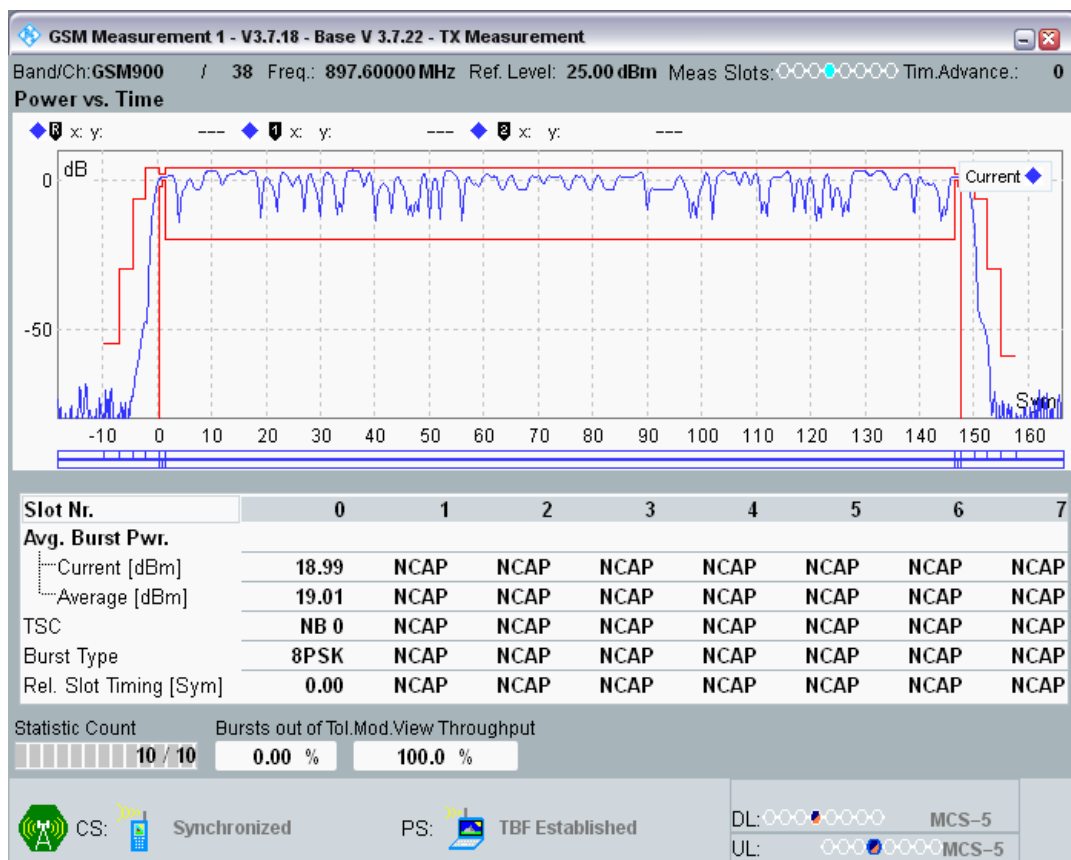


EGPRS900 Channel=38 Gamma=11;11;11;11

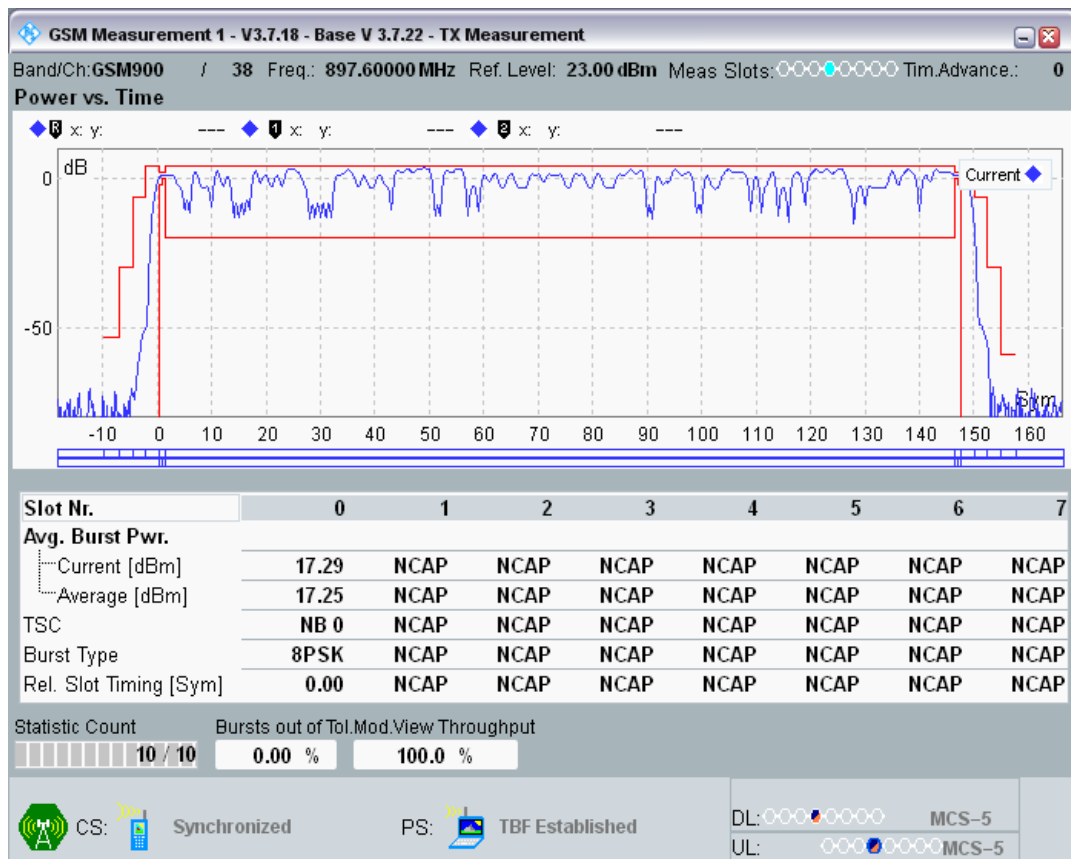


EGPRS900 Channel=38 Gamma=12;12;12;12

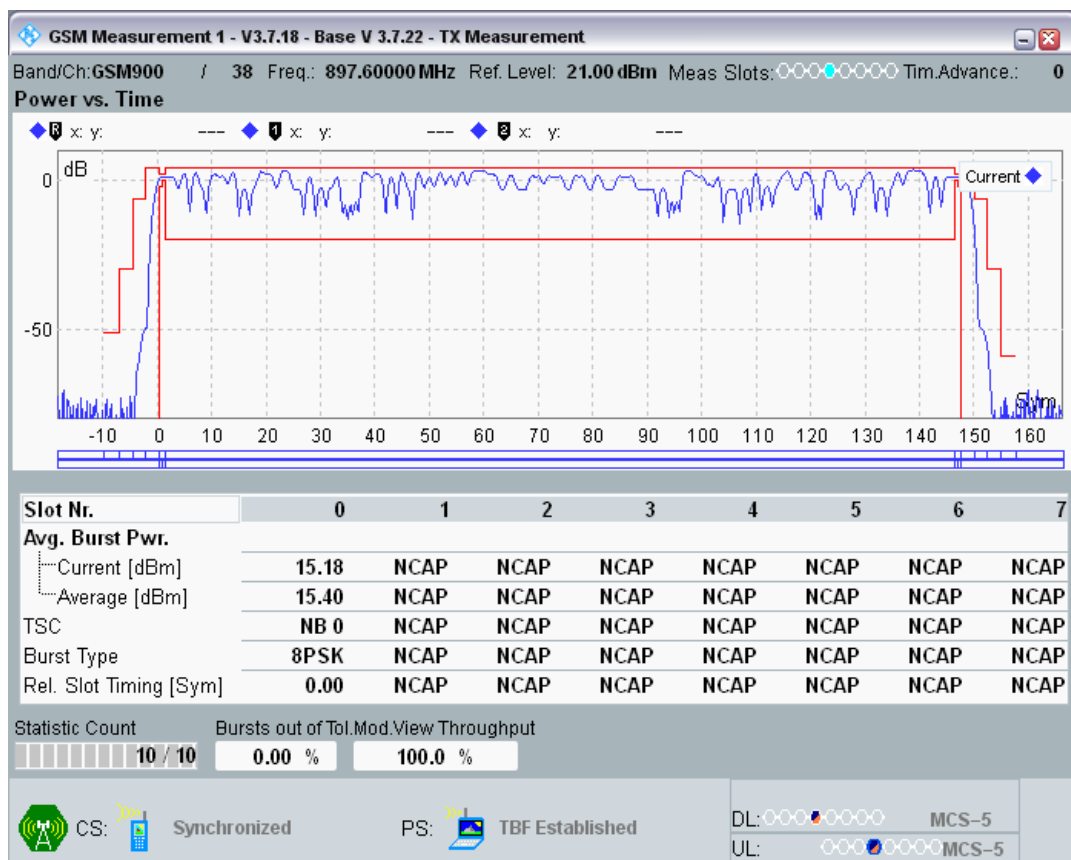

EGPRS900 Channel=38 Gamma=13;13;13;13

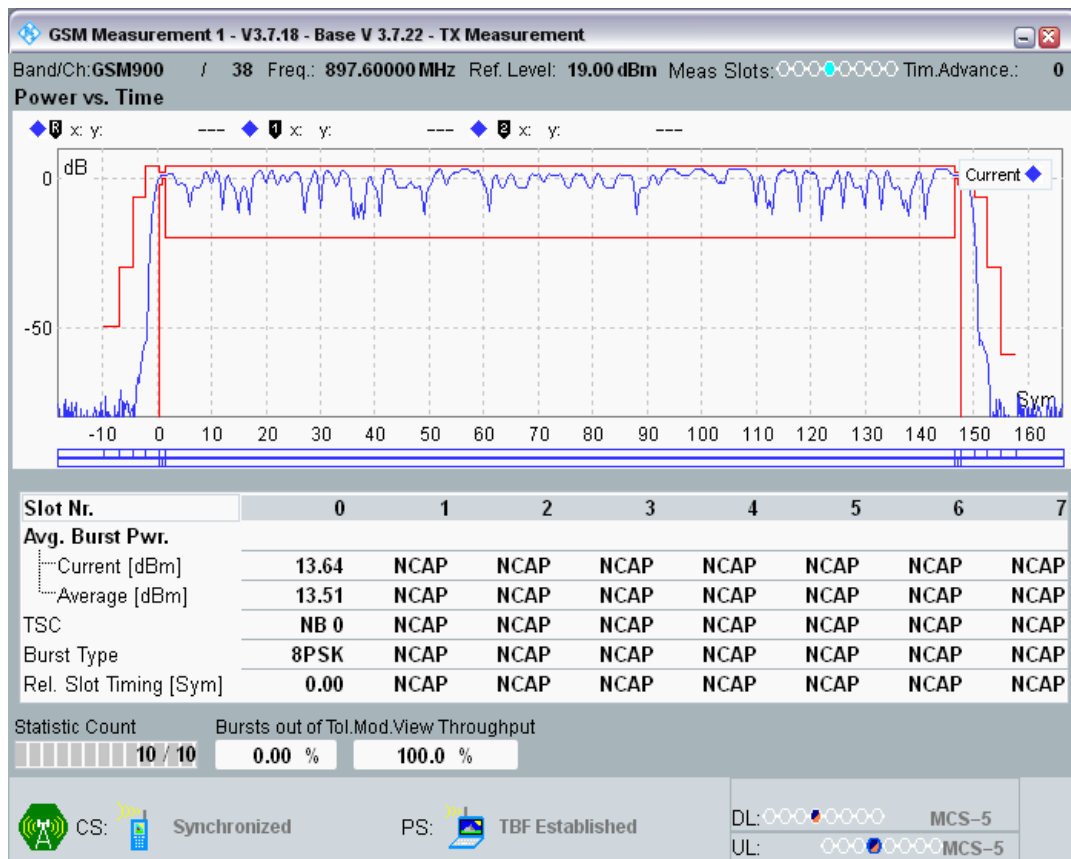

EGPRS900 Channel=38 Gamma=14;14;14;14

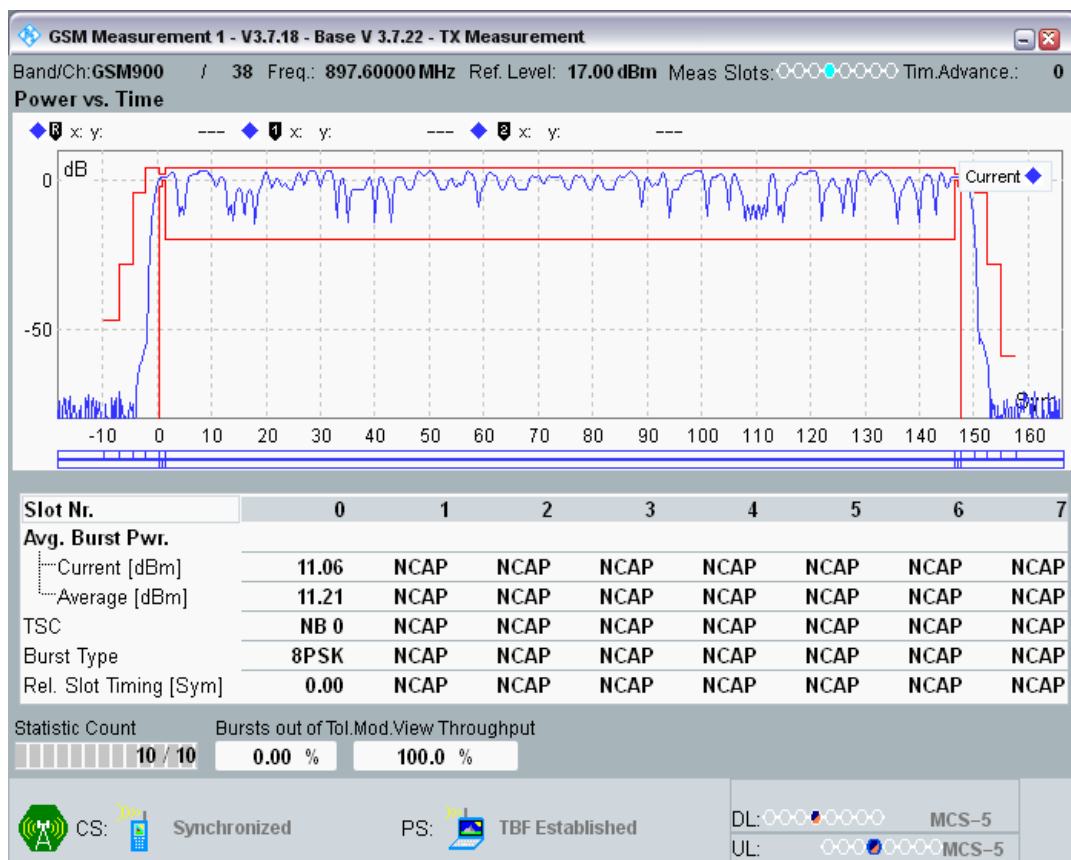


EGPRS900 Channel=38 Gamma=15;15;15;15




EGPRS900 Channel=38 Gamma=16;16;16;16




EGPRS900 Channel=38 Gamma=17;17;17;17

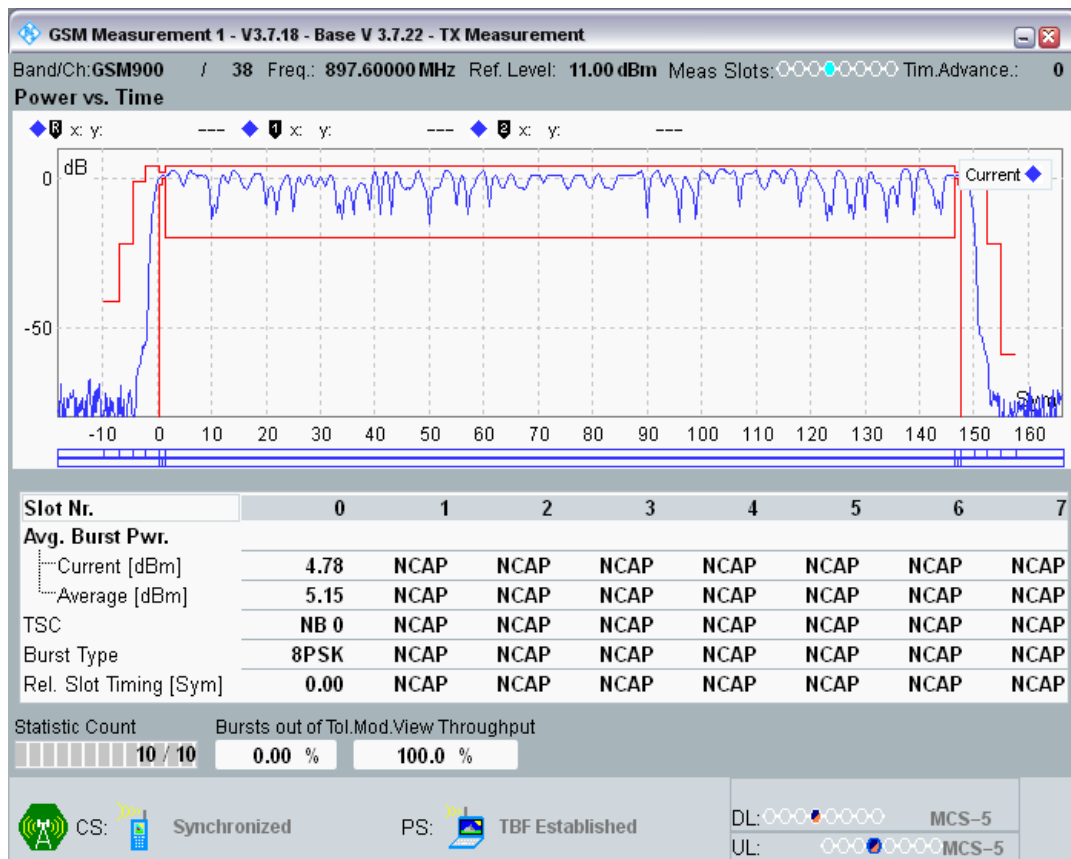


EGPRS900 Channel=124 Gamma=6;6;6;6

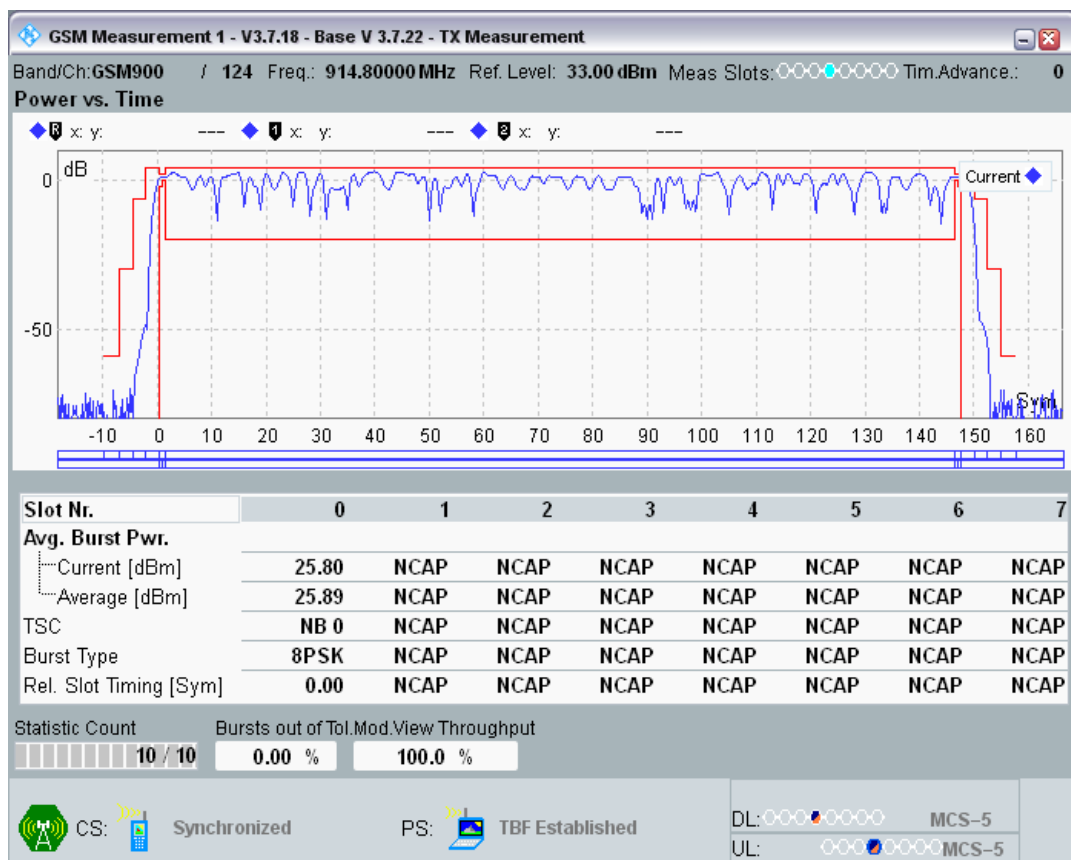


EGPRS900 Channel=124 Gamma=7;7;7;7

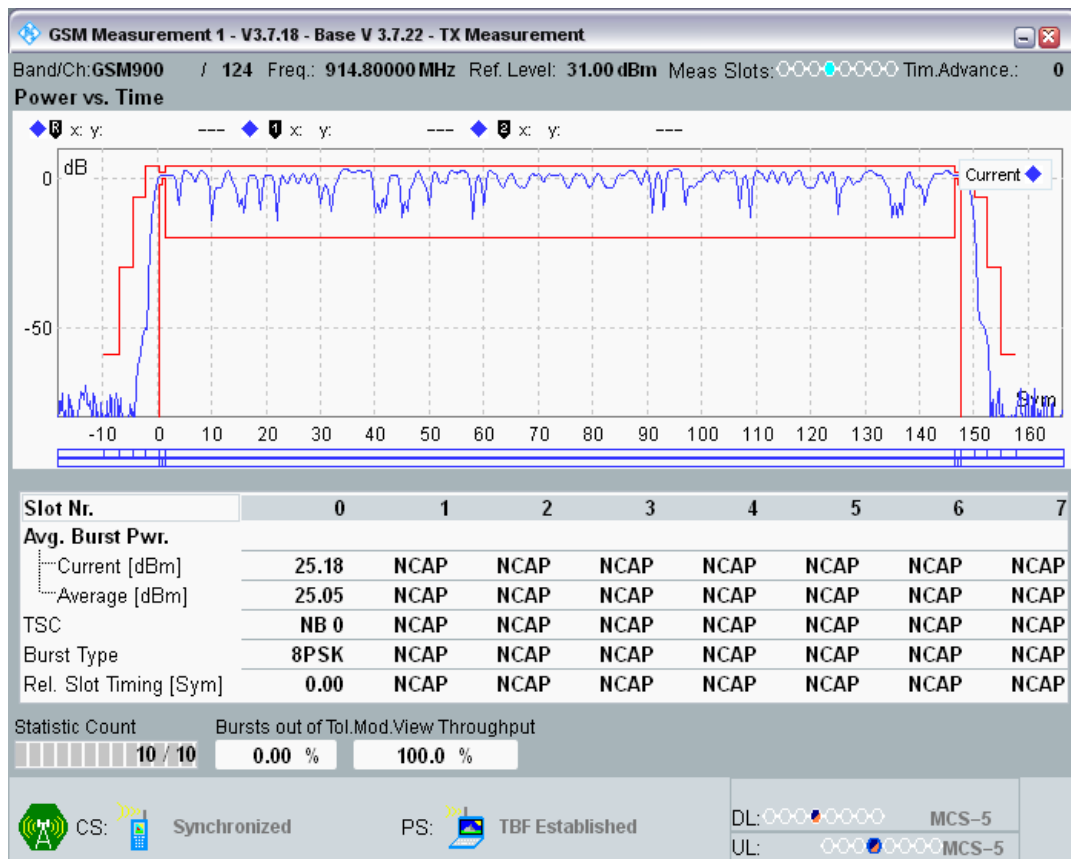


EGPRS900 Channel=124 Gamma=8;8;8;8

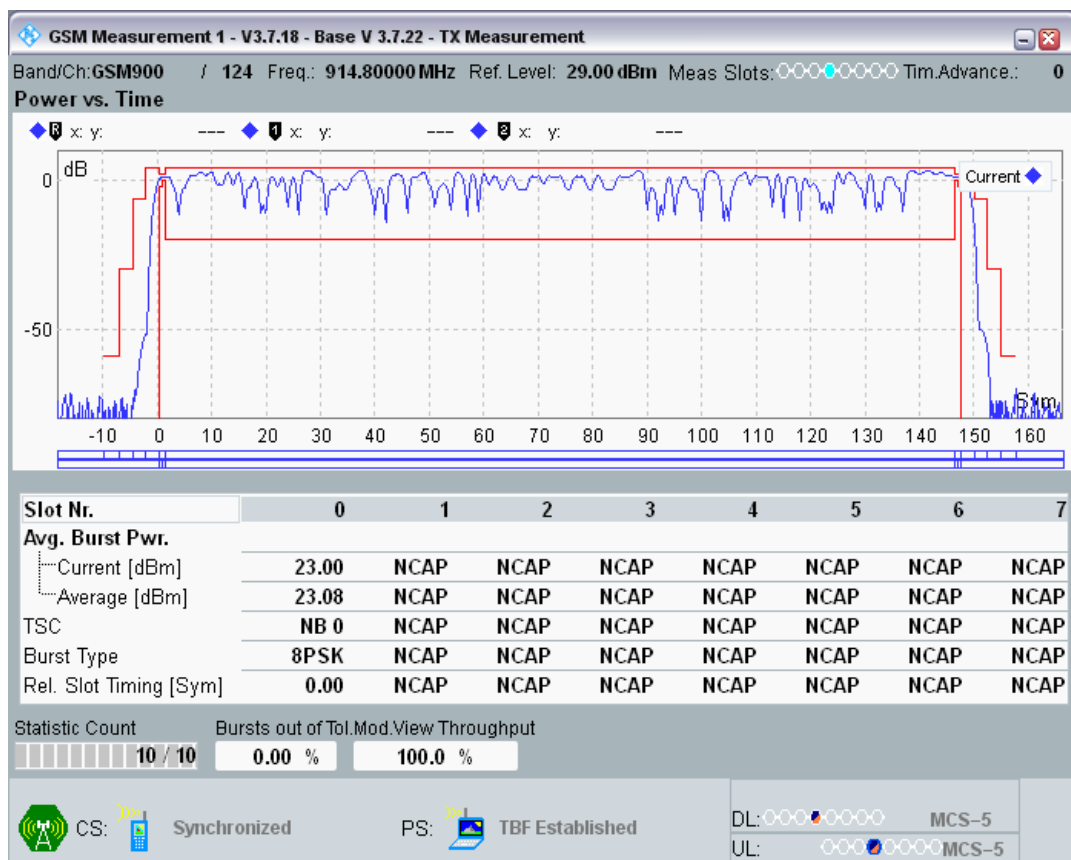

EGPRS900 Channel=124 Gamma=9;9;9;9

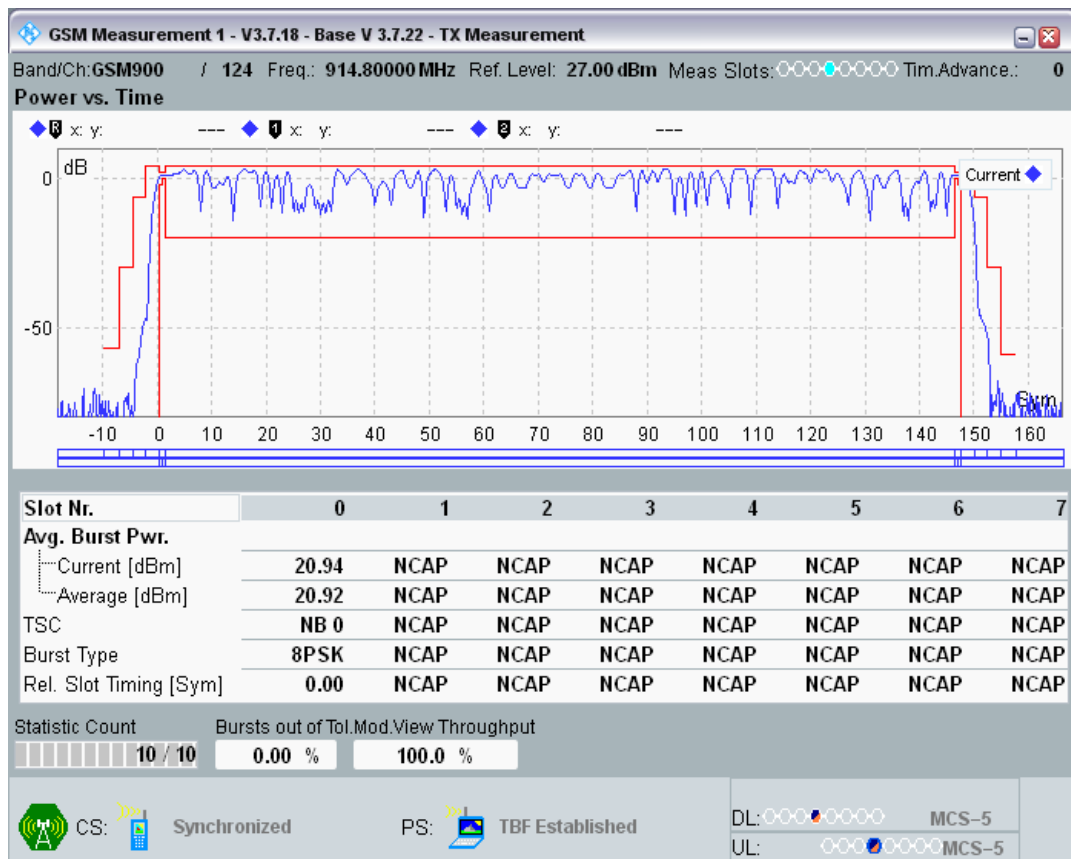


EGPRS900 Channel=124 Gamma=10;10;10;10

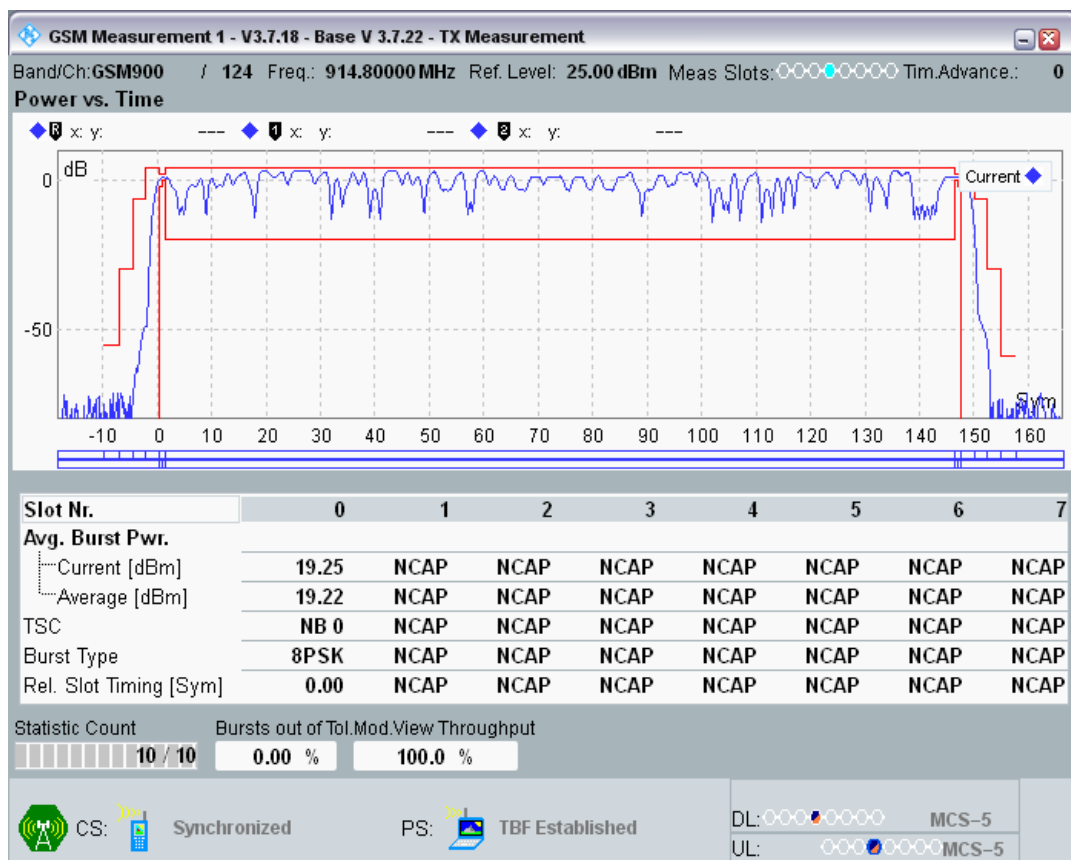


EGPRS900 Channel=124 Gamma=11;11;11;11




EGPRS900 Channel=124 Gamma=12;12;12;12

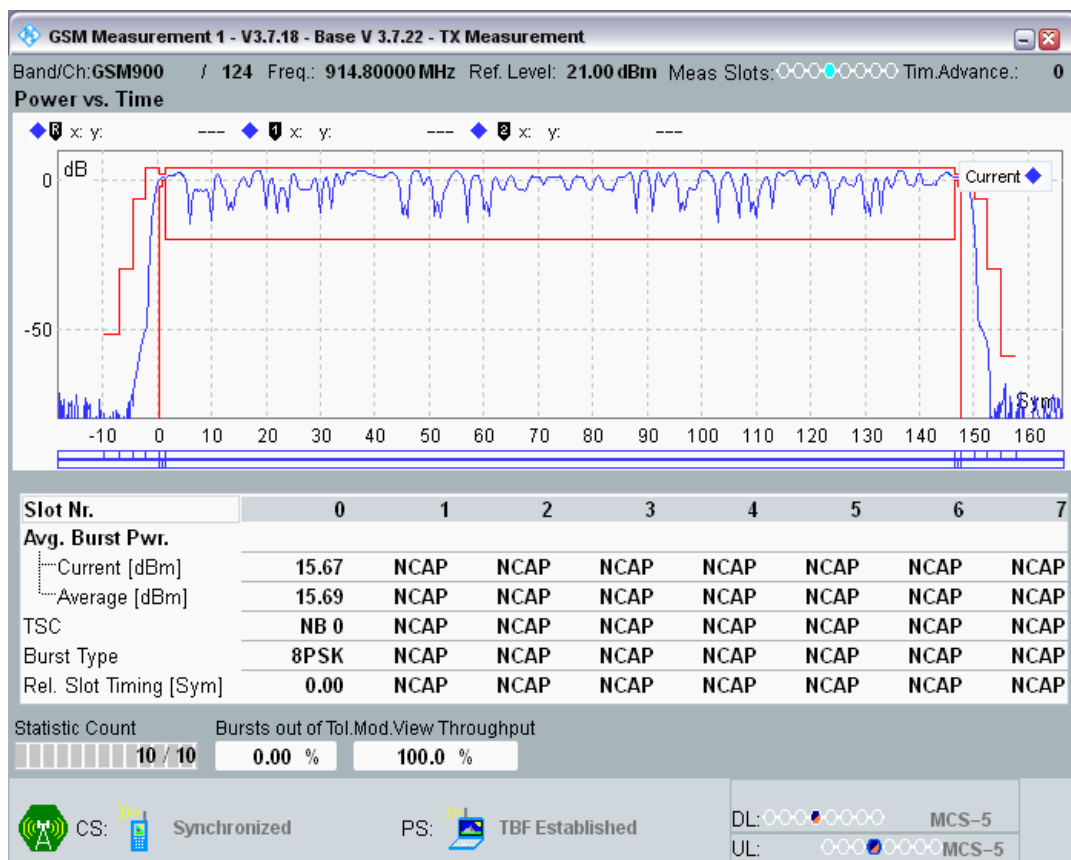


EGPRS900 Channel=124 Gamma=13;13;13;13

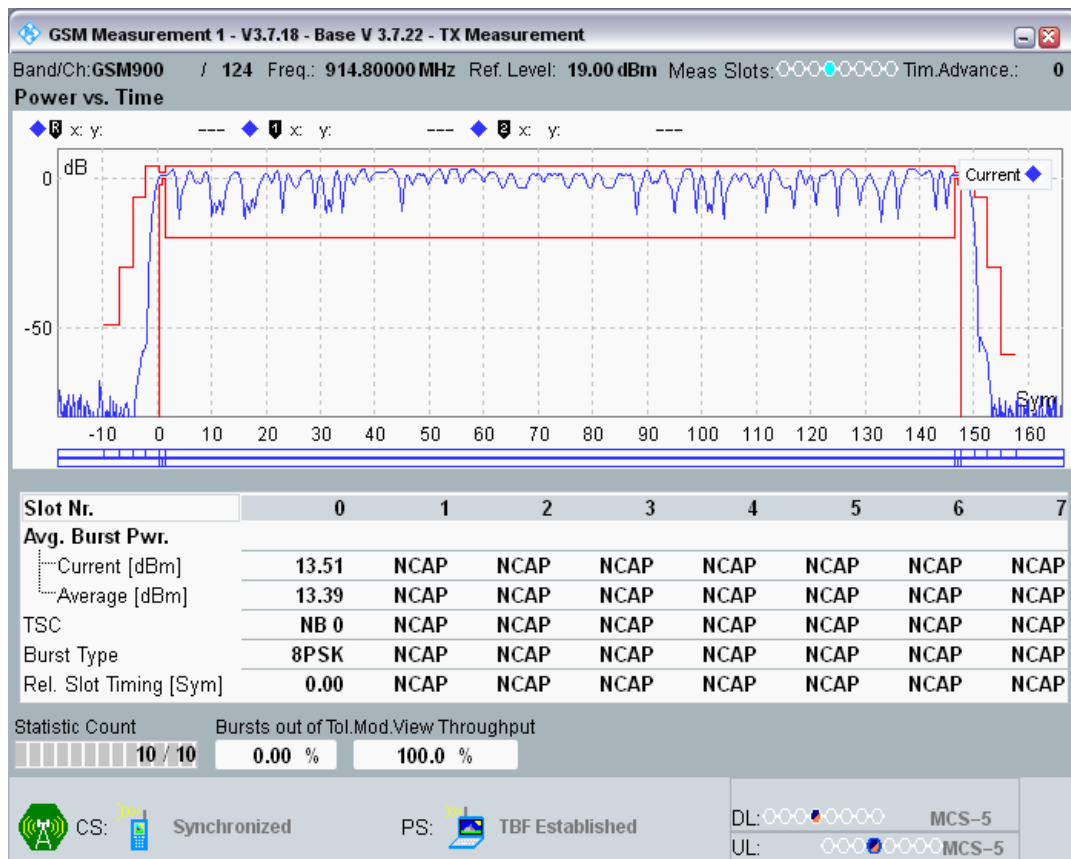


EGPRS900 Channel=124 Gamma=14;14;14;14

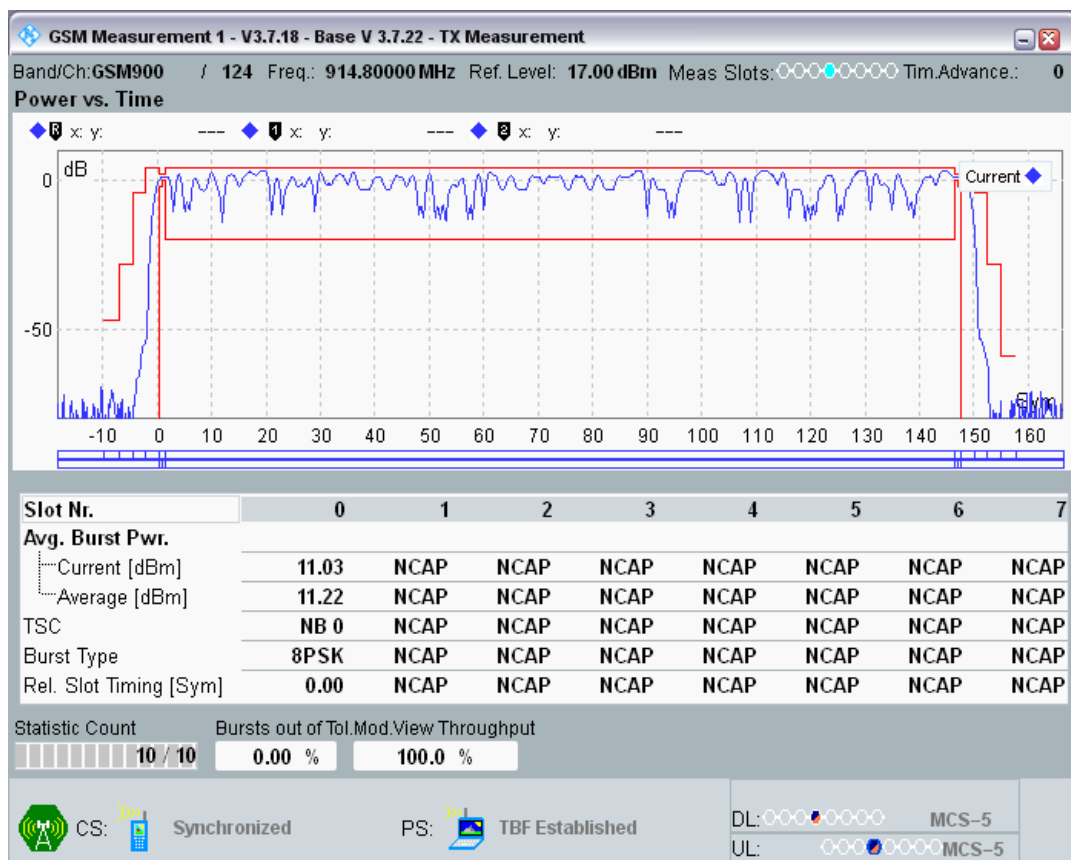

EGPRS900 Channel=124 Gamma=15;15;15;15

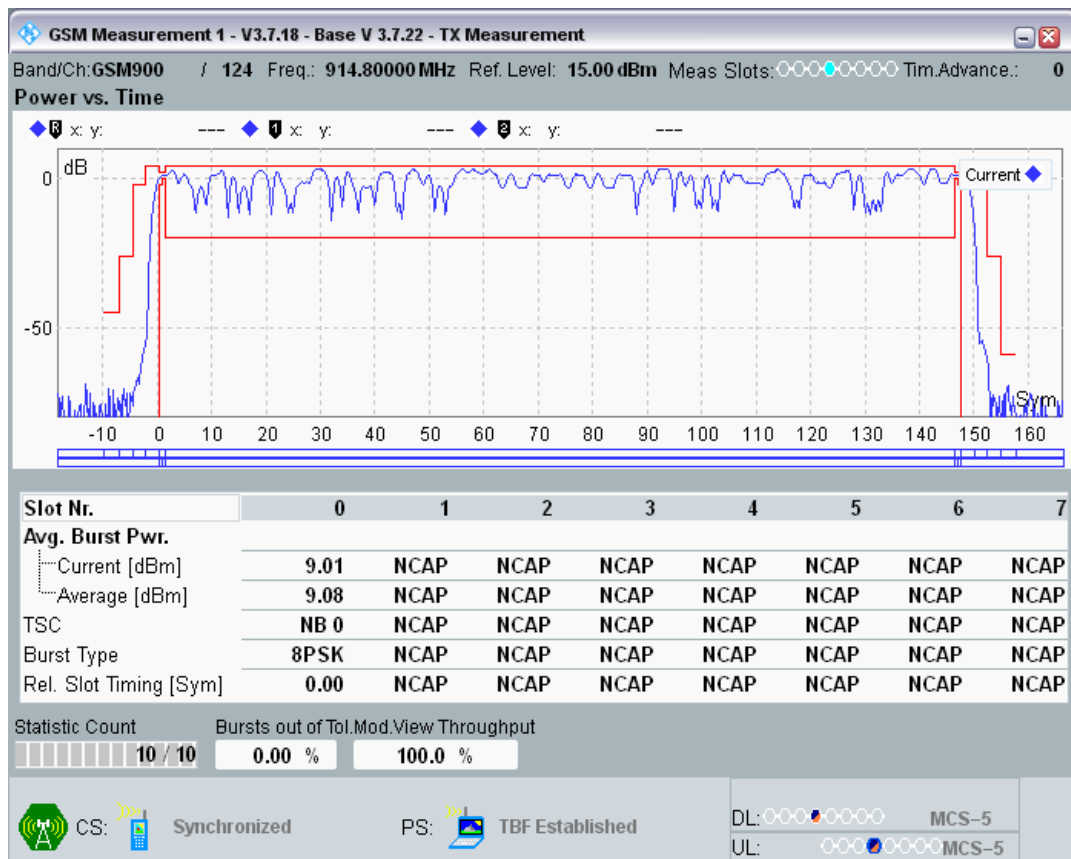

EGPRS900 Channel=124 Gamma=16;16;16;16

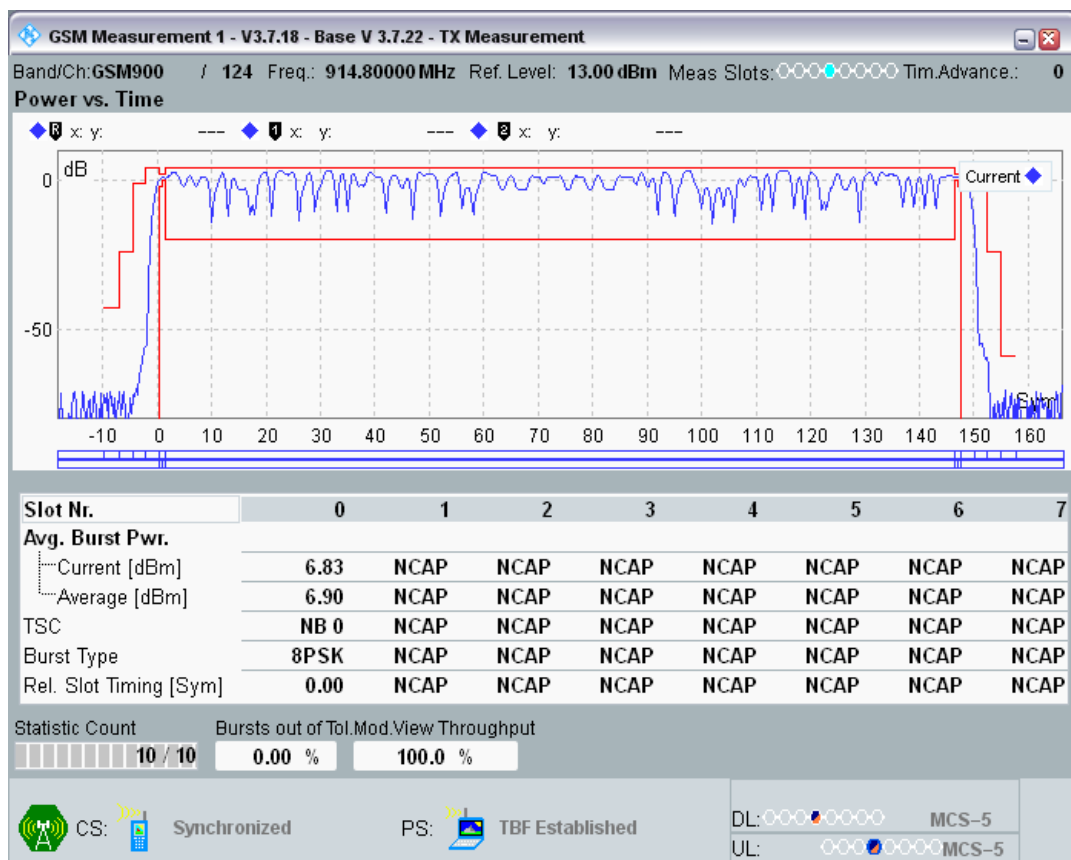

EGPRS900 Channel=124 Gamma=17;17;17;17



Clause 4.2.29 Modulation Spectrum in EGPRS configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (kHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
EGPRS1800	512	1710.2	5;5;5;5	-1800	-73.86	-60	-58.21	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	-1600	-72.61	-60	-56.96	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	-1400	-71.42	-60	-55.78	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	-1200	-70.91	-60	-55.27	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	-1000	-69.54	-60	-53.89	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	-800	-68.91	-60	-53.27	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	-600	-66.44	-60	-50.79	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	-400	-59.36	-60	-43.72	-36	PASS
EGPRS1800	512	1710.2	5;5;5;5	-250	-41.33	-33	-25.68	-36	PASS
EGPRS1800	512	1710.2	5;5;5;5	-200	-33.43	-30	-17.79	-36	PASS
EGPRS1800	512	1710.2	5;5;5;5	-100	-4.61	0.5	11.04	-36	PASS
EGPRS1800	512	1710.2	5;5;5;5	100	-3.65	0.5	11.99	-36	PASS
EGPRS1800	512	1710.2	5;5;5;5	200	-32.73	-30	-17.09	-36	PASS
EGPRS1800	512	1710.2	5;5;5;5	250	-41.40	-33	-25.75	-36	PASS
EGPRS1800	512	1710.2	5;5;5;5	400	-59.34	-60	-43.69	-36	PASS
EGPRS1800	512	1710.2	5;5;5;5	600	-65.00	-60	-49.36	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	800	-66.03	-60	-50.39	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	1000	-68.97	-60	-53.32	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	1200	-71.04	-60	-55.40	-55	PASS

EGPRS1800	512	1710.2	5;5;5;5	1400	-73.25	-60	-57.61	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	1600	-71.58	-60	-55.94	-55	PASS
EGPRS1800	512	1710.2	5;5;5;5	1800	-73.05	-60	-57.40	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	-1800	-74.61	-60	-81.97	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	-1600	-74.72	-60	-82.07	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	-1400	-72.98	-60	-80.33	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	-1200	-73.24	-60	-80.59	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	-1000	-71.50	-60	-78.85	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	-800	-68.88	-60	-76.23	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	-600	-68.01	-60	-75.37	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	-400	-62.77	-60	-70.12	-36	PASS
EGPRS1800	512	1710.2	18;18;18;18	-250	-40.99	-33	-48.35	-36	PASS
EGPRS1800	512	1710.2	18;18;18;18	-200	-37.50	-30	-44.85	-36	PASS
EGPRS1800	512	1710.2	18;18;18;18	-100	-8.67	0.5	-16.02	-36	PASS
EGPRS1800	512	1710.2	18;18;18;18	100	-8.42	0.5	-15.77	-36	PASS
EGPRS1800	512	1710.2	18;18;18;18	200	-37.50	-30	-44.85	-36	PASS
EGPRS1800	512	1710.2	18;18;18;18	250	-41.20	-33	-48.55	-36	PASS
EGPRS1800	512	1710.2	18;18;18;18	400	-62.72	-60	-70.07	-36	PASS
EGPRS1800	512	1710.2	18;18;18;18	600	-66.78	-60	-74.13	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	800	-69.92	-60	-77.27	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	1000	-71.12	-60	-78.47	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	1200	-72.03	-60	-79.38	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	1400	-73.92	-60	-81.27	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	1600	-74.25	-60	-81.60	-55	PASS
EGPRS1800	512	1710.2	18;18;18;18	1800	-74.59	-60	-81.94	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	-1800	-77.19	-60	-59.54	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	-1600	-76.24	-60	-58.58	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	-1400	-74.69	-60	-57.03	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	-1200	-74.24	-60	-56.59	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	-1000	-72.46	-60	-54.80	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	-800	-70.03	-60	-52.37	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	-600	-69.51	-60	-51.85	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	-400	-61.65	-60	-44.00	-36	PASS
EGPRS1800	698	1747.4	5;5;5;5	-250	-43.95	-33	-26.30	-36	PASS
EGPRS1800	698	1747.4	5;5;5;5	-200	-36.05	-30	-18.39	-36	PASS
EGPRS1800	698	1747.4	5;5;5;5	-100	-8.03	0.5	9.63	-36	PASS
EGPRS1800	698	1747.4	5;5;5;5	100	-7.78	0.5	9.87	-36	PASS
EGPRS1800	698	1747.4	5;5;5;5	200	-37.34	-30	-19.69	-36	PASS
EGPRS1800	698	1747.4	5;5;5;5	250	-43.11	-33	-25.45	-36	PASS
EGPRS1800	698	1747.4	5;5;5;5	400	-62.07	-60	-44.42	-36	PASS
EGPRS1800	698	1747.4	5;5;5;5	600	-68.29	-60	-50.63	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	800	-70.43	-60	-52.78	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	1000	-72.04	-60	-54.38	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	1200	-72.40	-60	-54.74	-55	PASS

EGPRS1800	698	1747.4	5;5;5;5	1400	-74.45	-60	-56.79	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	1600	-74.32	-60	-56.67	-55	PASS
EGPRS1800	698	1747.4	5;5;5;5	1800	-76.10	-60	-58.44	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	-1800	-75.62	-60	-83.11	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	-1600	-74.69	-60	-82.18	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	-1400	-74.16	-60	-81.65	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	-1200	-73.53	-60	-81.03	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	-1000	-72.70	-60	-80.19	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	-800	-71.04	-60	-78.53	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	-600	-69.14	-60	-76.63	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	-400	-63.96	-60	-71.45	-36	PASS
EGPRS1800	698	1747.4	18;18;18;18	-250	-41.75	-33	-49.24	-36	PASS
EGPRS1800	698	1747.4	18;18;18;18	-200	-38.63	-30	-46.12	-36	PASS
EGPRS1800	698	1747.4	18;18;18;18	-100	-8.28	0.5	-15.77	-36	PASS
EGPRS1800	698	1747.4	18;18;18;18	100	-8.93	0.5	-16.42	-36	PASS
EGPRS1800	698	1747.4	18;18;18;18	200	-37.93	-30	-45.42	-36	PASS
EGPRS1800	698	1747.4	18;18;18;18	250	-41.43	-33	-48.92	-36	PASS
EGPRS1800	698	1747.4	18;18;18;18	400	-63.43	-60	-70.92	-36	PASS
EGPRS1800	698	1747.4	18;18;18;18	600	-68.46	-60	-75.95	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	800	-70.22	-60	-77.71	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	1000	-71.93	-60	-79.42	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	1200	-73.17	-60	-80.66	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	1400	-73.60	-60	-81.09	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	1600	-75.05	-60	-82.54	-55	PASS
EGPRS1800	698	1747.4	18;18;18;18	1800	-75.06	-60	-82.56	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	-1800	-76.70	-60	-58.68	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	-1600	-75.62	-60	-57.61	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	-1400	-74.54	-60	-56.52	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	-1200	-73.44	-60	-55.43	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	-1000	-71.59	-60	-53.57	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	-800	-70.39	-60	-52.37	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	-600	-67.95	-60	-49.93	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	-400	-62.25	-60	-44.23	-36	PASS
EGPRS1800	885	1784.8	5;5;5;5	-250	-44.11	-33	-26.09	-36	PASS
EGPRS1800	885	1784.8	5;5;5;5	-200	-37.07	-30	-19.05	-36	PASS
EGPRS1800	885	1784.8	5;5;5;5	-100	-8.63	0.5	9.39	-36	PASS
EGPRS1800	885	1784.8	5;5;5;5	100	-8.52	0.5	9.50	-36	PASS
EGPRS1800	885	1784.8	5;5;5;5	200	-38.06	-30	-20.04	-36	PASS
EGPRS1800	885	1784.8	5;5;5;5	250	-43.13	-33	-25.11	-36	PASS
EGPRS1800	885	1784.8	5;5;5;5	400	-62.73	-60	-44.71	-36	PASS
EGPRS1800	885	1784.8	5;5;5;5	600	-68.48	-60	-50.46	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	800	-70.73	-60	-52.71	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	1000	-72.45	-60	-54.43	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	1200	-73.19	-60	-55.17	-55	PASS

EGPRS1800	885	1784.8	5;5;5;5	1400	-74.74	-60	-56.72	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	1600	-75.98	-60	-57.97	-55	PASS
EGPRS1800	885	1784.8	5;5;5;5	1800	-76.18	-60	-58.16	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	-1800	-75.75	-60	-83.78	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	-1600	-74.35	-60	-82.39	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	-1400	-73.80	-60	-81.84	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	-1200	-72.49	-60	-80.53	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	-1000	-71.55	-60	-79.59	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	-800	-69.72	-60	-77.76	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	-600	-68.52	-60	-76.56	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	-400	-63.19	-60	-71.23	-36	PASS
EGPRS1800	885	1784.8	18;18;18;18	-250	-40.80	-33	-48.84	-36	PASS
EGPRS1800	885	1784.8	18;18;18;18	-200	-37.39	-30	-45.43	-36	PASS
EGPRS1800	885	1784.8	18;18;18;18	-100	-8.04	0.5	-16.08	-36	PASS
EGPRS1800	885	1784.8	18;18;18;18	100	-7.66	0.5	-15.70	-36	PASS
EGPRS1800	885	1784.8	18;18;18;18	200	-36.50	-30	-44.54	-36	PASS
EGPRS1800	885	1784.8	18;18;18;18	250	-40.83	-33	-48.86	-36	PASS
EGPRS1800	885	1784.8	18;18;18;18	400	-63.17	-60	-71.20	-36	PASS
EGPRS1800	885	1784.8	18;18;18;18	600	-68.37	-60	-76.41	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	800	-69.50	-60	-77.54	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	1000	-72.30	-60	-80.34	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	1200	-72.25	-60	-80.29	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	1400	-73.60	-60	-81.64	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	1600	-74.96	-60	-83.00	-55	PASS
EGPRS1800	885	1784.8	18;18;18;18	1800	-75.45	-60	-83.49	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	-1800	-76.55	-60	-57.73	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	-1600	-76.50	-60	-57.68	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	-1400	-74.60	-60	-55.77	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	-1200	-73.80	-60	-54.98	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	-1000	-73.03	-60	-54.21	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	-800	-71.21	-60	-52.39	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	-600	-69.44	-60	-50.61	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	-400	-62.71	-60	-43.89	-36	PASS
EGPRS1900	512	1850.2	5;5;5;5	-250	-44.16	-33	-25.34	-36	PASS
EGPRS1900	512	1850.2	5;5;5;5	-200	-37.38	-30	-18.56	-36	PASS
EGPRS1900	512	1850.2	5;5;5;5	-100	-9.10	0.5	9.73	-36	PASS
EGPRS1900	512	1850.2	5;5;5;5	100	-9.49	0.5	9.33	-36	PASS
EGPRS1900	512	1850.2	5;5;5;5	200	-38.75	-30	-19.93	-36	PASS
EGPRS1900	512	1850.2	5;5;5;5	250	-43.06	-33	-24.24	-36	PASS
EGPRS1900	512	1850.2	5;5;5;5	400	-63.77	-60	-44.95	-36	PASS
EGPRS1900	512	1850.2	5;5;5;5	600	-68.85	-60	-50.02	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	800	-70.83	-60	-52.01	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	1000	-72.51	-60	-53.69	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	1200	-73.91	-60	-55.09	-55	PASS

EGPRS1900	512	1850.2	5;5;5;5	1400	-75.15	-60	-56.33	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	1600	-76.38	-60	-57.56	-55	PASS
EGPRS1900	512	1850.2	5;5;5;5	1800	-76.64	-60	-57.82	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	-1800	-74.35	-60	-82.36	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	-1600	-75.50	-60	-83.51	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	-1400	-74.04	-60	-82.05	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	-1200	-73.41	-60	-81.42	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	-1000	-72.40	-60	-80.40	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	-800	-70.83	-60	-78.84	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	-600	-70.12	-60	-78.13	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	-400	-63.01	-60	-71.02	-36	PASS
EGPRS1900	512	1850.2	18;18;18;18	-250	-40.91	-33	-48.91	-36	PASS
EGPRS1900	512	1850.2	18;18;18;18	-200	-38.44	-30	-46.45	-36	PASS
EGPRS1900	512	1850.2	18;18;18;18	-100	-8.31	0.5	-16.32	-36	PASS
EGPRS1900	512	1850.2	18;18;18;18	100	-8.47	0.5	-16.47	-36	PASS
EGPRS1900	512	1850.2	18;18;18;18	200	-37.79	-30	-45.79	-36	PASS
EGPRS1900	512	1850.2	18;18;18;18	250	-40.18	-33	-48.18	-36	PASS
EGPRS1900	512	1850.2	18;18;18;18	400	-61.62	-60	-69.63	-36	PASS
EGPRS1900	512	1850.2	18;18;18;18	600	-68.42	-60	-76.43	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	800	-70.15	-60	-78.16	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	1000	-71.00	-60	-79.01	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	1200	-72.59	-60	-80.59	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	1400	-73.72	-60	-81.73	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	1600	-74.87	-60	-82.87	-55	PASS
EGPRS1900	512	1850.2	18;18;18;18	1800	-75.78	-60	-83.78	-55	PASS
EGPRS1900	661	1880	5;5;5;5	-1800	-75.56	-60	-57.13	-55	PASS
EGPRS1900	661	1880	5;5;5;5	-1600	-75.76	-60	-57.33	-55	PASS
EGPRS1900	661	1880	5;5;5;5	-1400	-73.58	-60	-55.15	-55	PASS
EGPRS1900	661	1880	5;5;5;5	-1200	-72.19	-60	-53.76	-55	PASS
EGPRS1900	661	1880	5;5;5;5	-1000	-71.43	-60	-53.00	-55	PASS
EGPRS1900	661	1880	5;5;5;5	-800	-69.53	-60	-51.10	-55	PASS
EGPRS1900	661	1880	5;5;5;5	-600	-68.09	-60	-49.65	-55	PASS
EGPRS1900	661	1880	5;5;5;5	-400	-62.45	-60	-44.02	-36	PASS
EGPRS1900	661	1880	5;5;5;5	-250	-42.62	-33	-24.19	-36	PASS
EGPRS1900	661	1880	5;5;5;5	-200	-36.81	-30	-18.38	-36	PASS
EGPRS1900	661	1880	5;5;5;5	-100	-8.61	0.5	9.82	-36	PASS
EGPRS1900	661	1880	5;5;5;5	100	-8.43	0.5	10.01	-36	PASS
EGPRS1900	661	1880	5;5;5;5	200	-38.02	-30	-19.59	-36	PASS
EGPRS1900	661	1880	5;5;5;5	250	-42.25	-33	-23.82	-36	PASS
EGPRS1900	661	1880	5;5;5;5	400	-62.27	-60	-43.84	-36	PASS
EGPRS1900	661	1880	5;5;5;5	600	-68.32	-60	-49.89	-55	PASS
EGPRS1900	661	1880	5;5;5;5	800	-70.07	-60	-51.64	-55	PASS
EGPRS1900	661	1880	5;5;5;5	1000	-71.47	-60	-53.04	-55	PASS
EGPRS1900	661	1880	5;5;5;5	1200	-72.90	-60	-54.47	-55	PASS

EGPRS1900	661	1880	5;5;5;5	1400	-74.00	-60	-55.57	-55	PASS
EGPRS1900	661	1880	5;5;5;5	1600	-75.30	-60	-56.87	-55	PASS
EGPRS1900	661	1880	5;5;5;5	1800	-75.29	-60	-56.85	-55	PASS
EGPRS1900	661	1880	18;18;18;18	-1800	-74.88	-60	-82.32	-55	PASS
EGPRS1900	661	1880	18;18;18;18	-1600	-75.22	-60	-82.66	-55	PASS
EGPRS1900	661	1880	18;18;18;18	-1400	-73.86	-60	-81.29	-55	PASS
EGPRS1900	661	1880	18;18;18;18	-1200	-72.82	-60	-80.26	-55	PASS
EGPRS1900	661	1880	18;18;18;18	-1000	-71.57	-60	-79.00	-55	PASS
EGPRS1900	661	1880	18;18;18;18	-800	-68.81	-60	-76.24	-55	PASS
EGPRS1900	661	1880	18;18;18;18	-600	-68.10	-60	-75.53	-55	PASS
EGPRS1900	661	1880	18;18;18;18	-400	-62.51	-60	-69.95	-36	PASS
EGPRS1900	661	1880	18;18;18;18	-250	-41.65	-33	-49.09	-36	PASS
EGPRS1900	661	1880	18;18;18;18	-200	-36.89	-30	-44.32	-36	PASS
EGPRS1900	661	1880	18;18;18;18	-100	-7.99	0.5	-15.42	-36	PASS
EGPRS1900	661	1880	18;18;18;18	100	-8.31	0.5	-15.75	-36	PASS
EGPRS1900	661	1880	18;18;18;18	200	-37.33	-30	-44.76	-36	PASS
EGPRS1900	661	1880	18;18;18;18	250	-41.24	-33	-48.67	-36	PASS
EGPRS1900	661	1880	18;18;18;18	400	-62.42	-60	-69.85	-36	PASS
EGPRS1900	661	1880	18;18;18;18	600	-67.94	-60	-75.38	-55	PASS
EGPRS1900	661	1880	18;18;18;18	800	-70.02	-60	-77.45	-55	PASS
EGPRS1900	661	1880	18;18;18;18	1000	-72.26	-60	-79.69	-55	PASS
EGPRS1900	661	1880	18;18;18;18	1200	-72.75	-60	-80.19	-55	PASS
EGPRS1900	661	1880	18;18;18;18	1400	-73.80	-60	-81.24	-55	PASS
EGPRS1900	661	1880	18;18;18;18	1600	-74.84	-60	-82.28	-55	PASS
EGPRS1900	661	1880	18;18;18;18	1800	-75.62	-60	-83.05	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	-1800	-76.02	-60	-57.51	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	-1600	-74.57	-60	-56.07	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	-1400	-73.86	-60	-55.35	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	-1200	-72.72	-60	-54.22	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	-1000	-72.02	-60	-53.52	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	-800	-70.27	-60	-51.76	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	-600	-68.27	-60	-49.76	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	-400	-61.90	-60	-43.40	-36	PASS
EGPRS1900	810	1909.8	5;5;5;5	-250	-43.48	-33	-24.98	-36	PASS
EGPRS1900	810	1909.8	5;5;5;5	-200	-37.22	-30	-18.71	-36	PASS
EGPRS1900	810	1909.8	5;5;5;5	-100	-8.61	0.5	9.90	-36	PASS
EGPRS1900	810	1909.8	5;5;5;5	100	-8.17	0.5	10.34	-36	PASS
EGPRS1900	810	1909.8	5;5;5;5	200	-38.27	-30	-19.76	-36	PASS
EGPRS1900	810	1909.8	5;5;5;5	250	-43.14	-33	-24.64	-36	PASS
EGPRS1900	810	1909.8	5;5;5;5	400	-62.26	-60	-43.75	-36	PASS
EGPRS1900	810	1909.8	5;5;5;5	600	-68.85	-60	-50.35	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	800	-70.13	-60	-51.62	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	1000	-71.25	-60	-52.75	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	1200	-72.57	-60	-54.07	-55	PASS

EGPRS1900	810	1909.8	5;5;5;5	1400	-73.76	-60	-55.25	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	1600	-75.38	-60	-56.87	-55	PASS
EGPRS1900	810	1909.8	5;5;5;5	1800	-75.58	-60	-57.08	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	-1800	-75.55	-60	-83.01	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	-1600	-74.33	-60	-81.79	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	-1400	-73.90	-60	-81.36	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	-1200	-73.05	-60	-80.51	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	-1000	-70.98	-60	-78.44	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	-800	-69.66	-60	-77.12	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	-600	-68.21	-60	-75.66	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	-400	-62.52	-60	-69.97	-36	PASS
EGPRS1900	810	1909.8	18;18;18;18	-250	-40.98	-33	-48.43	-36	PASS
EGPRS1900	810	1909.8	18;18;18;18	-200	-37.78	-30	-45.24	-36	PASS
EGPRS1900	810	1909.8	18;18;18;18	-100	-8.00	0.5	-15.46	-36	PASS
EGPRS1900	810	1909.8	18;18;18;18	100	-8.52	0.5	-15.98	-36	PASS
EGPRS1900	810	1909.8	18;18;18;18	200	-37.12	-30	-44.57	-36	PASS
EGPRS1900	810	1909.8	18;18;18;18	250	-40.14	-33	-47.60	-36	PASS
EGPRS1900	810	1909.8	18;18;18;18	400	-62.83	-60	-70.28	-36	PASS
EGPRS1900	810	1909.8	18;18;18;18	600	-68.68	-60	-76.13	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	800	-69.44	-60	-76.89	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	1000	-71.24	-60	-78.69	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	1200	-71.67	-60	-79.13	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	1400	-73.81	-60	-81.26	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	1600	-74.35	-60	-81.80	-55	PASS
EGPRS1900	810	1909.8	18;18;18;18	1800	-74.49	-60	-81.94	-55	PASS
EGPRS850	128	824.2	6;6;6;6	-1800	-75.13	-60	-58.22	-51	PASS
EGPRS850	128	824.2	6;6;6;6	-1600	-74.82	-60	-57.90	-51	PASS
EGPRS850	128	824.2	6;6;6;6	-1400	-73.44	-60	-56.52	-51	PASS
EGPRS850	128	824.2	6;6;6;6	-1200	-72.79	-60	-55.87	-51	PASS
EGPRS850	128	824.2	6;6;6;6	-1000	-71.31	-60	-54.39	-51	PASS
EGPRS850	128	824.2	6;6;6;6	-800	-70.34	-60	-53.42	-51	PASS
EGPRS850	128	824.2	6;6;6;6	-600	-68.30	-60	-51.39	-51	PASS
EGPRS850	128	824.2	6;6;6;6	-400	-61.96	-60	-45.05	-36	PASS
EGPRS850	128	824.2	6;6;6;6	-250	-41.13	-33	-24.22	-36	PASS
EGPRS850	128	824.2	6;6;6;6	-200	-37.00	-30	-20.08	-36	PASS
EGPRS850	128	824.2	6;6;6;6	-100	-7.36	0.5	9.56	-36	PASS
EGPRS850	128	824.2	6;6;6;6	100	-6.79	0.5	10.12	-36	PASS
EGPRS850	128	824.2	6;6;6;6	200	-37.77	-30	-20.85	-36	PASS
EGPRS850	128	824.2	6;6;6;6	250	-41.17	-33	-24.25	-36	PASS
EGPRS850	128	824.2	6;6;6;6	400	-62.88	-60	-45.96	-36	PASS
EGPRS850	128	824.2	6;6;6;6	600	-69.00	-60	-52.08	-51	PASS
EGPRS850	128	824.2	6;6;6;6	800	-69.53	-60	-52.61	-51	PASS
EGPRS850	128	824.2	6;6;6;6	1000	-71.90	-60	-54.98	-51	PASS
EGPRS850	128	824.2	6;6;6;6	1200	-72.67	-60	-55.75	-51	PASS

EGPRS850	128	824.2	6;6;6;6	1400	-74.01	-60	-57.09	-51	PASS
EGPRS850	128	824.2	6;6;6;6	1600	-74.82	-60	-57.90	-51	PASS
EGPRS850	128	824.2	6;6;6;6	1800	-75.00	-60	-58.08	-51	PASS
EGPRS850	128	824.2	17;17;17;17	-1800	-75.99	-60	-79.41	-51	PASS
EGPRS850	128	824.2	17;17;17;17	-1600	-75.94	-60	-79.36	-51	PASS
EGPRS850	128	824.2	17;17;17;17	-1400	-74.34	-60	-77.77	-51	PASS
EGPRS850	128	824.2	17;17;17;17	-1200	-73.70	-60	-77.13	-51	PASS
EGPRS850	128	824.2	17;17;17;17	-1000	-72.56	-60	-75.99	-51	PASS
EGPRS850	128	824.2	17;17;17;17	-800	-71.08	-60	-74.50	-51	PASS
EGPRS850	128	824.2	17;17;17;17	-600	-69.74	-60	-73.16	-51	PASS
EGPRS850	128	824.2	17;17;17;17	-400	-65.40	-60	-68.83	-36	PASS
EGPRS850	128	824.2	17;17;17;17	-250	-41.59	-33	-45.02	-36	PASS
EGPRS850	128	824.2	17;17;17;17	-200	-38.45	-30	-41.88	-36	PASS
EGPRS850	128	824.2	17;17;17;17	-100	-8.05	0.5	-11.48	-36	PASS
EGPRS850	128	824.2	17;17;17;17	100	-8.06	0.5	-11.48	-36	PASS
EGPRS850	128	824.2	17;17;17;17	200	-37.73	-30	-41.15	-36	PASS
EGPRS850	128	824.2	17;17;17;17	250	-41.38	-33	-44.81	-36	PASS
EGPRS850	128	824.2	17;17;17;17	400	-66.28	-60	-69.71	-36	PASS
EGPRS850	128	824.2	17;17;17;17	600	-69.71	-60	-73.14	-51	PASS
EGPRS850	128	824.2	17;17;17;17	800	-70.39	-60	-73.82	-51	PASS
EGPRS850	128	824.2	17;17;17;17	1000	-72.84	-60	-76.26	-51	PASS
EGPRS850	128	824.2	17;17;17;17	1200	-73.10	-60	-76.52	-51	PASS
EGPRS850	128	824.2	17;17;17;17	1400	-74.58	-60	-78.00	-51	PASS
EGPRS850	128	824.2	17;17;17;17	1600	-75.82	-60	-79.24	-51	PASS
EGPRS850	128	824.2	17;17;17;17	1800	-75.89	-60	-79.32	-51	PASS
EGPRS850	190	836.6	6;6;6;6	-1800	-75.43	-60	-58.37	-51	PASS
EGPRS850	190	836.6	6;6;6;6	-1600	-75.35	-60	-58.29	-51	PASS
EGPRS850	190	836.6	6;6;6;6	-1400	-73.94	-60	-56.87	-51	PASS
EGPRS850	190	836.6	6;6;6;6	-1200	-73.75	-60	-56.68	-51	PASS
EGPRS850	190	836.6	6;6;6;6	-1000	-73.24	-60	-56.17	-51	PASS
EGPRS850	190	836.6	6;6;6;6	-800	-70.44	-60	-53.38	-51	PASS
EGPRS850	190	836.6	6;6;6;6	-600	-69.22	-60	-52.15	-51	PASS
EGPRS850	190	836.6	6;6;6;6	-400	-63.40	-60	-46.33	-36	PASS
EGPRS850	190	836.6	6;6;6;6	-250	-42.27	-33	-25.20	-36	PASS
EGPRS850	190	836.6	6;6;6;6	-200	-37.66	-30	-20.59	-36	PASS
EGPRS850	190	836.6	6;6;6;6	-100	-8.13	0.5	8.94	-36	PASS
EGPRS850	190	836.6	6;6;6;6	100	-7.56	0.5	9.50	-36	PASS
EGPRS850	190	836.6	6;6;6;6	200	-38.02	-30	-20.95	-36	PASS
EGPRS850	190	836.6	6;6;6;6	250	-41.61	-33	-24.54	-36	PASS
EGPRS850	190	836.6	6;6;6;6	400	-63.87	-60	-46.81	-36	PASS
EGPRS850	190	836.6	6;6;6;6	600	-69.55	-60	-52.48	-51	PASS
EGPRS850	190	836.6	6;6;6;6	800	-70.20	-60	-53.13	-51	PASS
EGPRS850	190	836.6	6;6;6;6	1000	-71.98	-60	-54.91	-51	PASS
EGPRS850	190	836.6	6;6;6;6	1200	-72.98	-60	-55.91	-51	PASS

EGPRS850	190	836.6	6;6;6;6	1400	-74.17	-60	-57.10	-51	PASS
EGPRS850	190	836.6	6;6;6;6	1600	-75.02	-60	-57.95	-51	PASS
EGPRS850	190	836.6	6;6;6;6	1800	-75.08	-60	-58.02	-51	PASS
EGPRS850	190	836.6	17;17;17;17	-1800	-75.38	-60	-79.40	-51	PASS
EGPRS850	190	836.6	17;17;17;17	-1600	-74.91	-60	-78.93	-51	PASS
EGPRS850	190	836.6	17;17;17;17	-1400	-74.22	-60	-78.24	-51	PASS
EGPRS850	190	836.6	17;17;17;17	-1200	-72.64	-60	-76.66	-51	PASS
EGPRS850	190	836.6	17;17;17;17	-1000	-72.40	-60	-76.42	-51	PASS
EGPRS850	190	836.6	17;17;17;17	-800	-70.29	-60	-74.31	-51	PASS
EGPRS850	190	836.6	17;17;17;17	-600	-70.00	-60	-74.02	-51	PASS
EGPRS850	190	836.6	17;17;17;17	-400	-66.48	-60	-70.50	-36	PASS
EGPRS850	190	836.6	17;17;17;17	-250	-40.45	-33	-44.47	-36	PASS
EGPRS850	190	836.6	17;17;17;17	-200	-37.56	-30	-41.58	-36	PASS
EGPRS850	190	836.6	17;17;17;17	-100	-7.58	0.5	-11.60	-36	PASS
EGPRS850	190	836.6	17;17;17;17	100	-7.77	0.5	-11.79	-36	PASS
EGPRS850	190	836.6	17;17;17;17	200	-38.16	-30	-42.18	-36	PASS
EGPRS850	190	836.6	17;17;17;17	250	-41.65	-33	-45.67	-36	PASS
EGPRS850	190	836.6	17;17;17;17	400	-66.20	-60	-70.22	-36	PASS
EGPRS850	190	836.6	17;17;17;17	600	-69.55	-60	-73.57	-51	PASS
EGPRS850	190	836.6	17;17;17;17	800	-70.94	-60	-74.96	-51	PASS
EGPRS850	190	836.6	17;17;17;17	1000	-73.17	-60	-77.19	-51	PASS
EGPRS850	190	836.6	17;17;17;17	1200	-73.56	-60	-77.58	-51	PASS
EGPRS850	190	836.6	17;17;17;17	1400	-73.94	-60	-77.97	-51	PASS
EGPRS850	190	836.6	17;17;17;17	1600	-75.49	-60	-79.51	-51	PASS
EGPRS850	190	836.6	17;17;17;17	1800	-75.93	-60	-79.95	-51	PASS
EGPRS850	251	848.8	6;6;6;6	-1800	-76.00	-60	-58.57	-51	PASS
EGPRS850	251	848.8	6;6;6;6	-1600	-76.15	-60	-58.72	-51	PASS
EGPRS850	251	848.8	6;6;6;6	-1400	-74.96	-60	-57.54	-51	PASS
EGPRS850	251	848.8	6;6;6;6	-1200	-73.74	-60	-56.31	-51	PASS
EGPRS850	251	848.8	6;6;6;6	-1000	-73.24	-60	-55.81	-51	PASS
EGPRS850	251	848.8	6;6;6;6	-800	-70.60	-60	-53.17	-51	PASS
EGPRS850	251	848.8	6;6;6;6	-600	-69.94	-60	-52.51	-51	PASS
EGPRS850	251	848.8	6;6;6;6	-400	-64.28	-60	-46.85	-36	PASS
EGPRS850	251	848.8	6;6;6;6	-250	-41.81	-33	-24.39	-36	PASS
EGPRS850	251	848.8	6;6;6;6	-200	-38.13	-30	-20.70	-36	PASS
EGPRS850	251	848.8	6;6;6;6	-100	-8.22	0.5	9.20	-36	PASS
EGPRS850	251	848.8	6;6;6;6	100	-7.87	0.5	9.56	-36	PASS
EGPRS850	251	848.8	6;6;6;6	200	-38.57	-30	-21.14	-36	PASS
EGPRS850	251	848.8	6;6;6;6	250	-42.03	-33	-24.60	-36	PASS
EGPRS850	251	848.8	6;6;6;6	400	-63.55	-60	-46.12	-36	PASS
EGPRS850	251	848.8	6;6;6;6	600	-69.56	-60	-52.14	-51	PASS
EGPRS850	251	848.8	6;6;6;6	800	-71.16	-60	-53.73	-51	PASS
EGPRS850	251	848.8	6;6;6;6	1000	-72.90	-60	-55.47	-51	PASS
EGPRS850	251	848.8	6;6;6;6	1200	-73.01	-60	-55.58	-51	PASS


EGPRS850	251	848.8	6;6;6;6	1400	-74.66	-60	-57.23	-51	PASS
EGPRS850	251	848.8	6;6;6;6	1600	-75.39	-60	-57.96	-51	PASS
EGPRS850	251	848.8	6;6;6;6	1800	-76.35	-60	-58.92	-51	PASS
EGPRS850	251	848.8	17;17;17;17	-1800	-76.24	-60	-80.62	-51	PASS
EGPRS850	251	848.8	17;17;17;17	-1600	-74.81	-60	-79.19	-51	PASS
EGPRS850	251	848.8	17;17;17;17	-1400	-73.63	-60	-78.01	-51	PASS
EGPRS850	251	848.8	17;17;17;17	-1200	-72.59	-60	-76.97	-51	PASS
EGPRS850	251	848.8	17;17;17;17	-1000	-72.52	-60	-76.90	-51	PASS
EGPRS850	251	848.8	17;17;17;17	-800	-70.92	-60	-75.30	-51	PASS
EGPRS850	251	848.8	17;17;17;17	-600	-69.63	-60	-74.01	-51	PASS
EGPRS850	251	848.8	17;17;17;17	-400	-65.66	-60	-70.04	-36	PASS
EGPRS850	251	848.8	17;17;17;17	-250	-41.71	-33	-46.09	-36	PASS
EGPRS850	251	848.8	17;17;17;17	-200	-37.63	-30	-42.01	-36	PASS
EGPRS850	251	848.8	17;17;17;17	-100	-7.30	0.5	-11.68	-36	PASS
EGPRS850	251	848.8	17;17;17;17	100	-8.23	0.5	-12.61	-36	PASS
EGPRS850	251	848.8	17;17;17;17	200	-37.51	-30	-41.89	-36	PASS
EGPRS850	251	848.8	17;17;17;17	250	-41.10	-33	-45.48	-36	PASS
EGPRS850	251	848.8	17;17;17;17	400	-65.70	-60	-70.08	-36	PASS
EGPRS850	251	848.8	17;17;17;17	600	-69.93	-60	-74.31	-51	PASS
EGPRS850	251	848.8	17;17;17;17	800	-70.51	-60	-74.89	-51	PASS
EGPRS850	251	848.8	17;17;17;17	1000	-71.92	-60	-76.30	-51	PASS
EGPRS850	251	848.8	17;17;17;17	1200	-73.78	-60	-78.16	-51	PASS
EGPRS850	251	848.8	17;17;17;17	1400	-74.55	-60	-78.93	-51	PASS
EGPRS850	251	848.8	17;17;17;17	1600	-75.04	-60	-79.42	-51	PASS
EGPRS850	251	848.8	17;17;17;17	1800	-75.77	-60	-80.15	-51	PASS
EGPRS900	975	880.2	6;6;6;6	-1800	-76.49	-60	-58.97	-51	PASS
EGPRS900	975	880.2	6;6;6;6	-1600	-75.89	-60	-58.37	-51	PASS
EGPRS900	975	880.2	6;6;6;6	-1400	-75.37	-60	-57.85	-51	PASS
EGPRS900	975	880.2	6;6;6;6	-1200	-73.96	-60	-56.44	-51	PASS
EGPRS900	975	880.2	6;6;6;6	-1000	-72.65	-60	-55.12	-51	PASS
EGPRS900	975	880.2	6;6;6;6	-800	-71.67	-60	-54.14	-51	PASS
EGPRS900	975	880.2	6;6;6;6	-600	-69.50	-60	-51.97	-51	PASS
EGPRS900	975	880.2	6;6;6;6	-400	-63.39	-60	-45.87	-36	PASS
EGPRS900	975	880.2	6;6;6;6	-250	-44.30	-33	-26.78	-36	PASS
EGPRS900	975	880.2	6;6;6;6	-200	-38.43	-30	-20.91	-36	PASS
EGPRS900	975	880.2	6;6;6;6	-100	-8.37	0.5	9.15	-36	PASS
EGPRS900	975	880.2	6;6;6;6	100	-8.10	0.5	9.42	-36	PASS
EGPRS900	975	880.2	6;6;6;6	200	-38.88	-30	-21.36	-36	PASS
EGPRS900	975	880.2	6;6;6;6	250	-42.70	-33	-25.17	-36	PASS
EGPRS900	975	880.2	6;6;6;6	400	-63.19	-60	-45.66	-36	PASS
EGPRS900	975	880.2	6;6;6;6	600	-69.75	-60	-52.22	-51	PASS
EGPRS900	975	880.2	6;6;6;6	800	-70.99	-60	-53.47	-51	PASS
EGPRS900	975	880.2	6;6;6;6	1000	-73.41	-60	-55.89	-51	PASS
EGPRS900	975	880.2	6;6;6;6	1200	-73.66	-60	-56.14	-51	PASS

EGPRS900	975	880.2	6;6;6;6	1400	-74.69	-60	-57.16	-51	PASS
EGPRS900	975	880.2	6;6;6;6	1600	-75.52	-60	-58.00	-51	PASS
EGPRS900	975	880.2	6;6;6;6	1800	-76.24	-60	-58.71	-51	PASS
EGPRS900	975	880.2	17;17;17;17	-1800	-75.94	-60	-79.02	-51	PASS
EGPRS900	975	880.2	17;17;17;17	-1600	-76.08	-60	-79.15	-51	PASS
EGPRS900	975	880.2	17;17;17;17	-1400	-75.02	-60	-78.10	-51	PASS
EGPRS900	975	880.2	17;17;17;17	-1200	-73.93	-60	-77.01	-51	PASS
EGPRS900	975	880.2	17;17;17;17	-1000	-72.92	-60	-76.00	-51	PASS
EGPRS900	975	880.2	17;17;17;17	-800	-72.36	-60	-75.44	-51	PASS
EGPRS900	975	880.2	17;17;17;17	-600	-70.01	-60	-73.09	-51	PASS
EGPRS900	975	880.2	17;17;17;17	-400	-66.40	-60	-69.47	-36	PASS
EGPRS900	975	880.2	17;17;17;17	-250	-42.52	-33	-45.60	-36	PASS
EGPRS900	975	880.2	17;17;17;17	-200	-38.71	-30	-41.79	-36	PASS
EGPRS900	975	880.2	17;17;17;17	-100	-8.41	0.5	-11.49	-36	PASS
EGPRS900	975	880.2	17;17;17;17	100	-8.70	0.5	-11.78	-36	PASS
EGPRS900	975	880.2	17;17;17;17	200	-38.54	-30	-41.62	-36	PASS
EGPRS900	975	880.2	17;17;17;17	250	-41.16	-33	-44.23	-36	PASS
EGPRS900	975	880.2	17;17;17;17	400	-67.10	-60	-70.18	-36	PASS
EGPRS900	975	880.2	17;17;17;17	600	-70.56	-60	-73.63	-51	PASS
EGPRS900	975	880.2	17;17;17;17	800	-71.78	-60	-74.85	-51	PASS
EGPRS900	975	880.2	17;17;17;17	1000	-73.74	-60	-76.82	-51	PASS
EGPRS900	975	880.2	17;17;17;17	1200	-74.13	-60	-77.20	-51	PASS
EGPRS900	975	880.2	17;17;17;17	1400	-74.59	-60	-77.67	-51	PASS
EGPRS900	975	880.2	17;17;17;17	1600	-76.40	-60	-79.47	-51	PASS
EGPRS900	975	880.2	17;17;17;17	1800	-76.33	-60	-79.41	-51	PASS
EGPRS900	38	897.6	6;6;6;6	-1800	-75.36	-60	-58.58	-51	PASS
EGPRS900	38	897.6	6;6;6;6	-1600	-74.89	-60	-58.12	-51	PASS
EGPRS900	38	897.6	6;6;6;6	-1400	-73.75	-60	-56.97	-51	PASS
EGPRS900	38	897.6	6;6;6;6	-1200	-72.42	-60	-55.65	-51	PASS
EGPRS900	38	897.6	6;6;6;6	-1000	-71.48	-60	-54.71	-51	PASS
EGPRS900	38	897.6	6;6;6;6	-800	-70.60	-60	-53.82	-51	PASS
EGPRS900	38	897.6	6;6;6;6	-600	-68.81	-60	-52.03	-51	PASS
EGPRS900	38	897.6	6;6;6;6	-400	-62.93	-60	-46.15	-36	PASS
EGPRS900	38	897.6	6;6;6;6	-250	-42.30	-33	-25.53	-36	PASS
EGPRS900	38	897.6	6;6;6;6	-200	-36.70	-30	-19.92	-36	PASS
EGPRS900	38	897.6	6;6;6;6	-100	-7.28	0.5	9.50	-36	PASS
EGPRS900	38	897.6	6;6;6;6	100	-6.97	0.5	9.81	-36	PASS
EGPRS900	38	897.6	6;6;6;6	200	-37.33	-30	-20.55	-36	PASS
EGPRS900	38	897.6	6;6;6;6	250	-43.21	-33	-26.44	-36	PASS
EGPRS900	38	897.6	6;6;6;6	400	-62.62	-60	-45.84	-36	PASS
EGPRS900	38	897.6	6;6;6;6	600	-69.10	-60	-52.33	-51	PASS
EGPRS900	38	897.6	6;6;6;6	800	-69.87	-60	-53.09	-51	PASS
EGPRS900	38	897.6	6;6;6;6	1000	-72.30	-60	-55.52	-51	PASS
EGPRS900	38	897.6	6;6;6;6	1200	-72.36	-60	-55.59	-51	PASS


EGPRS900	38	897.6	6;6;6;6	1400	-73.27	-60	-56.49	-51	PASS
EGPRS900	38	897.6	6;6;6;6	1600	-74.71	-60	-57.93	-51	PASS
EGPRS900	38	897.6	6;6;6;6	1800	-75.28	-60	-58.50	-51	PASS
EGPRS900	38	897.6	17;17;17;17	-1800	-75.49	-60	-79.20	-51	PASS
EGPRS900	38	897.6	17;17;17;17	-1600	-75.30	-60	-79.01	-51	PASS
EGPRS900	38	897.6	17;17;17;17	-1400	-73.14	-60	-76.84	-51	PASS
EGPRS900	38	897.6	17;17;17;17	-1200	-73.09	-60	-76.80	-51	PASS
EGPRS900	38	897.6	17;17;17;17	-1000	-72.47	-60	-76.18	-51	PASS
EGPRS900	38	897.6	17;17;17;17	-800	-70.50	-60	-74.21	-51	PASS
EGPRS900	38	897.6	17;17;17;17	-600	-69.74	-60	-73.44	-51	PASS
EGPRS900	38	897.6	17;17;17;17	-400	-65.88	-60	-69.59	-36	PASS
EGPRS900	38	897.6	17;17;17;17	-250	-41.10	-33	-44.81	-36	PASS
EGPRS900	38	897.6	17;17;17;17	-200	-37.85	-30	-41.56	-36	PASS
EGPRS900	38	897.6	17;17;17;17	-100	-7.57	0.5	-11.28	-36	PASS
EGPRS900	38	897.6	17;17;17;17	100	-8.30	0.5	-12.00	-36	PASS
EGPRS900	38	897.6	17;17;17;17	200	-37.79	-30	-41.49	-36	PASS
EGPRS900	38	897.6	17;17;17;17	250	-40.43	-33	-44.14	-36	PASS
EGPRS900	38	897.6	17;17;17;17	400	-66.09	-60	-69.80	-36	PASS
EGPRS900	38	897.6	17;17;17;17	600	-69.56	-60	-73.27	-51	PASS
EGPRS900	38	897.6	17;17;17;17	800	-71.25	-60	-74.96	-51	PASS
EGPRS900	38	897.6	17;17;17;17	1000	-72.66	-60	-76.37	-51	PASS
EGPRS900	38	897.6	17;17;17;17	1200	-72.49	-60	-76.20	-51	PASS
EGPRS900	38	897.6	17;17;17;17	1400	-74.40	-60	-78.11	-51	PASS
EGPRS900	38	897.6	17;17;17;17	1600	-75.40	-60	-79.11	-51	PASS
EGPRS900	38	897.6	17;17;17;17	1800	-76.33	-60	-80.04	-51	PASS
EGPRS900	124	914.8	6;6;6;6	-1800	-76.62	-60	-58.27	-51	PASS
EGPRS900	124	914.8	6;6;6;6	-1600	-77.48	-60	-59.14	-51	PASS
EGPRS900	124	914.8	6;6;6;6	-1400	-76.24	-60	-57.89	-51	PASS
EGPRS900	124	914.8	6;6;6;6	-1200	-75.43	-60	-57.09	-51	PASS
EGPRS900	124	914.8	6;6;6;6	-1000	-73.78	-60	-55.44	-51	PASS
EGPRS900	124	914.8	6;6;6;6	-800	-72.75	-60	-54.40	-51	PASS
EGPRS900	124	914.8	6;6;6;6	-600	-70.31	-60	-51.96	-51	PASS
EGPRS900	124	914.8	6;6;6;6	-400	-64.02	-60	-45.67	-36	PASS
EGPRS900	124	914.8	6;6;6;6	-250	-44.11	-33	-25.76	-36	PASS
EGPRS900	124	914.8	6;6;6;6	-200	-38.29	-30	-19.95	-36	PASS
EGPRS900	124	914.8	6;6;6;6	-100	-8.95	0.5	9.40	-36	PASS
EGPRS900	124	914.8	6;6;6;6	100	-9.26	0.5	9.08	-36	PASS
EGPRS900	124	914.8	6;6;6;6	200	-39.05	-30	-20.70	-36	PASS
EGPRS900	124	914.8	6;6;6;6	250	-43.38	-33	-25.03	-36	PASS
EGPRS900	124	914.8	6;6;6;6	400	-64.48	-60	-46.14	-36	PASS
EGPRS900	124	914.8	6;6;6;6	600	-70.71	-60	-52.36	-51	PASS
EGPRS900	124	914.8	6;6;6;6	800	-71.92	-60	-53.58	-51	PASS
EGPRS900	124	914.8	6;6;6;6	1000	-74.31	-60	-55.97	-51	PASS
EGPRS900	124	914.8	6;6;6;6	1200	-74.58	-60	-56.24	-51	PASS

EGPRS900	124	914.8	6;6;6;6	1400	-76.20	-60	-57.85	-51	PASS
EGPRS900	124	914.8	6;6;6;6	1600	-77.16	-60	-58.81	-51	PASS
EGPRS900	124	914.8	6;6;6;6	1800	-77.27	-60	-58.92	-51	PASS
EGPRS900	124	914.8	17;17;17;17	-1800	-75.05	-60	-78.87	-51	PASS
EGPRS900	124	914.8	17;17;17;17	-1600	-75.56	-60	-79.37	-51	PASS
EGPRS900	124	914.8	17;17;17;17	-1400	-73.64	-60	-77.46	-51	PASS
EGPRS900	124	914.8	17;17;17;17	-1200	-73.36	-60	-77.18	-51	PASS
EGPRS900	124	914.8	17;17;17;17	-1000	-72.67	-60	-76.48	-51	PASS
EGPRS900	124	914.8	17;17;17;17	-800	-71.29	-60	-75.10	-51	PASS
EGPRS900	124	914.8	17;17;17;17	-600	-70.43	-60	-74.25	-51	PASS
EGPRS900	124	914.8	17;17;17;17	-400	-65.35	-60	-69.16	-36	PASS
EGPRS900	124	914.8	17;17;17;17	-250	-41.24	-33	-45.06	-36	PASS
EGPRS900	124	914.8	17;17;17;17	-200	-37.54	-30	-41.36	-36	PASS
EGPRS900	124	914.8	17;17;17;17	-100	-8.36	0.5	-12.17	-36	PASS
EGPRS900	124	914.8	17;17;17;17	100	-7.45	0.5	-11.27	-36	PASS
EGPRS900	124	914.8	17;17;17;17	200	-37.67	-30	-41.49	-36	PASS
EGPRS900	124	914.8	17;17;17;17	250	-41.58	-33	-45.39	-36	PASS
EGPRS900	124	914.8	17;17;17;17	400	-65.59	-60	-69.40	-36	PASS
EGPRS900	124	914.8	17;17;17;17	600	-70.15	-60	-73.97	-51	PASS
EGPRS900	124	914.8	17;17;17;17	800	-70.63	-60	-74.44	-51	PASS
EGPRS900	124	914.8	17;17;17;17	1000	-73.01	-60	-76.82	-51	PASS
EGPRS900	124	914.8	17;17;17;17	1200	-74.00	-60	-77.81	-51	PASS
EGPRS900	124	914.8	17;17;17;17	1400	-74.12	-60	-77.93	-51	PASS
EGPRS900	124	914.8	17;17;17;17	1600	-75.35	-60	-79.17	-51	PASS
EGPRS900	124	914.8	17;17;17;17	1800	-75.38	-60	-79.19	-51	PASS


EGPRS1800 Channel=512 Gamma=5;5;5;5

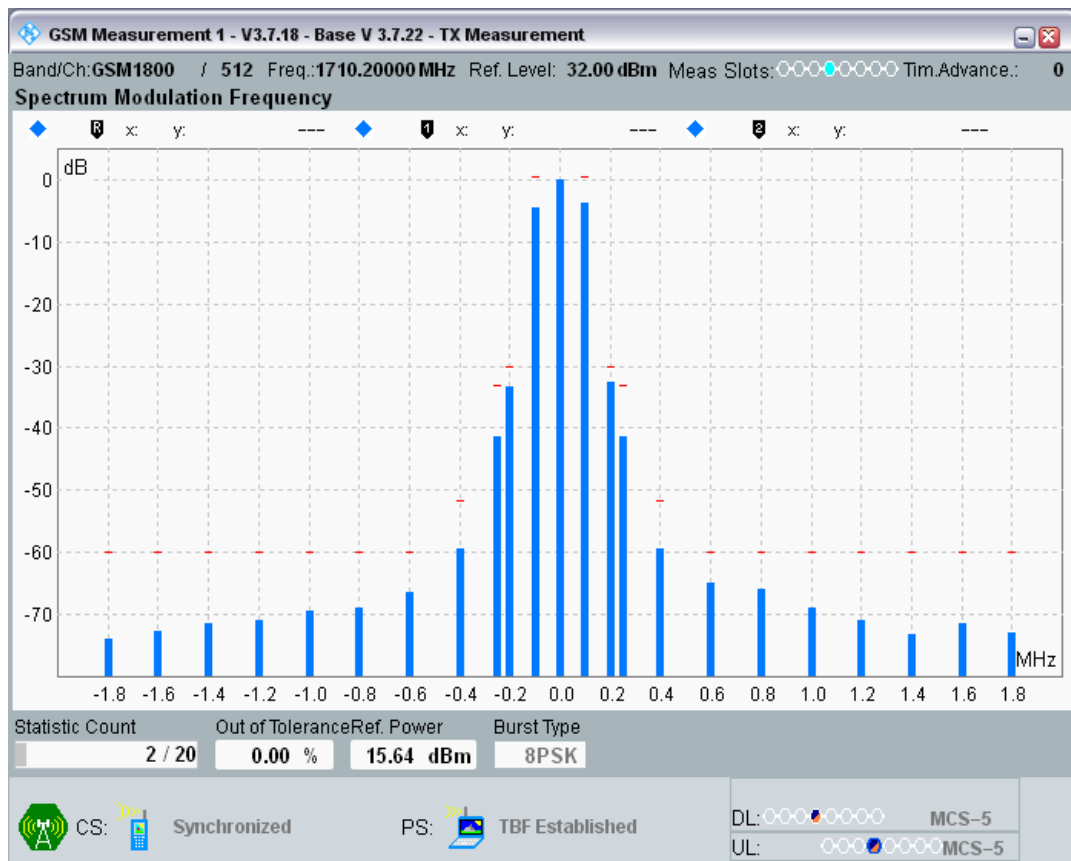


EGPRS1800 Channel=512 Gamma=18;18;18;18

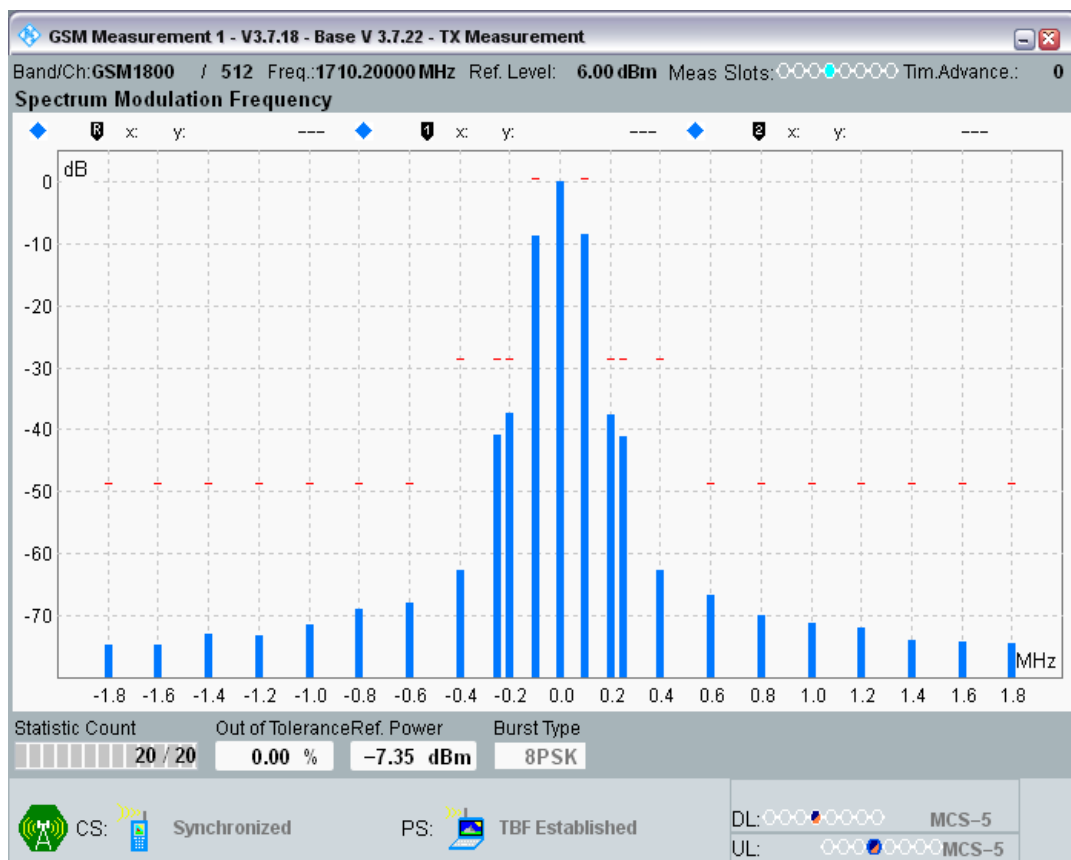


EGPRS1800 Channel=698 Gamma=5;5;5;5

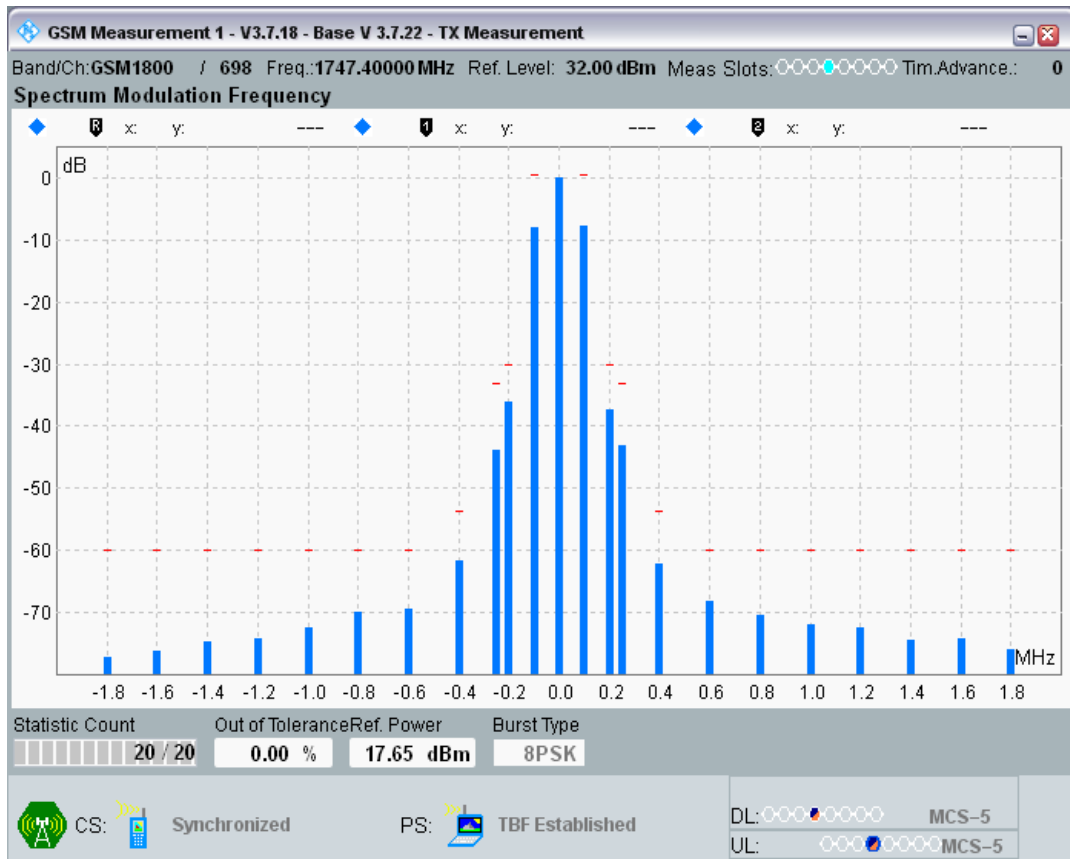


EGPRS1800 Channel=698 Gamma=18;18;18;18

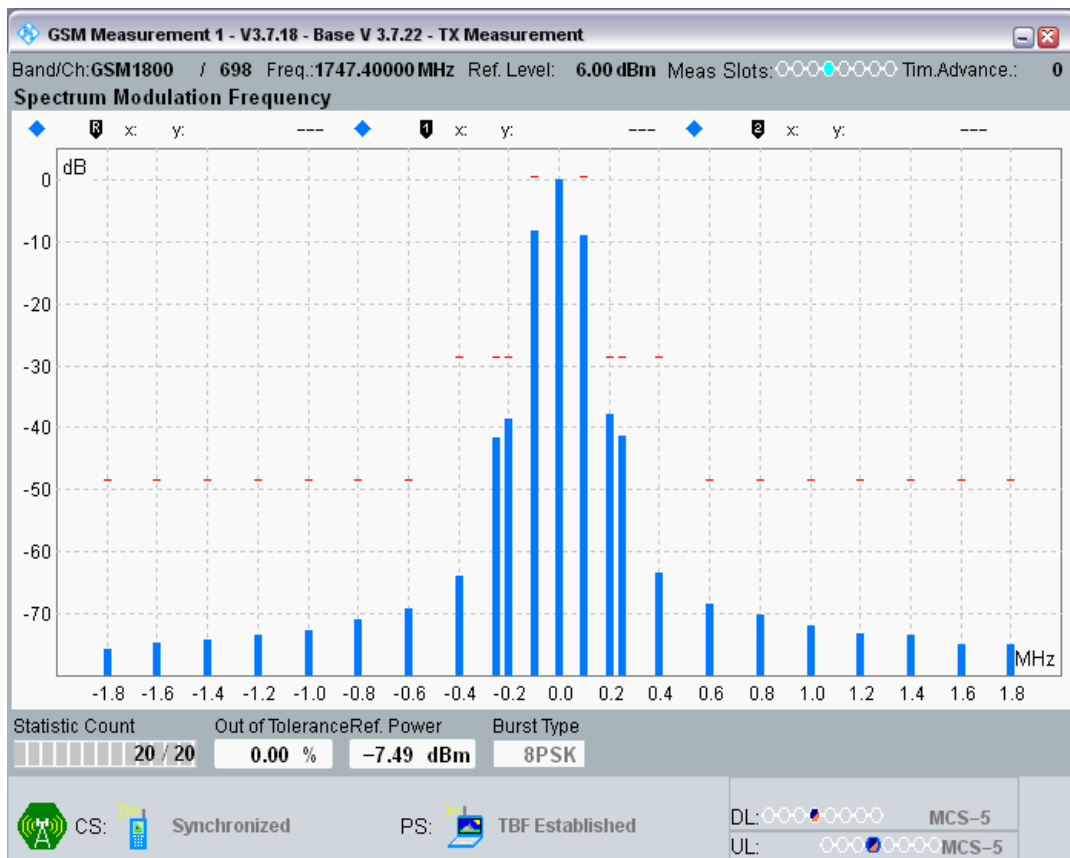


EGPRS1800 Channel=885 Gamma=5;5;5;5

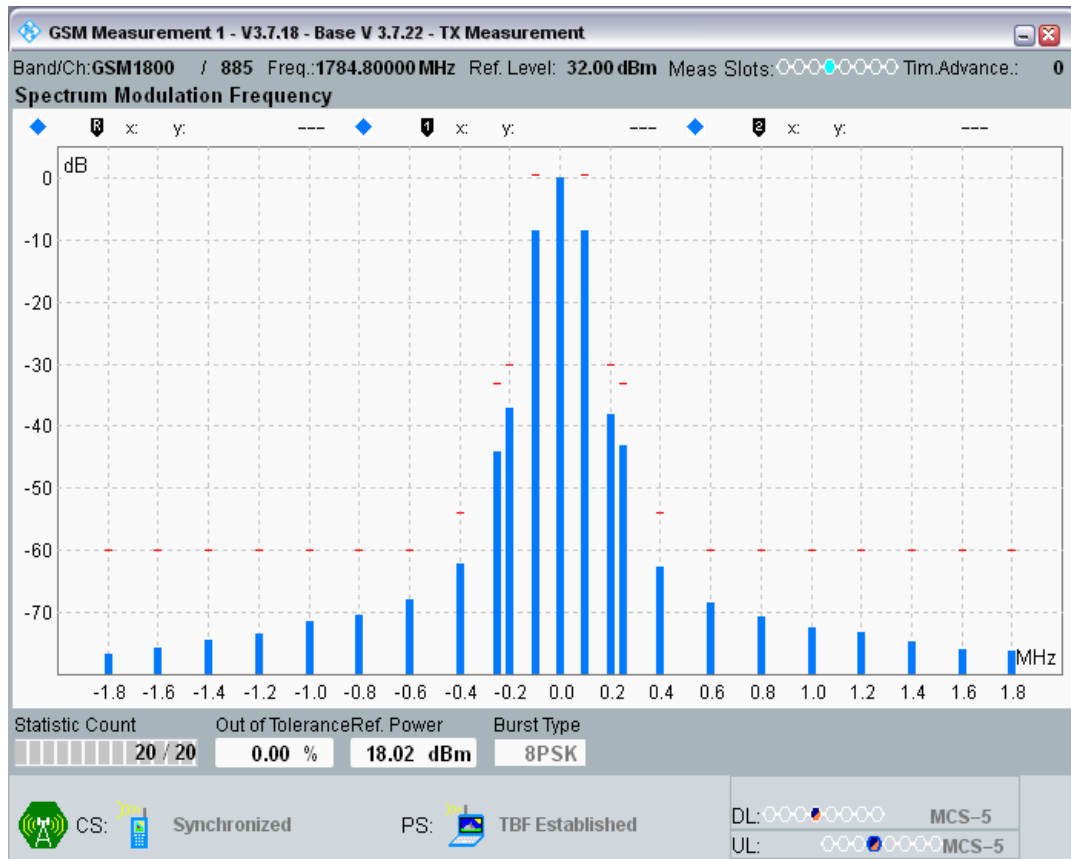


EGPRS1800 Channel=885 Gamma=18;18;18;18

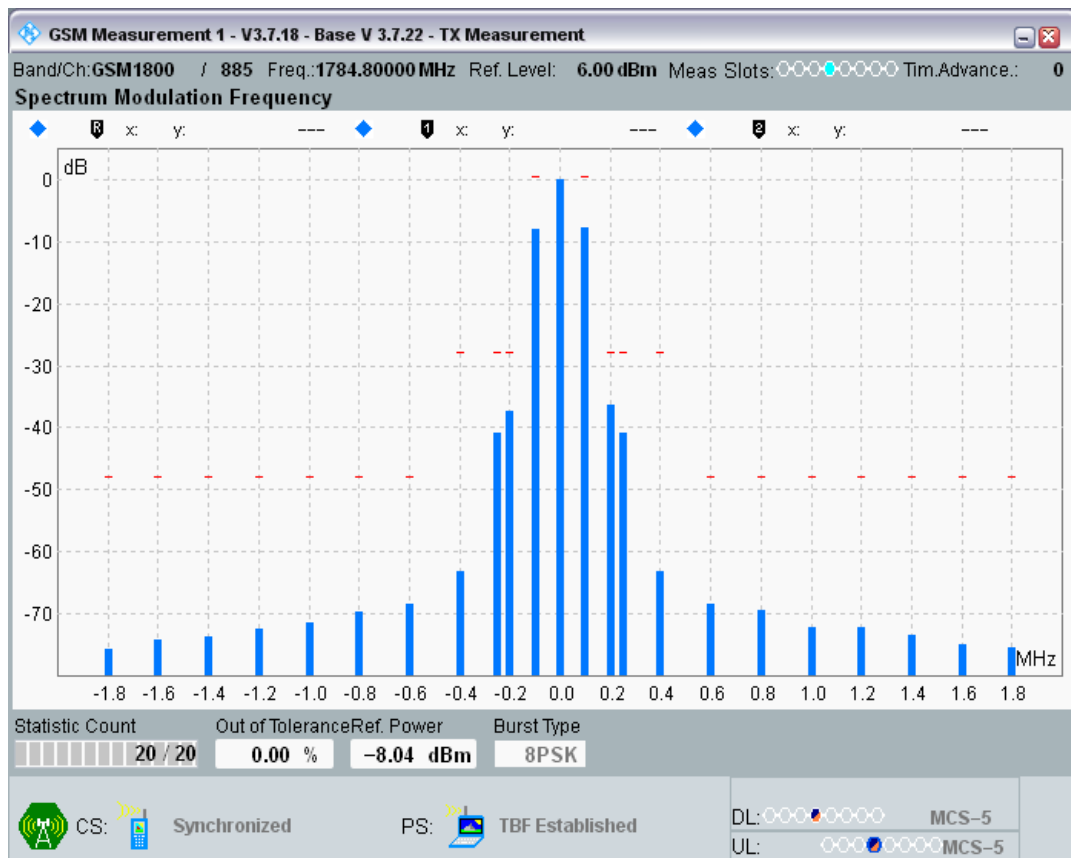


EGPRS1900 Channel=512 Gamma=5;5;5;5

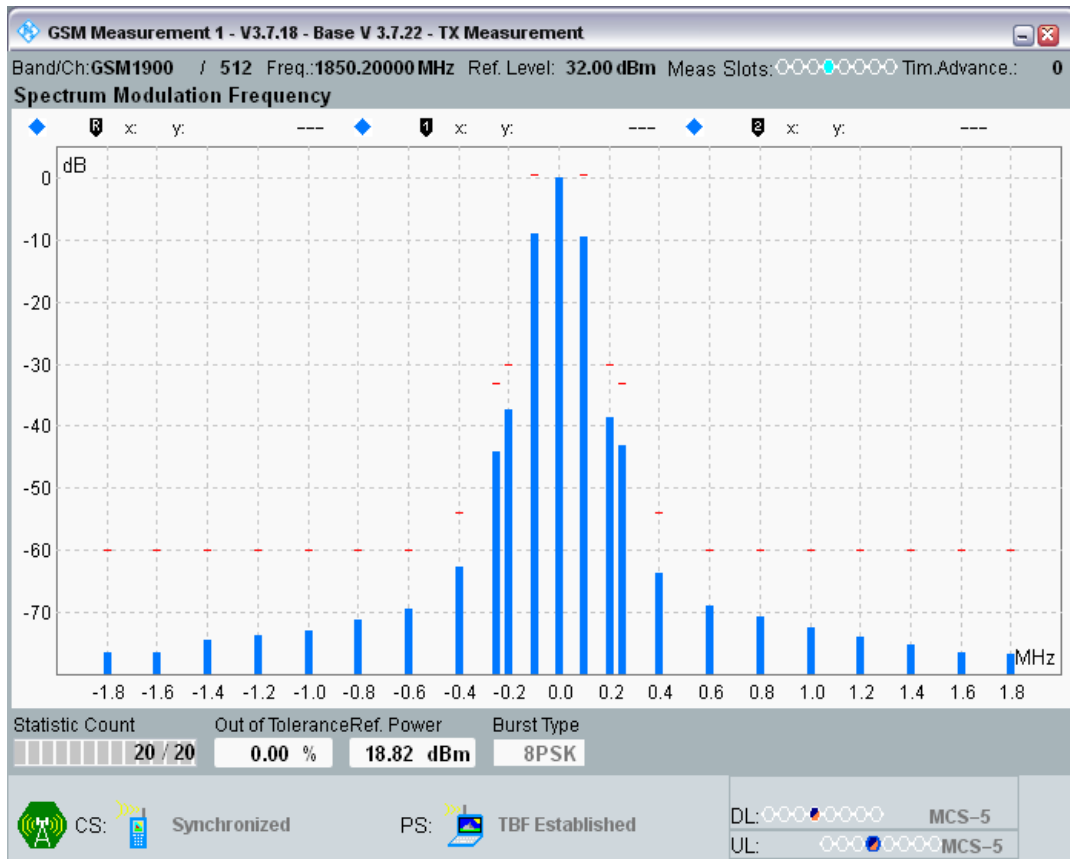


EGPRS1900 Channel=512 Gamma=18;18;18;18

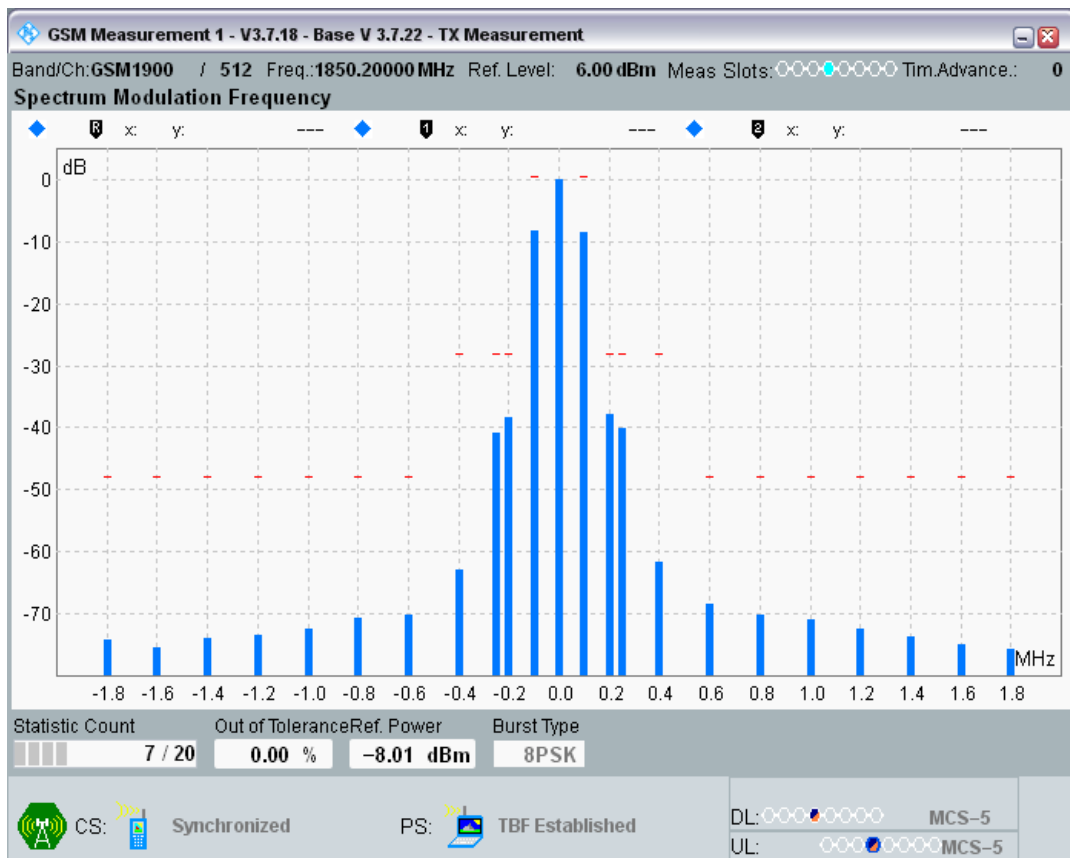


EGPRS1900 Channel=661 Gamma=5;5;5;5

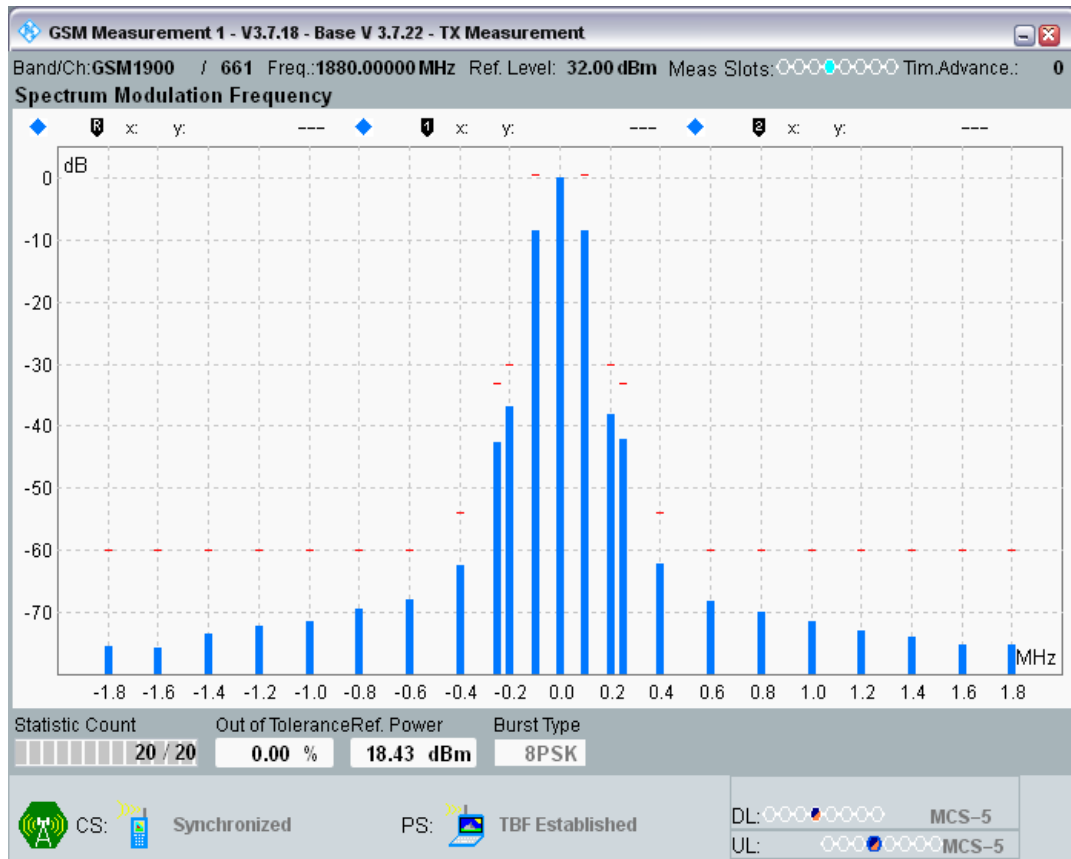


EGPRS1900 Channel=661 Gamma=18;18;18;18

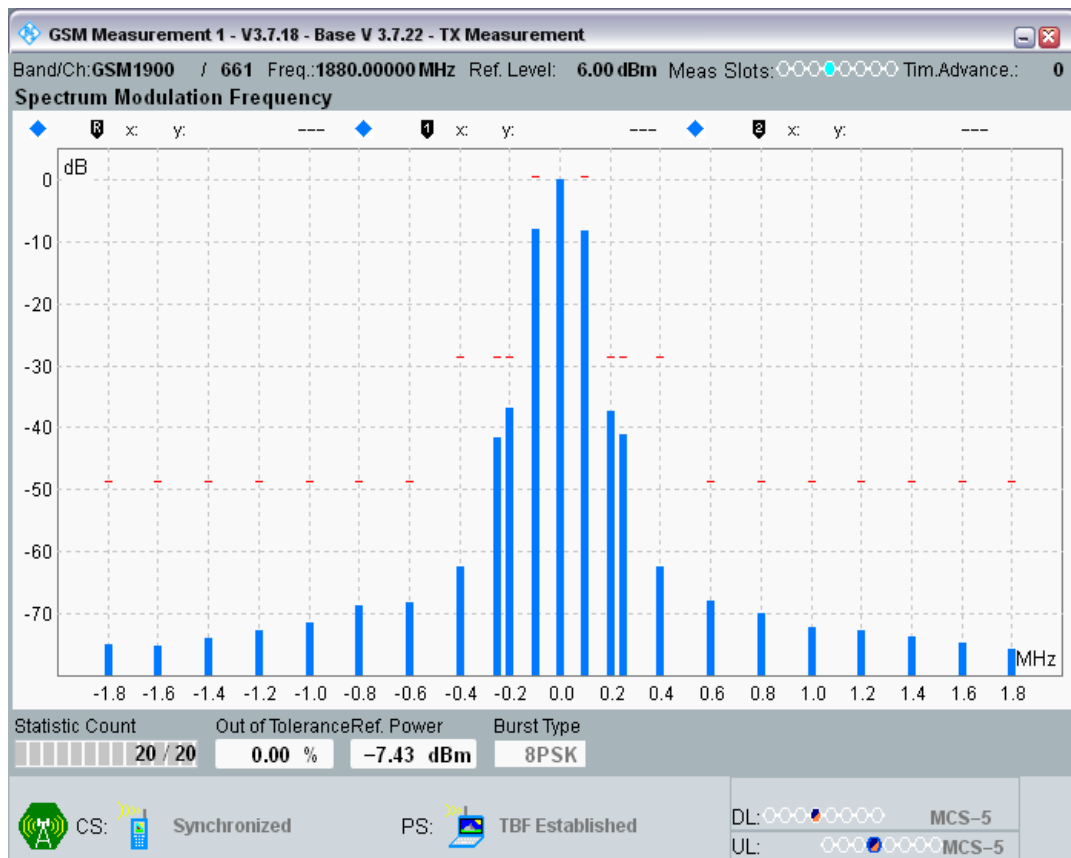


EGPRS1900 Channel=810 Gamma=5;5;5;5

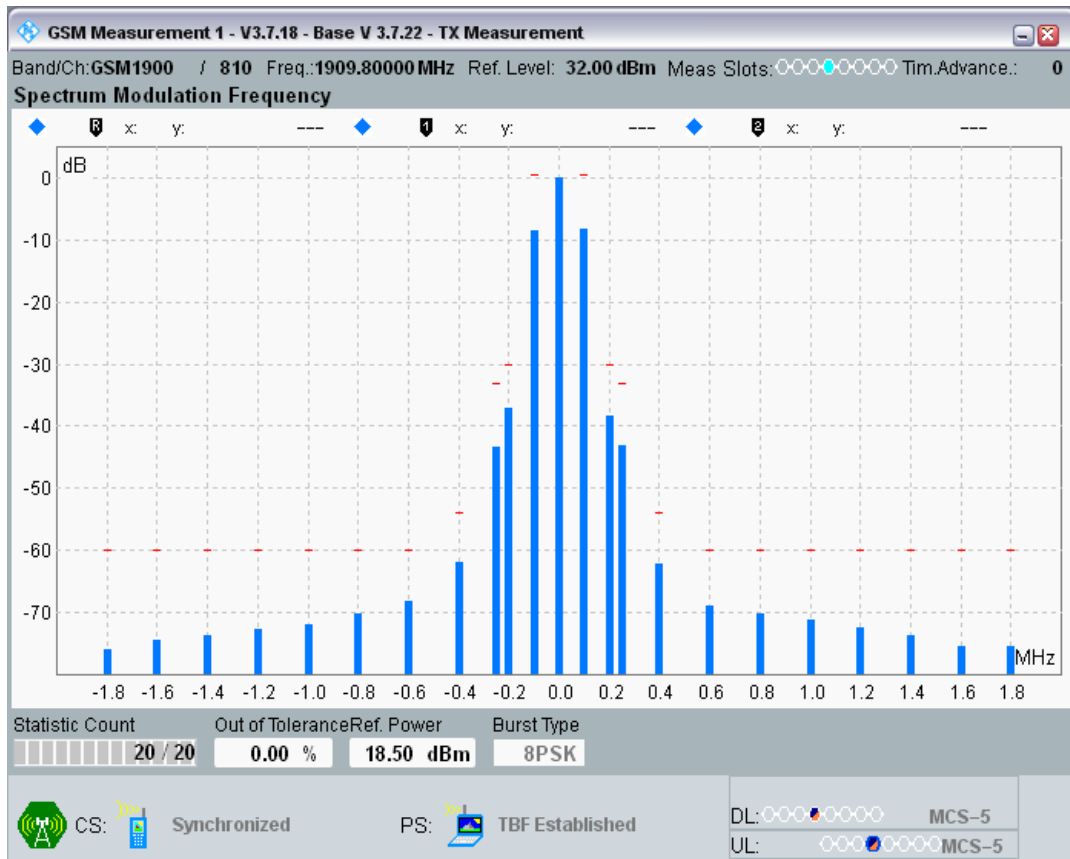


EGPRS1900 Channel=810 Gamma=18;18;18;18

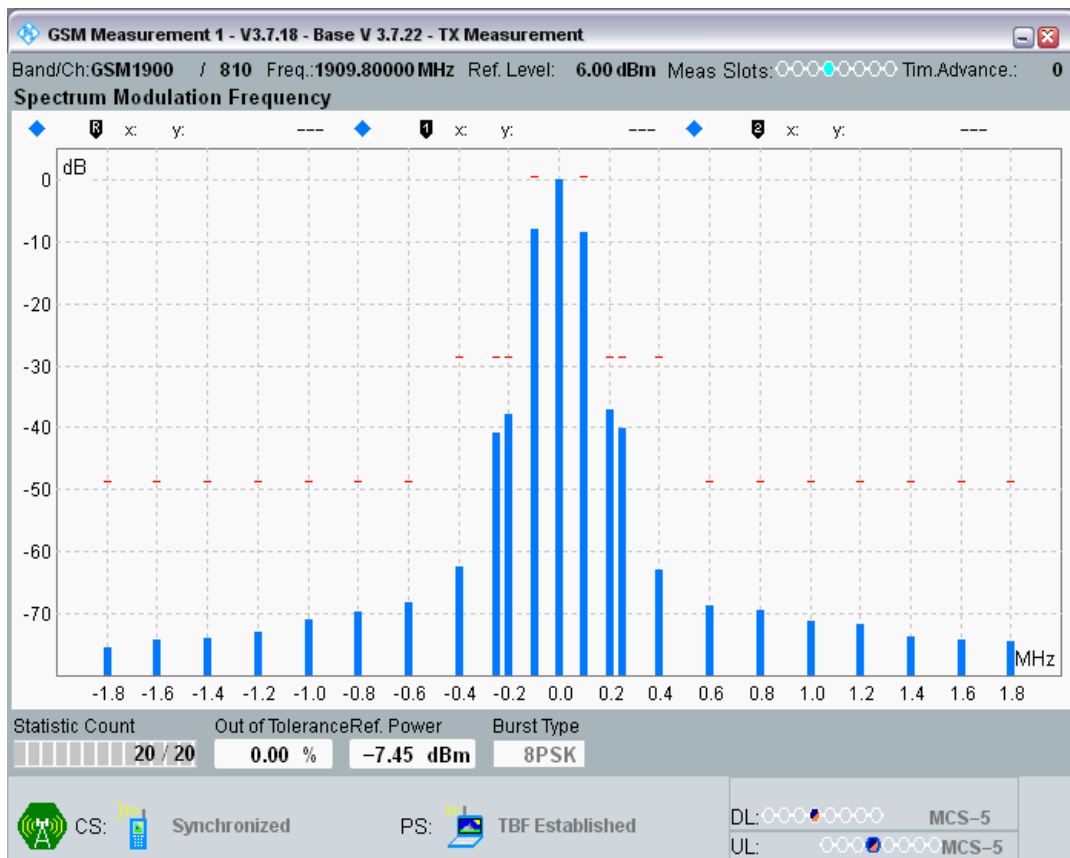


EGPRS850 Channel=128 Gamma=6;6;6;6

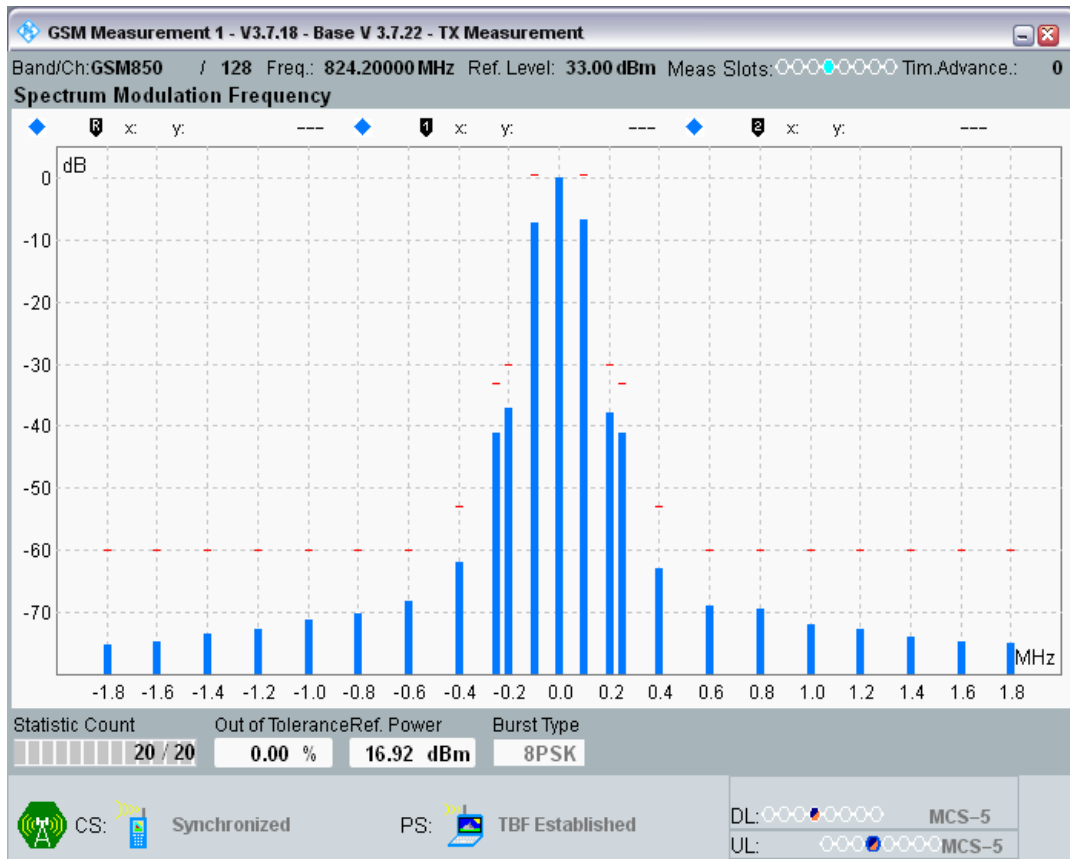


EGPRS850 Channel=128 Gamma=17;17;17;17

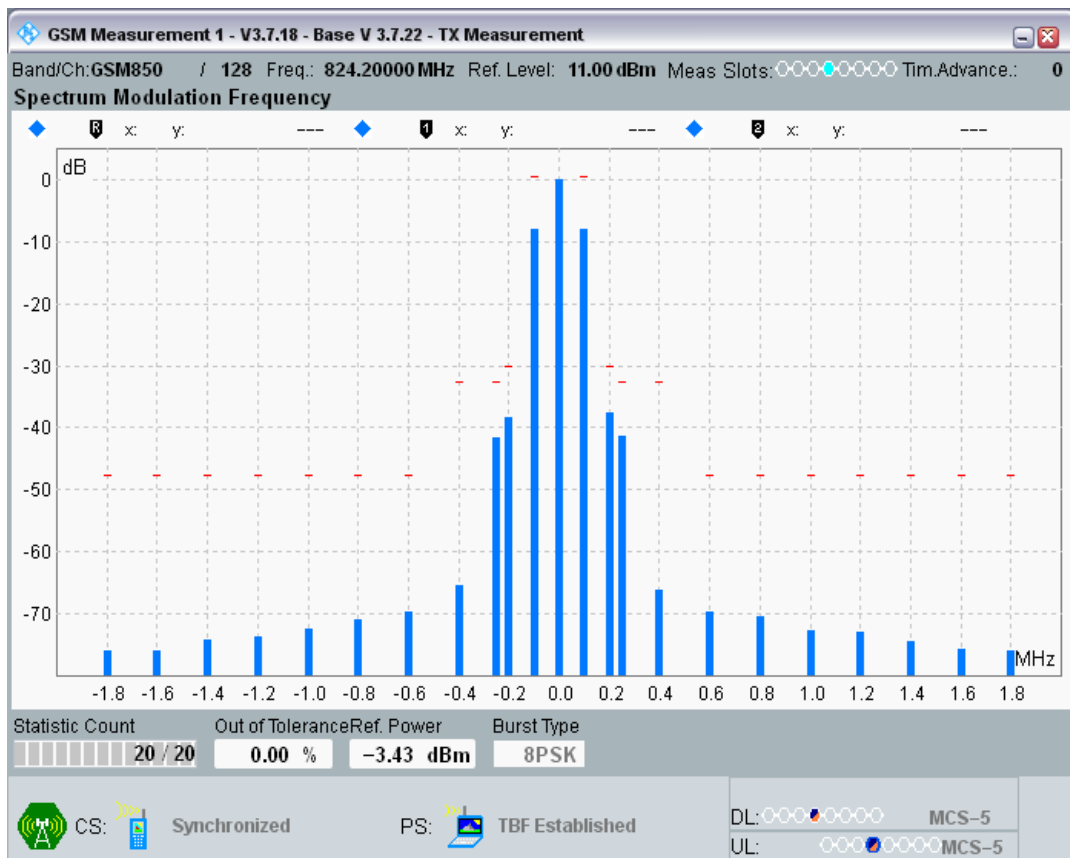


EGPRS850 Channel=190 Gamma=6;6;6;6

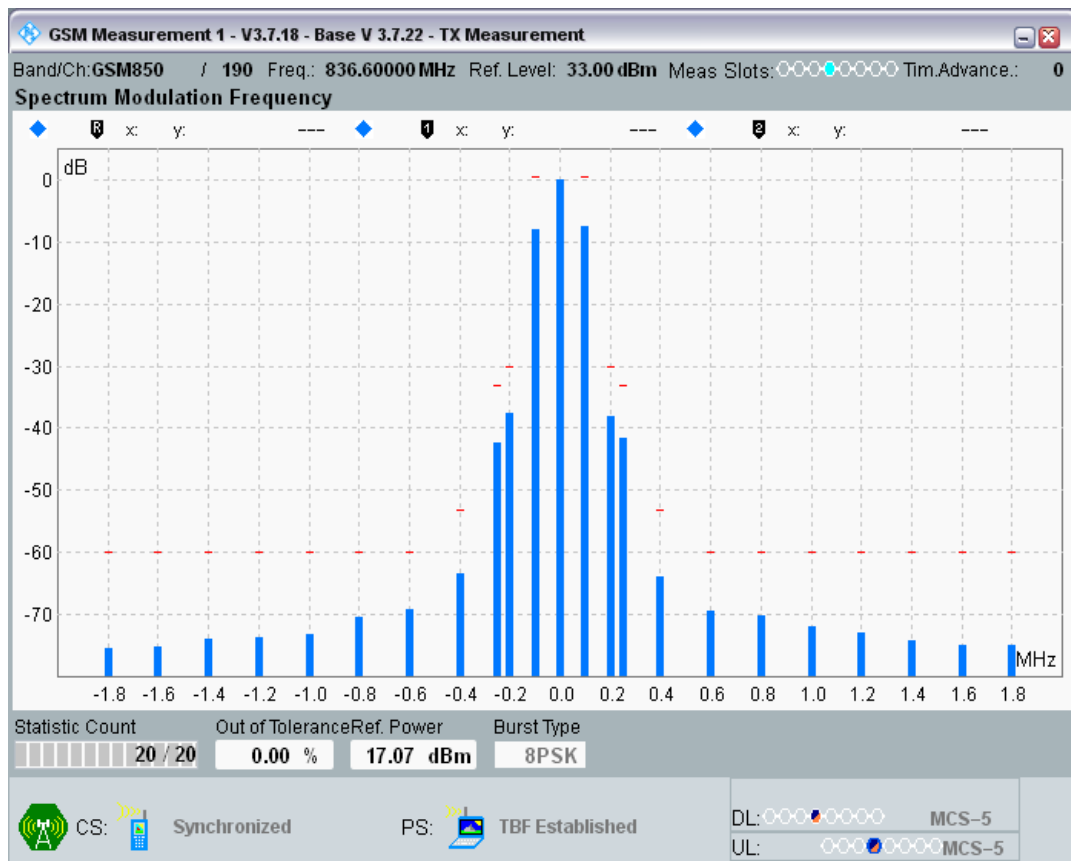


EGPRS850 Channel=190 Gamma=17;17;17;17

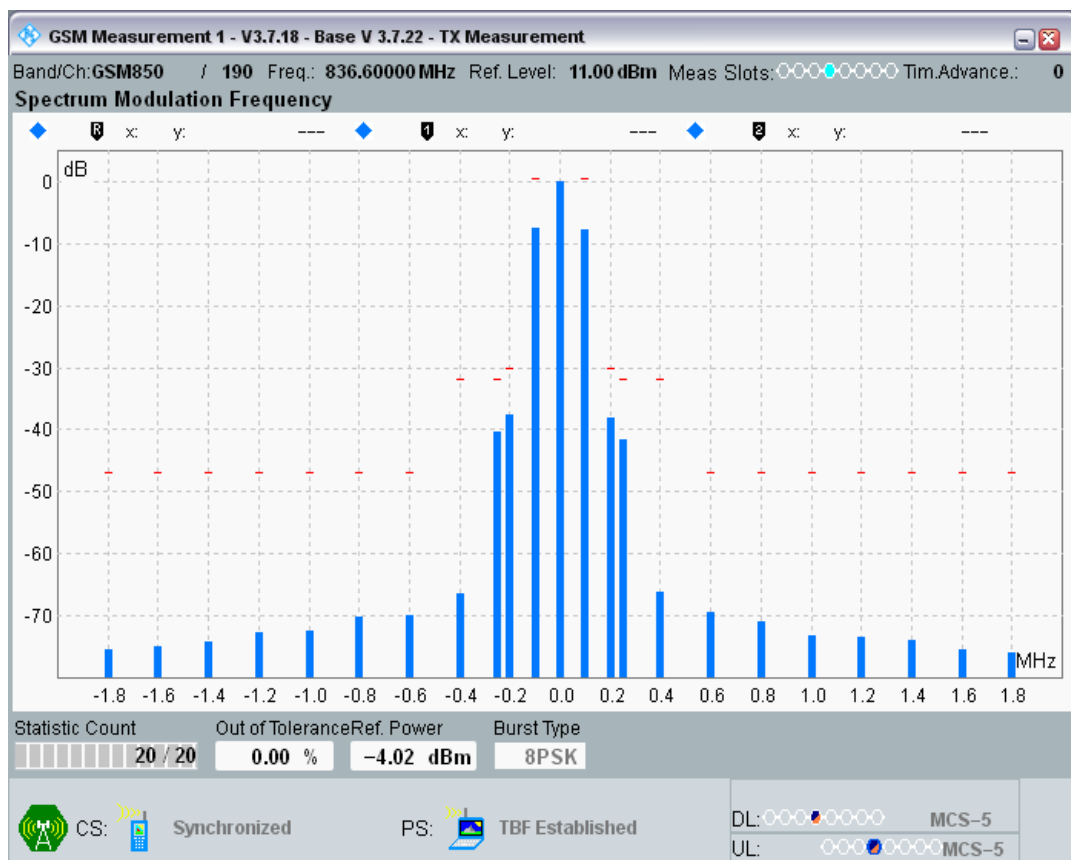


EGPRS850 Channel=251 Gamma=6;6;6;6

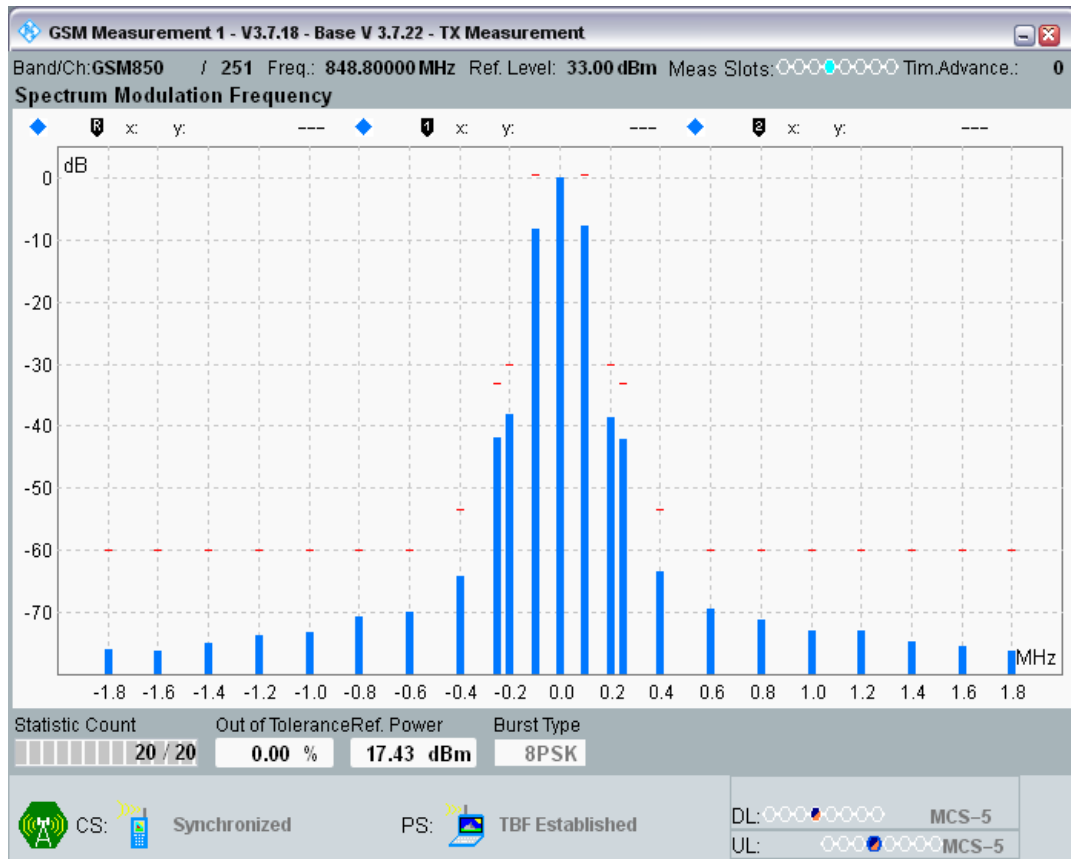


EGPRS850 Channel=251 Gamma=17;17;17;17

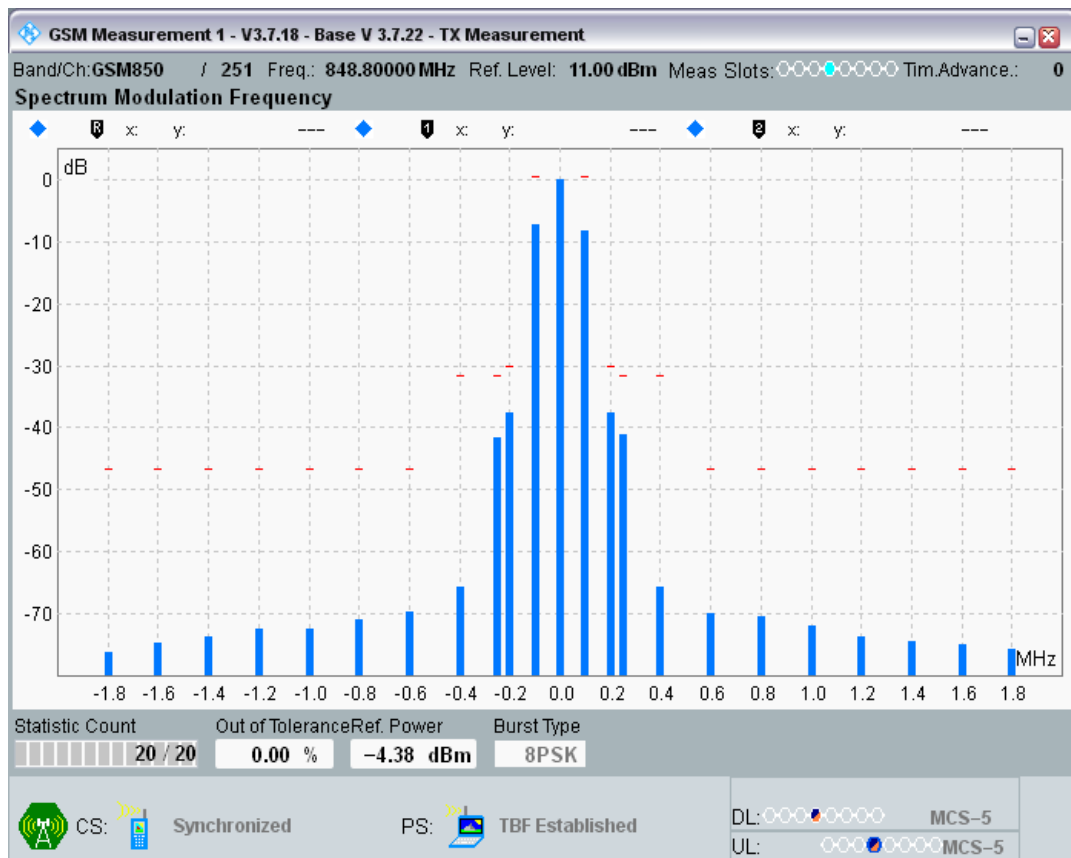


EGPRS900 Channel=975 Gamma=6;6;6;6

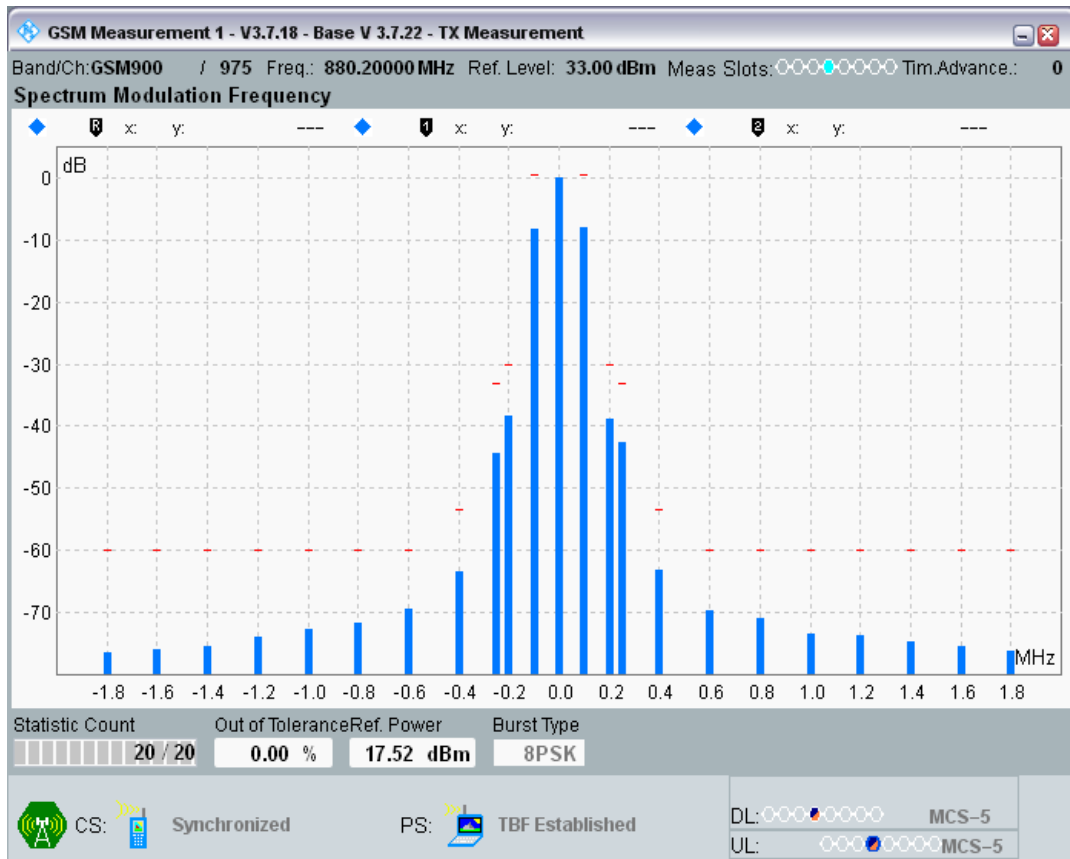


EGPRS900 Channel=975 Gamma=17;17;17;17

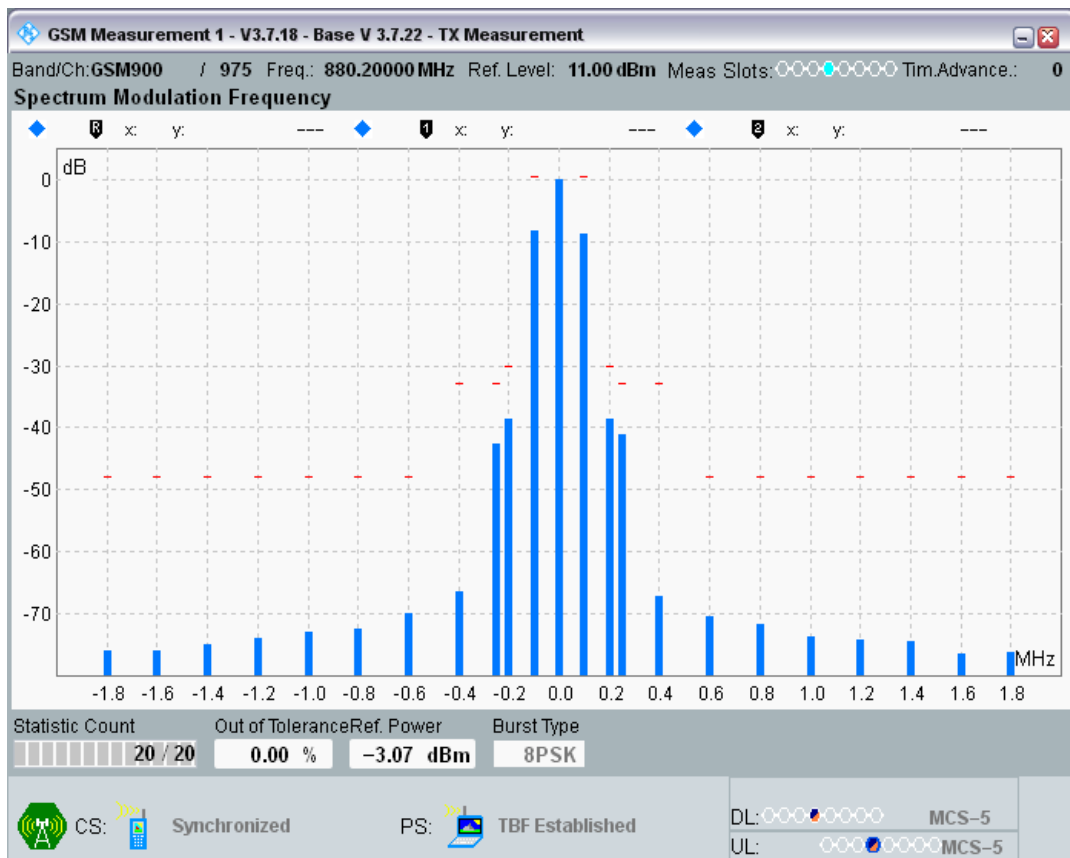


EGPRS900 Channel=38 Gamma=6;6;6;6

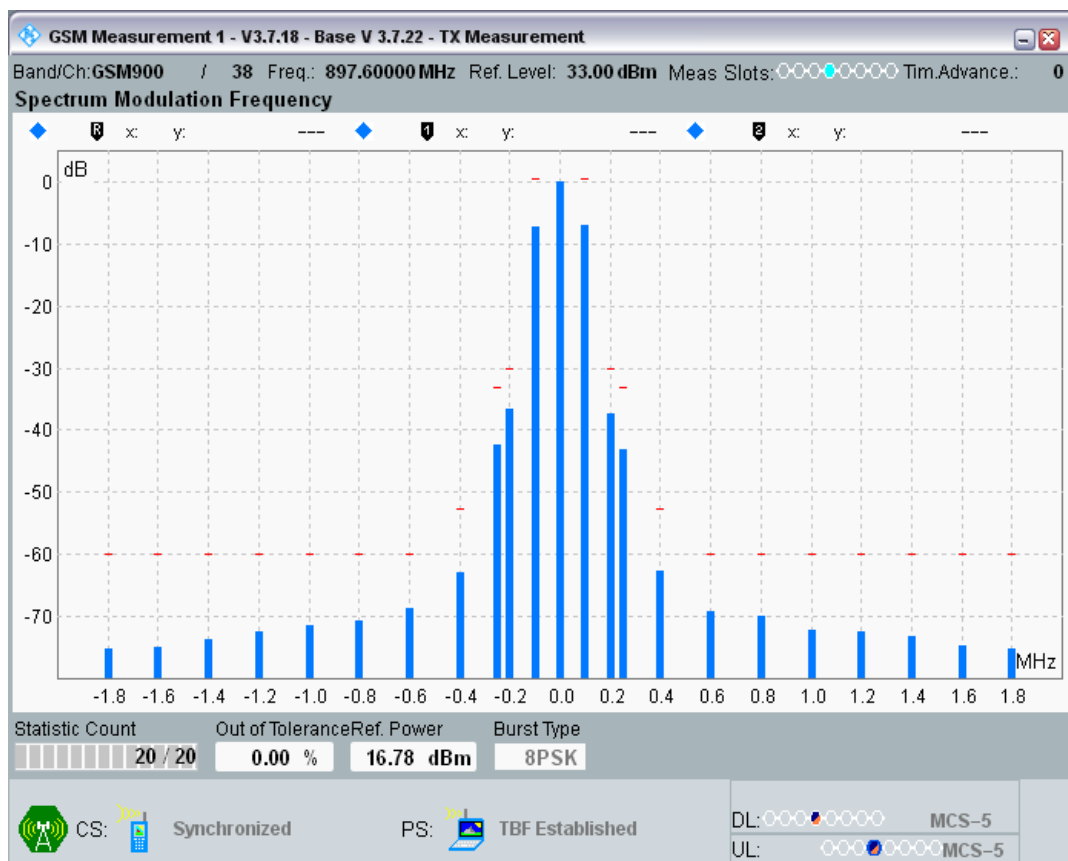


EGPRS900 Channel=38 Gamma=17;17;17;17

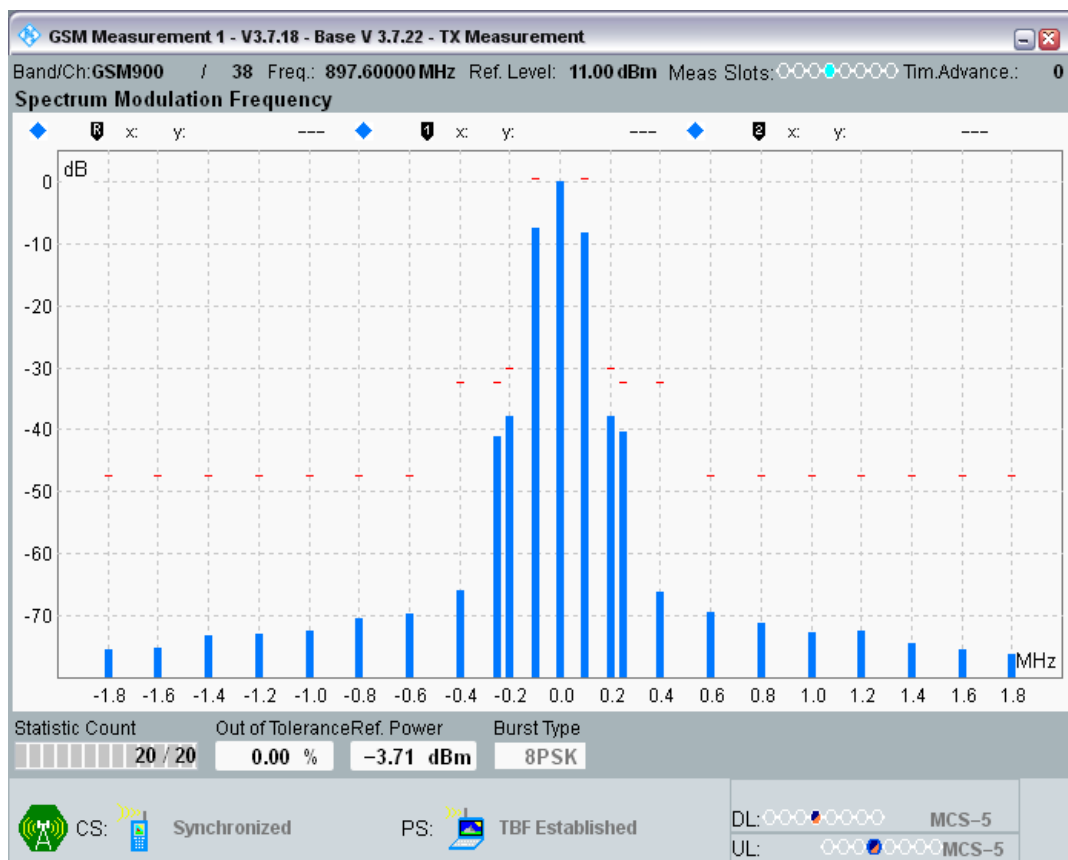

EGPRS900 Channel=124 Gamma=6;6;6;6

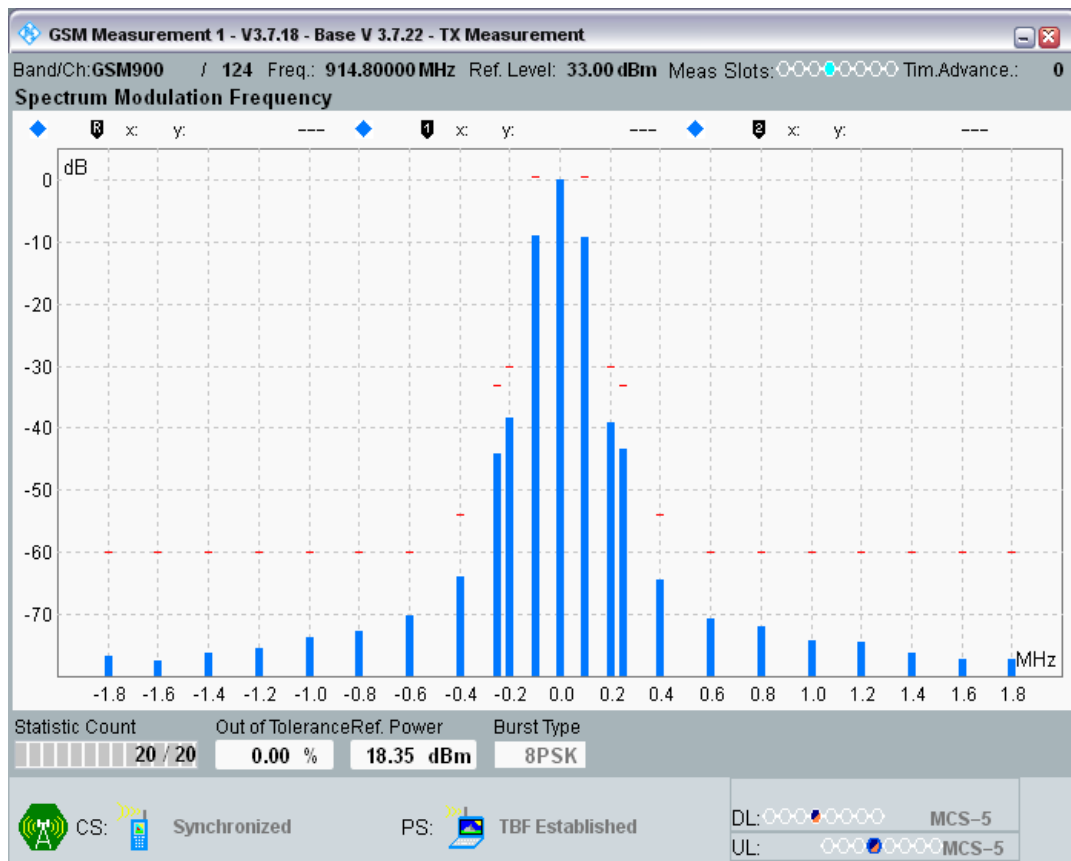

EGPRS900 Channel=124 Gamma=17;17;17;17

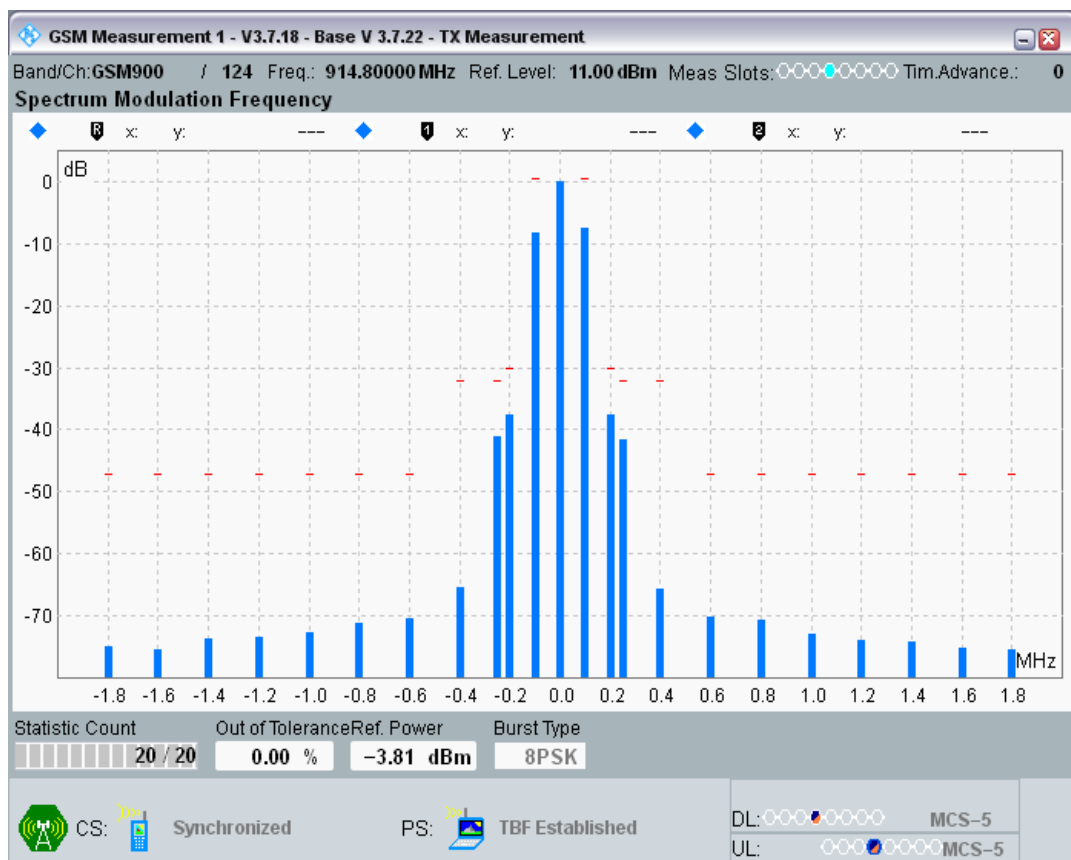

Clause 4.2.29 Switching Spectrum in EGPRS configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (kHz)	Result (dBm)	Limit (dBm)	Verdict
EGPRS1800	512	1710.2	5;5;5;5	Ref Power	26.67		PASS
EGPRS1800	512	1710.2	5;5;5;5	-1800	-47.61	-30.33	PASS
EGPRS1800	512	1710.2	5;5;5;5	-1200	-42.51	-27.33	PASS
EGPRS1800	512	1710.2	5;5;5;5	-600	-39.59	-25.66	PASS
EGPRS1800	512	1710.2	5;5;5;5	-400	-30.71	-23	PASS
EGPRS1800	512	1710.2	5;5;5;5	400	-30.24	-23	PASS
EGPRS1800	512	1710.2	5;5;5;5	600	-38.57	-25.66	PASS
EGPRS1800	512	1710.2	5;5;5;5	1200	-44.04	-27.33	PASS
EGPRS1800	512	1710.2	5;5;5;5	1800	-46.45	-30.33	PASS
EGPRS1800	512	1710.2	18;18;18;18	Ref Power	1.12		PASS
EGPRS1800	512	1710.2	18;18;18;18	-1800	-72.10	-36	PASS
EGPRS1800	512	1710.2	18;18;18;18	-1200	-67.39	-32	PASS
EGPRS1800	512	1710.2	18;18;18;18	-600	-64.82	-26	PASS
EGPRS1800	512	1710.2	18;18;18;18	-400	-58.87	-23	PASS
EGPRS1800	512	1710.2	18;18;18;18	400	-53.77	-23	PASS
EGPRS1800	512	1710.2	18;18;18;18	600	-63.86	-26	PASS
EGPRS1800	512	1710.2	18;18;18;18	1200	-68.07	-32	PASS
EGPRS1800	512	1710.2	18;18;18;18	1800	-70.89	-36	PASS
EGPRS1800	698	1747.4	5;5;5;5	Ref Power	25.85		PASS
EGPRS1800	698	1747.4	5;5;5;5	-1800	-48.82	-31.15	PASS
EGPRS1800	698	1747.4	5;5;5;5	-1200	-44.53	-28.15	PASS
EGPRS1800	698	1747.4	5;5;5;5	-600	-42.80	-26	PASS
EGPRS1800	698	1747.4	5;5;5;5	-400	-34.75	-23	PASS
EGPRS1800	698	1747.4	5;5;5;5	400	-32.95	-23	PASS
EGPRS1800	698	1747.4	5;5;5;5	600	-42.29	-26	PASS
EGPRS1800	698	1747.4	5;5;5;5	1200	-46.21	-28.15	PASS
EGPRS1800	698	1747.4	5;5;5;5	1800	-50.95	-31.15	PASS
EGPRS1800	698	1747.4	18;18;18;18	Ref Power	0.60		PASS
EGPRS1800	698	1747.4	18;18;18;18	-1800	-72.01	-36	PASS
EGPRS1800	698	1747.4	18;18;18;18	-1200	-69.82	-32	PASS
EGPRS1800	698	1747.4	18;18;18;18	-600	-64.38	-26	PASS
EGPRS1800	698	1747.4	18;18;18;18	-400	-59.03	-23	PASS
EGPRS1800	698	1747.4	18;18;18;18	400	-54.53	-23	PASS
EGPRS1800	698	1747.4	18;18;18;18	600	-64.09	-26	PASS
EGPRS1800	698	1747.4	18;18;18;18	1200	-70.05	-32	PASS
EGPRS1800	698	1747.4	18;18;18;18	1800	-72.37	-36	PASS
EGPRS1800	885	1784.8	5;5;5;5	Ref Power	25.91		PASS
EGPRS1800	885	1784.8	5;5;5;5	-1800	-47.16	-31.09	PASS
EGPRS1800	885	1784.8	5;5;5;5	-1200	-43.93	-28.09	PASS
EGPRS1800	885	1784.8	5;5;5;5	-600	-39.36	-26	PASS
EGPRS1800	885	1784.8	5;5;5;5	-400	-32.74	-23	PASS
EGPRS1800	885	1784.8	5;5;5;5	400	-30.84	-23	PASS
EGPRS1800	885	1784.8	5;5;5;5	600	-38.43	-26	PASS


EGPRS1800	885	1784.8	5;5;5;5	1200	-43.82	-28.09	PASS
EGPRS1800	885	1784.8	5;5;5;5	1800	-47.32	-31.09	PASS
EGPRS1800	885	1784.8	18;18;18;18	Ref Power	0.74		PASS
EGPRS1800	885	1784.8	18;18;18;18	-1800	-71.80	-36	PASS
EGPRS1800	885	1784.8	18;18;18;18	-1200	-70.30	-32	PASS
EGPRS1800	885	1784.8	18;18;18;18	-600	-63.87	-26	PASS
EGPRS1800	885	1784.8	18;18;18;18	-400	-58.93	-23	PASS
EGPRS1800	885	1784.8	18;18;18;18	400	-54.09	-23	PASS
EGPRS1800	885	1784.8	18;18;18;18	600	-63.83	-26	PASS
EGPRS1800	885	1784.8	18;18;18;18	1200	-69.93	-32	PASS
EGPRS1800	885	1784.8	18;18;18;18	1800	-73.08	-36	PASS
EGPRS1900	512	1850.2	5;5;5;5	Ref Power	26.52		PASS
EGPRS1900	512	1850.2	5;5;5;5	-1800	-46.66	-30.48	PASS
EGPRS1900	512	1850.2	5;5;5;5	-1200	-45.09	-27.48	PASS
EGPRS1900	512	1850.2	5;5;5;5	-600	-38.61	-25.74	PASS
EGPRS1900	512	1850.2	5;5;5;5	-400	-32.08	-23	PASS
EGPRS1900	512	1850.2	5;5;5;5	400	-29.55	-23	PASS
EGPRS1900	512	1850.2	5;5;5;5	600	-37.76	-25.74	PASS
EGPRS1900	512	1850.2	5;5;5;5	1200	-43.28	-27.48	PASS
EGPRS1900	512	1850.2	5;5;5;5	1800	-46.05	-30.48	PASS
EGPRS1900	512	1850.2	18;18;18;18	Ref Power	0.43		PASS
EGPRS1900	512	1850.2	18;18;18;18	-1800	-71.46	-36	PASS
EGPRS1900	512	1850.2	18;18;18;18	-1200	-66.83	-32	PASS
EGPRS1900	512	1850.2	18;18;18;18	-600	-65.47	-26	PASS
EGPRS1900	512	1850.2	18;18;18;18	-400	-57.41	-23	PASS
EGPRS1900	512	1850.2	18;18;18;18	400	-54.97	-23	PASS
EGPRS1900	512	1850.2	18;18;18;18	600	-64.02	-26	PASS
EGPRS1900	512	1850.2	18;18;18;18	1200	-70.40	-32	PASS
EGPRS1900	512	1850.2	18;18;18;18	1800	-72.04	-36	PASS
EGPRS1900	661	1880	5;5;5;5	Ref Power	26.79		PASS
EGPRS1900	661	1880	5;5;5;5	-1800	-46.03	-30.21	PASS
EGPRS1900	661	1880	5;5;5;5	-1200	-43.02	-27.21	PASS
EGPRS1900	661	1880	5;5;5;5	-600	-38.09	-25.61	PASS
EGPRS1900	661	1880	5;5;5;5	-400	-29.86	-23	PASS
EGPRS1900	661	1880	5;5;5;5	400	-30.06	-23	PASS
EGPRS1900	661	1880	5;5;5;5	600	-37.58	-25.61	PASS
EGPRS1900	661	1880	5;5;5;5	1200	-44.23	-27.21	PASS
EGPRS1900	661	1880	5;5;5;5	1800	-45.82	-30.21	PASS
EGPRS1900	661	1880	18;18;18;18	Ref Power	0.87		PASS
EGPRS1900	661	1880	18;18;18;18	-1800	-72.19	-36	PASS
EGPRS1900	661	1880	18;18;18;18	-1200	-68.64	-32	PASS
EGPRS1900	661	1880	18;18;18;18	-600	-63.64	-26	PASS
EGPRS1900	661	1880	18;18;18;18	-400	-57.52	-23	PASS
EGPRS1900	661	1880	18;18;18;18	400	-54.69	-23	PASS

EGPRS1900	661	1880	18;18;18;18	600	-64.23	-26	PASS
EGPRS1900	661	1880	18;18;18;18	1200	-69.22	-32	PASS
EGPRS1900	661	1880	18;18;18;18	1800	-72.03	-36	PASS
EGPRS1900	810	1909.8	5;5;5;5	Ref Power	26.62		PASS
EGPRS1900	810	1909.8	5;5;5;5	-1800	-46.38	-30.38	PASS
EGPRS1900	810	1909.8	5;5;5;5	-1200	-42.91	-27.38	PASS
EGPRS1900	810	1909.8	5;5;5;5	-600	-38.15	-25.69	PASS
EGPRS1900	810	1909.8	5;5;5;5	-400	-30.49	-23	PASS
EGPRS1900	810	1909.8	5;5;5;5	400	-28.04	-23	PASS
EGPRS1900	810	1909.8	5;5;5;5	600	-38.44	-25.69	PASS
EGPRS1900	810	1909.8	5;5;5;5	1200	-43.28	-27.38	PASS
EGPRS1900	810	1909.8	5;5;5;5	1800	-45.84	-30.38	PASS
EGPRS1900	810	1909.8	18;18;18;18	Ref Power	0.82		PASS
EGPRS1900	810	1909.8	18;18;18;18	-1800	-71.96	-36	PASS
EGPRS1900	810	1909.8	18;18;18;18	-1200	-69.77	-32	PASS
EGPRS1900	810	1909.8	18;18;18;18	-600	-61.53	-26	PASS
EGPRS1900	810	1909.8	18;18;18;18	-400	-57.37	-23	PASS
EGPRS1900	810	1909.8	18;18;18;18	400	-54.08	-23	PASS
EGPRS1900	810	1909.8	18;18;18;18	600	-61.73	-26	PASS
EGPRS1900	810	1909.8	18;18;18;18	1200	-68.48	-32	PASS
EGPRS1900	810	1909.8	18;18;18;18	1800	-72.25	-36	PASS
EGPRS850	128	824.2	6;6;6;6	Ref Power	26.22		PASS
EGPRS850	128	824.2	6;6;6;6	-1800	-46.57	-30.78	PASS
EGPRS850	128	824.2	6;6;6;6	-1200	-45.11	-27.78	PASS
EGPRS850	128	824.2	6;6;6;6	-600	-40.67	-26	PASS
EGPRS850	128	824.2	6;6;6;6	-400	-32.38	-23	PASS
EGPRS850	128	824.2	6;6;6;6	400	-29.35	-23	PASS
EGPRS850	128	824.2	6;6;6;6	600	-36.17	-26	PASS
EGPRS850	128	824.2	6;6;6;6	1200	-44.90	-27.78	PASS
EGPRS850	128	824.2	6;6;6;6	1800	-47.76	-30.78	PASS
EGPRS850	128	824.2	17;17;17;17	Ref Power	5.01		PASS
EGPRS850	128	824.2	17;17;17;17	-1800	-66.09	-36	PASS
EGPRS850	128	824.2	17;17;17;17	-1200	-66.12	-32	PASS
EGPRS850	128	824.2	17;17;17;17	-600	-61.99	-26	PASS
EGPRS850	128	824.2	17;17;17;17	-400	-56.11	-23	PASS
EGPRS850	128	824.2	17;17;17;17	400	-51.04	-23	PASS
EGPRS850	128	824.2	17;17;17;17	600	-61.93	-26	PASS
EGPRS850	128	824.2	17;17;17;17	1200	-64.46	-32	PASS
EGPRS850	128	824.2	17;17;17;17	1800	-68.07	-36	PASS
EGPRS850	190	836.6	6;6;6;6	Ref Power	25.78		PASS
EGPRS850	190	836.6	6;6;6;6	-1800	-45.87	-31.22	PASS
EGPRS850	190	836.6	6;6;6;6	-1200	-45.11	-28.22	PASS
EGPRS850	190	836.6	6;6;6;6	-600	-40.34	-26	PASS
EGPRS850	190	836.6	6;6;6;6	-400	-34.07	-23	PASS


EGPRS850	190	836.6	6;6;6;6	400	-31.23	-23	PASS
EGPRS850	190	836.6	6;6;6;6	600	-40.55	-26	PASS
EGPRS850	190	836.6	6;6;6;6	1200	-45.51	-28.22	PASS
EGPRS850	190	836.6	6;6;6;6	1800	-47.95	-31.22	PASS
EGPRS850	190	836.6	17;17;17;17	Ref Power	4.56		PASS
EGPRS850	190	836.6	17;17;17;17	-1800	-68.64	-36	PASS
EGPRS850	190	836.6	17;17;17;17	-1200	-66.56	-32	PASS
EGPRS850	190	836.6	17;17;17;17	-600	-60.53	-26	PASS
EGPRS850	190	836.6	17;17;17;17	-400	-55.64	-23	PASS
EGPRS850	190	836.6	17;17;17;17	400	-52.07	-23	PASS
EGPRS850	190	836.6	17;17;17;17	600	-61.79	-26	PASS
EGPRS850	190	836.6	17;17;17;17	1200	-66.27	-32	PASS
EGPRS850	190	836.6	17;17;17;17	1800	-68.47	-36	PASS
EGPRS850	251	848.8	6;6;6;6	Ref Power	25.77		PASS
EGPRS850	251	848.8	6;6;6;6	-1800	-47.80	-31.23	PASS
EGPRS850	251	848.8	6;6;6;6	-1200	-45.66	-28.23	PASS
EGPRS850	251	848.8	6;6;6;6	-600	-39.26	-26	PASS
EGPRS850	251	848.8	6;6;6;6	-400	-33.58	-23	PASS
EGPRS850	251	848.8	6;6;6;6	400	-30.67	-23	PASS
EGPRS850	251	848.8	6;6;6;6	600	-39.40	-26	PASS
EGPRS850	251	848.8	6;6;6;6	1200	-46.47	-28.23	PASS
EGPRS850	251	848.8	6;6;6;6	1800	-46.58	-31.23	PASS
EGPRS850	251	848.8	17;17;17;17	Ref Power	4.38		PASS
EGPRS850	251	848.8	17;17;17;17	-1800	-66.90	-36	PASS
EGPRS850	251	848.8	17;17;17;17	-1200	-66.95	-32	PASS
EGPRS850	251	848.8	17;17;17;17	-600	-61.98	-26	PASS
EGPRS850	251	848.8	17;17;17;17	-400	-56.00	-23	PASS
EGPRS850	251	848.8	17;17;17;17	400	-52.47	-23	PASS
EGPRS850	251	848.8	17;17;17;17	600	-61.41	-26	PASS
EGPRS850	251	848.8	17;17;17;17	1200	-66.05	-32	PASS
EGPRS850	251	848.8	17;17;17;17	1800	-68.01	-36	PASS
EGPRS900	975	880.2	6;6;6;6	Ref Power	25.59		PASS
EGPRS900	975	880.2	6;6;6;6	-1800	-48.25	-31.41	PASS
EGPRS900	975	880.2	6;6;6;6	-1200	-46.39	-28.41	PASS
EGPRS900	975	880.2	6;6;6;6	-600	-41.42	-26	PASS
EGPRS900	975	880.2	6;6;6;6	-400	-34.20	-23	PASS
EGPRS900	975	880.2	6;6;6;6	400	-31.45	-23	PASS
EGPRS900	975	880.2	6;6;6;6	600	-40.25	-26	PASS
EGPRS900	975	880.2	6;6;6;6	1200	-46.31	-28.41	PASS
EGPRS900	975	880.2	6;6;6;6	1800	-47.21	-31.41	PASS
EGPRS900	975	880.2	17;17;17;17	Ref Power	4.75		PASS
EGPRS900	975	880.2	17;17;17;17	-1800	-67.98	-36	PASS
EGPRS900	975	880.2	17;17;17;17	-1200	-66.36	-32	PASS
EGPRS900	975	880.2	17;17;17;17	-600	-62.27	-26	PASS

EGPRS900	975	880.2	17;17;17;17	-400	-55.27	-23	PASS
EGPRS900	975	880.2	17;17;17;17	400	-51.41	-23	PASS
EGPRS900	975	880.2	17;17;17;17	600	-61.22	-26	PASS
EGPRS900	975	880.2	17;17;17;17	1200	-67.62	-32	PASS
EGPRS900	975	880.2	17;17;17;17	1800	-68.75	-36	PASS
EGPRS900	38	897.6	6;6;6;6	Ref Power	25.89		PASS
EGPRS900	38	897.6	6;6;6;6	-1800	-47.46	-31.11	PASS
EGPRS900	38	897.6	6;6;6;6	-1200	-45.11	-28.11	PASS
EGPRS900	38	897.6	6;6;6;6	-600	-39.87	-26	PASS
EGPRS900	38	897.6	6;6;6;6	-400	-34.52	-23	PASS
EGPRS900	38	897.6	6;6;6;6	400	-31.21	-23	PASS
EGPRS900	38	897.6	6;6;6;6	600	-42.48	-26	PASS
EGPRS900	38	897.6	6;6;6;6	1200	-44.63	-28.11	PASS
EGPRS900	38	897.6	6;6;6;6	1800	-47.92	-31.11	PASS
EGPRS900	38	897.6	17;17;17;17	Ref Power	4.98		PASS
EGPRS900	38	897.6	17;17;17;17	-1800	-68.08	-36	PASS
EGPRS900	38	897.6	17;17;17;17	-1200	-64.83	-32	PASS
EGPRS900	38	897.6	17;17;17;17	-600	-62.19	-26	PASS
EGPRS900	38	897.6	17;17;17;17	-400	-55.46	-23	PASS
EGPRS900	38	897.6	17;17;17;17	400	-51.43	-23	PASS
EGPRS900	38	897.6	17;17;17;17	600	-60.24	-26	PASS
EGPRS900	38	897.6	17;17;17;17	1200	-65.76	-32	PASS
EGPRS900	38	897.6	17;17;17;17	1800	-69.03	-36	PASS
EGPRS900	124	914.8	6;6;6;6	Ref Power	25.94		PASS
EGPRS900	124	914.8	6;6;6;6	-1800	-48.01	-31.06	PASS
EGPRS900	124	914.8	6;6;6;6	-1200	-43.54	-28.06	PASS
EGPRS900	124	914.8	6;6;6;6	-600	-37.52	-26	PASS
EGPRS900	124	914.8	6;6;6;6	-400	-33.02	-23	PASS
EGPRS900	124	914.8	6;6;6;6	400	-32.18	-23	PASS
EGPRS900	124	914.8	6;6;6;6	600	-39.72	-26	PASS
EGPRS900	124	914.8	6;6;6;6	1200	-45.63	-28.06	PASS
EGPRS900	124	914.8	6;6;6;6	1800	-48.08	-31.06	PASS
EGPRS900	124	914.8	17;17;17;17	Ref Power	4.78		PASS
EGPRS900	124	914.8	17;17;17;17	-1800	-68.90	-36	PASS
EGPRS900	124	914.8	17;17;17;17	-1200	-66.33	-32	PASS
EGPRS900	124	914.8	17;17;17;17	-600	-60.43	-26	PASS
EGPRS900	124	914.8	17;17;17;17	-400	-55.12	-23	PASS
EGPRS900	124	914.8	17;17;17;17	400	-49.82	-23	PASS
EGPRS900	124	914.8	17;17;17;17	600	-61.92	-26	PASS
EGPRS900	124	914.8	17;17;17;17	1200	-67.20	-32	PASS
EGPRS900	124	914.8	17;17;17;17	1800	-66.31	-36	PASS


EGPRS1800 Channel=512 Gamma=5;5;5;5

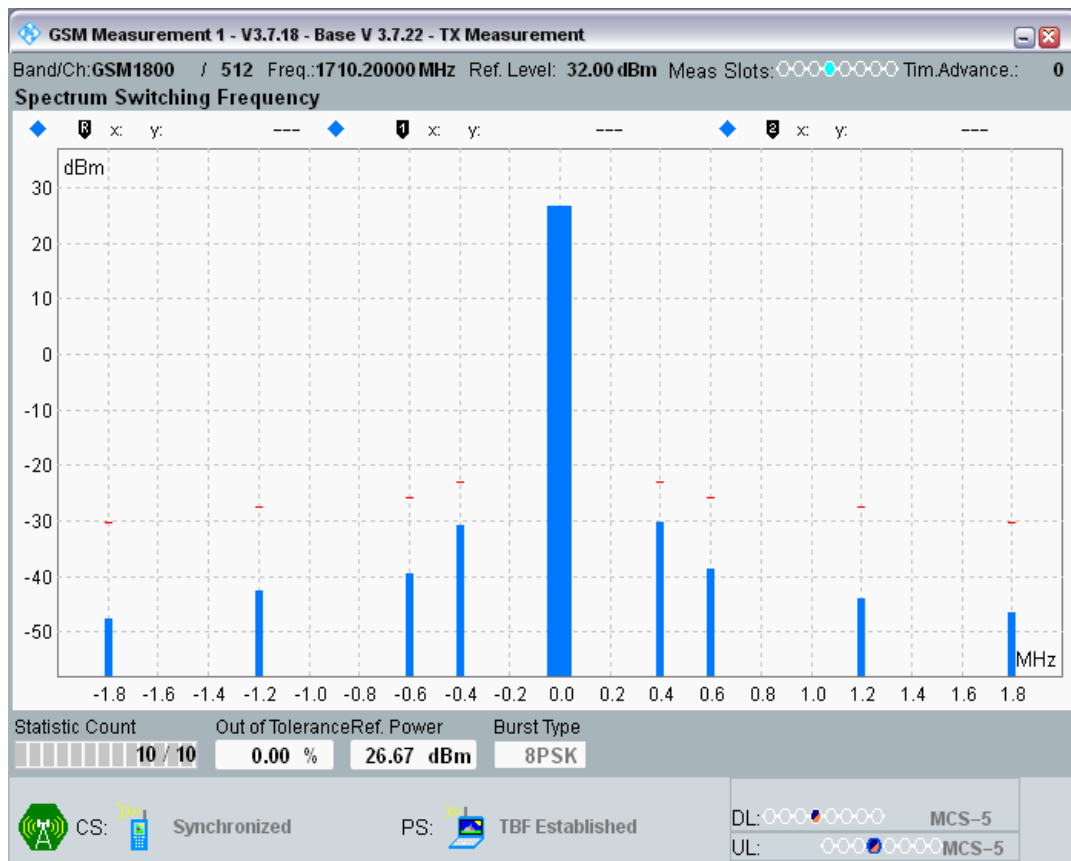


EGPRS1800 Channel=512 Gamma=18;18;18;18

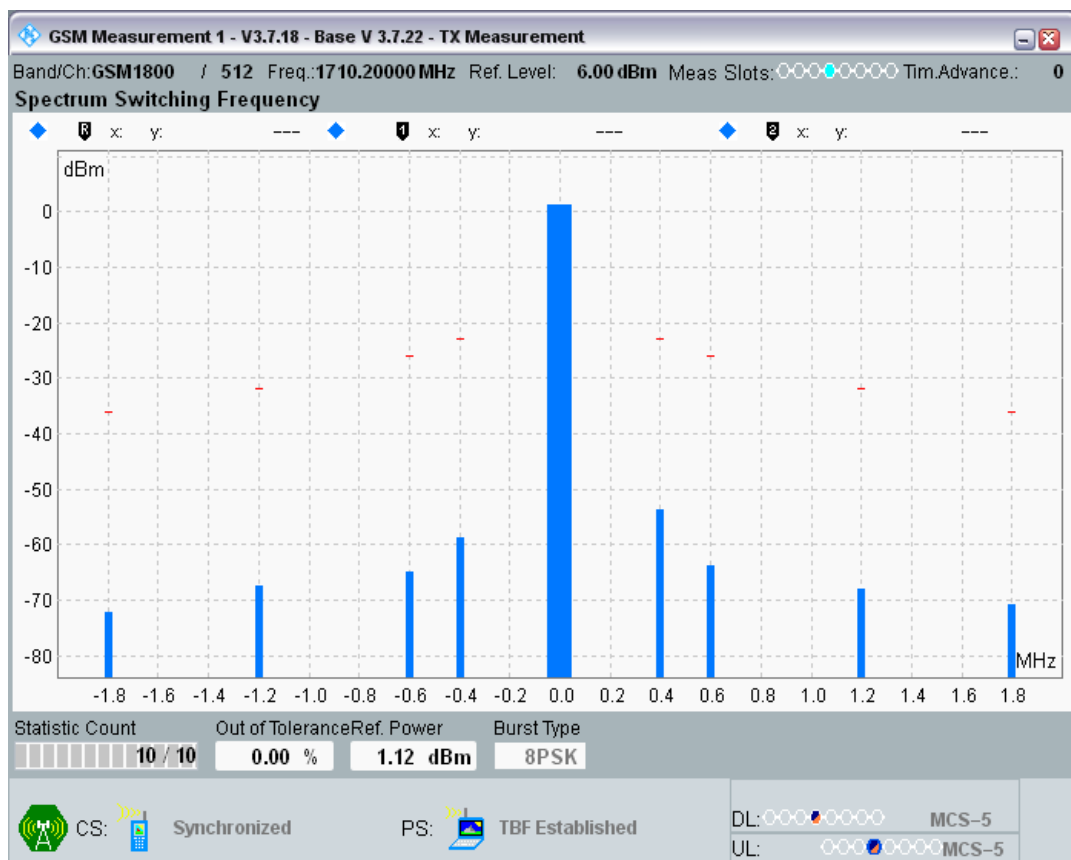


EGPRS1800 Channel=698 Gamma=5;5;5;5

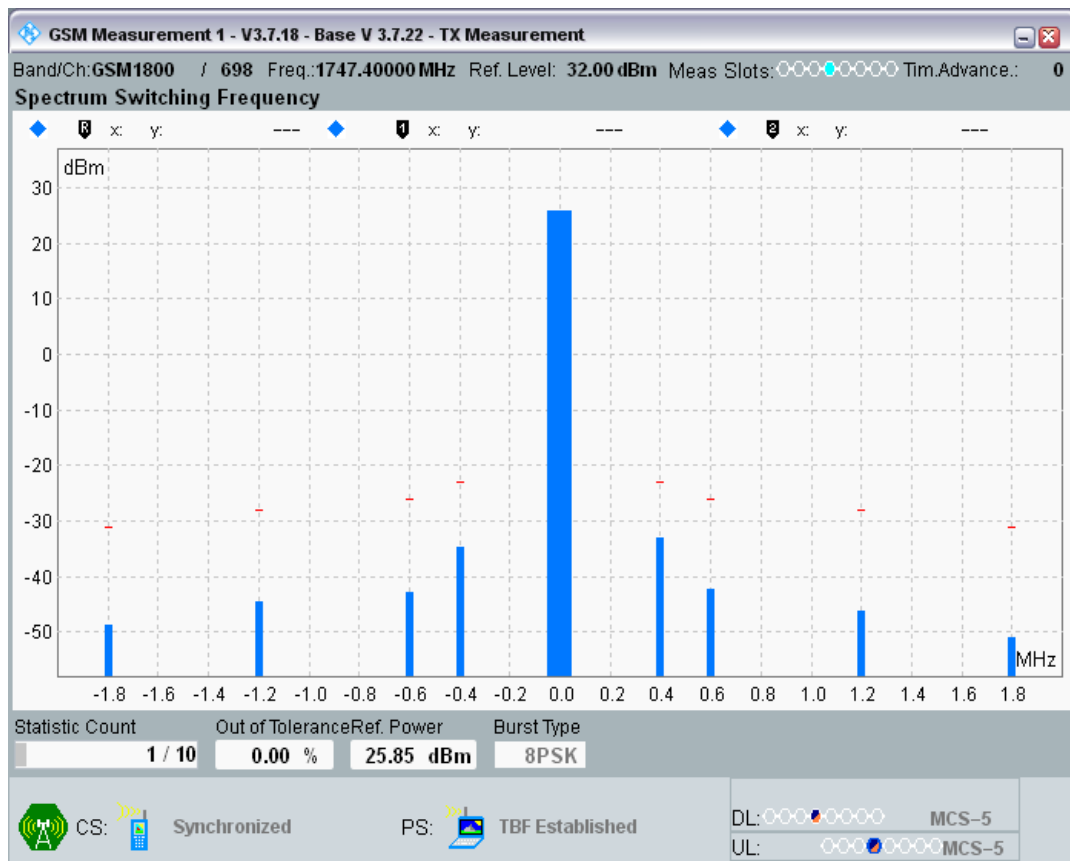


EGPRS1800 Channel=698 Gamma=18;18;18;18

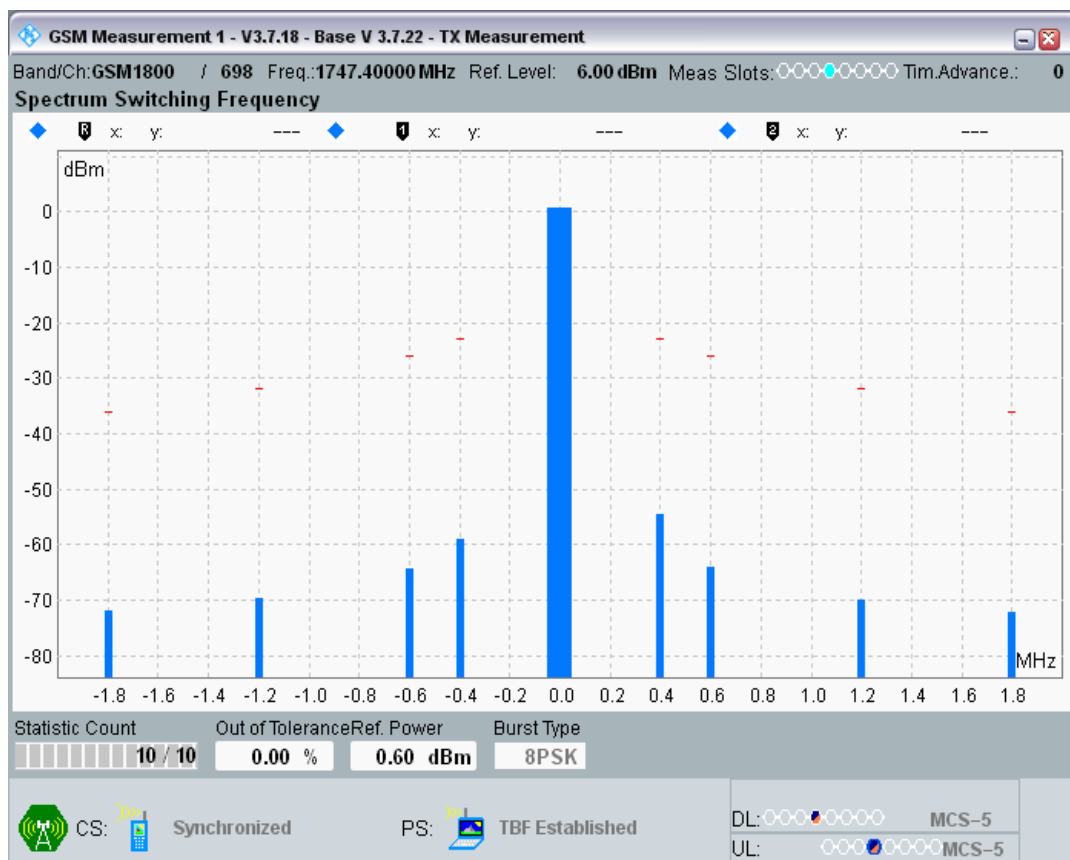


EGPRS1800 Channel=885 Gamma=5;5;5;5

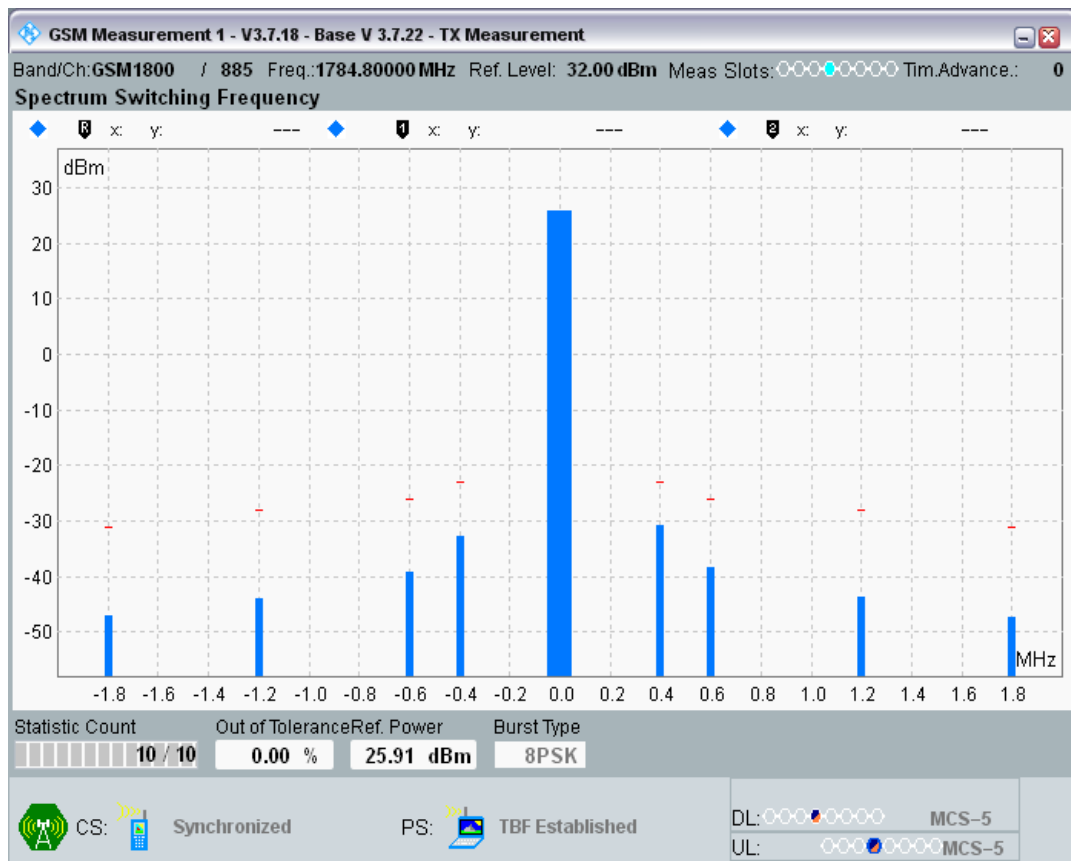


EGPRS1800 Channel=885 Gamma=18;18;18;18

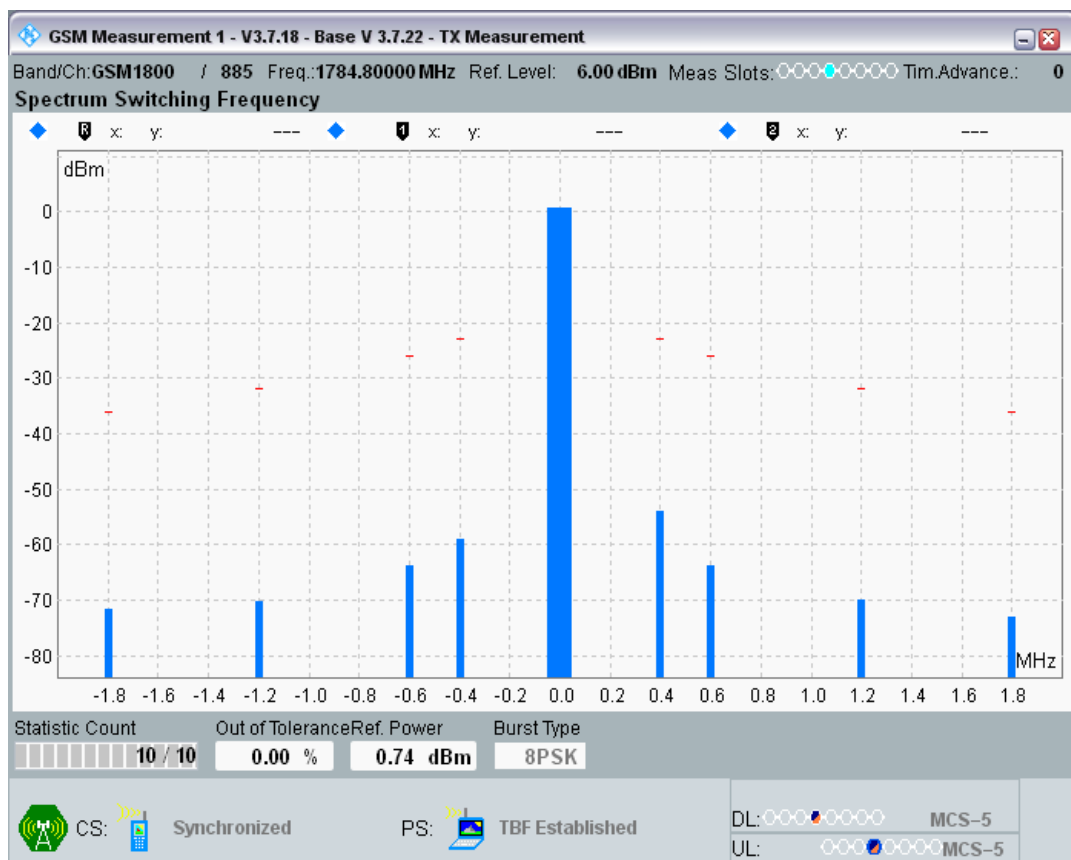

EGPRS1900 Channel=512 Gamma=5;5;5;5

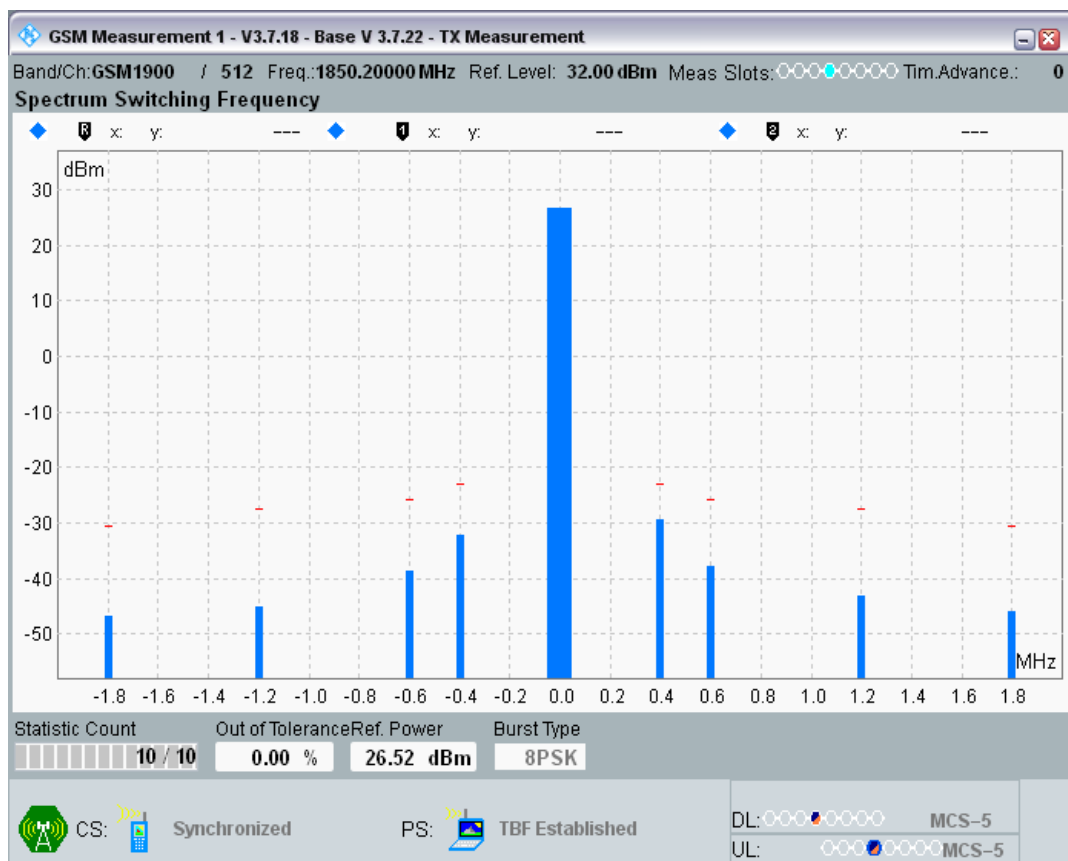


EGPRS1900 Channel=512 Gamma=18;18;18;18

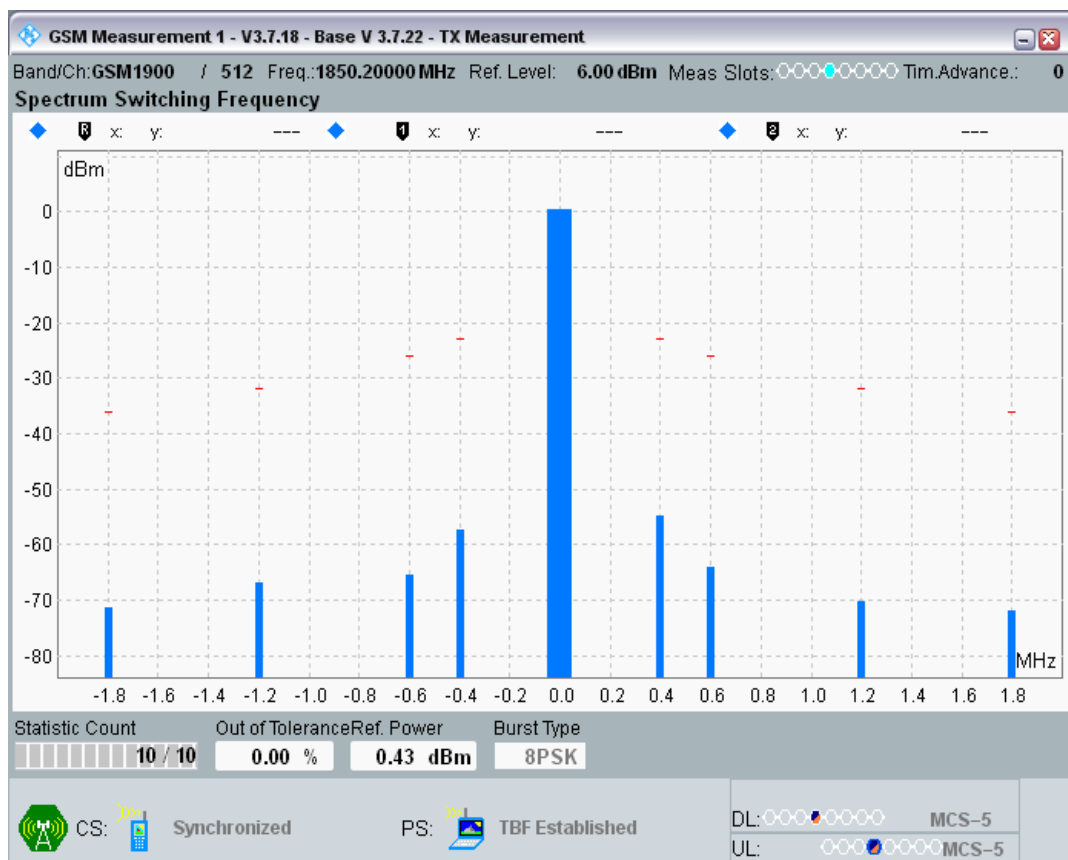


EGPRS1900 Channel=661 Gamma=5;5;5;5




EGPRS1900 Channel=661 Gamma=18;18;18;18

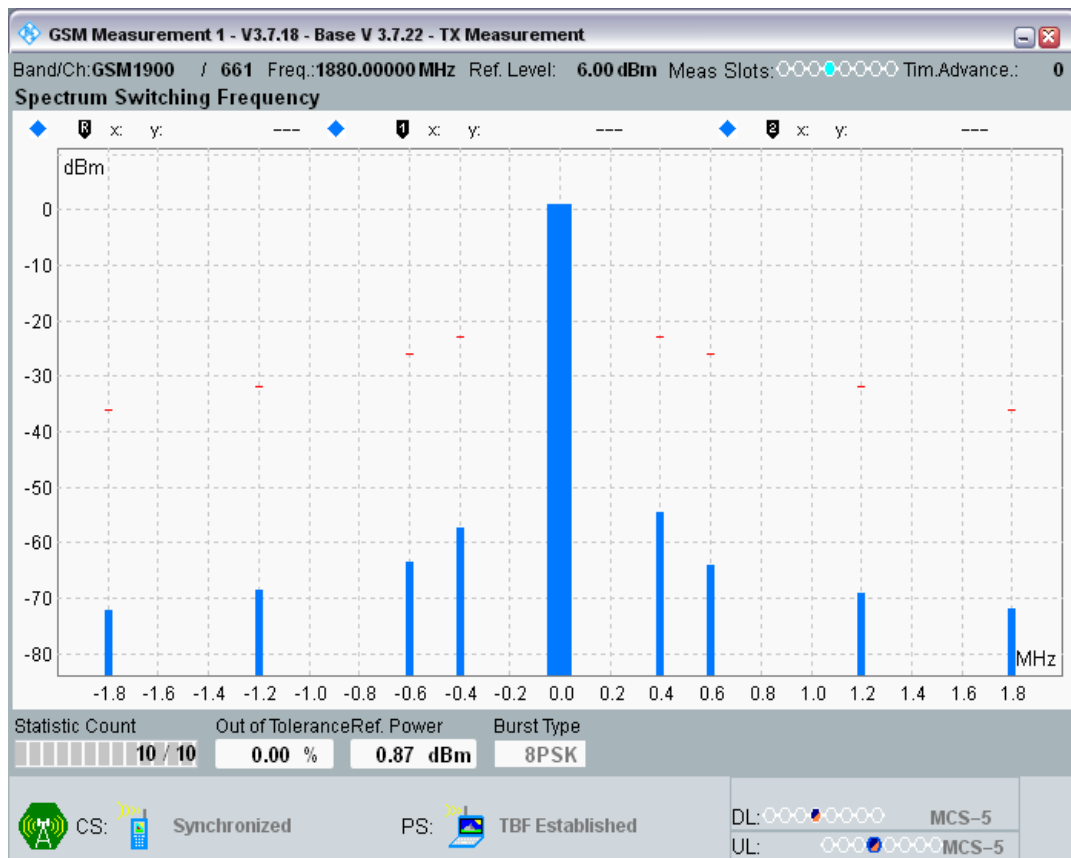


EGPRS1900 Channel=810 Gamma=5;5;5;5

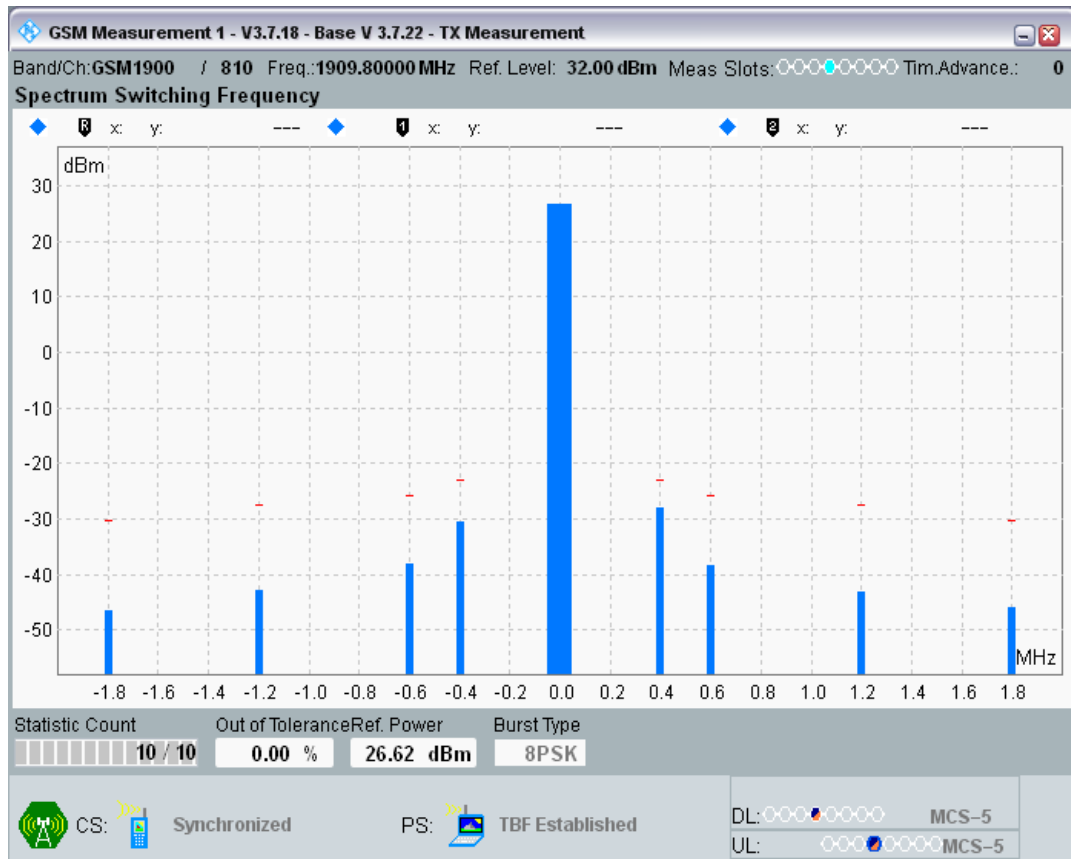


EGPRS1900 Channel=810 Gamma=18;18;18;18

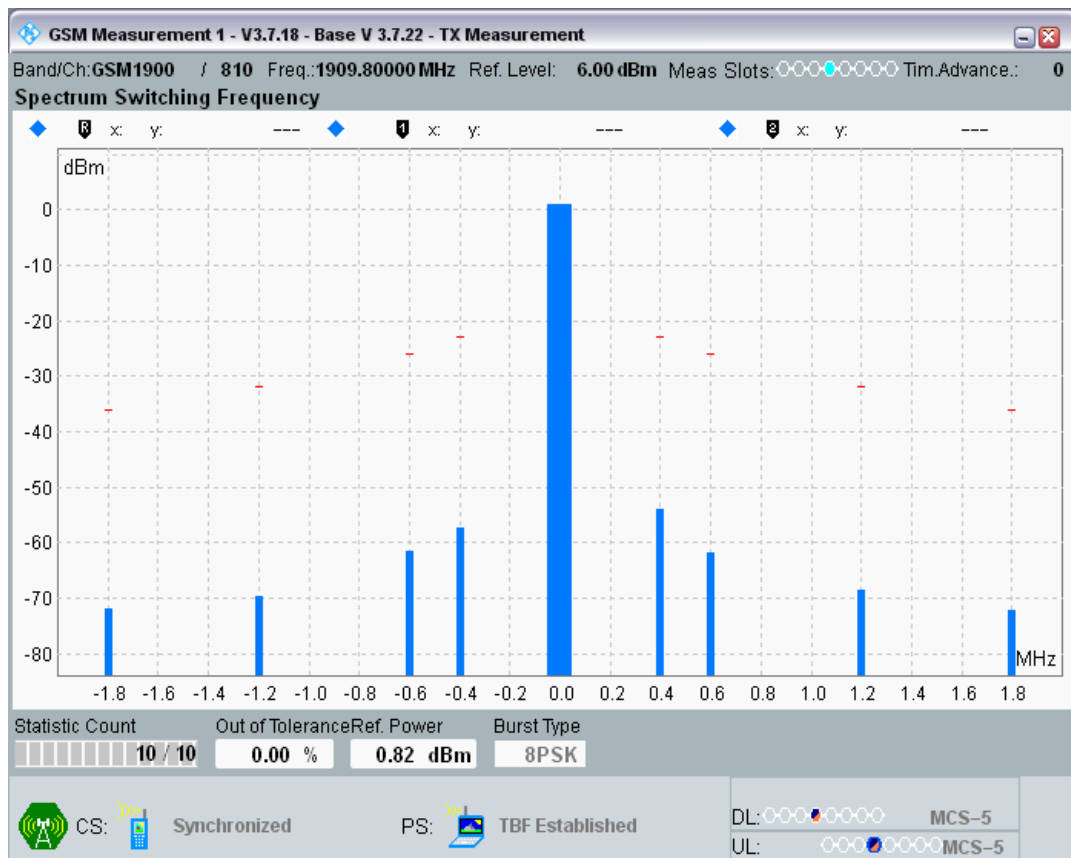


EGPRS850 Channel=128 Gamma=6;6;6;6

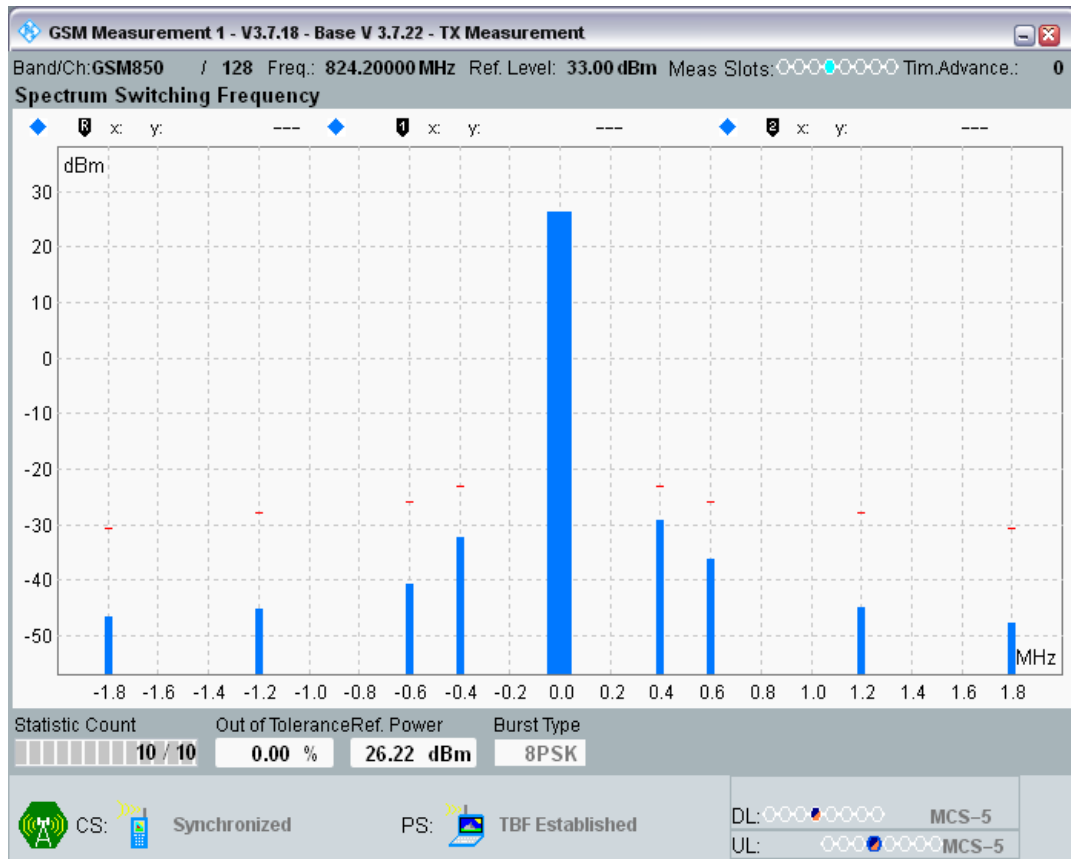


EGPRS850 Channel=128 Gamma=17;17;17;17

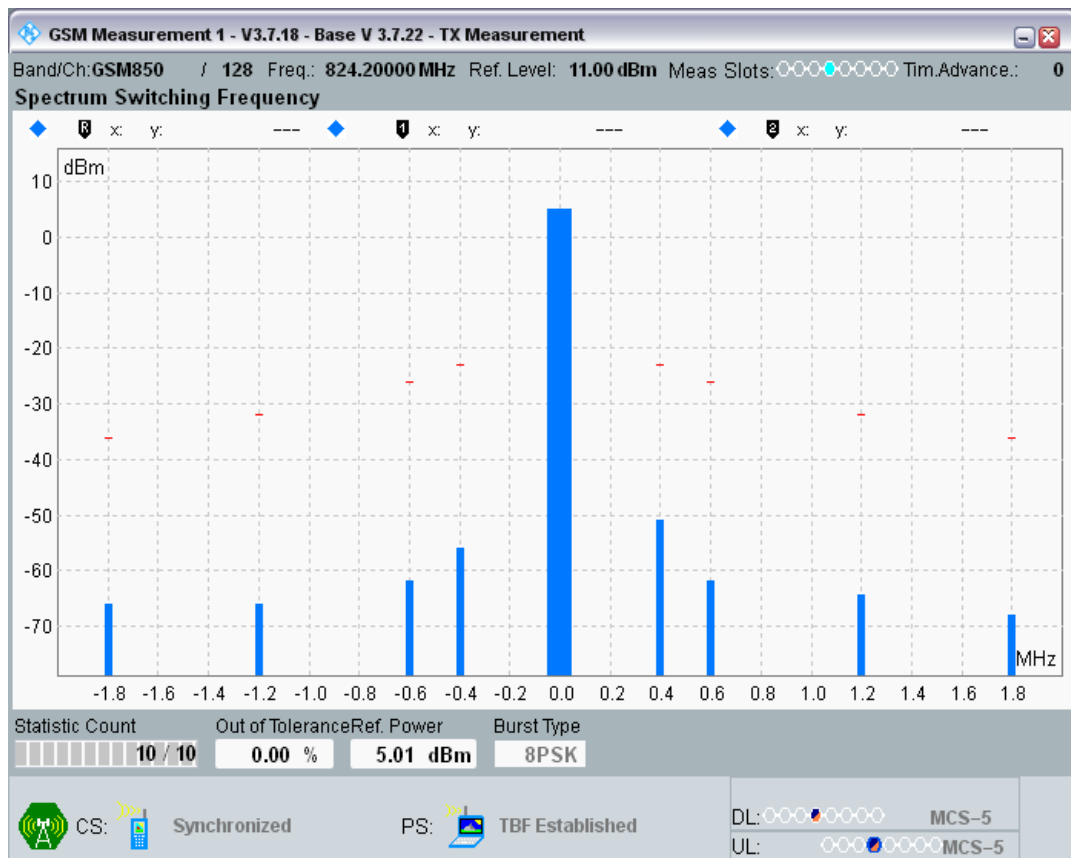


EGPRS850 Channel=190 Gamma=6;6;6;6

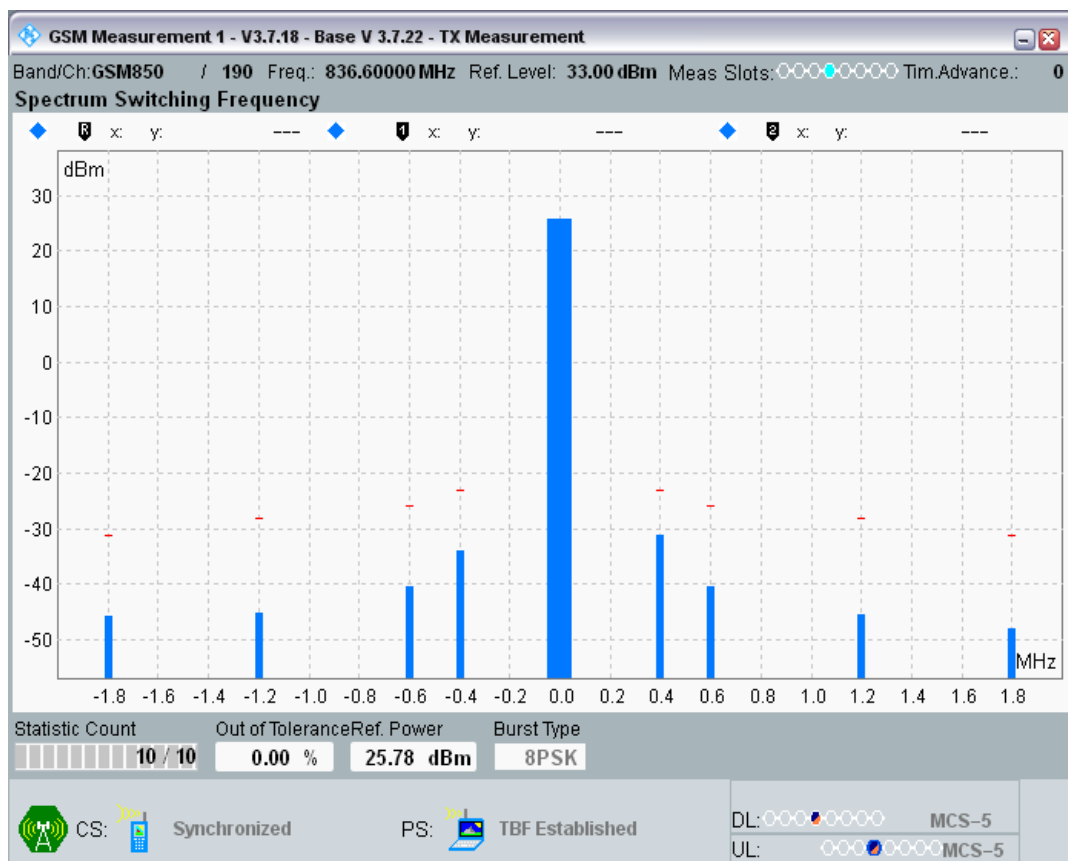


EGPRS850 Channel=190 Gamma=17;17;17;17

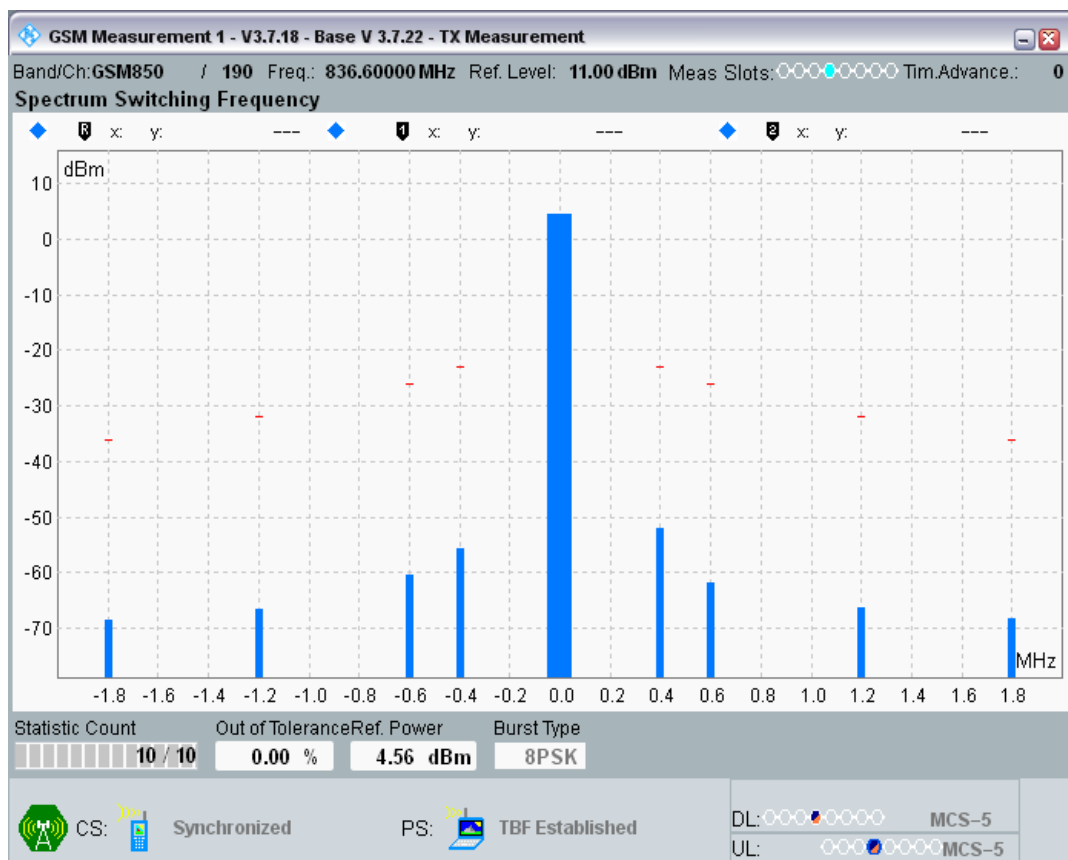


EGPRS850 Channel=251 Gamma=6;6;6;6

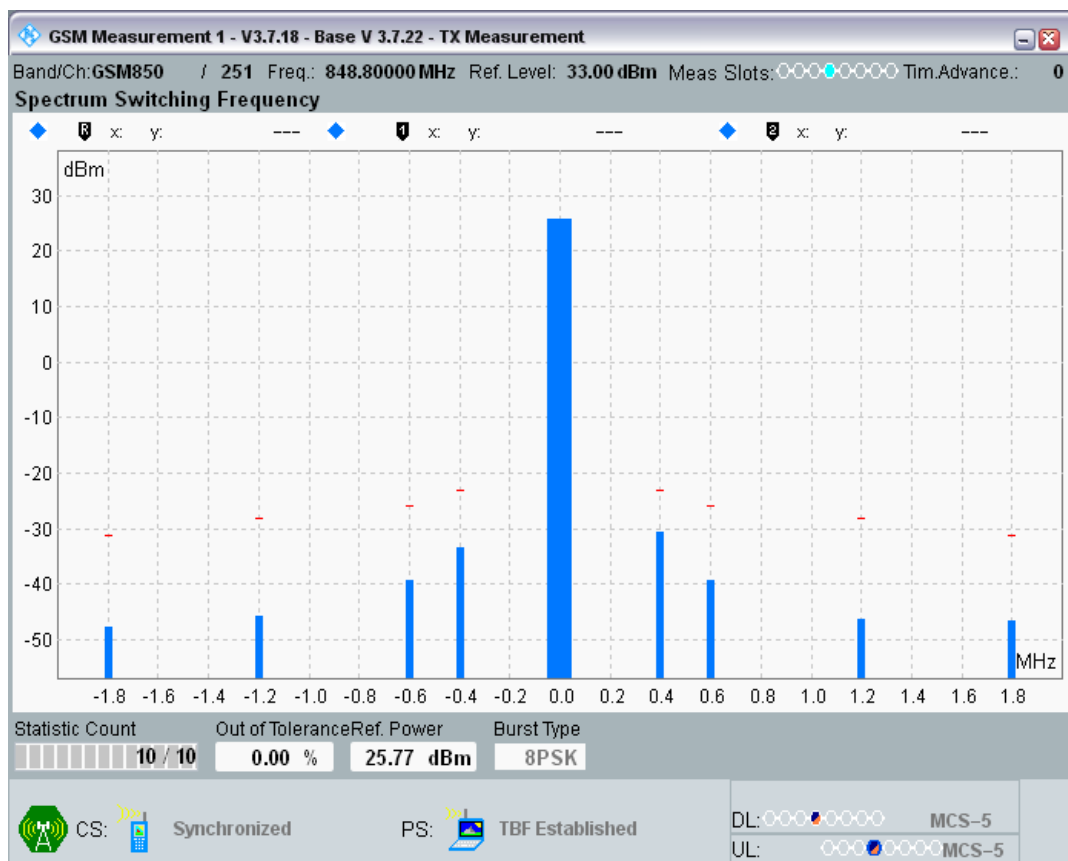


EGPRS850 Channel=251 Gamma=17;17;17;17

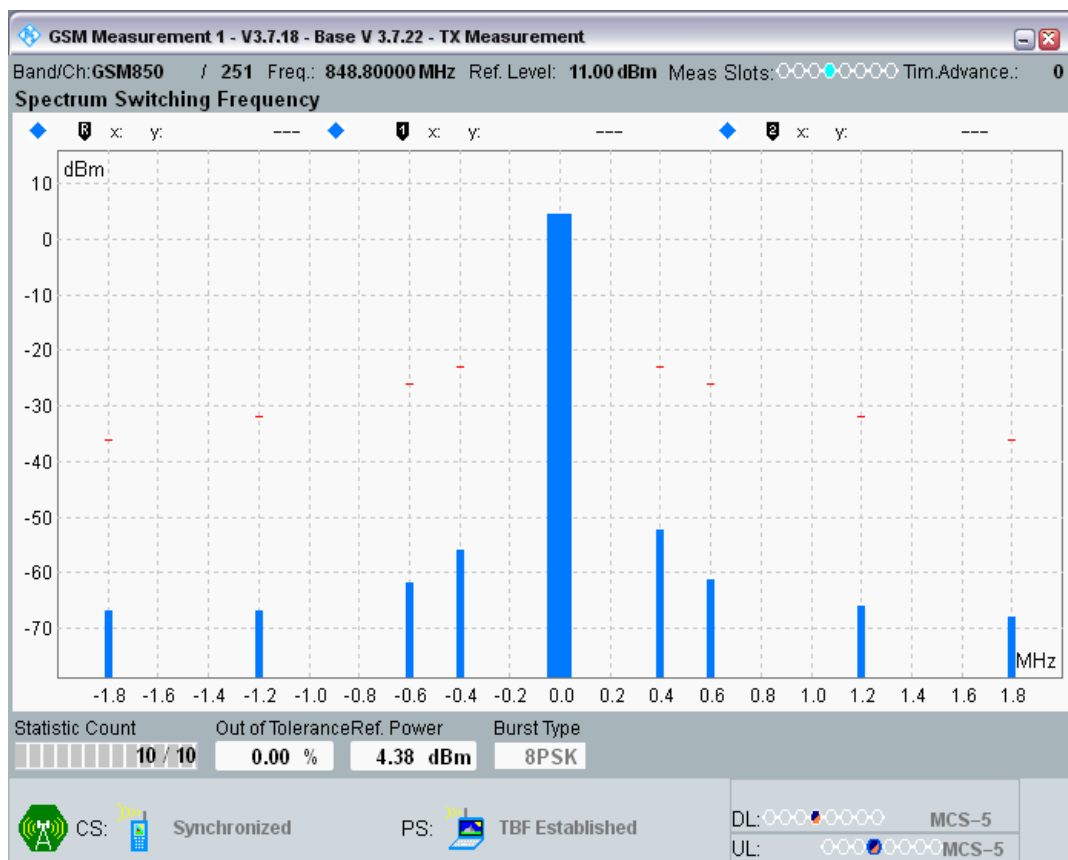


EGPRS900 Channel=975 Gamma=6;6;6;6

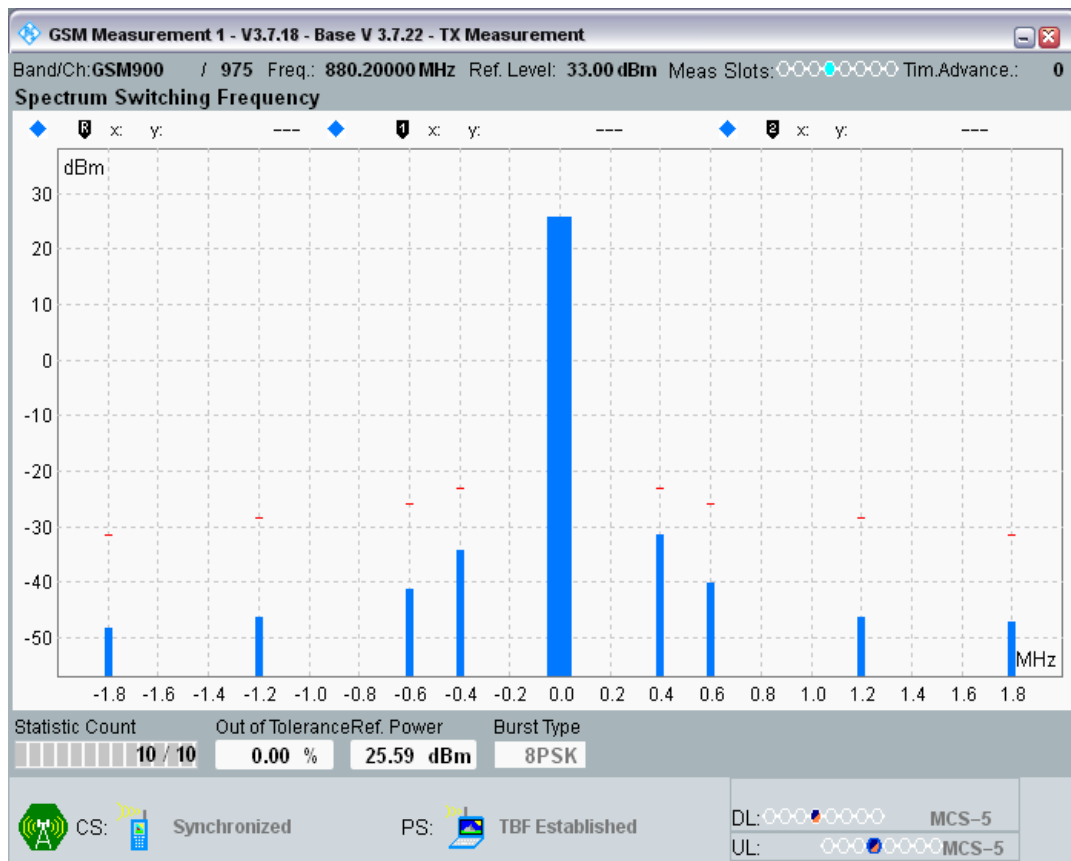


EGPRS900 Channel=975 Gamma=17;17;17;17

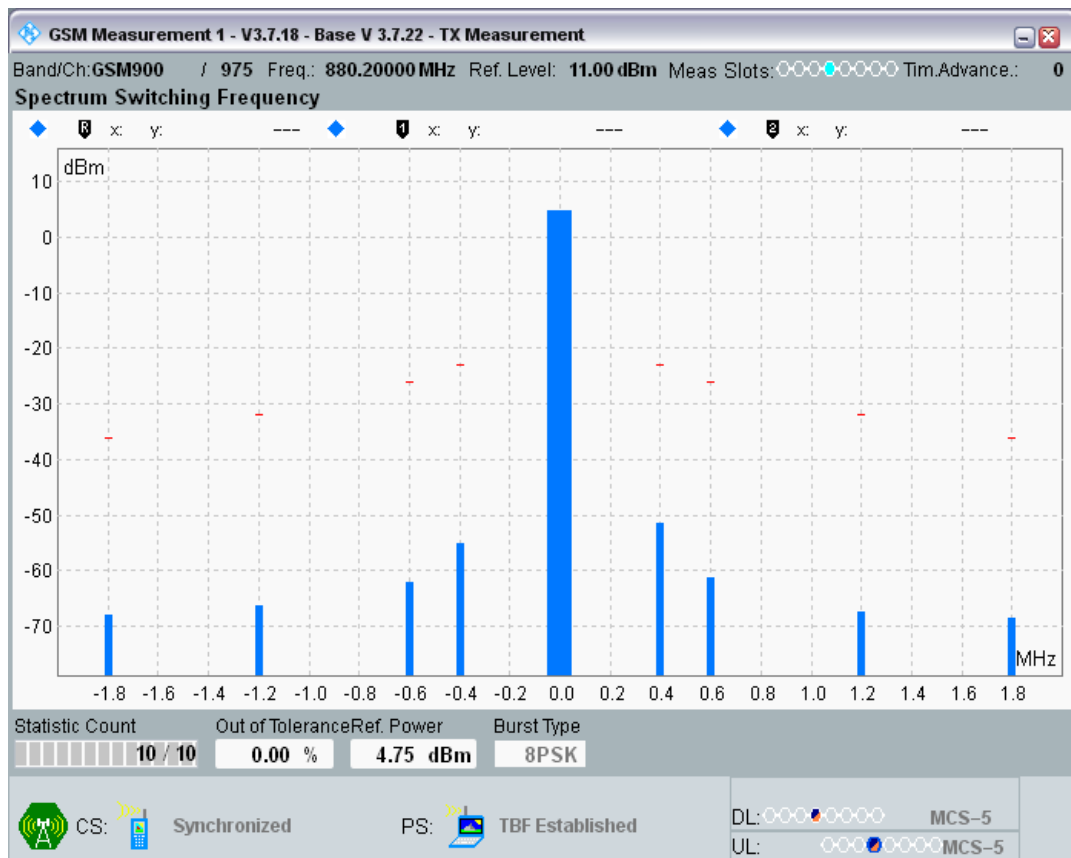


EGPRS900 Channel=38 Gamma=6;6;6;6

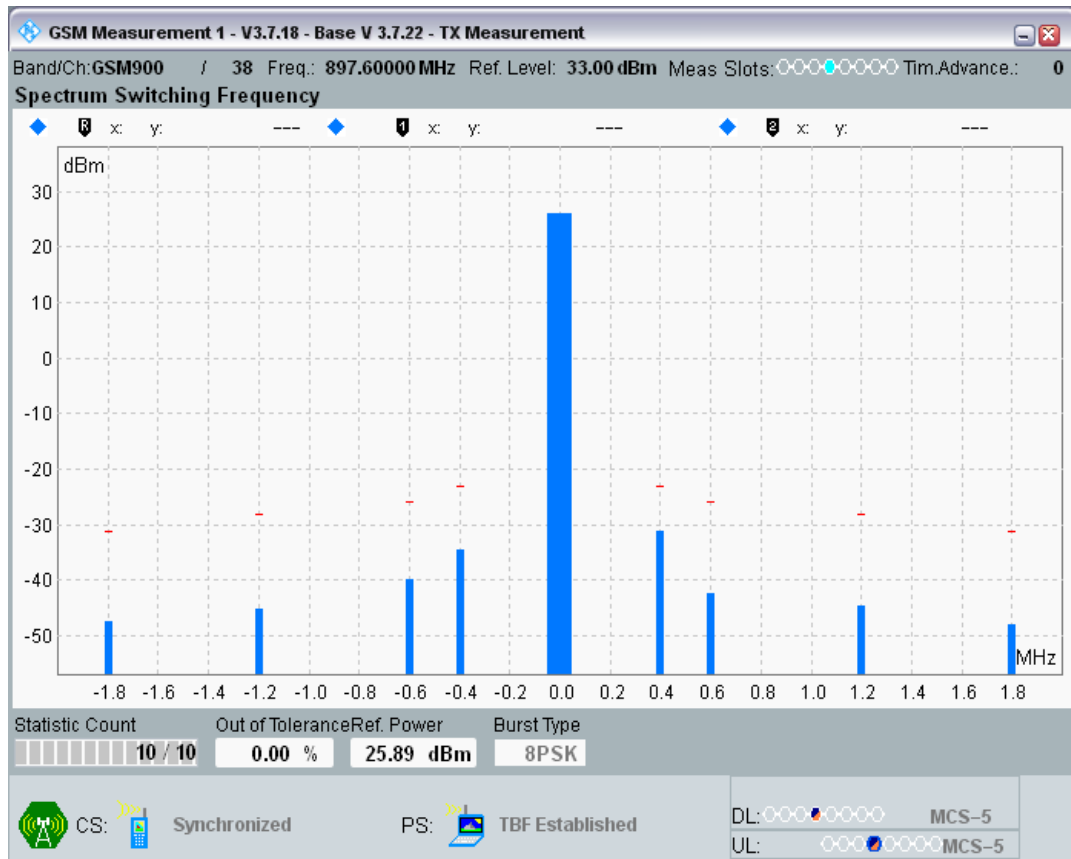


EGPRS900 Channel=38 Gamma=17;17;17;17

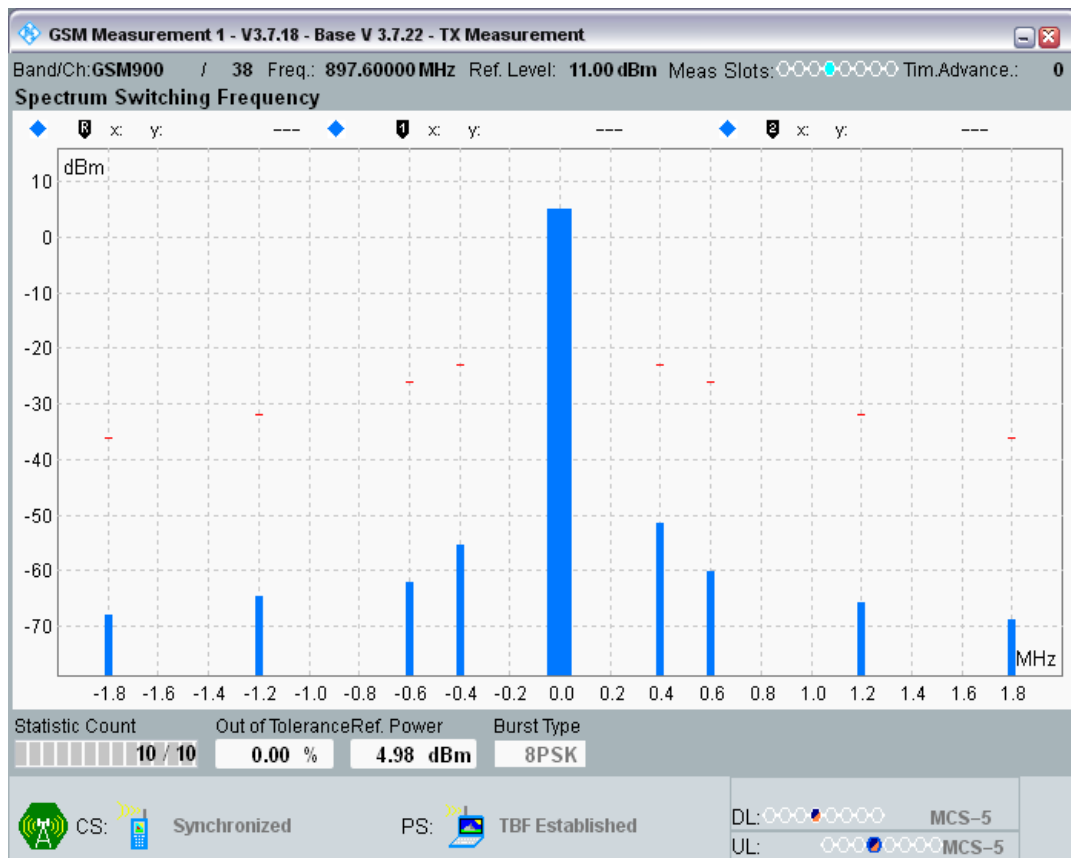

EGPRS900 Channel=124 Gamma=6;6;6;6

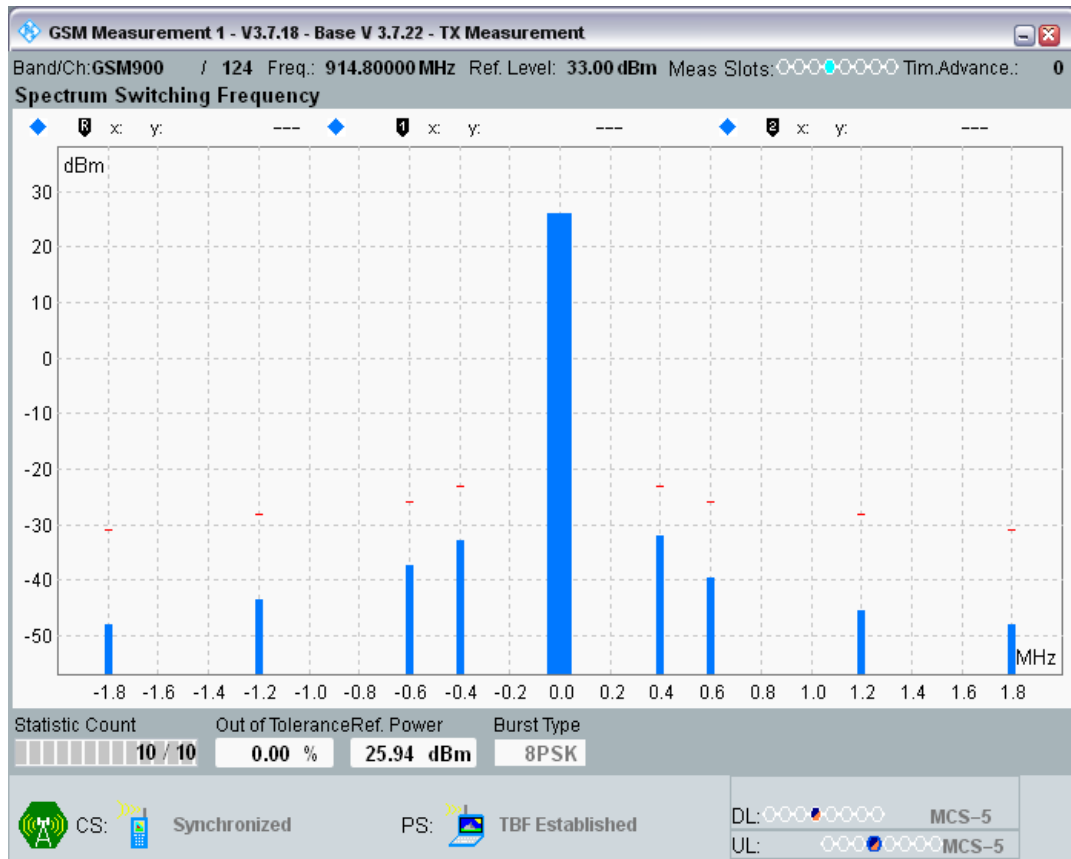

EGPRS900 Channel=124 Gamma=17;17;17;17

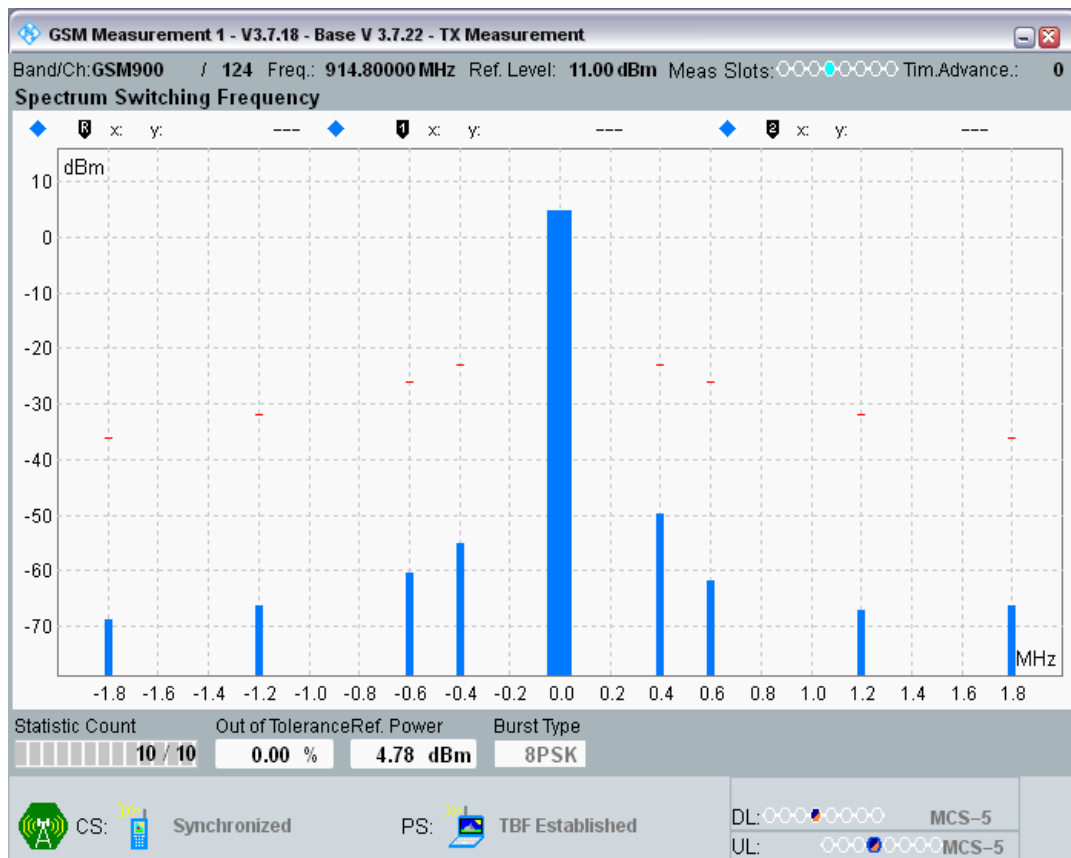

Clause 4.2.34 Intermodulation rejection - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Code Scheme	Interfer 1 Freq (MHz)	Interfer 1 Level (dBm)	Interfer 2 Freq (MHz)	Interfer 2 Level (dBm)	BLER (%)	Limit (%)	Verdict
EGPRS1800	512	1710.2	1805.2	PDTCH MCS1	1804.4	-49	1803.6	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS1	1806	-49	1806.8	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS2	1804.4	-49	1803.6	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS2	1806	-49	1806.8	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS3	1804.4	-49	1803.6	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS3	1806	-49	1806.8	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS4	1804.4	-49	1803.6	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS4	1806	-49	1806.8	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS5	1804.4	-49	1803.6	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS5	1806	-49	1806.8	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS6	1804.4	-49	1803.6	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS6	1806	-49	1806.8	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS7	1804.4	-49	1803.6	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS7	1806	-49	1806.8	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS8	1804.4	-49	1803.6	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS8	1806	-49	1806.8	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS9	1804.4	-49	1803.6	-50	0.00	10	PASS
EGPRS1800	512	1710.2	1805.2	PDTCH MCS9	1806	-49	1806.8	-50	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS1	1841.6	-49	1840.8	-50	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS1	1843.2	-49	1844	-50	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS1	1841.6	-49	1840.8	-50	0.00	10	PASS

0				MCS2							
EGPRS180	698	1747.4	1842.4	PDTCH	1843.2	-49	1844	-50	0.00	10	PASS
0				MCS2							
EGPRS180	698	1747.4	1842.4	PDTCH	1841.6	-49	1840.8	-50	0.00	10	PASS
0				MCS3							
EGPRS180	698	1747.4	1842.4	PDTCH	1843.2	-49	1844	-50	0.00	10	PASS
0				MCS3							
EGPRS180	698	1747.4	1842.4	PDTCH	1841.6	-49	1840.8	-50	0.00	10	PASS
0				MCS4							
EGPRS180	698	1747.4	1842.4	PDTCH	1843.2	-49	1844	-50	0.00	10	PASS
0				MCS4							
EGPRS180	698	1747.4	1842.4	PDTCH	1841.6	-49	1840.8	-50	0.00	10	PASS
0				MCS5							
EGPRS180	698	1747.4	1842.4	PDTCH	1843.2	-49	1844	-50	0.00	10	PASS
0				MCS5							
EGPRS180	698	1747.4	1842.4	PDTCH	1841.6	-49	1840.8	-50	0.00	10	PASS
0				MCS6							
EGPRS180	698	1747.4	1842.4	PDTCH	1843.2	-49	1844	-50	0.00	10	PASS
0				MCS6							
EGPRS180	698	1747.4	1842.4	PDTCH	1841.6	-49	1840.8	-50	0.00	10	PASS
0				MCS7							
EGPRS180	698	1747.4	1842.4	PDTCH	1843.2	-49	1844	-50	0.00	10	PASS
0				MCS7							
EGPRS180	698	1747.4	1842.4	PDTCH	1841.6	-49	1840.8	-50	0.00	10	PASS
0				MCS8							
EGPRS180	698	1747.4	1842.4	PDTCH	1843.2	-49	1844	-50	0.00	10	PASS
0				MCS8							
EGPRS180	698	1747.4	1842.4	PDTCH	1841.6	-49	1840.8	-50	0.00	10	PASS
0				MCS9							
EGPRS180	698	1747.4	1842.4	PDTCH	1843.2	-49	1844	-50	0.00	10	PASS
0				MCS9							
EGPRS180	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-50	0.00	10	PASS
0				MCS1							
EGPRS180	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-50	0.00	10	PASS
0				MCS1							
EGPRS180	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-50	0.00	10	PASS
0				MCS2							
EGPRS180	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-50	0.00	10	PASS
0				MCS2							
EGPRS180	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-50	0.00	10	PASS
0				MCS3							
EGPRS180	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-50	0.00	10	PASS
0				MCS3							
EGPRS180	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-50	0.00	10	PASS

0				MCS4							
EGPRS180	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-50	0.00	10	PASS
0				MCS4							
EGPRS180	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-50	0.00	10	PASS
0				MCS5							
EGPRS180	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-50	0.00	10	PASS
0				MCS5							
EGPRS180	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-50	0.00	10	PASS
0				MCS6							
EGPRS180	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-50	0.00	10	PASS
0				MCS6							
EGPRS180	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-50	0.00	10	PASS
0				MCS7							
EGPRS180	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-50	0.00	10	PASS
0				MCS7							
EGPRS180	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-50	0.00	10	PASS
0				MCS8							
EGPRS180	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-50	0.00	10	PASS
0				MCS8							
EGPRS180	885	1784.8	1879.8	PDTCH	1879	-49	1878.2	-50	0.00	10	PASS
0				MCS9							
EGPRS180	885	1784.8	1879.8	PDTCH	1880.6	-49	1881.4	-50	0.00	10	PASS
0				MCS9							
EGPRS190	512	1850.2	1930.2	PDTCH	1929.4	-49	1928.6	-50	0.00	10	PASS
0				MCS1							
EGPRS190	512	1850.2	1930.2	PDTCH	1931	-49	1931.8	-50	0.00	10	PASS
0				MCS1							
EGPRS190	512	1850.2	1930.2	PDTCH	1929.4	-49	1928.6	-50	0.00	10	PASS
0				MCS2							
EGPRS190	512	1850.2	1930.2	PDTCH	1931	-49	1931.8	-50	0.00	10	PASS
0				MCS2							
EGPRS190	512	1850.2	1930.2	PDTCH	1929.4	-49	1928.6	-50	0.10	10	PASS
0				MCS3							
EGPRS190	512	1850.2	1930.2	PDTCH	1931	-49	1931.8	-50	0.40	10	PASS
0				MCS3							
EGPRS190	512	1850.2	1930.2	PDTCH	1929.4	-49	1928.6	-50	0.00	10	PASS
0				MCS4							
EGPRS190	512	1850.2	1930.2	PDTCH	1931	-49	1931.8	-50	0.00	10	PASS
0				MCS4							
EGPRS190	512	1850.2	1930.2	PDTCH	1929.4	-49	1928.6	-50	0.00	10	PASS
0				MCS5							
EGPRS190	512	1850.2	1930.2	PDTCH	1931	-49	1931.8	-50	0.00	10	PASS
0				MCS5							
EGPRS190	512	1850.2	1930.2	PDTCH	1929.4	-49	1928.6	-50	0.00	10	PASS

0				MCS6							
EGPRS190	512	1850.2	1930.2	PDTCH	1931	-49	1931.8	-50	0.00	10	PASS
0				MCS6							
EGPRS190	512	1850.2	1930.2	PDTCH	1929.4	-49	1928.6	-50	0.00	10	PASS
0				MCS7							
EGPRS190	512	1850.2	1930.2	PDTCH	1931	-49	1931.8	-50	0.00	10	PASS
0				MCS7							
EGPRS190	512	1850.2	1930.2	PDTCH	1929.4	-49	1928.6	-50	0.10	10	PASS
0				MCS8							
EGPRS190	512	1850.2	1930.2	PDTCH	1931	-49	1931.8	-50	0.00	10	PASS
0				MCS8							
EGPRS190	512	1850.2	1930.2	PDTCH	1929.4	-49	1928.6	-50	0.00	10	PASS
0				MCS9							
EGPRS190	512	1850.2	1930.2	PDTCH	1931	-49	1931.8	-50	0.00	10	PASS
0				MCS9							
EGPRS190	661	1880	1960	PDTCH	1959.2	-49	1958.4	-50	0.00	10	PASS
0				MCS1							
EGPRS190	661	1880	1960	PDTCH	1960.8	-49	1961.6	-50	0.00	10	PASS
0				MCS1							
EGPRS190	661	1880	1960	PDTCH	1959.2	-49	1958.4	-50	0.00	10	PASS
0				MCS2							
EGPRS190	661	1880	1960	PDTCH	1960.8	-49	1961.6	-50	0.00	10	PASS
0				MCS2							
EGPRS190	661	1880	1960	PDTCH	1959.2	-49	1958.4	-50	0.00	10	PASS
0				MCS3							
EGPRS190	661	1880	1960	PDTCH	1960.8	-49	1961.6	-50	0.00	10	PASS
0				MCS3							
EGPRS190	661	1880	1960	PDTCH	1959.2	-49	1958.4	-50	0.00	10	PASS
0				MCS4							
EGPRS190	661	1880	1960	PDTCH	1960.8	-49	1961.6	-50	0.00	10	PASS
0				MCS4							
EGPRS190	661	1880	1960	PDTCH	1959.2	-49	1958.4	-50	0.00	10	PASS
0				MCS5							
EGPRS190	661	1880	1960	PDTCH	1960.8	-49	1961.6	-50	0.00	10	PASS
0				MCS5							
EGPRS190	661	1880	1960	PDTCH	1959.2	-49	1958.4	-50	0.00	10	PASS
0				MCS6							
EGPRS190	661	1880	1960	PDTCH	1960.8	-49	1961.6	-50	0.00	10	PASS
0				MCS6							
EGPRS190	661	1880	1960	PDTCH	1959.2	-49	1958.4	-50	0.00	10	PASS
0				MCS7							
EGPRS190	661	1880	1960	PDTCH	1960.8	-49	1961.6	-50	0.00	10	PASS
0				MCS7							
EGPRS190	661	1880	1960	PDTCH	1959.2	-49	1958.4	-50	0.00	10	PASS

0				MCS8							
EGPRS190	661	1880	1960	PDTCH	1960.8	-49	1961.6	-50	0.00	10	PASS
0				MCS8							
EGPRS190	661	1880	1960	PDTCH	1959.2	-49	1958.4	-50	0.00	10	PASS
0				MCS9							
EGPRS190	661	1880	1960	PDTCH	1960.8	-49	1961.6	-50	0.00	10	PASS
0				MCS9							
EGPRS190	810	1909.8	1989.8	PDTCH	1989	-49	1988.2	-50	0.00	10	PASS
0				MCS1							
EGPRS190	810	1909.8	1989.8	PDTCH	1990.6	-49	1991.4	-50	0.00	10	PASS
0				MCS1							
EGPRS190	810	1909.8	1989.8	PDTCH	1989	-49	1988.2	-50	0.00	10	PASS
0				MCS2							
EGPRS190	810	1909.8	1989.8	PDTCH	1990.6	-49	1991.4	-50	0.00	10	PASS
0				MCS2							
EGPRS190	810	1909.8	1989.8	PDTCH	1989	-49	1988.2	-50	0.00	10	PASS
0				MCS3							
EGPRS190	810	1909.8	1989.8	PDTCH	1990.6	-49	1991.4	-50	0.00	10	PASS
0				MCS3							
EGPRS190	810	1909.8	1989.8	PDTCH	1989	-49	1988.2	-50	0.00	10	PASS
0				MCS4							
EGPRS190	810	1909.8	1989.8	PDTCH	1990.6	-49	1991.4	-50	0.00	10	PASS
0				MCS4							
EGPRS190	810	1909.8	1989.8	PDTCH	1989	-49	1988.2	-50	0.00	10	PASS
0				MCS5							
EGPRS190	810	1909.8	1989.8	PDTCH	1990.6	-49	1991.4	-50	0.00	10	PASS
0				MCS5							
EGPRS190	810	1909.8	1989.8	PDTCH	1989	-49	1988.2	-50	0.00	10	PASS
0				MCS6							
EGPRS190	810	1909.8	1989.8	PDTCH	1990.6	-49	1991.4	-50	0.00	10	PASS
0				MCS6							
EGPRS190	810	1909.8	1989.8	PDTCH	1989	-49	1988.2	-50	0.00	10	PASS
0				MCS7							
EGPRS190	810	1909.8	1989.8	PDTCH	1990.6	-49	1991.4	-50	0.00	10	PASS
0				MCS7							
EGPRS190	810	1909.8	1989.8	PDTCH	1989	-49	1988.2	-50	0.00	10	PASS
0				MCS8							
EGPRS190	810	1909.8	1989.8	PDTCH	1990.6	-49	1991.4	-50	0.00	10	PASS
0				MCS8							
EGPRS190	810	1909.8	1989.8	PDTCH	1989	-49	1988.2	-50	0.40	10	PASS
0				MCS9							
EGPRS190	810	1909.8	1989.8	PDTCH	1990.6	-49	1991.4	-50	0.20	10	PASS
0				MCS9							
EGPRS850	128	824.2	869.2	PDTCH	868.4	-49	867.6	-50	0.00	10	PASS

				MCS1							
EGPRS850	128	824.2	869.2	PDTCH MCS1	870	-49	870.8	-50	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS2	868.4	-49	867.6	-50	0.10	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS2	870	-49	870.8	-50	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS3	868.4	-49	867.6	-50	2.10	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS3	870	-49	870.8	-50	2.40	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS4	868.4	-49	867.6	-50	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS4	870	-49	870.8	-50	0.90	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS5	868.4	-49	867.6	-50	3.90	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS5	870	-49	870.8	-50	3.20	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS6	868.4	-49	867.6	-50	0.20	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS6	870	-49	870.8	-50	0.40	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS7	868.4	-49	867.6	-50	0.40	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS7	870	-49	870.8	-50	0.50	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS8	868.4	-49	867.6	-50	8.30	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS8	870	-49	870.8	-50	6.20	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS9	868.4	-49	867.6	-50	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS9	870	-49	870.8	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS1	880.8	-49	880	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS1	882.4	-49	883.2	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS2	880.8	-49	880	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS2	882.4	-49	883.2	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH	880.8	-49	880	-50	0.00	10	PASS

				MCS3							
EGPRS850	190	836.6	881.6	PDTCH MCS3	882.4	-49	883.2	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS4	880.8	-49	880	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS4	882.4	-49	883.2	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS5	880.8	-49	880	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS5	882.4	-49	883.2	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS6	880.8	-49	880	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS6	882.4	-49	883.2	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS7	880.8	-49	880	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS7	882.4	-49	883.2	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS8	880.8	-49	880	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS8	882.4	-49	883.2	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS9	880.8	-49	880	-50	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS9	882.4	-49	883.2	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS1	893	-49	892.2	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS1	894.6	-49	895.4	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS2	893	-49	892.2	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS2	894.6	-49	895.4	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS3	893	-49	892.2	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS3	894.6	-49	895.4	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS4	893	-49	892.2	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS4	894.6	-49	895.4	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH	893	-49	892.2	-50	0.00	10	PASS

				MCS5							
EGPRS850	251	848.8	893.8	PDTCH MCS5	894.6	-49	895.4	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS6	893	-49	892.2	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS6	894.6	-49	895.4	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS7	893	-49	892.2	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS7	894.6	-49	895.4	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS8	893	-49	892.2	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS8	894.6	-49	895.4	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS9	893	-49	892.2	-50	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS9	894.6	-49	895.4	-50	0.00	10	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS1	914.4	-49	913.6	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS1	916	-49	916.8	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS2	914.4	-49	913.6	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS2	916	-49	916.8	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS3	914.4	-49	913.6	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS3	916	-49	916.8	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS4	914.4	-49	913.6	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS4	916	-49	916.8	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS5	914.4	-49	913.6	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS5	916	-49	916.8	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS6	914.4	-49	913.6	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS6	916	-49	916.8	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH	914.4	-49	913.6	-50	0.00	2.43	PASS

				MCS7						9	
EGPRS900	975	880.2	915.2	PDTCH MCS7	916	-49	916.8	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS8	914.4	-49	913.6	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS8	916	-49	916.8	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS9	914.4	-49	913.6	-50	0.00	2.43 9	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS9	916	-49	916.8	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS1	941.8	-49	941	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS1	943.4	-49	944.2	-50	2.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS2	941.8	-49	941	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS2	943.4	-49	944.2	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS3	941.8	-49	941	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS3	943.4	-49	944.2	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS4	941.8	-49	941	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS4	943.4	-49	944.2	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS5	941.8	-49	941	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS5	943.4	-49	944.2	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS6	941.8	-49	941	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS6	943.4	-49	944.2	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS7	941.8	-49	941	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS7	943.4	-49	944.2	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS8	941.8	-49	941	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS8	943.4	-49	944.2	-50	0.00	2.43 9	PASS
EGPRS900	38	897.6	942.6	PDTCH	941.8	-49	941	-50	0.00	2.43	PASS

				MCS9						9	
EGPRS900	38	897.6	942.6	PDTCH	943.4	-49	944.2	-50	0.00	2.43	PASS
				MCS9						9	
EGPRS900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	2.43	PASS
				MCS1						9	
EGPRS900	124	914.8	959.8	PDTCH	960.6	-49	961.4	-50	0.00	2.43	PASS
				MCS1						9	
EGPRS900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	2.43	PASS
				MCS2						9	
EGPRS900	124	914.8	959.8	PDTCH	960.6	-49	961.4	-50	0.00	2.43	PASS
				MCS2						9	
EGPRS900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	2.43	PASS
				MCS3						9	
EGPRS900	124	914.8	959.8	PDTCH	960.6	-49	961.4	-50	0.00	2.43	PASS
				MCS3						9	
EGPRS900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	2.43	PASS
				MCS4						9	
EGPRS900	124	914.8	959.8	PDTCH	960.6	-49	961.4	-50	0.00	2.43	PASS
				MCS4						9	
EGPRS900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	2.43	PASS
				MCS5						9	
EGPRS900	124	914.8	959.8	PDTCH	960.6	-49	961.4	-50	0.00	2.43	PASS
				MCS5						9	
EGPRS900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	2.43	PASS
				MCS6						9	
EGPRS900	124	914.8	959.8	PDTCH	960.6	-49	961.4	-50	0.00	2.43	PASS
				MCS6						9	
EGPRS900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	2.43	PASS
				MCS7						9	
EGPRS900	124	914.8	959.8	PDTCH	960.6	-49	961.4	-50	0.00	2.43	PASS
				MCS7						9	
EGPRS900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	2.43	PASS
				MCS8						9	
EGPRS900	124	914.8	959.8	PDTCH	960.6	-49	961.4	-50	0.00	2.43	PASS
				MCS8						9	
EGPRS900	124	914.8	959.8	PDTCH	959	-49	958.2	-50	0.00	2.43	PASS
				MCS9						9	
EGPRS900	124	914.8	959.8	PDTCH	960.6	-49	961.4	-50	0.00	2.43	PASS
				MCS9						9	

Clause 4.2.34 Intermodulation rejection - EGPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Code Scheme	Interfer 1 Freq (MHz)	Interfer 1 Level (dBm)	Interfer 2 Freq (MHz)	Interfer 2 Level (dBm)	BLER (%)	Limit (%)	Verdict
------	---------	--------------------	--------------------	-------------	-----------------------	------------------------	-----------------------	------------------------	----------	-----------	---------

EGPRS180 0	512	1710.2	1805.2	USF MCS4	1804.4	-49	1803.6	-50	0.00	1	PASS
EGPRS180 0	512	1710.2	1805.2	USF MCS4	1806	-49	1806.8	-50	0.00	1	PASS
EGPRS180 0	512	1710.2	1805.2	USF MCS9	1804.4	-49	1803.6	-50	0.00	1	PASS
EGPRS180 0	512	1710.2	1805.2	USF MCS9	1806	-49	1806.8	-50	0.00	1	PASS
EGPRS180 0	698	1747.4	1842.4	USF MCS4	1841.6	-49	1840.8	-50	0.00	1	PASS
EGPRS180 0	698	1747.4	1842.4	USF MCS4	1843.2	-49	1844	-50	0.00	1	PASS
EGPRS180 0	698	1747.4	1842.4	USF MCS9	1841.6	-49	1840.8	-50	0.00	1	PASS
EGPRS180 0	698	1747.4	1842.4	USF MCS9	1843.2	-49	1844	-50	0.00	1	PASS
EGPRS180 0	885	1784.8	1879.8	USF MCS4	1879	-49	1878.2	-50	0.00	1	PASS
EGPRS180 0	885	1784.8	1879.8	USF MCS4	1880.6	-49	1881.4	-50	0.00	1	PASS
EGPRS180 0	885	1784.8	1879.8	USF MCS9	1879	-49	1878.2	-50	0.00	1	PASS
EGPRS180 0	885	1784.8	1879.8	USF MCS9	1880.6	-49	1881.4	-50	0.00	1	PASS
EGPRS190 0	512	1850.2	1930.2	USF MCS4	1929.4	-49	1928.6	-50	0.00	1	PASS
EGPRS190 0	512	1850.2	1930.2	USF MCS4	1931	-49	1931.8	-50	0.00	1	PASS
EGPRS190 0	512	1850.2	1930.2	USF MCS9	1929.4	-49	1928.6	-50	0.00	1	PASS
EGPRS190 0	512	1850.2	1930.2	USF MCS9	1931	-49	1931.8	-50	0.00	1	PASS
EGPRS190 0	661	1880	1960	USF MCS4	1959.2	-49	1958.4	-50	0.00	1	PASS
EGPRS190 0	661	1880	1960	USF MCS4	1960.8	-49	1961.6	-50	0.00	1	PASS
EGPRS190 0	661	1880	1960	USF MCS9	1959.2	-49	1958.4	-50	0.00	1	PASS
EGPRS190 0	661	1880	1960	USF MCS9	1960.8	-49	1961.6	-50	0.00	1	PASS
EGPRS190 0	810	1909.8	1989.8	USF MCS4	1989	-49	1988.2	-50	0.00	1	PASS
EGPRS190 0	810	1909.8	1989.8	USF MCS4	1990.6	-49	1991.4	-50	0.00	1	PASS

EGPRS190 0	810	1909.8	1989.8	USF MCS9	1989	-49	1988.2	-50	0.00	1	PASS
EGPRS190 0	810	1909.8	1989.8	USF MCS9	1990.6	-49	1991.4	-50	0.00	1	PASS
EGPRS850	128	824.2	869.2	USF MCS4	868.4	-49	867.6	-50	0.00	1	PASS
EGPRS850	128	824.2	869.2	USF MCS4	870	-49	870.8	-50	0.00	1	PASS
EGPRS850	128	824.2	869.2	USF MCS9	868.4	-49	867.6	-50	0.00	1	PASS
EGPRS850	128	824.2	869.2	USF MCS9	870	-49	870.8	-50	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS4	880.8	-49	880	-50	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS4	882.4	-49	883.2	-50	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS9	880.8	-49	880	-50	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS9	882.4	-49	883.2	-50	0.00	1	PASS
EGPRS850	251	848.8	893.8	USF MCS4	893	-49	892.2	-50	0.00	1	PASS
EGPRS850	251	848.8	893.8	USF MCS4	894.6	-49	895.4	-50	0.00	1	PASS
EGPRS850	251	848.8	893.8	USF MCS9	893	-49	892.2	-50	0.00	1	PASS
EGPRS850	251	848.8	893.8	USF MCS9	894.6	-49	895.4	-50	0.00	1	PASS
EGPRS900	975	880.2	915.2	USF MCS4	914.4	-49	913.6	-50	0.00	8.96 1	PASS
EGPRS900	975	880.2	915.2	USF MCS4	916	-49	916.8	-50	0.00	8.96 1	PASS
EGPRS900	975	880.2	915.2	USF MCS9	914.4	-49	913.6	-50	0.00	8.96 1	PASS
EGPRS900	975	880.2	915.2	USF MCS9	916	-49	916.8	-50	0.00	8.96 1	PASS
EGPRS900	38	897.6	942.6	USF MCS4	941.8	-49	941	-50	0.00	8.96 1	PASS
EGPRS900	38	897.6	942.6	USF MCS4	943.4	-49	944.2	-50	0.00	8.96 1	PASS
EGPRS900	38	897.6	942.6	USF MCS9	941.8	-49	941	-50	0.00	8.96 1	PASS
EGPRS900	38	897.6	942.6	USF MCS9	943.4	-49	944.2	-50	0.00	8.96 1	PASS

EGPRS900	124	914.8	959.8	USF MCS4	959	-49	958.2	-50	0.00	8.96 1	PASS
EGPRS900	124	914.8	959.8	USF MCS4	960.6	-49	961.4	-50	0.00	8.96 1	PASS
EGPRS900	124	914.8	959.8	USF MCS9	959	-49	958.2	-50	0.00	8.96 1	PASS
EGPRS900	124	914.8	959.8	USF MCS9	960.6	-49	961.4	-50	0.00	8.96 1	PASS

Clause 4.2.37 AM suppression - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Code Scheme	Interfer Freq (MHz)	Interfer Level (dBm)	BLER (%)	Limit (%)	Verdict
EGPRS1800	512	1710.2	1805.2	PDTCH MCS5	1811.2	-31	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS5	1848.4	-31	0.00	10	PASS
EGPRS1800	885	1784.8	1879.8	PDTCH MCS5	1885.8	-31	0.00	10	PASS
EGPRS1900	512	1850.2	1930.2	PDTCH MCS5	1936.2	-31	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS5	1966	-31	0.00	10	PASS
EGPRS1900	810	1909.8	1989.8	PDTCH MCS5	1995.8	-31	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS5	875.2	-31	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS5	887.6	-31	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS5	899.8	-31	0.00	10	PASS
EGPRS900	975	880.2	915.2	PDTCH MCS5	921.2	-31	0.00	2.439	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS5	948.6	-31	0.00	2.439	PASS
EGPRS900	124	914.8	959.8	PDTCH MCS5	965.8	-31	0.00	2.439	PASS

Clause 4.2.37 AM suppression - EGPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Code Scheme	Interfer Freq (MHz)	Interfer Level (dBm)	BLER (%)	Limit (%)	Verdict
EGPRS1800	512	1710.2	1805.2	USF MCS5	1811.2	-31	0.00	1	PASS
EGPRS1800	698	1747.4	1842.4	USF MCS5	1848.4	-31	0.00	1	PASS

EGPRS1800	885	1784.8	1879.8	USF MCS5	1885.8	-31	0.00	1	PASS
EGPRS1900	512	1850.2	1930.2	USF MCS5	1936.2	-31	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS5	1966	-31	0.00	1	PASS
EGPRS1900	810	1909.8	1989.8	USF MCS5	1995.8	-31	0.00	1	PASS
EGPRS850	128	824.2	869.2	USF MCS5	875.2	-31	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS5	887.6	-31	0.00	1	PASS
EGPRS850	251	848.8	893.8	USF MCS5	899.8	-31	0.00	1	PASS
EGPRS900	975	880.2	915.2	USF MCS5	921.2	-31	0.00	8.961	PASS
EGPRS900	38	897.6	942.6	USF MCS5	948.6	-31	0.00	8.961	PASS
EGPRS900	124	914.8	959.8	USF MCS5	965.8	-31	0.00	8.961	PASS

Clause 4.2.40 Adjacent channel rejection - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Type	Range	Wanted Level(dBm)	Interfer Freq (MHz)	Interfer Level (dBm)	BLER (%)	Limit (%)	Verdict
EGPRS1800	698	1747.4	1842.4	PDTCH MCS1 TU50	Adj -1	-81	1842.2	-74	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS1 TU50	Adj +1	-81	1842.6	-74	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS1 TU50	Adj -2	-81	1842	-42	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS1 TU50	Adj +2	-81	1842.8	-42	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS2 TU50	Adj -1	-79	1842.2	-74	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS2 TU50	Adj +1	-79	1842.6	-74	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH	Adj -2	-79	1842	-42	0.00	10	PASS

				MCS2 TU50							
EGPRS1800	698	1747.4	1842.4	PDTCH MCS2 TU50	Adj +2	-79	1842.8	-42	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS3 TU50	Adj -1	-74	1842.2	-74	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS3 TU50	Adj +1	-74	1842.6	-74	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS3 TU50	Adj -2	-74	1842	-42	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS3 TU50	Adj +2	-74	1842.8	-42	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS4 TU50	Adj -1	-68	1842.2	-74	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS4 TU50	Adj +1	-68	1842.6	-74	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS4 TU50	Adj -2	-68	1842	-42	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS4 TU50	Adj +2	-68	1842.8	-42	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS5 TU50	Adj -1	-78	1842.2	-77	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS5 TU50	Adj +1	-78	1842.6	-77	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS5 TU50	Adj -2	-78	1842	-44	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS5 TU50	Adj +2	-78	1842.8	-44	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS6 TU50	Adj -1	-75	1842.2	-77.5	0.00	10	PASS

EGPRS1800	698	1747.4	1842.4	PDTCH MCS6 TU50	Adj +1	-75	1842.6	-77.5	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS6 TU50	Adj -2	-75	1842	-44	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS6 TU50	Adj +2	-75	1842.8	-44	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS7 TU50	Adj -1	-65.5	1842.2	-79	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS7 TU50	Adj +1	-65.5	1842.6	-79	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS7 TU50	Adj -2	-65.5	1842	-44	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS7 TU50	Adj +2	-65.5	1842.8	-44	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS8 TU50	Adj -1	-63.5	1842.2	-80.5	0.00	30	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS8 TU50	Adj +1	-63.5	1842.6	-80.5	0.00	30	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS8 TU50	Adj -2	-63.5	1842	-44	0.00	30	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS8 TU50	Adj +2	-63.5	1842.8	-44	0.00	30	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS9 TU1_5	Adj -1	-67.5	1842.2	-78.5	0.00	30	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS9 TU1_5	Adj +1	-67.5	1842.6	-78.5	0.00	30	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS9 TU1_5	Adj -2	-67.5	1842	-44	0.00	30	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS9	Adj +2	-67.5	1842.8	-44	0.00	30	PASS

				TU1_5							
EGPRS1900	661	1880	1960	PDTCH MCS1 TU50	Adj -1	-81	1959.8	-74	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS1 TU50	Adj +1	-81	1960.2	-74	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS1 TU50	Adj -2	-81	1959.6	-42	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS1 TU50	Adj +2	-81	1960.4	-42	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS2 TU50	Adj -1	-79	1959.8	-74	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS2 TU50	Adj +1	-79	1960.2	-74	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS2 TU50	Adj -2	-79	1959.6	-42	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS2 TU50	Adj +2	-79	1960.4	-42	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS3 TU50	Adj -1	-74	1959.8	-74	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS3 TU50	Adj +1	-74	1960.2	-74	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS3 TU50	Adj -2	-74	1959.6	-42	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS3 TU50	Adj +2	-74	1960.4	-42	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS4 TU50	Adj -1	-68	1959.8	-74	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS4 TU50	Adj +1	-68	1960.2	-74	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH	Adj -2	-68	1959.6	-42	0.00	10	PASS

				MCS4 TU50							
EGPRS1900	661	1880	1960	PDTCH MCS4 TU50	Adj +2	-68	1960.4	-42	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS5 TU50	Adj -1	-78	1959.8	-77	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS5 TU50	Adj +1	-78	1960.2	-77	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS5 TU50	Adj -2	-78	1959.6	-44	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS5 TU50	Adj +2	-78	1960.4	-44	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS6 TU50	Adj -1	-75	1959.8	-77.5	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS6 TU50	Adj +1	-75	1960.2	-77.5	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS6 TU50	Adj -2	-75	1959.6	-44	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS6 TU50	Adj +2	-75	1960.4	-44	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS7 TU50	Adj -1	-65.5	1959.8	-79	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS7 TU50	Adj +1	-65.5	1960.2	-79	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS7 TU50	Adj -2	-65.5	1959.6	-44	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS7 TU50	Adj +2	-65.5	1960.4	-44	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS8 TU50	Adj -1	-63.5	1959.8	-80.5	0.00	30	PASS

EGPRS1900	661	1880	1960	PDTCH MCS8 TU50	Adj +1	-63.5	1960.2	-80.5	0.00	30	PASS
EGPRS1900	661	1880	1960	PDTCH MCS8 TU50	Adj -2	-63.5	1959.6	-44	0.00	30	PASS
EGPRS1900	661	1880	1960	PDTCH MCS8 TU50	Adj +2	-63.5	1960.4	-44	0.00	30	PASS
EGPRS1900	661	1880	1960	PDTCH MCS9 TU1_5	Adj -1	-67.5	1959.8	-78.5	0.00	30	PASS
EGPRS1900	661	1880	1960	PDTCH MCS9 TU1_5	Adj +1	-67.5	1960.2	-78.5	0.20	30	PASS
EGPRS1900	661	1880	1960	PDTCH MCS9 TU1_5	Adj -2	-67.5	1959.6	-44	0.10	30	PASS
EGPRS1900	661	1880	1960	PDTCH MCS9 TU1_5	Adj +2	-67.5	1960.4	-44	0.10	30	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS1 TU50	Adj -1	-80.5	881.4	-74	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS1 TU50	Adj +1	-80.5	881.8	-74	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS1 TU50	Adj -2	-80.5	881.2	-42	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS1 TU50	Adj +2	-80.5	882	-42	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS2 TU50	Adj -1	-78.5	881.4	-74	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS2 TU50	Adj +1	-78.5	881.8	-74	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS2 TU50	Adj -2	-78.5	881.2	-42	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS2	Adj +2	-78.5	882	-42	0.00	10	PASS

				TU50							
EGPRS850	190	836.6	881.6	PDTCH MCS3 TU50	Adj -1	-74	881.4	-74	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS3 TU50	Adj +1	-74	881.8	-74	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS3 TU50	Adj -2	-74	881.2	-42	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS3 TU50	Adj +2	-74	882	-42	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS4 TU50	Adj -1	-69	881.4	-74	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS4 TU50	Adj +1	-69	881.8	-74	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS4 TU50	Adj -2	-69	881.2	-42	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS4 TU50	Adj +2	-69	882	-42	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS5 TU50	Adj -1	-77.5	881.4	-77.5	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS5 TU50	Adj +1	-77.5	881.8	-77.5	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS5 TU50	Adj -2	-77.5	881.2	-44	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS5 TU50	Adj +2	-77.5	882	-44	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS6 TU50	Adj -1	-75	881.4	-78	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS6 TU50	Adj +1	-75	881.8	-78	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH	Adj -2	-75	881.2	-44	0.00	10	PASS

				MCS6 TU50							
EGPRS850	190	836.6	881.6	PDTCH MCS6 TU50	Adj +2	-75	882	-44	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS7 TU50	Adj -1	-68	881.4	-79	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS7 TU50	Adj +1	-68	881.8	-79	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS7 TU50	Adj -2	-68	881.2	-44	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS7 TU50	Adj +2	-68	882	-44	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS8 TU50	Adj -1	-67.5	881.4	-79.5	0.00	30	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS8 TU50	Adj +1	-67.5	881.8	-79.5	0.00	30	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS8 TU50	Adj -2	-67.5	881.2	-44	0.00	30	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS8 TU50	Adj +2	-67.5	882	-44	0.00	30	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS9 TU3	Adj -1	-67.5	881.4	-78.5	0.00	30	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS9 TU3	Adj +1	-67.5	881.8	-78.5	0.00	30	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS9 TU3	Adj -2	-67.5	881.2	-44	0.00	30	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS9 TU3	Adj +2	-67.5	882	-44	0.00	30	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS1 TU50	Adj -1	-80.5	942.4	-74	0.00	10	PASS

EGPRS900	38	897.6	942.6	PDTCH MCS1 TU50	Adj +1	-80.5	942.8	-74	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS1 TU50	Adj -2	-80.5	942.2	-42	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS1 TU50	Adj +2	-80.5	943	-42	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS2 TU50	Adj -1	-78.5	942.4	-74	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS2 TU50	Adj +1	-78.5	942.8	-74	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS2 TU50	Adj -2	-78.5	942.2	-42	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS2 TU50	Adj +2	-78.5	943	-42	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS3 TU50	Adj -1	-74	942.4	-74	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS3 TU50	Adj +1	-74	942.8	-74	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS3 TU50	Adj -2	-74	942.2	-42	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS3 TU50	Adj +2	-74	943	-42	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS4 TU50	Adj -1	-69	942.4	-74	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS4 TU50	Adj +1	-69	942.8	-74	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS4 TU50	Adj -2	-69	942.2	-42	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS4	Adj +2	-69	943	-42	0.00	10	PASS

				TU50							
EGPRS900	38	897.6	942.6	PDTCH MCS5 TU50	Adj -1	-77.5	942.4	-77.5	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS5 TU50	Adj +1	-77.5	942.8	-77.5	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS5 TU50	Adj -2	-77.5	942.2	-44	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS5 TU50	Adj +2	-77.5	943	-44	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS6 TU50	Adj -1	-75	942.4	-78	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS6 TU50	Adj +1	-75	942.8	-78	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS6 TU50	Adj -2	-75	942.2	-44	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS6 TU50	Adj +2	-75	943	-44	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS7 TU50	Adj -1	-68	942.4	-79	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS7 TU50	Adj +1	-68	942.8	-79	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS7 TU50	Adj -2	-68	942.2	-44	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS7 TU50	Adj +2	-68	943	-44	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS8 TU50	Adj -1	-67.5	942.4	-79.5	0.00	30	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS8 TU50	Adj +1	-67.5	942.8	-79.5	0.00	30	PASS
EGPRS900	38	897.6	942.6	PDTCH	Adj -2	-67.5	942.2	-44	0.00	30	PASS

				MCS8 TU50							
EGPRS900	38	897.6	942.6	PDTCH MCS8 TU50	Adj +2	-67.5	943	-44	0.00	30	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS9 TU3	Adj -1	-67.5	942.4	-78.5	0.00	30	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS9 TU3	Adj +1	-67.5	942.8	-78.5	0.00	30	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS9 TU3	Adj -2	-67.5	942.2	-44	0.00	30	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS9 TU3	Adj +2	-67.5	943	-44	0.00	30	PASS

Clause 4.2.40 Adjacent channel rejection - EGPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Type	Range	Wanted Level(dBm)	Interfer Freq (MHz)	Interfer Level (dBm)	BLER (%)	Limit (%)	Verdict
EGPRS1800	698	1747.4	1842.4	USF MCS1 TU50	Adj -1	-81.5	1842.2	-74	0.00	1	PASS
EGPRS1800	698	1747.4	1842.4	USF MCS1 TU50	Adj +1	-81.5	1842.6	-74	0.00	1	PASS
EGPRS1800	698	1747.4	1842.4	USF MCS1 TU50	Adj -2	-81.5	1842	-42	0.00	1	PASS
EGPRS1800	698	1747.4	1842.4	USF MCS1 TU50	Adj +2	-81.5	1842.8	-42	0.00	1	PASS
EGPRS1800	698	1747.4	1842.4	USF MCS5 TU50	Adj -1	-83	1842.2	-75	0.00	1	PASS
EGPRS1800	698	1747.4	1842.4	USF MCS5 TU50	Adj +1	-83	1842.6	-75	0.00	1	PASS
EGPRS1800	698	1747.4	1842.4	USF MCS5 TU50	Adj -2	-83	1842	-44	0.00	1	PASS
EGPRS1800	698	1747.4	1842.4	USF	Adj +2	-83	1842.8	-44	0.00	1	PASS

				MCS5 TU50							
EGPRS1900	661	1880	1960	USF MCS1 TU50	Adj -1	-81.5	1959.8	-74	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS1 TU50	Adj +1	-81.5	1960.2	-74	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS1 TU50	Adj -2	-81.5	1959.6	-42	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS1 TU50	Adj +2	-81.5	1960.4	-42	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS5 TU50	Adj -1	-83	1959.8	-75	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS5 TU50	Adj +1	-83	1960.2	-75	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS5 TU50	Adj -2	-83	1959.6	-44	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS5 TU50	Adj +2	-83	1960.4	-44	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS1 TU50	Adj -1	-80	881.4	-74	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS1 TU50	Adj +1	-80	881.8	-74	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS1 TU50	Adj -2	-80	881.2	-42	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS1 TU50	Adj +2	-80	882	-42	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS5 TU50	Adj -1	-81.5	881.4	-74.5	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS5 TU50	Adj +1	-81.5	881.8	-74.5	0.00	1	PASS

EGPRS850	190	836.6	881.6	USF MCS5 TU50	Adj -2	-81.5	881.2	-44	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS5 TU50	Adj +2	-81.5	882	-44	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS1 TU50	Adj -1	-80	942.4	-74	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS1 TU50	Adj +1	-80	942.8	-74	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS1 TU50	Adj -2	-80	942.2	-42	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS1 TU50	Adj +2	-80	943	-42	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS5 TU50	Adj -1	-81.5	942.4	-74.5	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS5 TU50	Adj +1	-81.5	942.8	-74.5	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS5 TU50	Adj -2	-81.5	942.2	-44	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS5 TU50	Adj +2	-81.5	943	-44	0.00	1	PASS

Clause 4.2.45 Minimum Input level for Reference Performance - EGPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Type	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
EGPRS1800	Hopping	-	-	PDTCH MCS4 Static FH	-98.5	0.00	10	PASS
EGPRS1800	Hopping	-	-	PDTCH MCS4 TU50 FH	-87.5	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS4 TU50	-87.5	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS3 RA130	-89.5	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS2 HT100	-96.5	0.00	10	PASS

EGPRS1800	698	1747.4	1842.4	PDTCH MCS1 TU50	-99.5	0.00	10	PASS
EGPRS1800	Hopping	-	-	PDTCH MCS8 Static FH	89.5	0.00	10	PASS
EGPRS1800	Hopping	-	-	PDTCH MCS8 TU50 FH	-79	0.00	30	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS8 TU50	-79	0.00	30	PASS
EGPRS1800	Hopping	-	-	PDTCH MCS9 Static FH	-84	0.00	10	PASS
EGPRS1800	Hopping	-	-	PDTCH MCS7 TU50 FH	-80.5	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS6 HT100	-82.5	0.00	10	PASS
EGPRS1800	698	1747.4	1842.4	PDTCH MCS5 RA130	-92	0.00	10	PASS
EGPRS1900	Hopping	-	-	PDTCH MCS4 Static FH	-98.5	0.00	10	PASS
EGPRS1900	Hopping	-	-	PDTCH MCS4 TU50 FH	-87.5	0.00	10	PASS
EGPRS1900	512	1850.2	1930.2	PDTCH MCS4 TU50	-87.5	0.00	10	PASS
EGPRS1900	512	1850.2	1930.2	PDTCH MCS3 RA130	-89.5	0.00	10	PASS
EGPRS1900	512	1850.2	1930.2	PDTCH MCS2 HT100	-96.5	0.00	10	PASS
EGPRS1900	512	1850.2	1930.2	PDTCH MCS1 TU50	-99.5	0.00	10	PASS
EGPRS1900	Hopping	-	-	PDTCH MCS8 Static FH	89.5	0.00	10	PASS
EGPRS1900	Hopping	-	-	PDTCH MCS8 TU50 FH	-79	0.00	30	PASS
EGPRS1900	512	1850.2	1930.2	PDTCH MCS8 TU50	-79	0.00	30	PASS
EGPRS1900	Hopping	-	-	PDTCH MCS9 Static FH	-84	0.10	10	PASS
EGPRS1900	Hopping	-	-	PDTCH MCS7 TU50 FH	-80.5	0.00	10	PASS
EGPRS1900	512	1850.2	1930.2	PDTCH MCS6 HT100	-82.5	0.00	10	PASS
EGPRS1900	512	1850.2	1930.2	PDTCH MCS5 RA130	-92	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS4 TU50	-87.5	0.00	10	PASS

EGPRS1900	661	1880	1960	PDTCH MCS3 RA130	-89.5	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS2 HT100	-96.5	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS1 TU50	-99.5	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS8 TU50	-79	0.00	30	PASS
EGPRS1900	661	1880	1960	PDTCH MCS6 HT100	-82.5	0.00	10	PASS
EGPRS1900	661	1880	1960	PDTCH MCS5 RA130	-92	0.00	10	PASS
EGPRS1900	810	1909.8	1989.8	PDTCH MCS4 TU50	-87.5	0.00	10	PASS
EGPRS1900	810	1909.8	1989.8	PDTCH MCS3 RA130	-89.5	0.00	10	PASS
EGPRS1900	810	1909.8	1989.8	PDTCH MCS2 HT100	-96.5	0.00	10	PASS
EGPRS1900	810	1909.8	1989.8	PDTCH MCS1 TU50	-99.5	0.00	10	PASS
EGPRS1900	810	1909.8	1989.8	PDTCH MCS8 TU50	-79	0.00	30	PASS
EGPRS1900	810	1909.8	1989.8	PDTCH MCS6 HT100	-82.5	0.00	10	PASS
EGPRS1900	810	1909.8	1989.8	PDTCH MCS5 RA130	-92	0.00	10	PASS
EGPRS850	Hopping	-	-	PDTCH MCS4 Static FH	-98.5	0.00	10	PASS
EGPRS850	Hopping	-	-	PDTCH MCS4 TU50 FH	-88	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS4 TU50	-88	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS3 RA250	-89.5	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS2 HT100	-97	0.40	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS1 TU50	-99.5	2.70	10	PASS
EGPRS850	Hopping	-	-	PDTCH MCS8 Static FH	89.5	0.00	10	PASS
EGPRS850	Hopping	-	-	PDTCH MCS8 TU50 FH	-82	0.00	30	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS8 TU50	-82	0.00	30	PASS

EGPRS850	Hopping	-	-	PDTCH MCS9 Static FH	-85	0.00	10	PASS
EGPRS850	Hopping	-	-	PDTCH MCS7 TU50 FH	-83	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS6 HT100	-88	0.00	10	PASS
EGPRS850	128	824.2	869.2	PDTCH MCS5 RA250	-92	0.20	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS4 TU50	-88	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS3 RA250	-89.5	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS2 HT100	-97	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS1 TU50	-99.5	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS8 TU50	-82	0.00	30	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS6 HT100	-88	0.00	10	PASS
EGPRS850	190	836.6	881.6	PDTCH MCS5 RA250	-92	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS4 TU50	-88	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS3 RA250	-89.5	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS2 HT100	-97	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS1 TU50	-99.5	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS8 TU50	-82	0.00	30	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS6 HT100	-88	0.00	10	PASS
EGPRS850	251	848.8	893.8	PDTCH MCS5 RA250	-92	0.00	10	PASS
EGPRS900	Hopping	-	-	PDTCH MCS4 Static FH	-98.5	0.00	10	PASS
EGPRS900	Hopping	-	-	PDTCH MCS4 TU50 FH	-88	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS4 TU50	-88	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS3 RA250	-89.5	0.00	10	PASS

EGPRS900	38	897.6	942.6	PDTCH MCS2 HT100	-97	0.10	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS1 TU50	-99.5	0.00	10	PASS
EGPRS900	Hopping	-	-	PDTCH MCS8 Static FH	89.5	0.00	10	PASS
EGPRS900	Hopping	-	-	PDTCH MCS8 TU50 FH	-82	0.00	30	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS8 TU50	-82	0.00	30	PASS
EGPRS900	Hopping	-	-	PDTCH MCS9 Static FH	-85	0.00	10	PASS
EGPRS900	Hopping	-	-	PDTCH MCS7 TU50 FH	-83	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS6 HT100	-88	0.00	10	PASS
EGPRS900	38	897.6	942.6	PDTCH MCS5 RA250	-92	1.00	10	PASS

Clause 4.2.45 Minimum Input level for Reference Performance - EGPRS USF


Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Type	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
EGPRS1800	698	1747.4	1842.4	USF MCS1 HT100	-99.5	0.00	1	PASS
EGPRS1800	Hopping	-	-	USF MCS4 Static FH	-105	0.00	1	PASS
EGPRS1800	698	1747.4	1842.4	USF MCS5 HT100	-98	0.00	1	PASS
EGPRS1800	Hopping	-	-	USF MCS5 Static FH	-105	0.00	1	PASS
EGPRS1900	512	1850.2	1930.2	USF MCS1 HT100	-99.5	0.00	1	PASS
EGPRS1900	Hopping	-	-	USF MCS4 Static FH	-105	0.00	1	PASS
EGPRS1900	512	1850.2	1930.2	USF MCS5 HT100	-98	0.00	1	PASS
EGPRS1900	Hopping	-	-	USF MCS5 Static FH	-105	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS1 HT100	-99.5	0.00	1	PASS
EGPRS1900	Hopping	-	-	USF MCS4 Static FH	-105	0.00	1	PASS
EGPRS1900	661	1880	1960	USF MCS5 HT100	-98	0.00	1	PASS

EGPRS1900	Hopping	-	-	USF MCS5 Static FH	-105	0.00	1	PASS
EGPRS1900	810	1909.8	1989.8	USF MCS1 HT100	-99.5	0.00	1	PASS
EGPRS1900	Hopping	-	-	USF MCS4 Static FH	-105	0.00	1	PASS
EGPRS1900	810	1909.8	1989.8	USF MCS5 HT100	-98	0.00	1	PASS
EGPRS1900	Hopping	-	-	USF MCS5 Static FH	-105	0.00	1	PASS
EGPRS850	128	824.2	869.2	USF MCS1 HT100	-99.5	0.00	1	PASS
EGPRS850	Hopping	-	-	USF MCS4 Static FH	-105	0.00	1	PASS
EGPRS850	128	824.2	869.2	USF MCS5 HT100	-98	0.00	1	PASS
EGPRS850	Hopping	-	-	USF MCS5 Static FH	-105	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS1 HT100	-99.5	0.00	1	PASS
EGPRS850	Hopping	-	-	USF MCS4 Static FH	-105	0.00	1	PASS
EGPRS850	190	836.6	881.6	USF MCS5 HT100	-98	0.00	1	PASS
EGPRS850	Hopping	-	-	USF MCS5 Static FH	-105	0.00	1	PASS
EGPRS850	251	848.8	893.8	USF MCS1 HT100	-99.5	0.00	1	PASS
EGPRS850	Hopping	-	-	USF MCS4 Static FH	-105	0.00	1	PASS
EGPRS850	251	848.8	893.8	USF MCS5 HT100	-98	0.00	1	PASS
EGPRS850	Hopping	-	-	USF MCS5 Static FH	-105	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS1 HT100	-99.5	0.00	1	PASS
EGPRS900	Hopping	-	-	USF MCS4 Static FH	-105	0.00	1	PASS
EGPRS900	38	897.6	942.6	USF MCS5 HT100	-98	0.00	1	PASS
EGPRS900	Hopping	-	-	USF MCS5 Static FH	-105	0.00	1	PASS


Clause 4.2.4 Frequency error and phase error in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Type	Result	Low Limit	high Limit	Verdict
GPRS1800	698	1747.4	3;3;3;3	Frequency Error (Hz)	-10.56	-174.74	174.74	PASS
GPRS1800	698	1747.4	3;3;3;3	RMS Phase Error (Degree)	1.28	0	5	PASS
GPRS1800	698	1747.4	3;3;3;3	Peak Phase Error (Degree)	6.65	0	20	PASS
GPRS1800	698	1747.4	18;18;18;18	Frequency Error (Hz)	19.57	-174.74	174.74	PASS
GPRS1800	698	1747.4	18;18;18;18	RMS Phase Error (Degree)	1.22	0	5	PASS
GPRS1800	698	1747.4	18;18;18;18	Peak Phase Error (Degree)	3.81	0	20	PASS
GPRS1900	661	1880	3;3;3;3	Frequency Error (Hz)	12.69	-188	188	PASS
GPRS1900	661	1880	3;3;3;3	RMS Phase Error (Degree)	1.25	0	5	PASS
GPRS1900	661	1880	3;3;3;3	Peak Phase Error (Degree)	4.89	0	20	PASS
GPRS1900	661	1880	18;18;18;18	Frequency Error (Hz)	26.86	-188	188	PASS
GPRS1900	661	1880	18;18;18;18	RMS Phase Error (Degree)	1.26	0	5	PASS
GPRS1900	661	1880	18;18;18;18	Peak Phase Error (Degree)	3.95	0	20	PASS
GPRS850	190	836.6	3;3;3;3	Frequency Error (Hz)	5.84	-83.66	83.66	PASS
GPRS850	190	836.6	3;3;3;3	RMS Phase Error (Degree)	1.00	0	5	PASS
GPRS850	190	836.6	3;3;3;3	Peak Phase Error (Degree)	2.77	0	20	PASS
GPRS850	190	836.6	17;17;17;17	Frequency Error (Hz)	8.23	-83.66	83.66	PASS
GPRS850	190	836.6	17;17;17;17	RMS Phase Error (Degree)	1.00	0	5	PASS
GPRS850	190	836.6	17;17;17;17	Peak Phase Error (Degree)	2.61	0	20	PASS
GPRS900	38	897.6	3;3;3;3	Frequency Error (Hz)	7.39	-89.76	89.76	PASS
GPRS900	38	897.6	3;3;3;3	RMS Phase Error (Degree)	0.82	0	5	PASS
GPRS900	38	897.6	3;3;3;3	Peak Phase Error (Degree)	3.62	0	20	PASS
GPRS900	38	897.6	17;17;17;17	Frequency Error (Hz)	16.82	-89.76	89.76	PASS
GPRS900	38	897.6	17;17;17;17	RMS Phase Error (Degree)	0.79	0	5	PASS
GPRS900	38	897.6	17;17;17;17	Peak Phase Error (Degree)	2.49	0	20	PASS


GPRS1800 Channel=698 Gamma=3;3;3;3

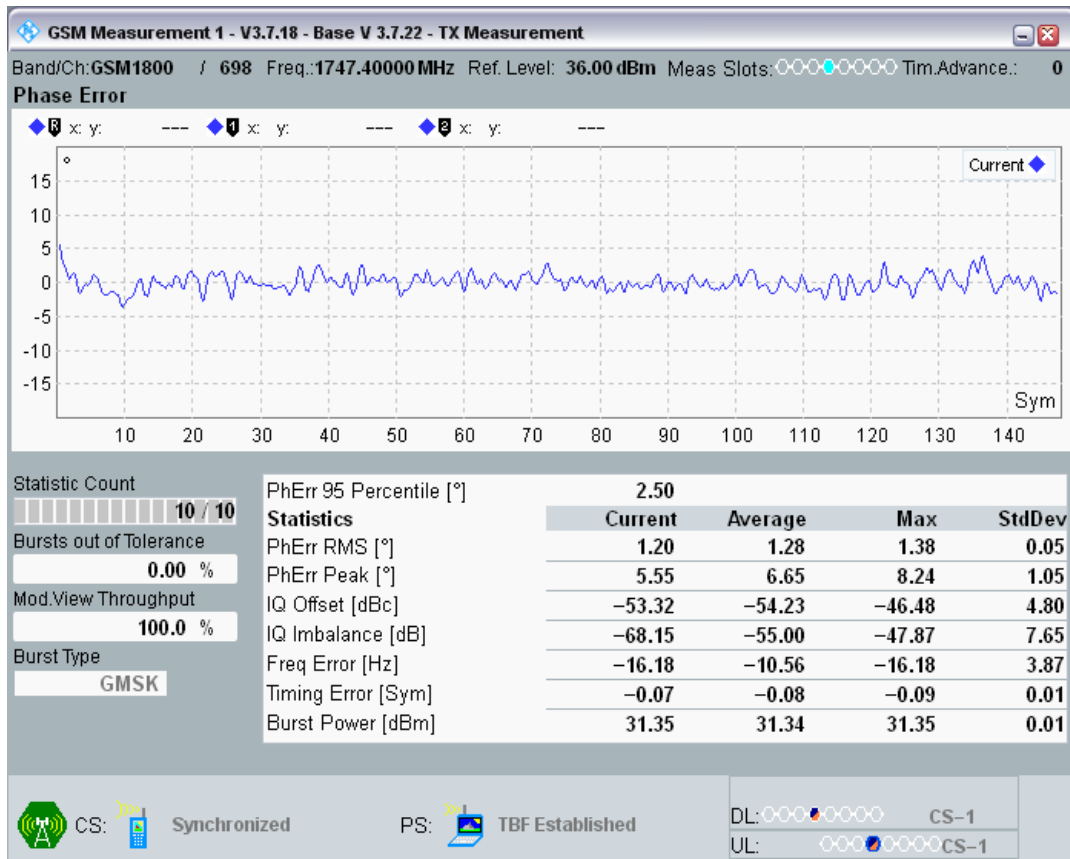


GPRS1800 Channel=698 Gamma=18;18;18;18

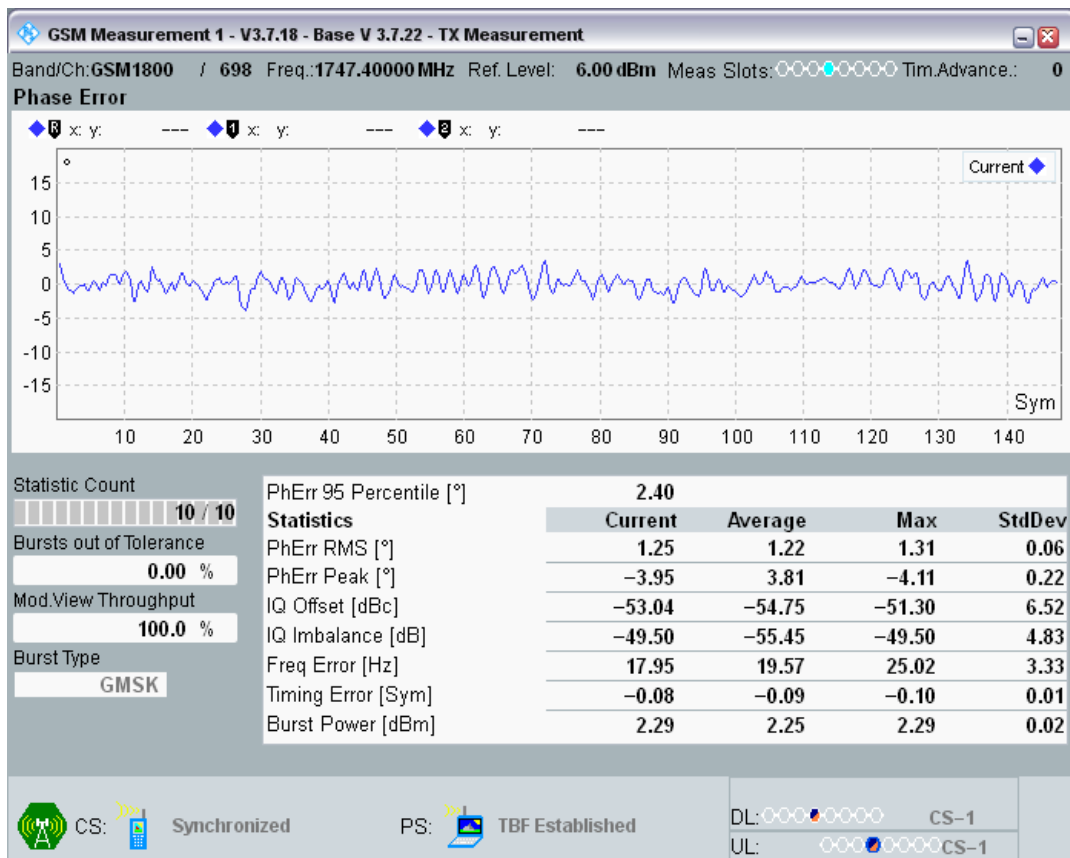


GPRS1900 Channel=661 Gamma=3;3;3;3

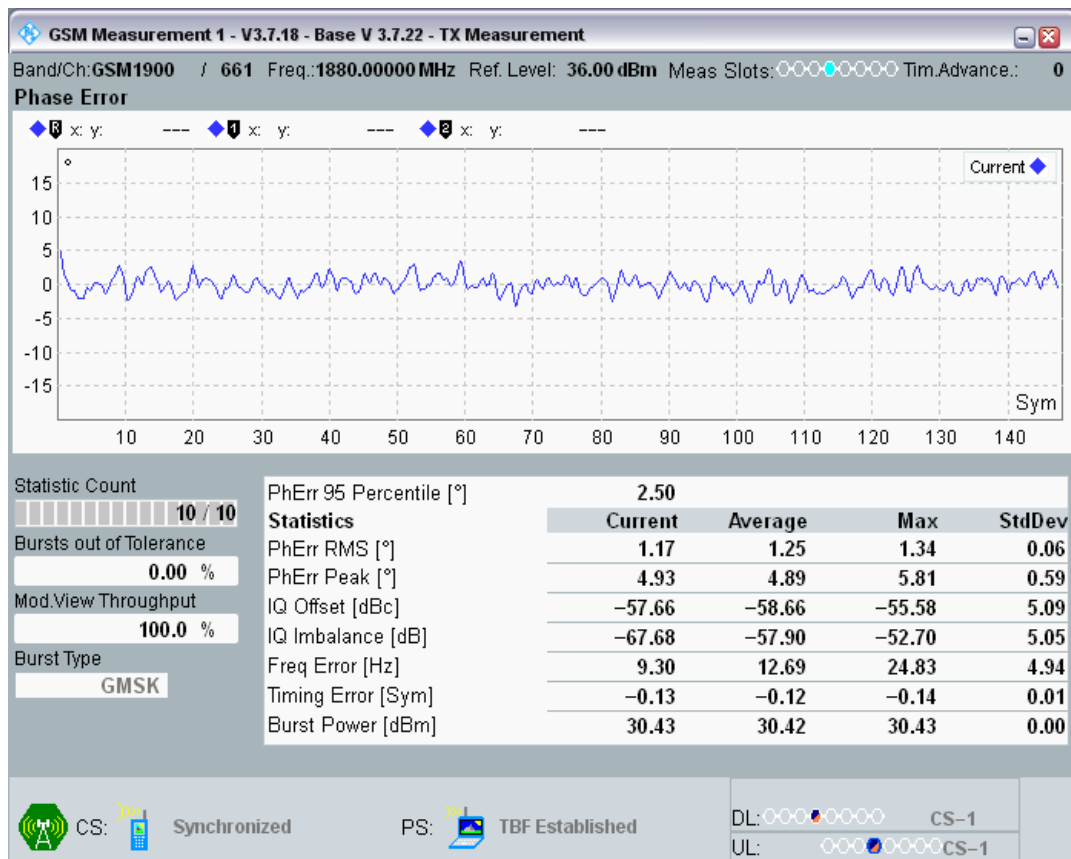


GPRS1900 Channel=661 Gamma=18;18;18;18

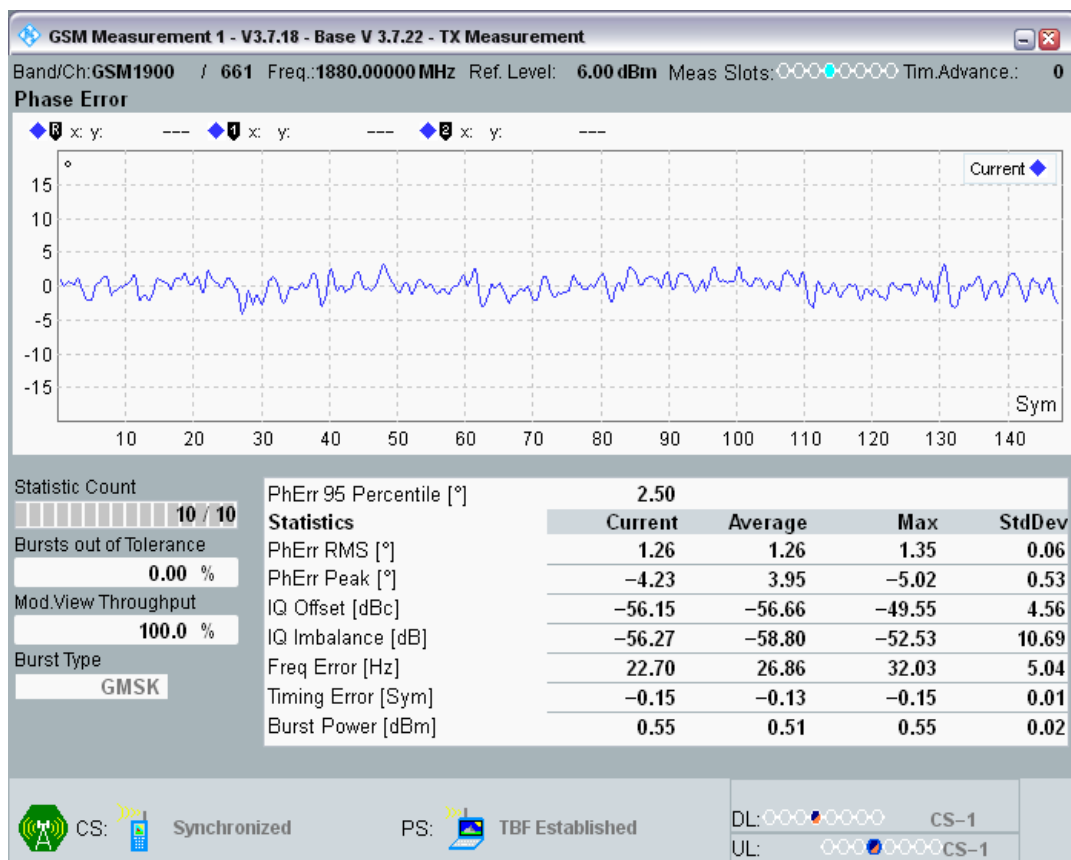


GPRS850 Channel=190 Gamma=3;3;3;3

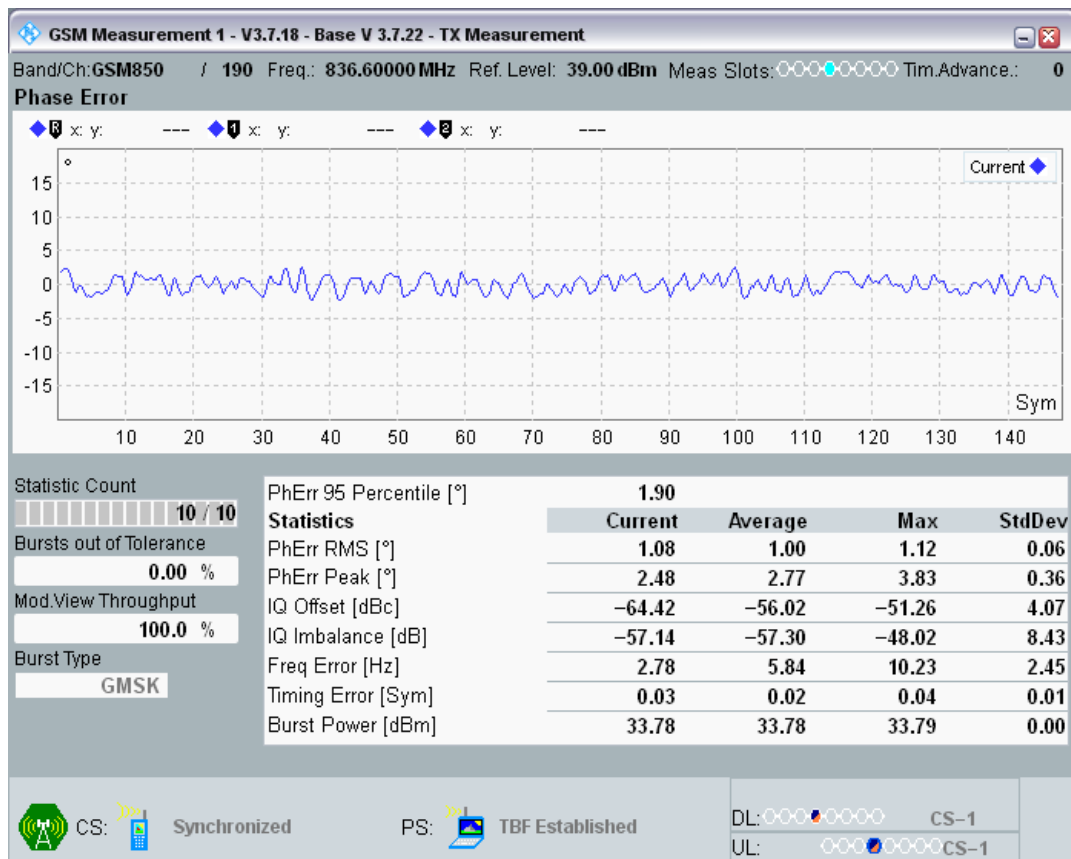


GPRS850 Channel=190 Gamma=17;17;17;17

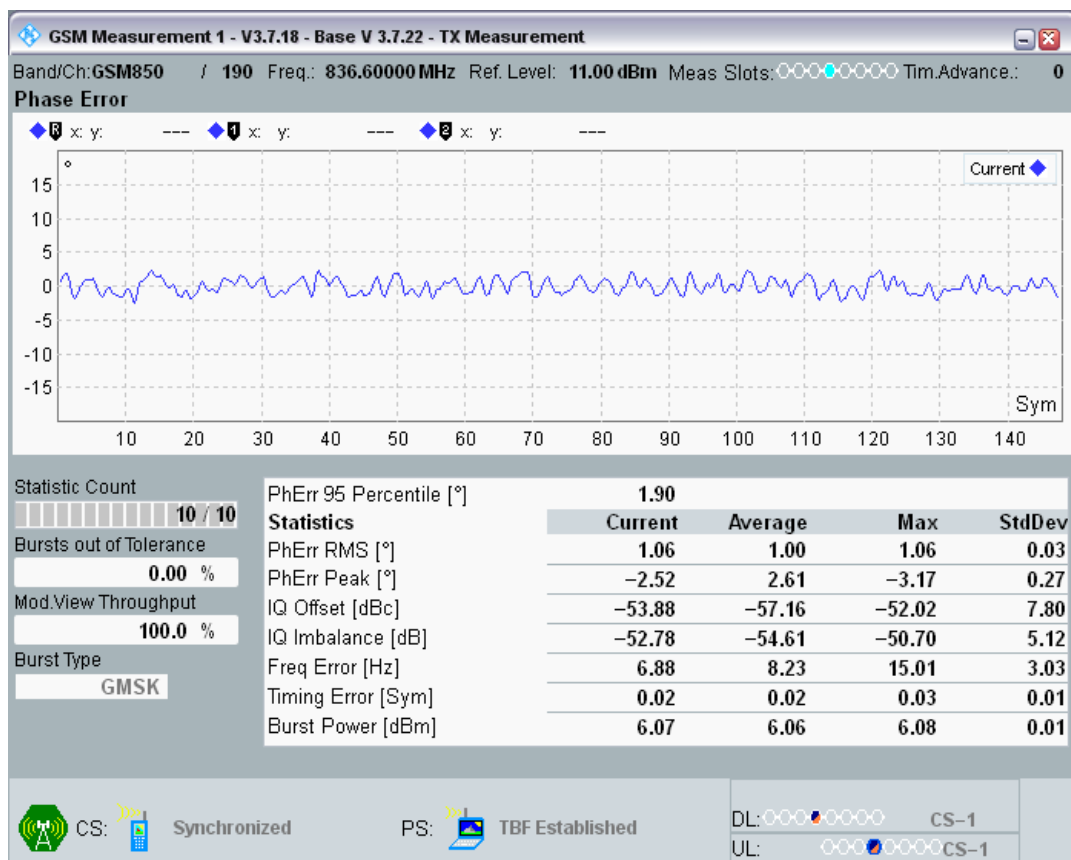

GPRS900 Channel=38 Gamma=3;3;3;3

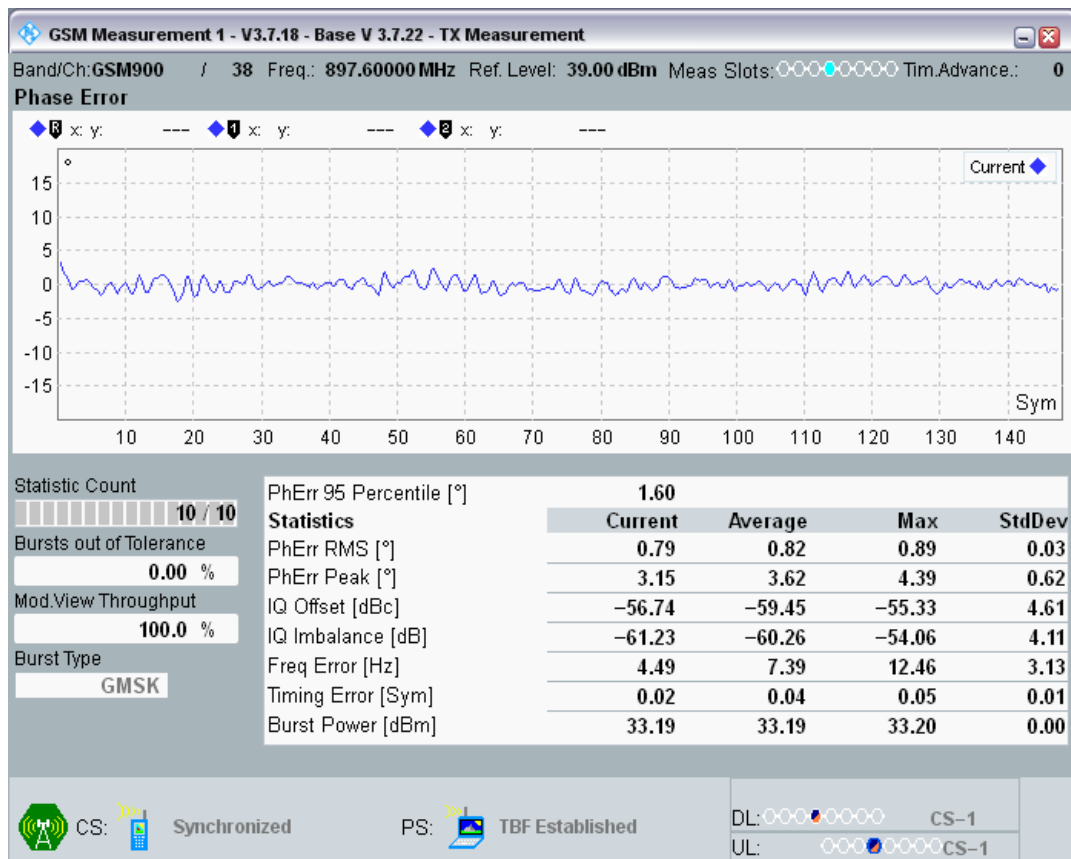

GPRS900 Channel=38 Gamma=17;17;17;17

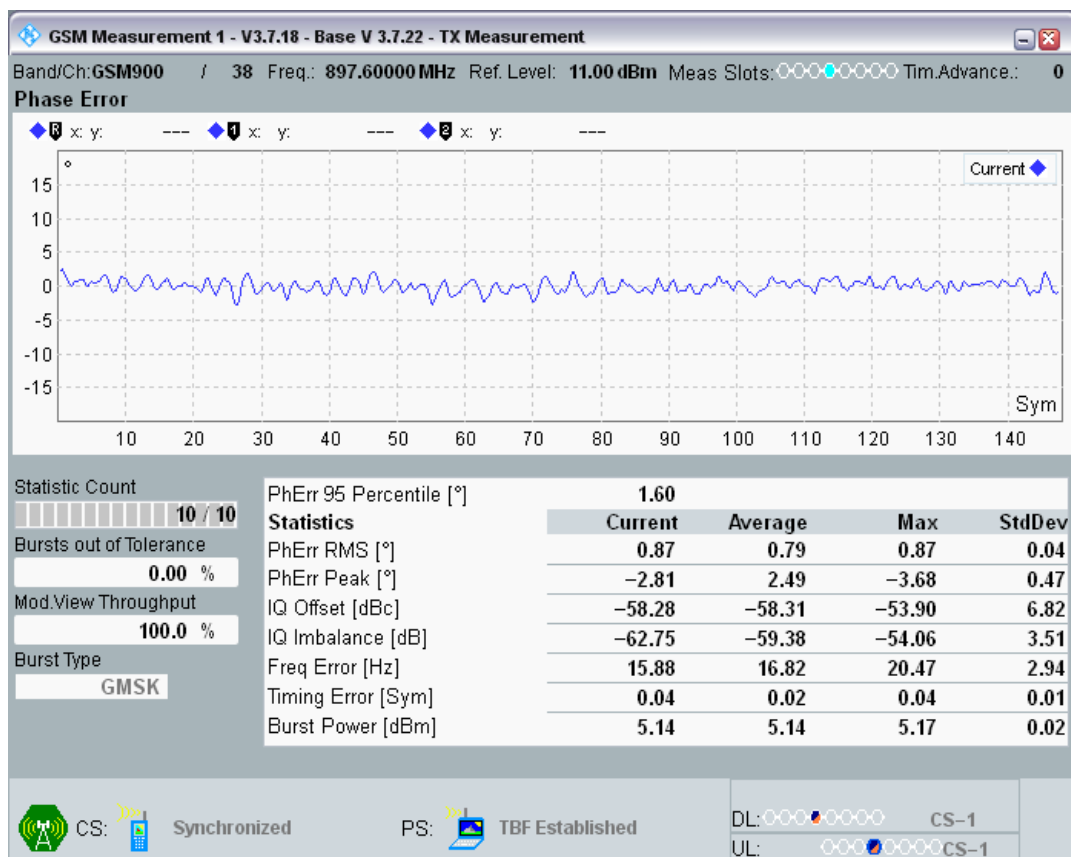

Clause 4.2.10 Transmitter output power in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Slot	Result	Low Limit	high Limit	Verdict
GPRS1800	512	1710.2	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	3;3;3;3	Power slot1	30.82	28	32	PASS
GPRS1800	512	1710.2	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	4;4;4;4	Power slot1	28.41	25	31	PASS
GPRS1800	512	1710.2	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	5;5;5;5	Power slot1	26.83	23	29	PASS
GPRS1800	512	1710.2	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	6;6;6;6	Power slot1	24.74	21	27	PASS
GPRS1800	512	1710.2	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	7;7;7;7	Power slot1	22.73	19	25	PASS
GPRS1800	512	1710.2	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	8;8;8;8	Power slot1	20.76	17	23	PASS
GPRS1800	512	1710.2	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	9;9;9;9	Power slot1	18.69	15	21	PASS
GPRS1800	512	1710.2	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	10;10;10;10	Power slot1	16.77	13	19	PASS
GPRS1800	512	1710.2	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	11;11;11;11	Power slot1	14.84	11	17	PASS
GPRS1800	512	1710.2	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	12;12;12;12	Power slot1	12.82	8	16	PASS
GPRS1800	512	1710.2	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	13;13;13;13	Power slot1	11.02	6	14	PASS
GPRS1800	512	1710.2	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	14;14;14;14	Power slot1	9.12	4	12	PASS
GPRS1800	512	1710.2	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	15;15;15;15	Power slot1	7.37	2	10	PASS
GPRS1800	512	1710.2	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	16;16;16;16	Power slot1	5.62	0	8	PASS
GPRS1800	512	1710.2	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	17;17;17;17	Power slot1	4.03	-3	7	PASS
GPRS1800	512	1710.2	18;18;18;18	PvT(%)	0.00	0	0	PASS
GPRS1800	512	1710.2	18;18;18;18	Power slot1	2.34	-5	5	PASS
GPRS1800	698	1747.4	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	3;3;3;3	Power slot1	31.24	28	32	PASS
GPRS1800	698	1747.4	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	4;4;4;4	Power slot1	28.43	25	31	PASS
GPRS1800	698	1747.4	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	5;5;5;5	Power slot1	26.79	23	29	PASS
GPRS1800	698	1747.4	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	6;6;6;6	Power slot1	24.63	21	27	PASS
GPRS1800	698	1747.4	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	7;7;7;7	Power slot1	22.62	19	25	PASS
GPRS1800	698	1747.4	8;8;8;8	PvT(%)	0.00	0	0	PASS

GPRS1800	698	1747.4	8;8;8;8	Power slot1	20.60	17	23	PASS
GPRS1800	698	1747.4	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	9;9;9;9	Power slot1	18.57	15	21	PASS
GPRS1800	698	1747.4	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	10;10;10;10	Power slot1	16.65	13	19	PASS
GPRS1800	698	1747.4	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	11;11;11;11	Power slot1	14.62	11	17	PASS
GPRS1800	698	1747.4	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	12;12;12;12	Power slot1	12.69	8	16	PASS
GPRS1800	698	1747.4	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	13;13;13;13	Power slot1	10.88	6	14	PASS
GPRS1800	698	1747.4	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	14;14;14;14	Power slot1	8.95	4	12	PASS
GPRS1800	698	1747.4	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	15;15;15;15	Power slot1	7.19	2	10	PASS
GPRS1800	698	1747.4	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	16;16;16;16	Power slot1	5.47	0	8	PASS
GPRS1800	698	1747.4	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	17;17;17;17	Power slot1	3.83	-3	7	PASS
GPRS1800	698	1747.4	18;18;18;18	PvT(%)	0.00	0	0	PASS
GPRS1800	698	1747.4	18;18;18;18	Power slot1	2.15	-5	5	PASS
GPRS1800	885	1784.8	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	3;3;3;3	Power slot1	31.55	28	32	PASS
GPRS1800	885	1784.8	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	4;4;4;4	Power slot1	28.64	25	31	PASS
GPRS1800	885	1784.8	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	5;5;5;5	Power slot1	26.92	23	29	PASS
GPRS1800	885	1784.8	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	6;6;6;6	Power slot1	24.70	21	27	PASS
GPRS1800	885	1784.8	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	7;7;7;7	Power slot1	22.71	19	25	PASS
GPRS1800	885	1784.8	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	8;8;8;8	Power slot1	20.74	17	23	PASS
GPRS1800	885	1784.8	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	9;9;9;9	Power slot1	18.66	15	21	PASS
GPRS1800	885	1784.8	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	10;10;10;10	Power slot1	16.76	13	19	PASS
GPRS1800	885	1784.8	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	11;11;11;11	Power slot1	14.69	11	17	PASS
GPRS1800	885	1784.8	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	12;12;12;12	Power slot1	12.73	8	16	PASS
GPRS1800	885	1784.8	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	13;13;13;13	Power slot1	10.95	6	14	PASS
GPRS1800	885	1784.8	14;14;14;14	PvT(%)	0.00	0	0	PASS

GPRS1800	885	1784.8	14;14;14;14	Power slot1	9.07	4	12	PASS
GPRS1800	885	1784.8	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	15;15;15;15	Power slot1	7.30	2	10	PASS
GPRS1800	885	1784.8	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	16;16;16;16	Power slot1	5.53	0	8	PASS
GPRS1800	885	1784.8	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	17;17;17;17	Power slot1	3.99	-3	7	PASS
GPRS1800	885	1784.8	18;18;18;18	PvT(%)	0.00	0	0	PASS
GPRS1800	885	1784.8	18;18;18;18	Power slot1	2.36	-5	5	PASS
GPRS1900	512	1850.2	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	3;3;3;3	Power slot1	30.34	28	32	PASS
GPRS1900	512	1850.2	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	4;4;4;4	Power slot1	27.91	25	31	PASS
GPRS1900	512	1850.2	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	5;5;5;5	Power slot1	26.44	23	29	PASS
GPRS1900	512	1850.2	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	6;6;6;6	Power slot1	24.46	21	27	PASS
GPRS1900	512	1850.2	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	7;7;7;7	Power slot1	22.56	19	25	PASS
GPRS1900	512	1850.2	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	8;8;8;8	Power slot1	20.51	17	23	PASS
GPRS1900	512	1850.2	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	9;9;9;9	Power slot1	18.57	15	21	PASS
GPRS1900	512	1850.2	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	10;10;10;10	Power slot1	16.48	13	19	PASS
GPRS1900	512	1850.2	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	11;11;11;11	Power slot1	14.33	11	17	PASS
GPRS1900	512	1850.2	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	12;12;12;12	Power slot1	12.26	8	16	PASS
GPRS1900	512	1850.2	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	13;13;13;13	Power slot1	10.28	6	14	PASS
GPRS1900	512	1850.2	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	14;14;14;14	Power slot1	8.29	4	12	PASS
GPRS1900	512	1850.2	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	15;15;15;15	Power slot1	6.30	2	10	PASS
GPRS1900	512	1850.2	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	16;16;16;16	Power slot1	4.20	0	8	PASS
GPRS1900	512	1850.2	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	17;17;17;17	Power slot1	2.30	-3	7	PASS
GPRS1900	512	1850.2	18;18;18;18	PvT(%)	0.00	0	0	PASS
GPRS1900	512	1850.2	18;18;18;18	Power slot1	0.37	-5	5	PASS
GPRS1900	661	1880	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	3;3;3;3	Power slot1	30.32	28	32	PASS
GPRS1900	661	1880	4;4;4;4	PvT(%)	0.00	0	0	PASS

GPRS1900	661	1880	4;4;4;4	Power slot1	28.01	25	31	PASS
GPRS1900	661	1880	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	5;5;5;5	Power slot1	26.49	23	29	PASS
GPRS1900	661	1880	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	6;6;6;6	Power slot1	24.53	21	27	PASS
GPRS1900	661	1880	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	7;7;7;7	Power slot1	22.59	19	25	PASS
GPRS1900	661	1880	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	8;8;8;8	Power slot1	20.53	17	23	PASS
GPRS1900	661	1880	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	9;9;9;9	Power slot1	18.55	15	21	PASS
GPRS1900	661	1880	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	10;10;10;10	Power slot1	16.47	13	19	PASS
GPRS1900	661	1880	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	11;11;11;11	Power slot1	14.40	11	17	PASS
GPRS1900	661	1880	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	12;12;12;12	Power slot1	12.32	8	16	PASS
GPRS1900	661	1880	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	13;13;13;13	Power slot1	10.34	6	14	PASS
GPRS1900	661	1880	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	14;14;14;14	Power slot1	8.35	4	12	PASS
GPRS1900	661	1880	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	15;15;15;15	Power slot1	6.39	2	10	PASS
GPRS1900	661	1880	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	16;16;16;16	Power slot1	4.33	0	8	PASS
GPRS1900	661	1880	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	17;17;17;17	Power slot1	2.37	-3	7	PASS
GPRS1900	661	1880	18;18;18;18	PvT(%)	0.00	0	0	PASS
GPRS1900	661	1880	18;18;18;18	Power slot1	0.45	-5	5	PASS
GPRS1900	810	1909.8	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	3;3;3;3	Power slot1	30.35	28	32	PASS
GPRS1900	810	1909.8	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	4;4;4;4	Power slot1	28.06	25	31	PASS
GPRS1900	810	1909.8	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	5;5;5;5	Power slot1	26.53	23	29	PASS
GPRS1900	810	1909.8	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	6;6;6;6	Power slot1	24.56	21	27	PASS
GPRS1900	810	1909.8	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	7;7;7;7	Power slot1	22.61	19	25	PASS
GPRS1900	810	1909.8	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	8;8;8;8	Power slot1	20.54	17	23	PASS
GPRS1900	810	1909.8	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	9;9;9;9	Power slot1	18.55	15	21	PASS
GPRS1900	810	1909.8	10;10;10;10	PvT(%)	0.00	0	0	PASS

GPRS1900	810	1909.8	10;10;10;10	Power slot1	16.47	13	19	PASS
GPRS1900	810	1909.8	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	11;11;11;11	Power slot1	14.36	11	17	PASS
GPRS1900	810	1909.8	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	12;12;12;12	Power slot1	12.31	8	16	PASS
GPRS1900	810	1909.8	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	13;13;13;13	Power slot1	10.35	6	14	PASS
GPRS1900	810	1909.8	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	14;14;14;14	Power slot1	8.39	4	12	PASS
GPRS1900	810	1909.8	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	15;15;15;15	Power slot1	6.46	2	10	PASS
GPRS1900	810	1909.8	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	16;16;16;16	Power slot1	4.39	0	8	PASS
GPRS1900	810	1909.8	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	17;17;17;17	Power slot1	2.42	-3	7	PASS
GPRS1900	810	1909.8	18;18;18;18	PvT(%)	0.00	0	0	PASS
GPRS1900	810	1909.8	18;18;18;18	Power slot1	0.58	-5	5	PASS
GPRS850	128	824.2	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	3;3;3;3	Power slot1	34.12	31	35	PASS
GPRS850	128	824.2	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	4;4;4;4	Power slot1	31.47	28	34	PASS
GPRS850	128	824.2	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	5;5;5;5	Power slot1	29.60	26	32	PASS
GPRS850	128	824.2	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	6;6;6;6	Power slot1	27.56	24	30	PASS
GPRS850	128	824.2	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	7;7;7;7	Power slot1	25.49	22	28	PASS
GPRS850	128	824.2	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	8;8;8;8	Power slot1	23.50	20	26	PASS
GPRS850	128	824.2	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	9;9;9;9	Power slot1	21.57	18	24	PASS
GPRS850	128	824.2	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	10;10;10;10	Power slot1	19.48	16	22	PASS
GPRS850	128	824.2	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	11;11;11;11	Power slot1	17.57	14	20	PASS
GPRS850	128	824.2	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	12;12;12;12	Power slot1	15.56	12	18	PASS
GPRS850	128	824.2	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	13;13;13;13	Power slot1	13.67	10	16	PASS
GPRS850	128	824.2	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	14;14;14;14	Power slot1	11.67	6	16	PASS
GPRS850	128	824.2	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	15;15;15;15	Power slot1	9.87	4	14	PASS
GPRS850	128	824.2	16;16;16;16	PvT(%)	0.00	0	0	PASS

GPRS850	128	824.2	16;16;16;16	Power slot1	8.09	2	12	PASS
GPRS850	128	824.2	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS850	128	824.2	17;17;17;17	Power slot1	6.25	0	10	PASS
GPRS850	190	836.6	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	3;3;3;3	Power slot1	33.68	31	35	PASS
GPRS850	190	836.6	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	4;4;4;4	Power slot1	31.25	28	34	PASS
GPRS850	190	836.6	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	5;5;5;5	Power slot1	29.33	26	32	PASS
GPRS850	190	836.6	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	6;6;6;6	Power slot1	27.23	24	30	PASS
GPRS850	190	836.6	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	7;7;7;7	Power slot1	25.21	22	28	PASS
GPRS850	190	836.6	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	8;8;8;8	Power slot1	23.19	20	26	PASS
GPRS850	190	836.6	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	9;9;9;9	Power slot1	21.19	18	24	PASS
GPRS850	190	836.6	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	10;10;10;10	Power slot1	19.19	16	22	PASS
GPRS850	190	836.6	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	11;11;11;11	Power slot1	17.27	14	20	PASS
GPRS850	190	836.6	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	12;12;12;12	Power slot1	15.29	12	18	PASS
GPRS850	190	836.6	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	13;13;13;13	Power slot1	13.42	10	16	PASS
GPRS850	190	836.6	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	14;14;14;14	Power slot1	11.45	6	16	PASS
GPRS850	190	836.6	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	15;15;15;15	Power slot1	9.60	4	14	PASS
GPRS850	190	836.6	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	16;16;16;16	Power slot1	7.83	2	12	PASS
GPRS850	190	836.6	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS850	190	836.6	17;17;17;17	Power slot1	5.99	0	10	PASS
GPRS850	251	848.8	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	3;3;3;3	Power slot1	33.59	31	35	PASS
GPRS850	251	848.8	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	4;4;4;4	Power slot1	31.32	28	34	PASS
GPRS850	251	848.8	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	5;5;5;5	Power slot1	29.41	26	32	PASS
GPRS850	251	848.8	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	6;6;6;6	Power slot1	27.31	24	30	PASS
GPRS850	251	848.8	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	7;7;7;7	Power slot1	25.27	22	28	PASS
GPRS850	251	848.8	8;8;8;8	PvT(%)	0.00	0	0	PASS

GPRS850	251	848.8	8;8;8;8	Power slot1	23.25	20	26	PASS
GPRS850	251	848.8	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	9;9;9;9	Power slot1	21.26	18	24	PASS
GPRS850	251	848.8	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	10;10;10;10	Power slot1	19.24	16	22	PASS
GPRS850	251	848.8	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	11;11;11;11	Power slot1	17.36	14	20	PASS
GPRS850	251	848.8	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	12;12;12;12	Power slot1	15.38	12	18	PASS
GPRS850	251	848.8	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	13;13;13;13	Power slot1	13.52	10	16	PASS
GPRS850	251	848.8	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	14;14;14;14	Power slot1	11.54	6	16	PASS
GPRS850	251	848.8	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	15;15;15;15	Power slot1	9.76	4	14	PASS
GPRS850	251	848.8	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	16;16;16;16	Power slot1	7.96	2	12	PASS
GPRS850	251	848.8	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS850	251	848.8	17;17;17;17	Power slot1	6.14	0	10	PASS
GPRS900	975	880.2	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	3;3;3;3	Power slot1	32.89	31	35	PASS
GPRS900	975	880.2	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	4;4;4;4	Power slot1	30.62	28	34	PASS
GPRS900	975	880.2	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	5;5;5;5	Power slot1	28.85	26	32	PASS
GPRS900	975	880.2	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	6;6;6;6	Power slot1	26.76	24	30	PASS
GPRS900	975	880.2	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	7;7;7;7	Power slot1	24.80	22	28	PASS
GPRS900	975	880.2	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	8;8;8;8	Power slot1	22.69	20	26	PASS
GPRS900	975	880.2	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	9;9;9;9	Power slot1	20.63	18	24	PASS
GPRS900	975	880.2	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	10;10;10;10	Power slot1	18.74	16	22	PASS
GPRS900	975	880.2	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	11;11;11;11	Power slot1	16.83	14	20	PASS
GPRS900	975	880.2	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	12;12;12;12	Power slot1	14.74	12	18	PASS
GPRS900	975	880.2	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	13;13;13;13	Power slot1	12.77	10	16	PASS
GPRS900	975	880.2	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	14;14;14;14	Power slot1	10.63	6	16	PASS
GPRS900	975	880.2	15;15;15;15	PvT(%)	0.00	0	0	PASS


GPRS900	975	880.2	15;15;15;15	Power slot1	8.73	4	14	PASS
GPRS900	975	880.2	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	16;16;16;16	Power slot1	6.60	2	12	PASS
GPRS900	975	880.2	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS900	975	880.2	17;17;17;17	Power slot1	4.75	0	10	PASS
GPRS900	38	897.6	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	3;3;3;3	Power slot1	33.08	31	35	PASS
GPRS900	38	897.6	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	4;4;4;4	Power slot1	30.85	28	34	PASS
GPRS900	38	897.6	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	5;5;5;5	Power slot1	29.12	26	32	PASS
GPRS900	38	897.6	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	6;6;6;6	Power slot1	27.05	24	30	PASS
GPRS900	38	897.6	7;7;7;7	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	7;7;7;7	Power slot1	25.10	22	28	PASS
GPRS900	38	897.6	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	8;8;8;8	Power slot1	23.03	20	26	PASS
GPRS900	38	897.6	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	9;9;9;9	Power slot1	20.97	18	24	PASS
GPRS900	38	897.6	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	10;10;10;10	Power slot1	19.03	16	22	PASS
GPRS900	38	897.6	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	11;11;11;11	Power slot1	17.04	14	20	PASS
GPRS900	38	897.6	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	12;12;12;12	Power slot1	14.97	12	18	PASS
GPRS900	38	897.6	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	13;13;13;13	Power slot1	13.08	10	16	PASS
GPRS900	38	897.6	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	14;14;14;14	Power slot1	10.91	6	16	PASS
GPRS900	38	897.6	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	15;15;15;15	Power slot1	8.94	4	14	PASS
GPRS900	38	897.6	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	16;16;16;16	Power slot1	6.83	2	12	PASS
GPRS900	38	897.6	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS900	38	897.6	17;17;17;17	Power slot1	4.97	0	10	PASS
GPRS900	124	914.8	3;3;3;3	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	3;3;3;3	Power slot1	33.19	31	35	PASS
GPRS900	124	914.8	4;4;4;4	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	4;4;4;4	Power slot1	30.82	28	34	PASS
GPRS900	124	914.8	5;5;5;5	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	5;5;5;5	Power slot1	29.07	26	32	PASS
GPRS900	124	914.8	6;6;6;6	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	6;6;6;6	Power slot1	27.00	24	30	PASS
GPRS900	124	914.8	7;7;7;7	PvT(%)	0.00	0	0	PASS

GPRS900	124	914.8	8;8;8;8	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	8;8;8;8	Power slot1	22.94	20	26	PASS
GPRS900	124	914.8	9;9;9;9	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	9;9;9;9	Power slot1	20.88	18	24	PASS
GPRS900	124	914.8	10;10;10;10	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	10;10;10;10	Power slot1	18.96	16	22	PASS
GPRS900	124	914.8	11;11;11;11	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	11;11;11;11	Power slot1	17.00	14	20	PASS
GPRS900	124	914.8	12;12;12;12	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	12;12;12;12	Power slot1	14.85	12	18	PASS
GPRS900	124	914.8	13;13;13;13	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	13;13;13;13	Power slot1	12.93	10	16	PASS
GPRS900	124	914.8	14;14;14;14	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	14;14;14;14	Power slot1	10.85	6	16	PASS
GPRS900	124	914.8	15;15;15;15	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	15;15;15;15	Power slot1	8.76	4	14	PASS
GPRS900	124	914.8	16;16;16;16	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	16;16;16;16	Power slot1	6.61	2	12	PASS
GPRS900	124	914.8	17;17;17;17	PvT(%)	0.00	0	0	PASS
GPRS900	124	914.8	17;17;17;17	Power slot1	4.76	0	10	PASS


GPRS1800 Channel=512 Gamma=3;3;3;3



GPRS1800 Channel=512 Gamma=4;4;4;4

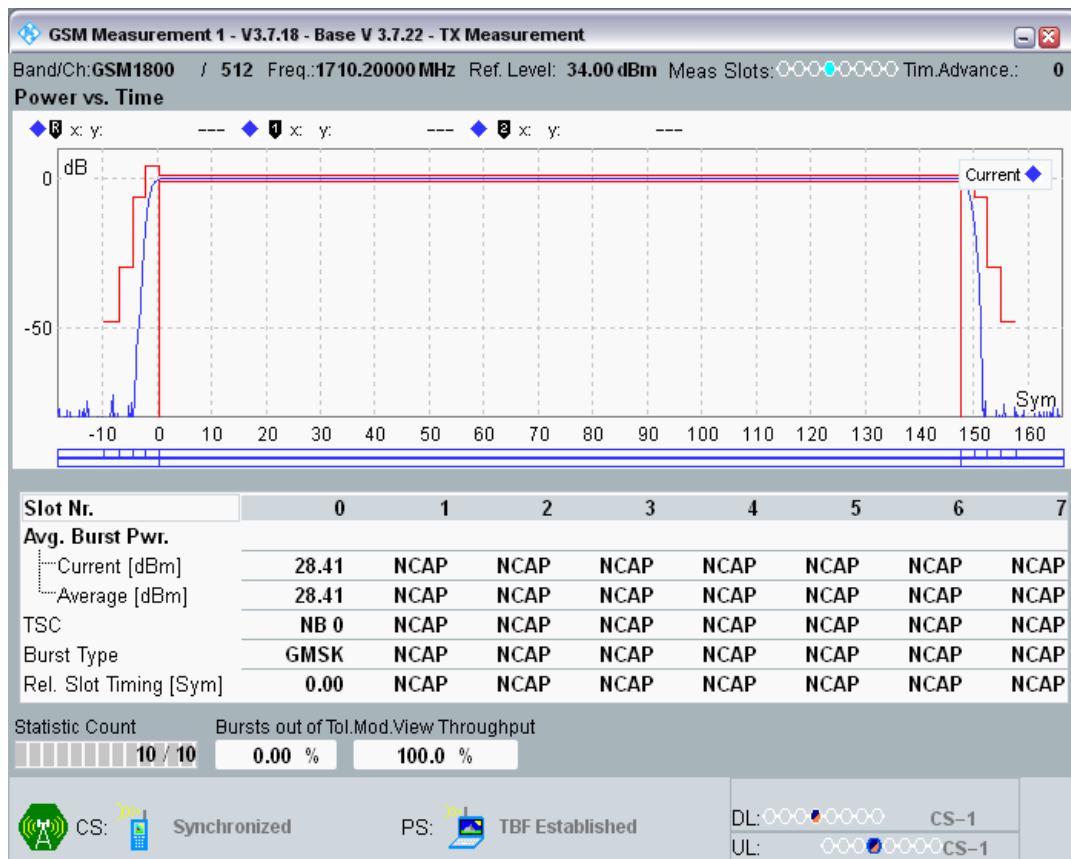

GPRS1800 Channel=512 Gamma=5;5;5;5

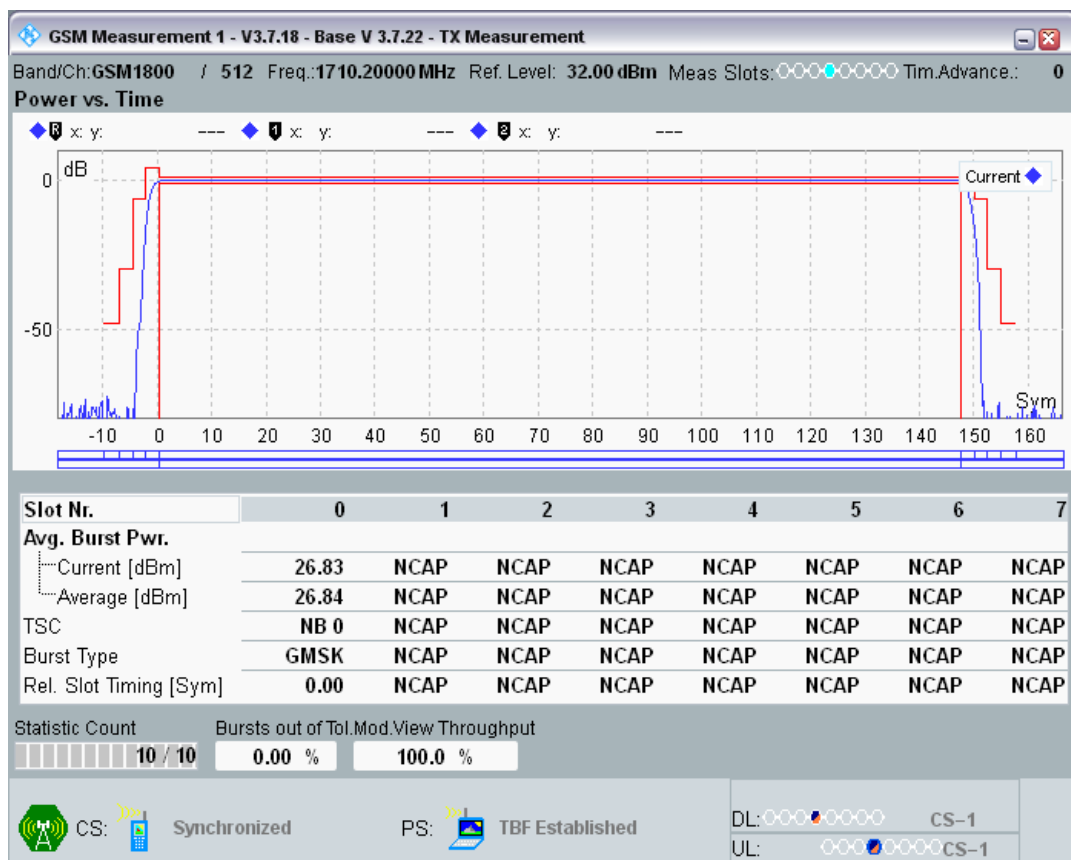


GPRS1800 Channel=512 Gamma=6;6;6;6




GPRS1800 Channel=512 Gamma=7;7;7;7



GPRS1800 Channel=512 Gamma=8;8;8;8

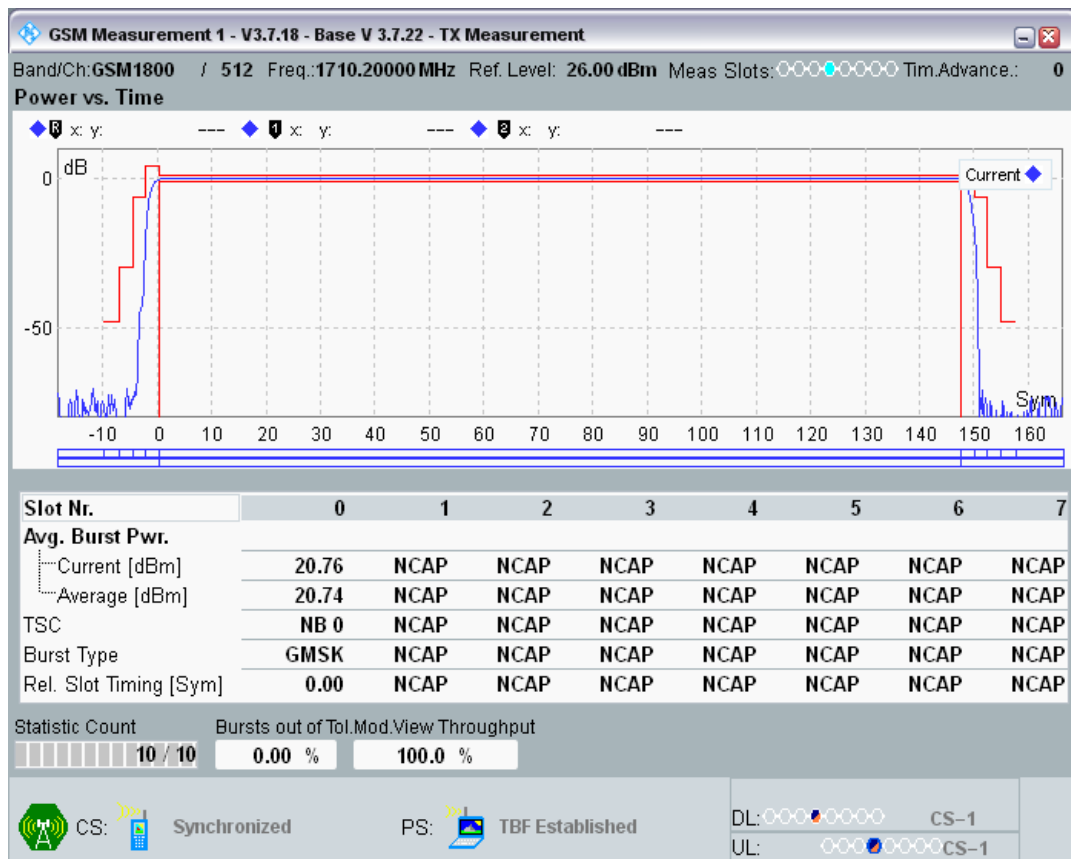

GPRS1800 Channel=512 Gamma=9;9;9;9

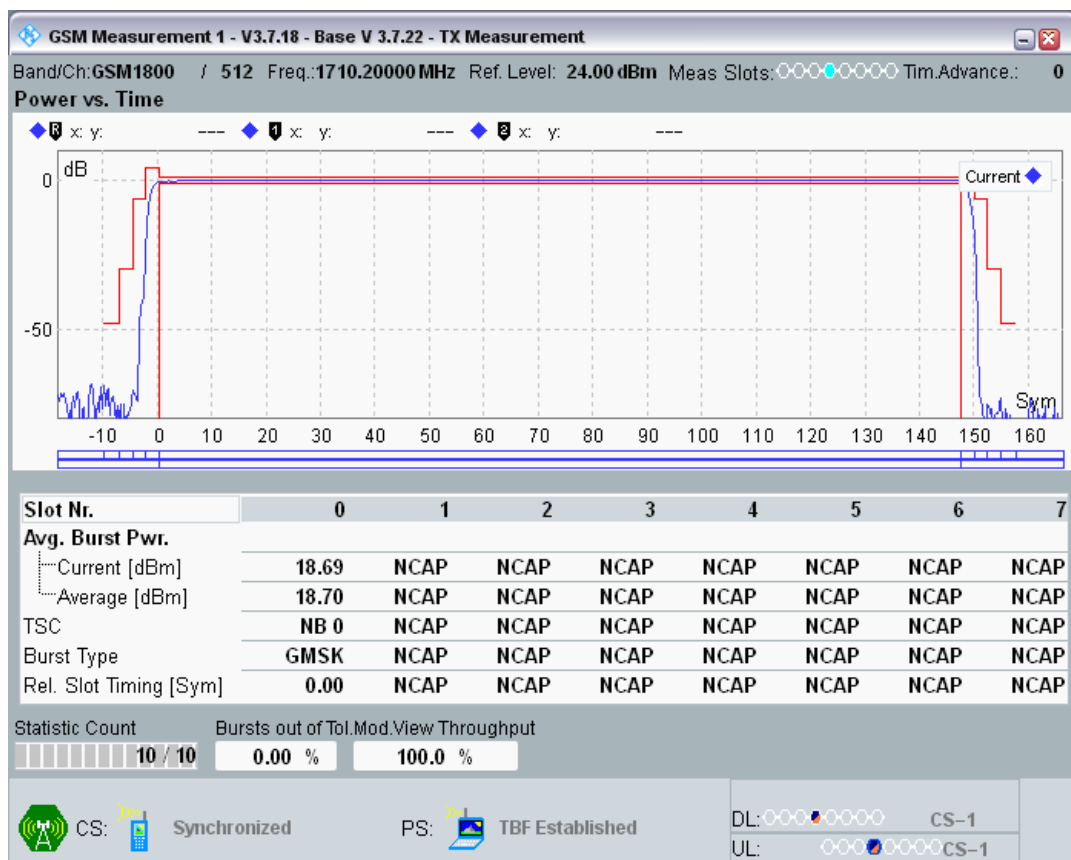


GPRS1800 Channel=512 Gamma=10;10;10;10




GPRS1800 Channel=512 Gamma=11;11;11;11




GPRS1800 Channel=512 Gamma=12;12;12;12

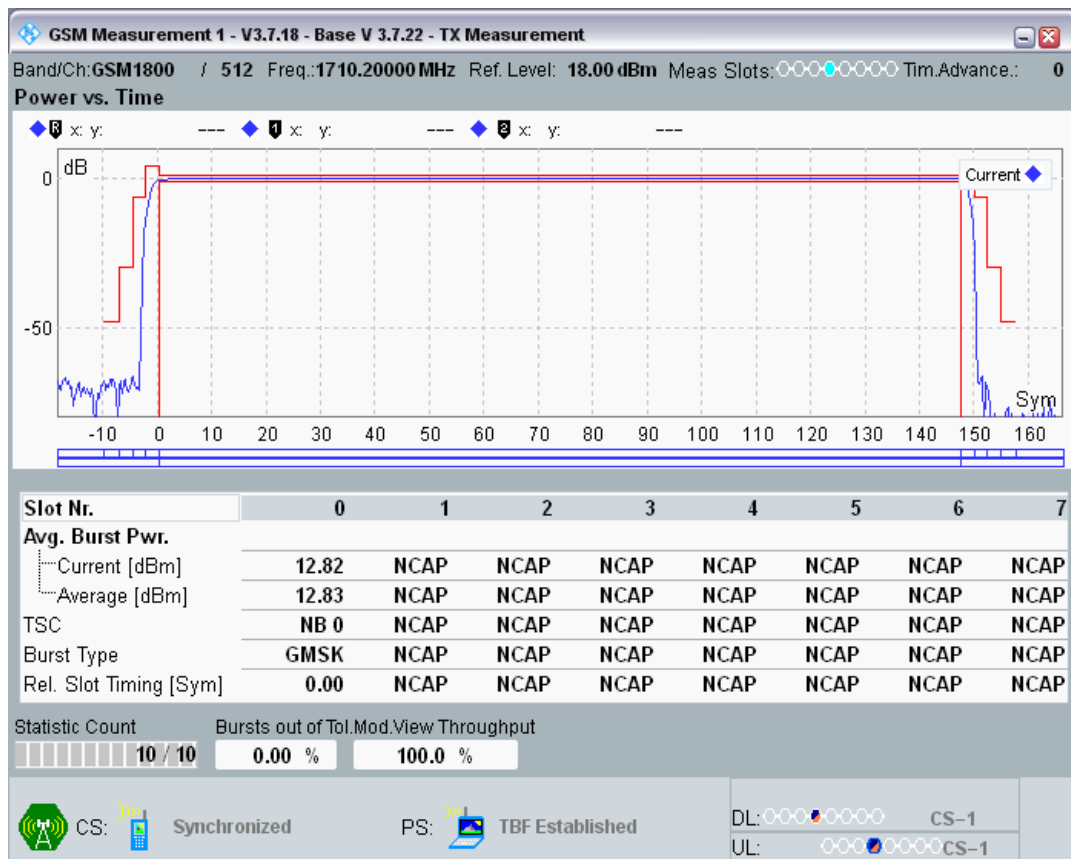


GPRS1800 Channel=512 Gamma=13;13;13;13

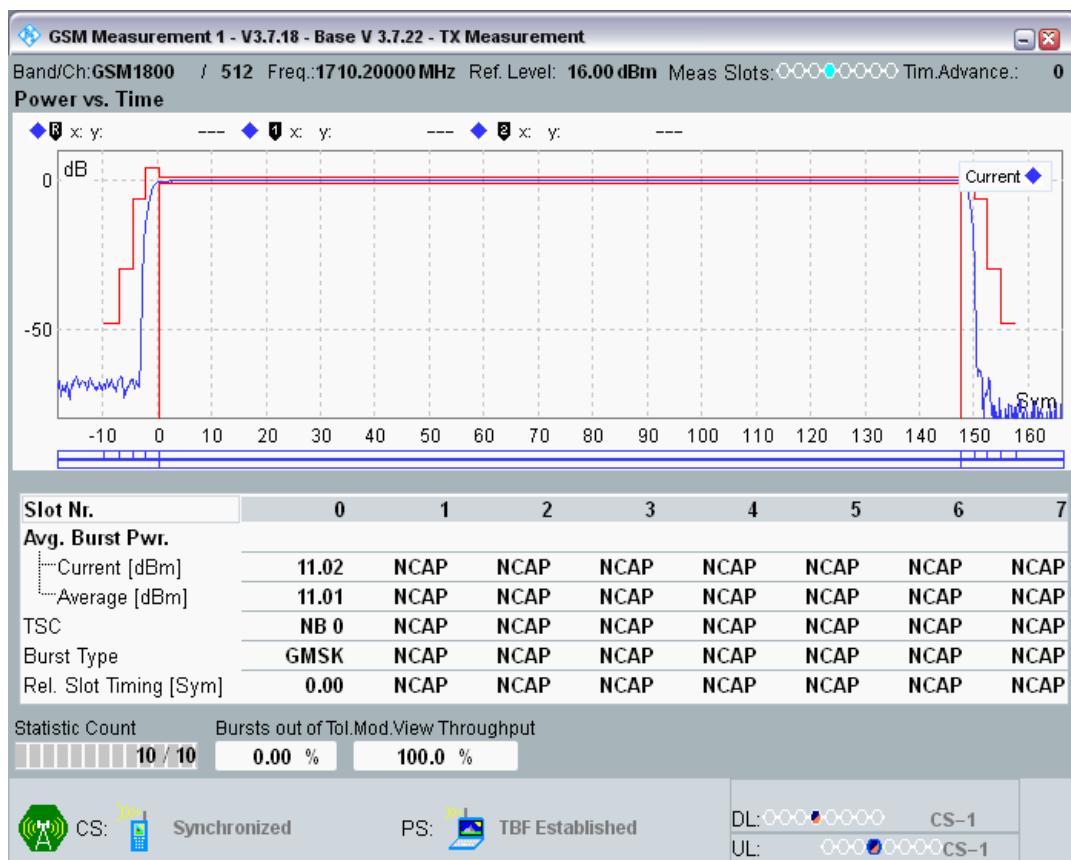


GPRS1800 Channel=512 Gamma=14;14;14;14

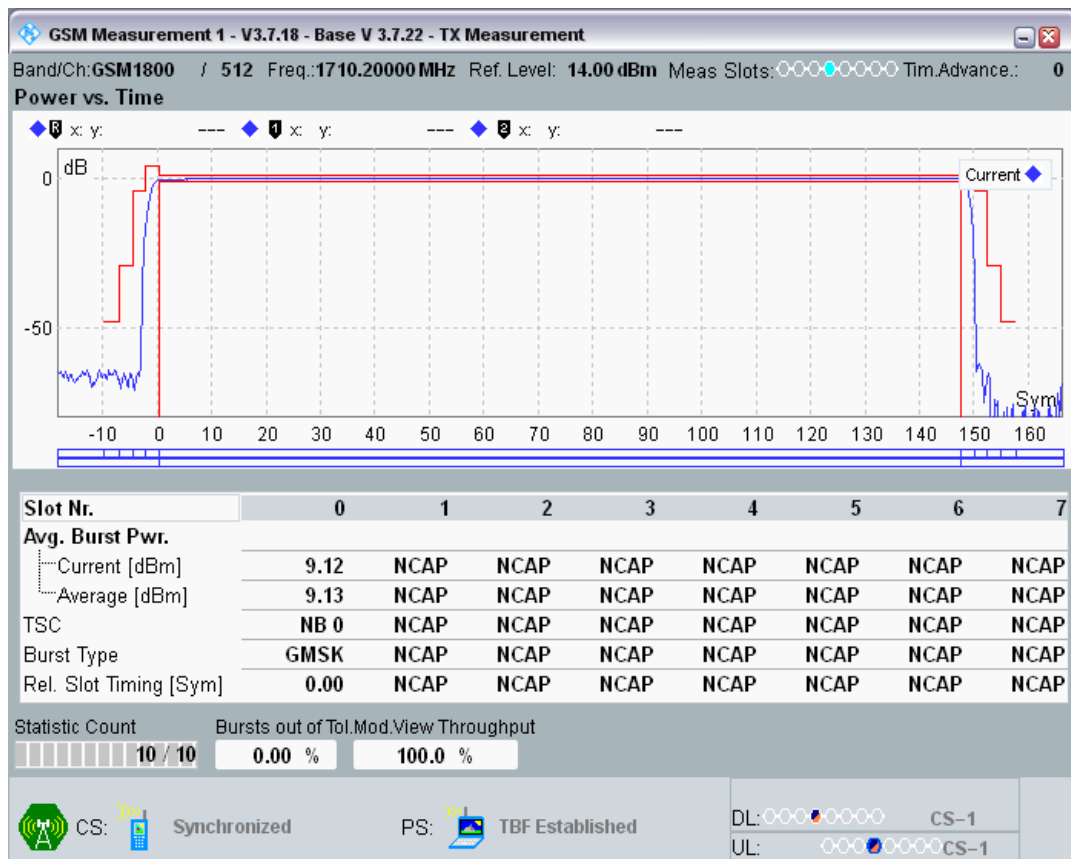


GPRS1800 Channel=512 Gamma=15;15;15;15

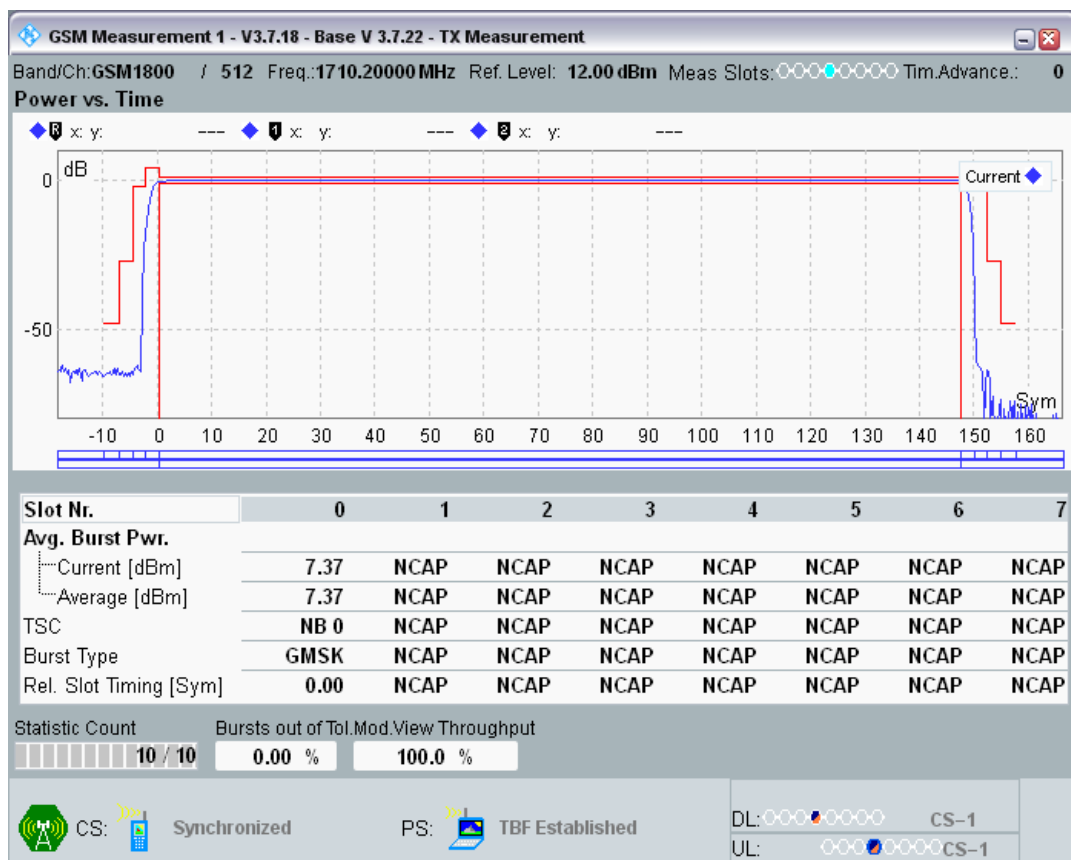


GPRS1800 Channel=512 Gamma=16;16;16;16

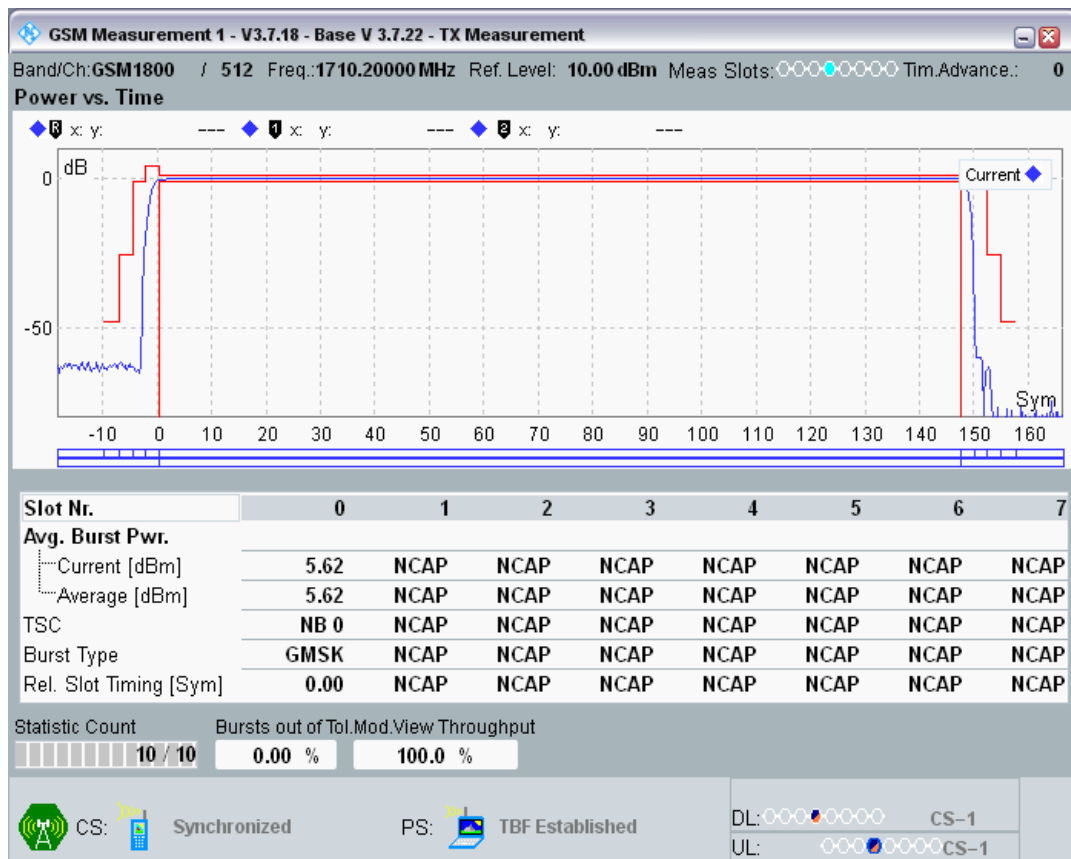


GPRS1800 Channel=512 Gamma=17;17;17;17

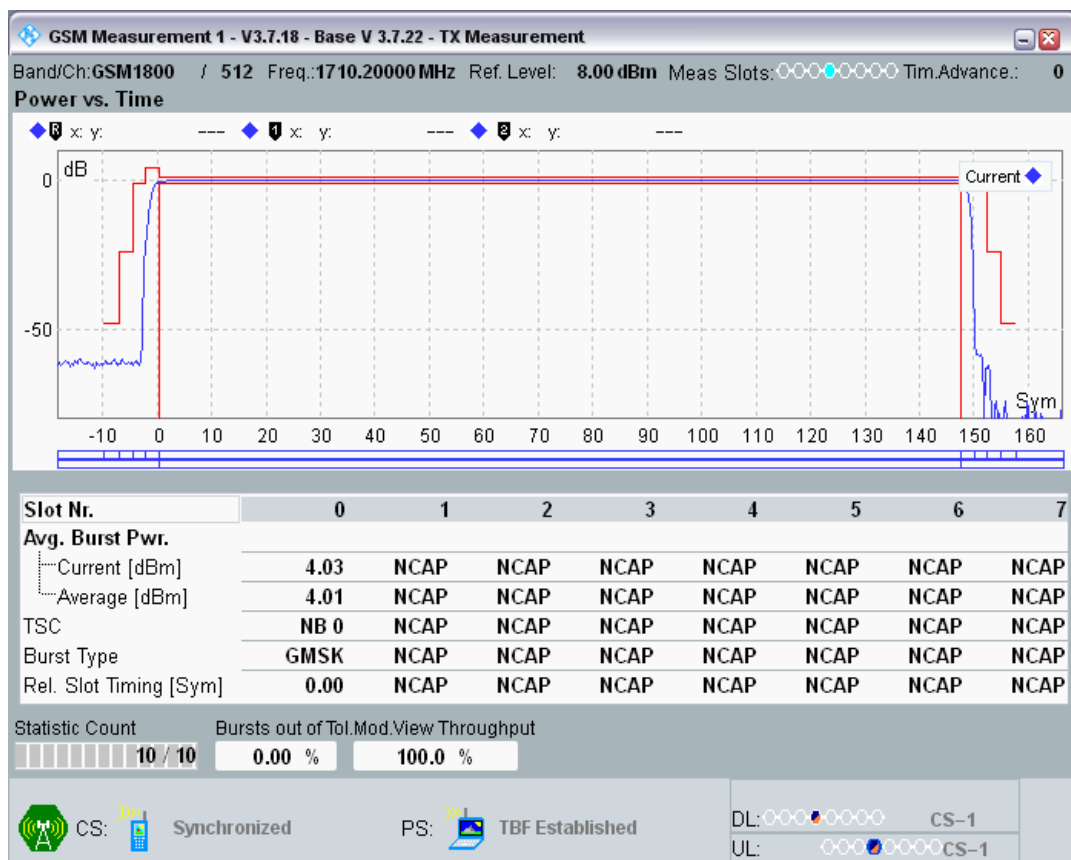

GPRS1800 Channel=512 Gamma=18;18;18;18

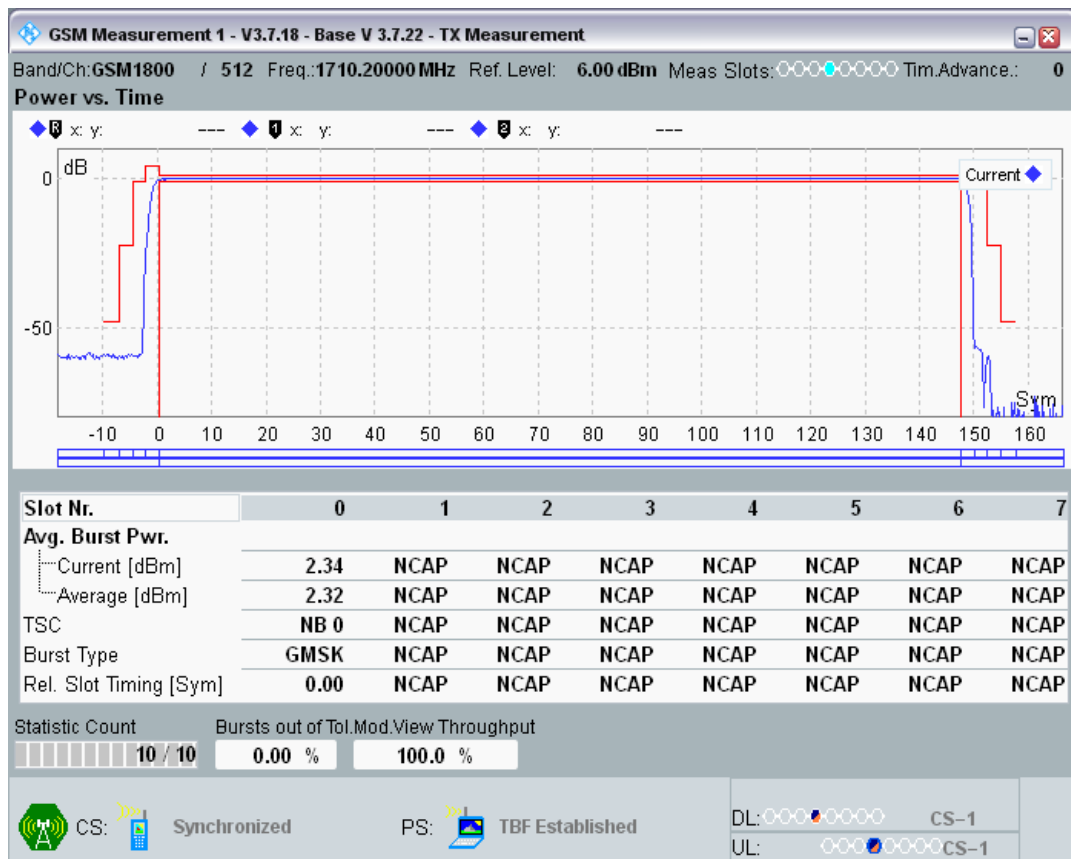


GPRS1800 Channel=698 Gamma=3;3;3;3

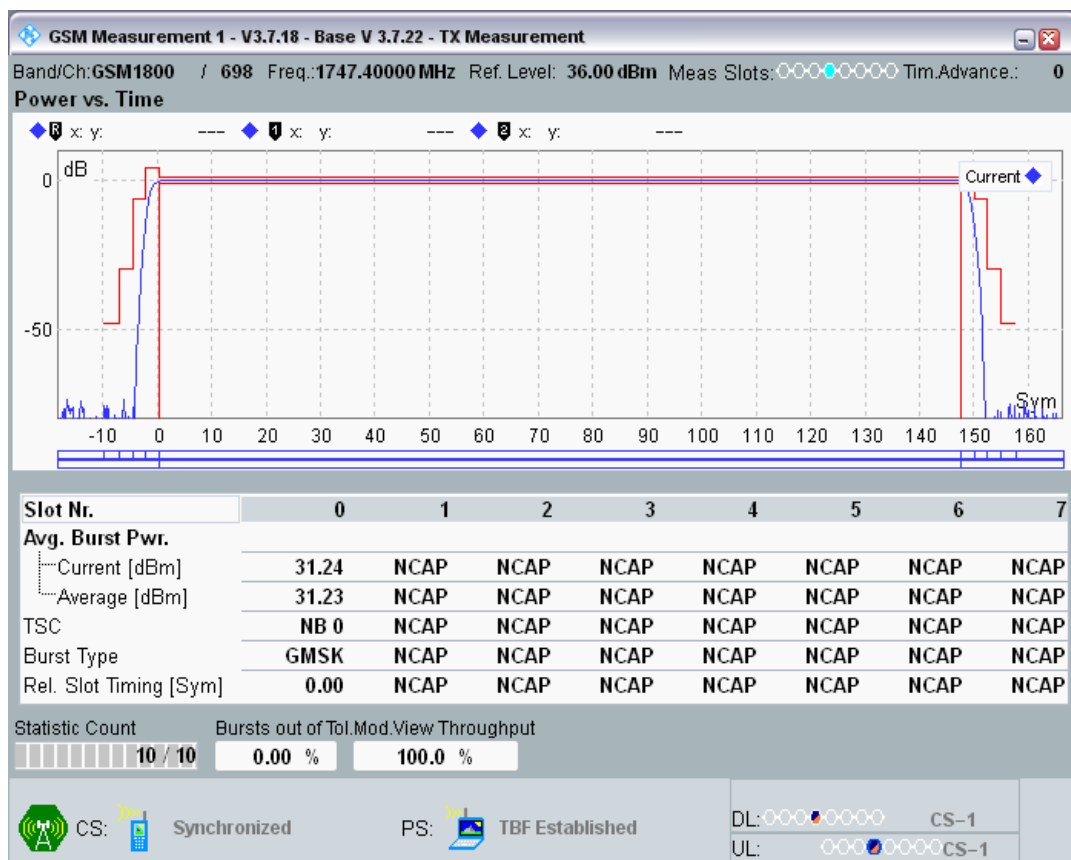

GPRS1800 Channel=698 Gamma=4;4;4;4



GPRS1800 Channel=698 Gamma=5;5;5;5

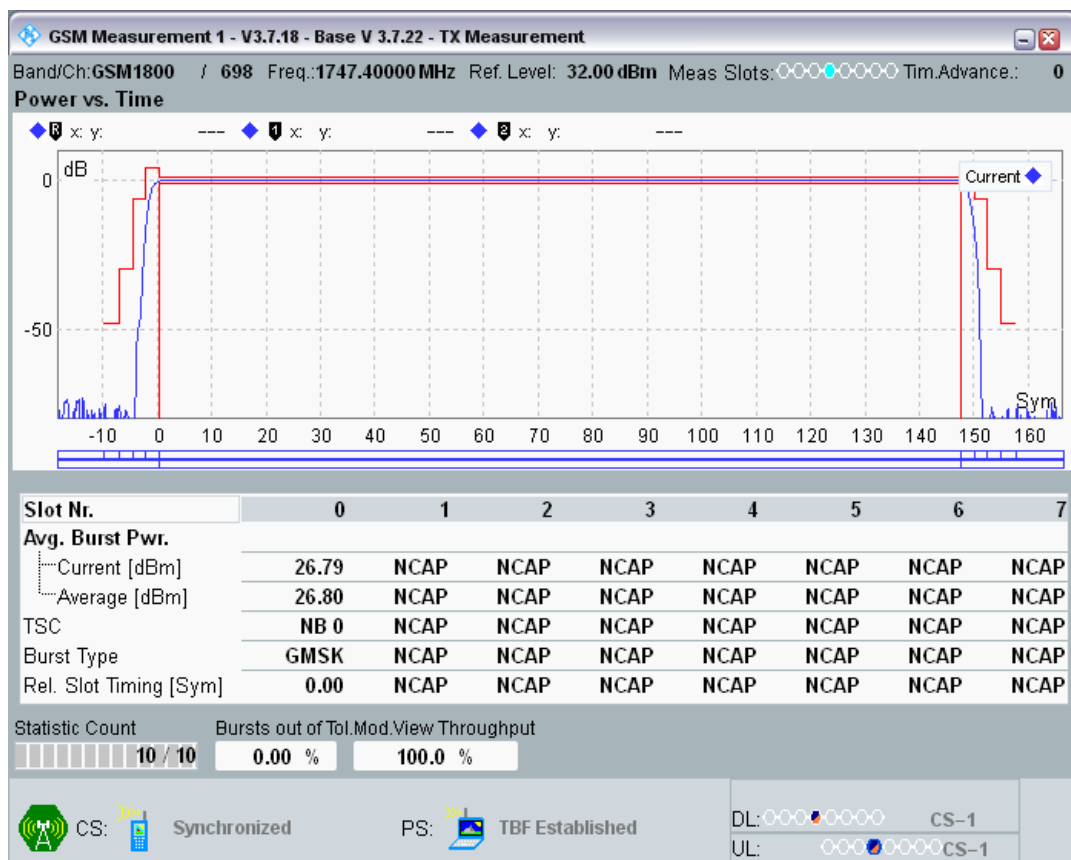

GPRS1800 Channel=698 Gamma=6;6;6;6




GPRS1800 Channel=698 Gamma=7;7;7;7




GPRS1800 Channel=698 Gamma=8;8;8;8




GPRS1800 Channel=698 Gamma=9;9;9;9

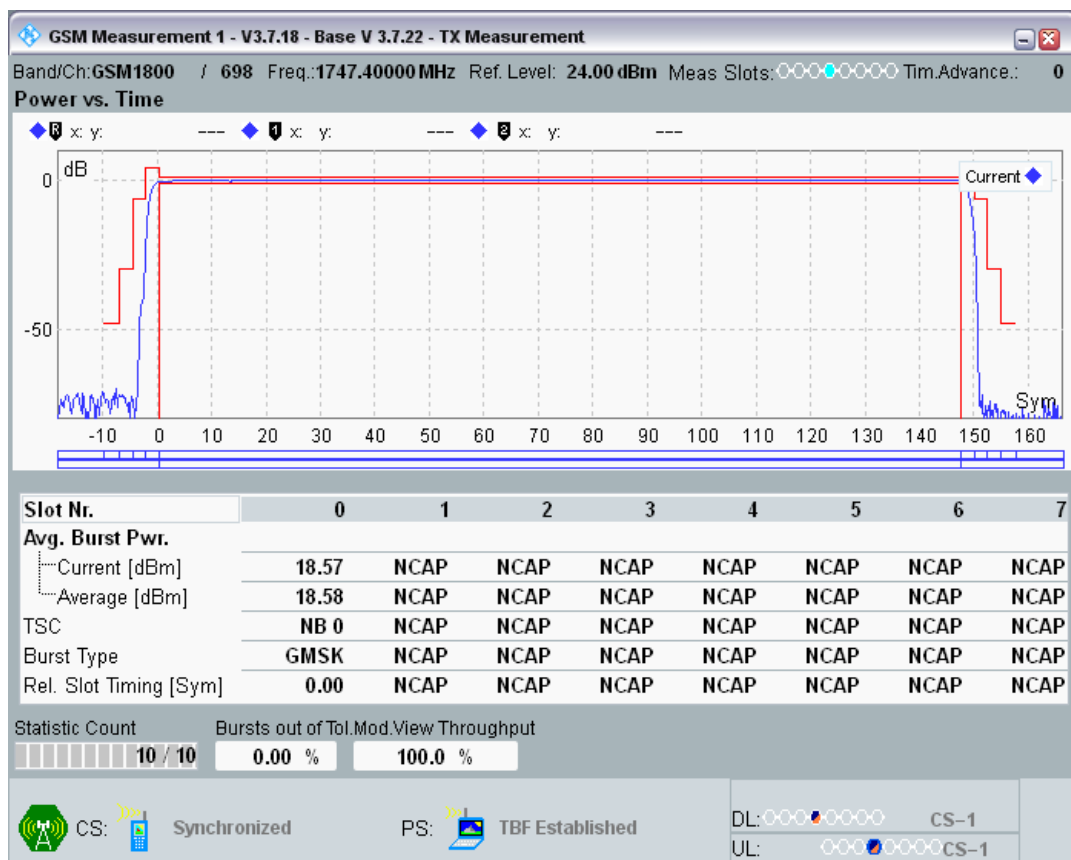

GPRS1800 Channel=698 Gamma=10;10;10;10

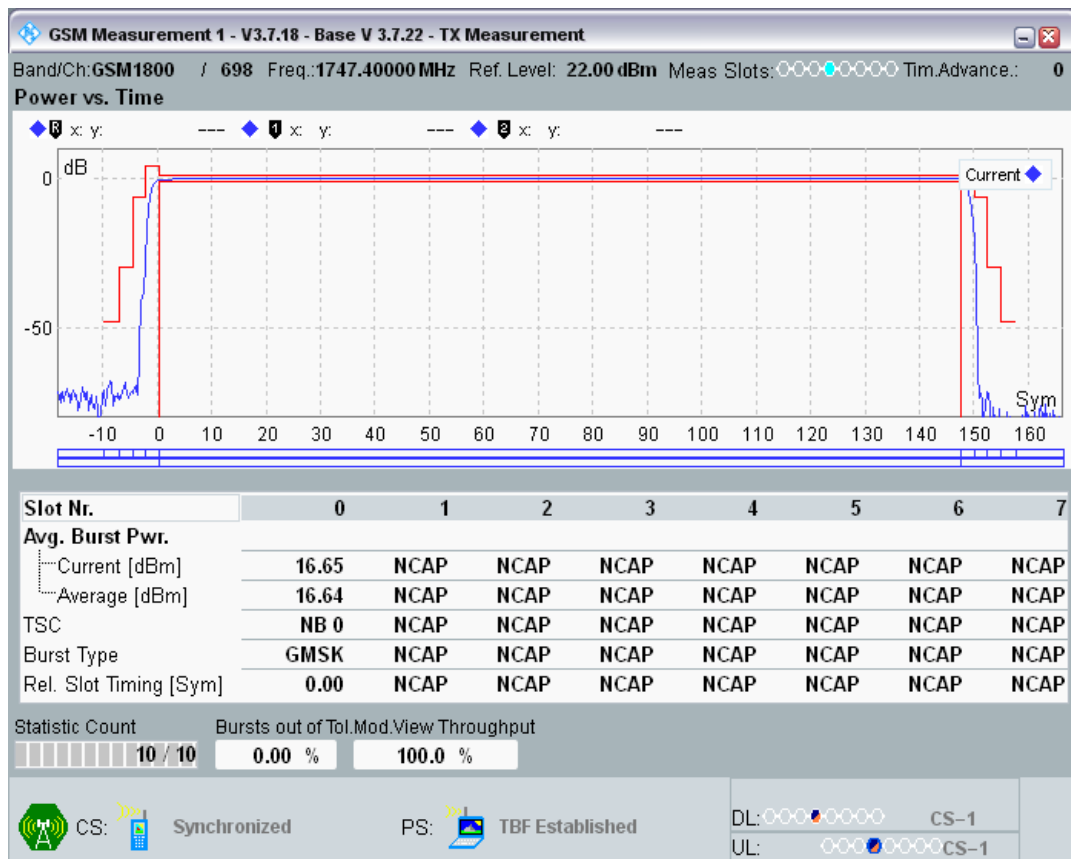


GPRS1800 Channel=698 Gamma=11;11;11;11

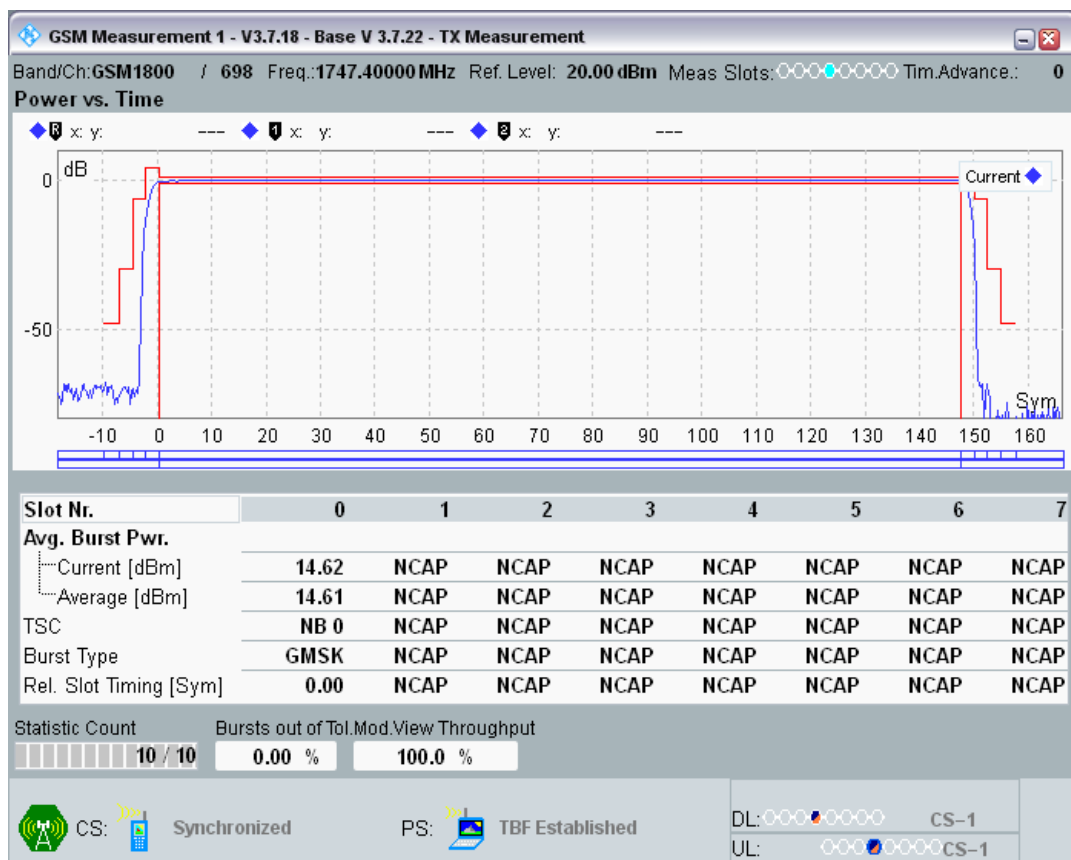


GPRS1800 Channel=698 Gamma=12;12;12;12




GPRS1800 Channel=698 Gamma=13;13;13;13

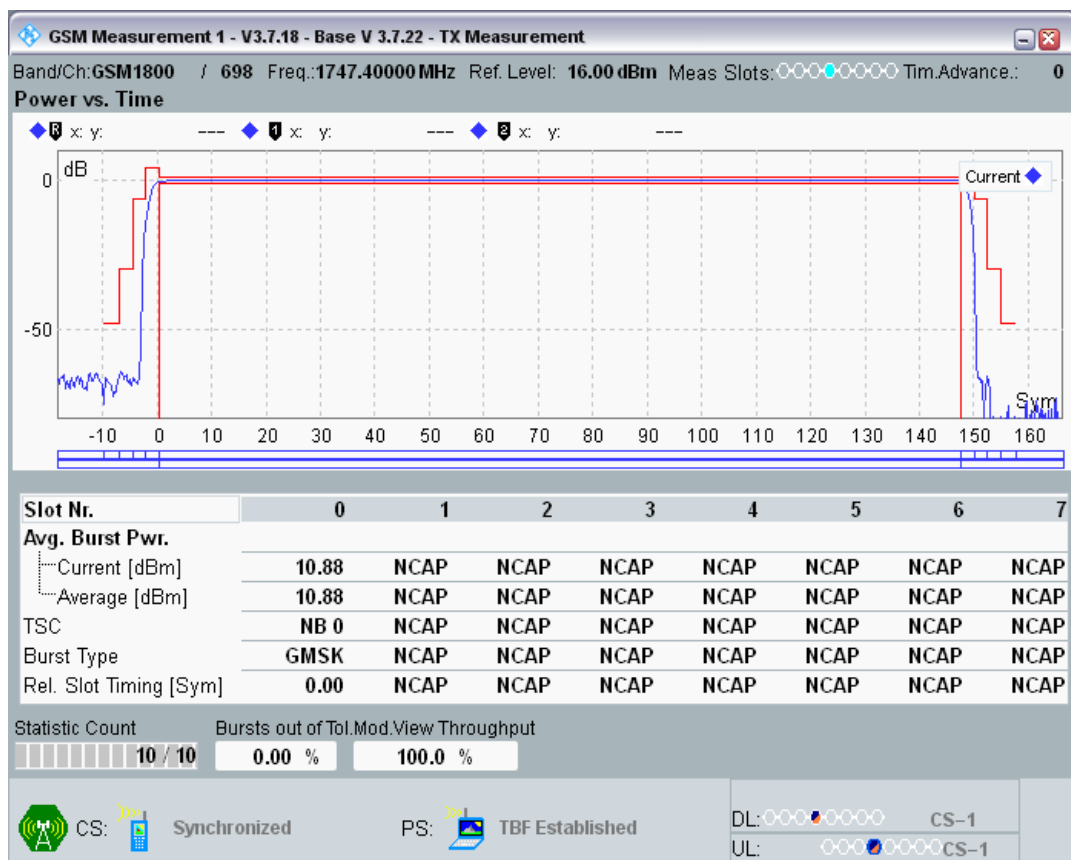


GPRS1800 Channel=698 Gamma=14;14;14;14

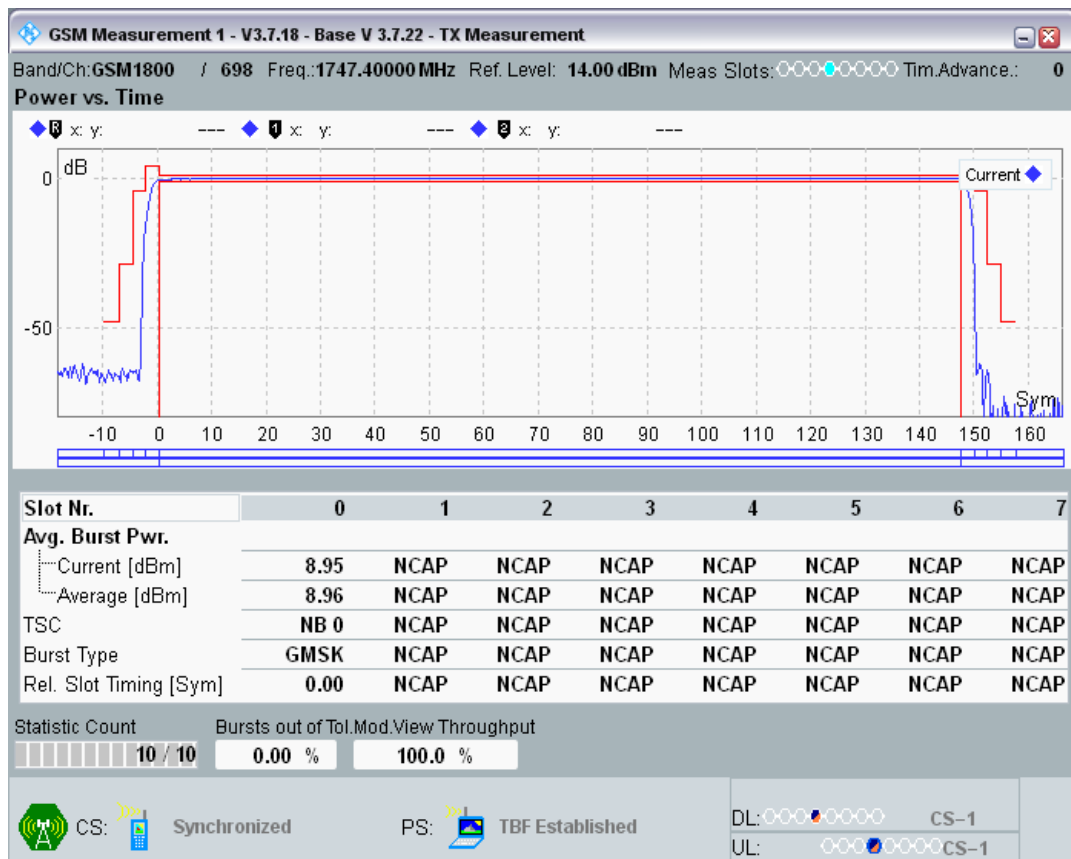


GPRS1800 Channel=698 Gamma=15;15;15;15

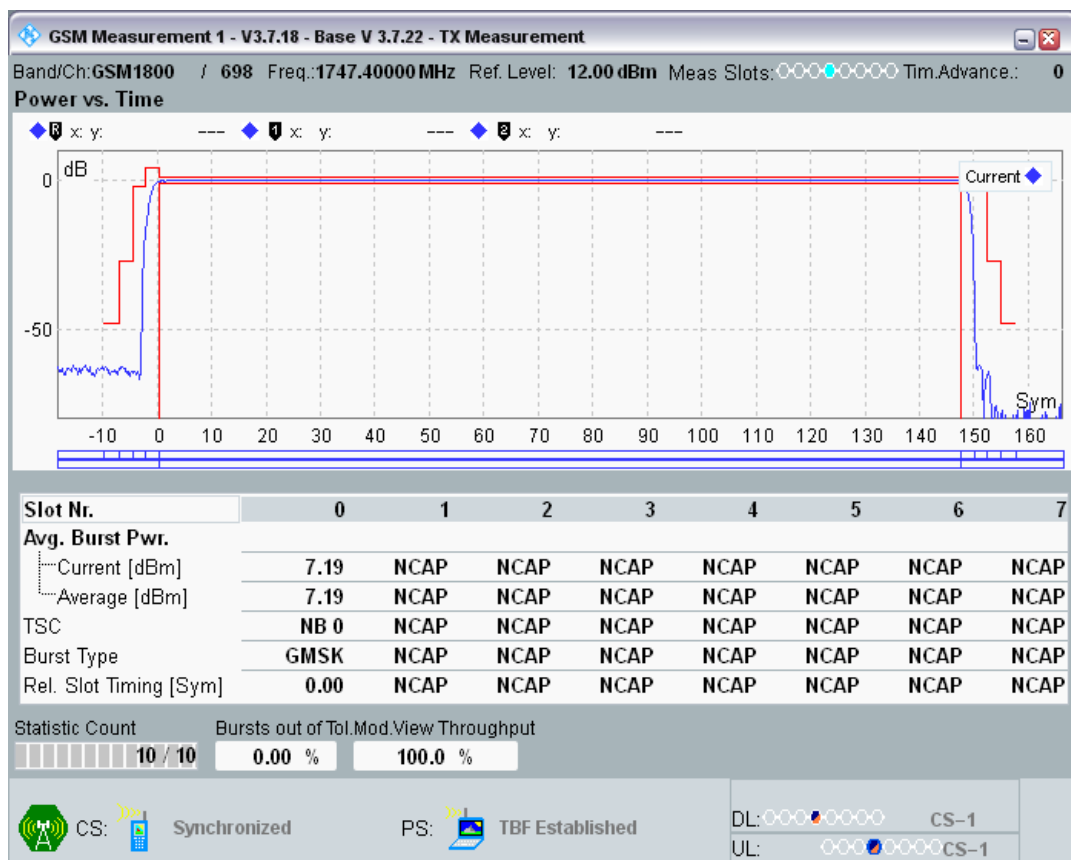


GPRS1800 Channel=698 Gamma=16;16;16;16

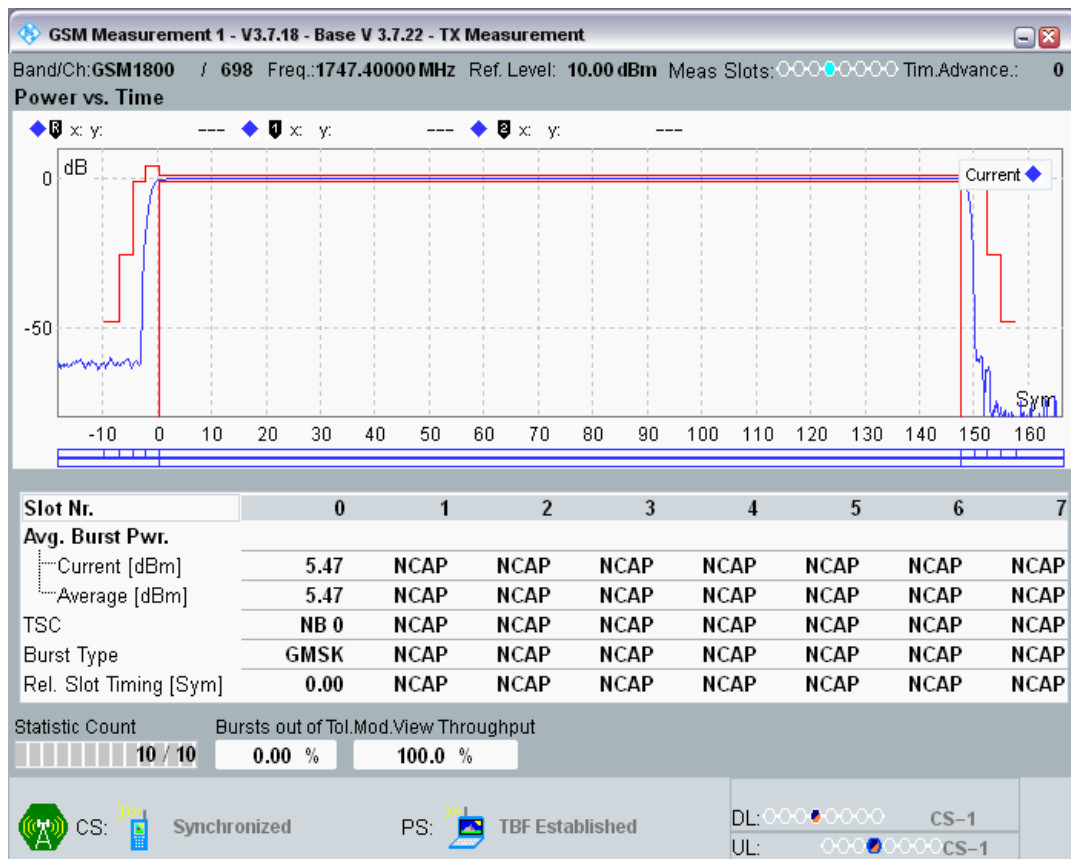


GPRS1800 Channel=698 Gamma=17;17;17;17

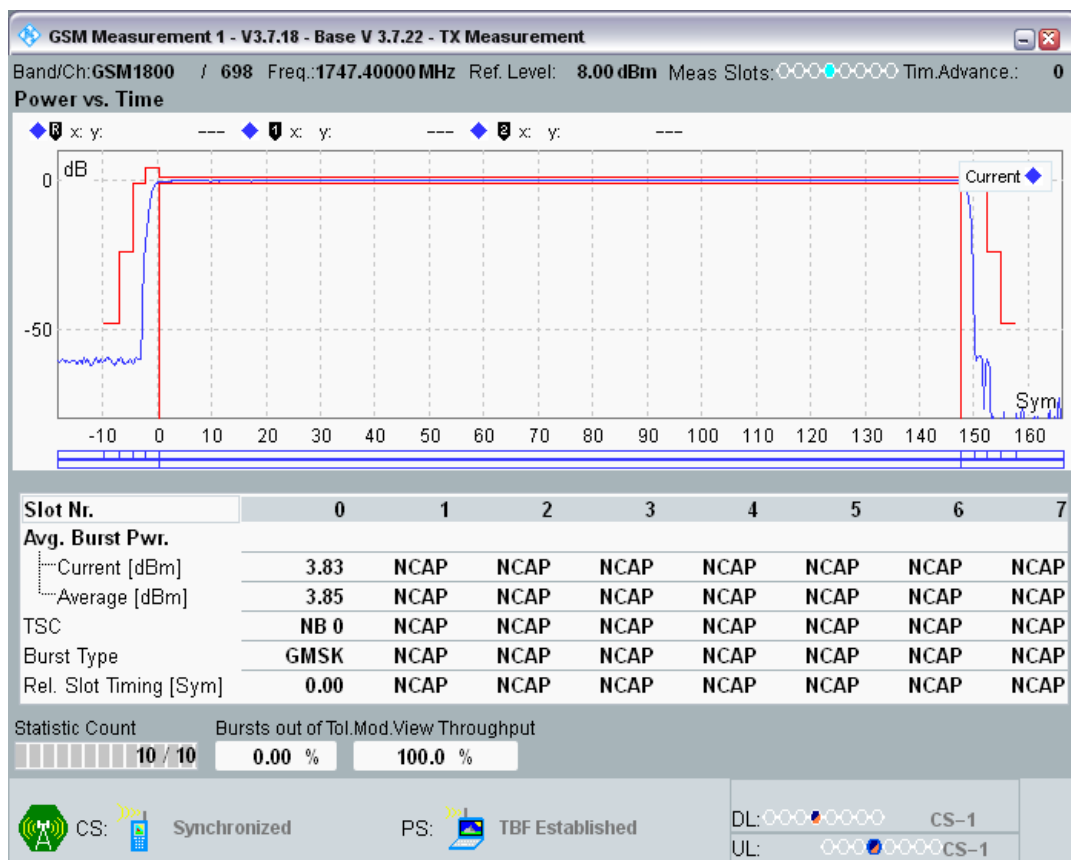

GPRS1800 Channel=698 Gamma=18;18;18;18

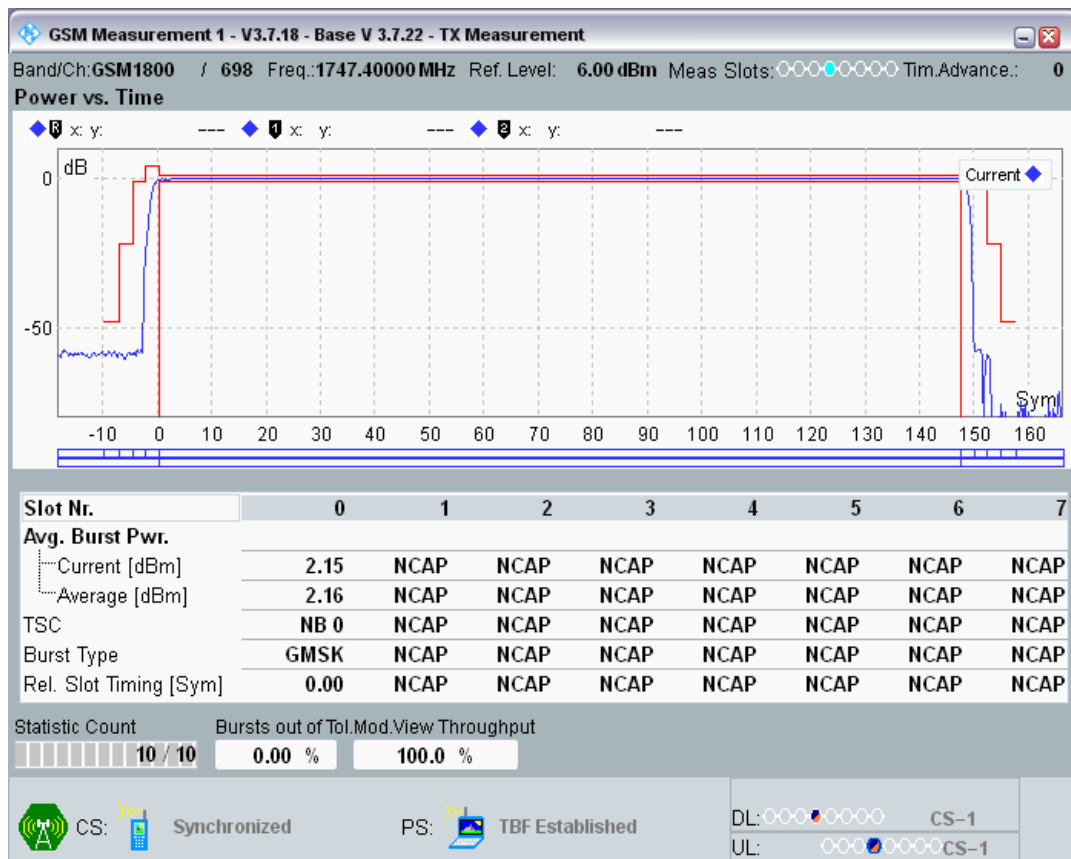


GPRS1800 Channel=885 Gamma=3;3;3;3

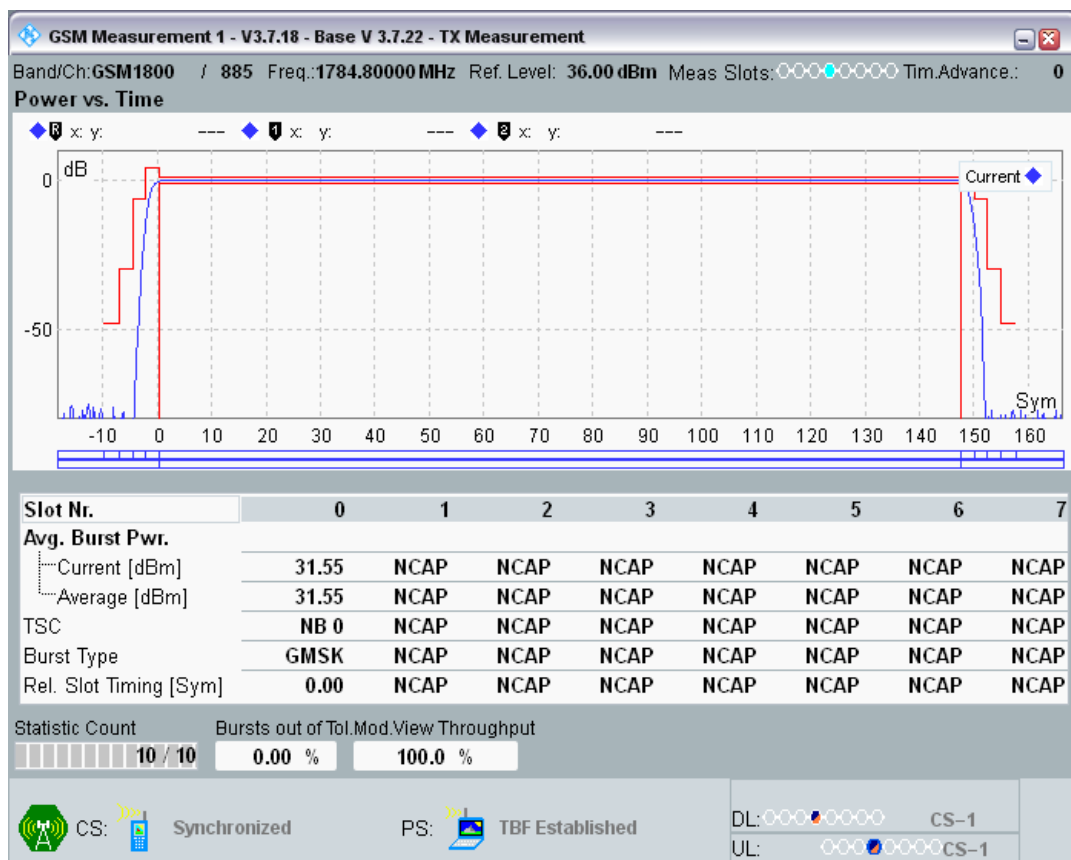

GPRS1800 Channel=885 Gamma=4;4;4;4




GPRS1800 Channel=885 Gamma=5;5;5;5

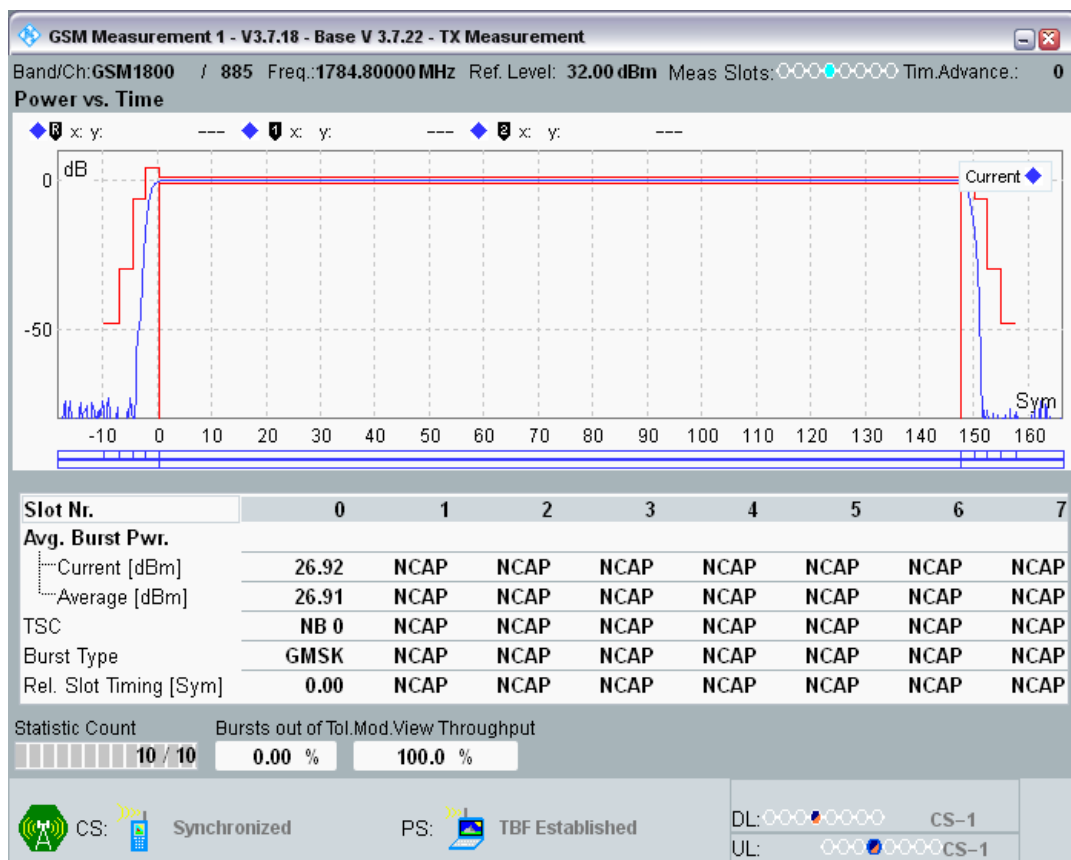


GPRS1800 Channel=885 Gamma=6;6;6;6




GPRS1800 Channel=885 Gamma=7;7;7;7

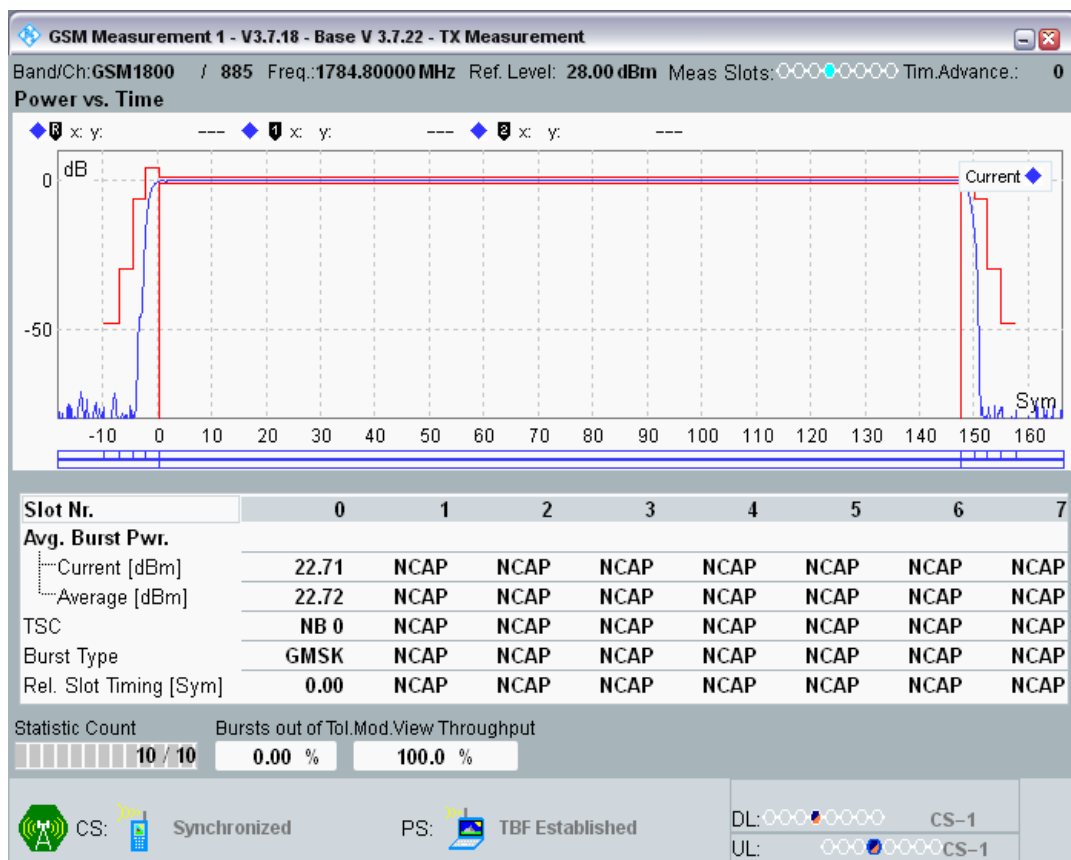


GPRS1800 Channel=885 Gamma=8;8;8;8

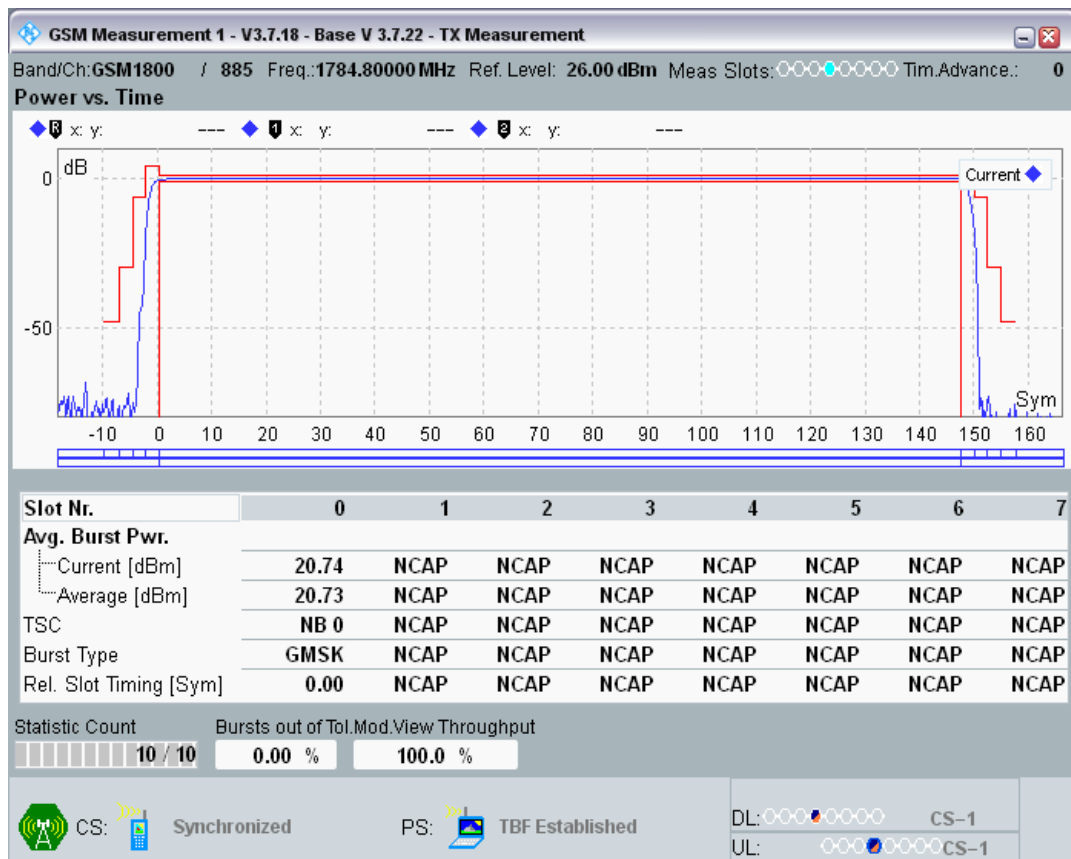


GPRS1800 Channel=885 Gamma=9;9;9;9

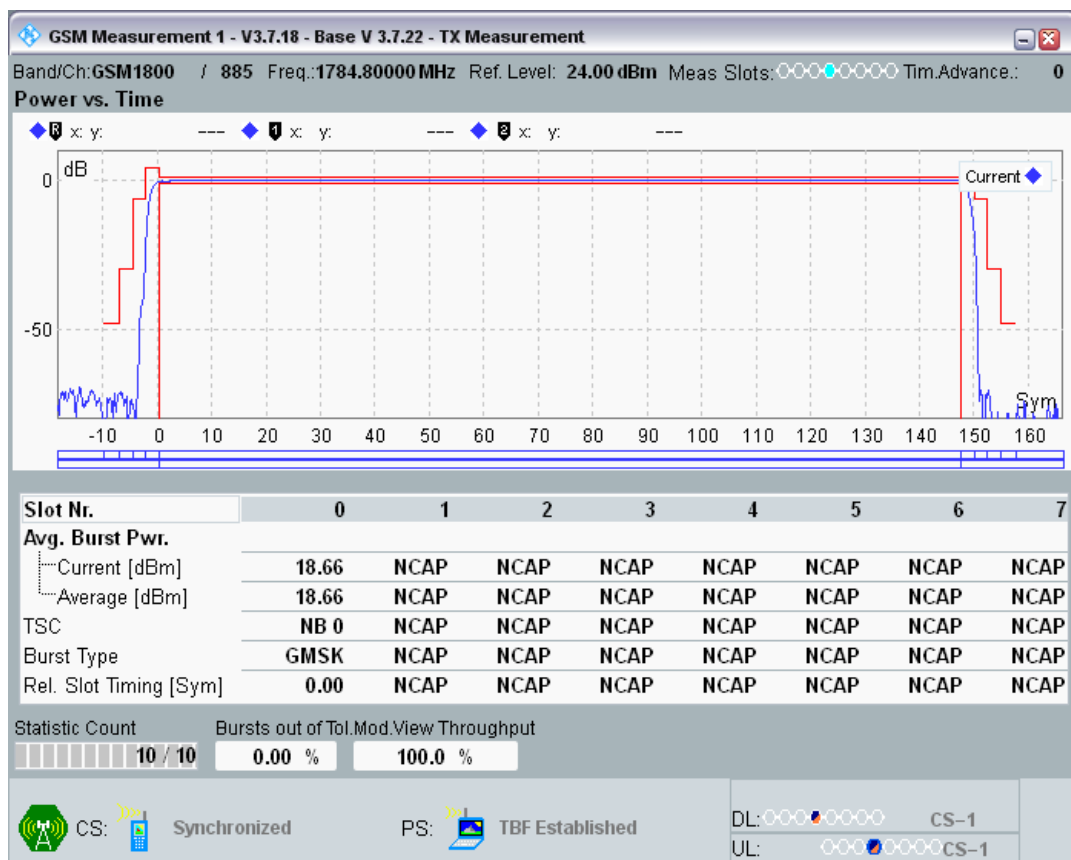


GPRS1800 Channel=885 Gamma=10;10;10;10

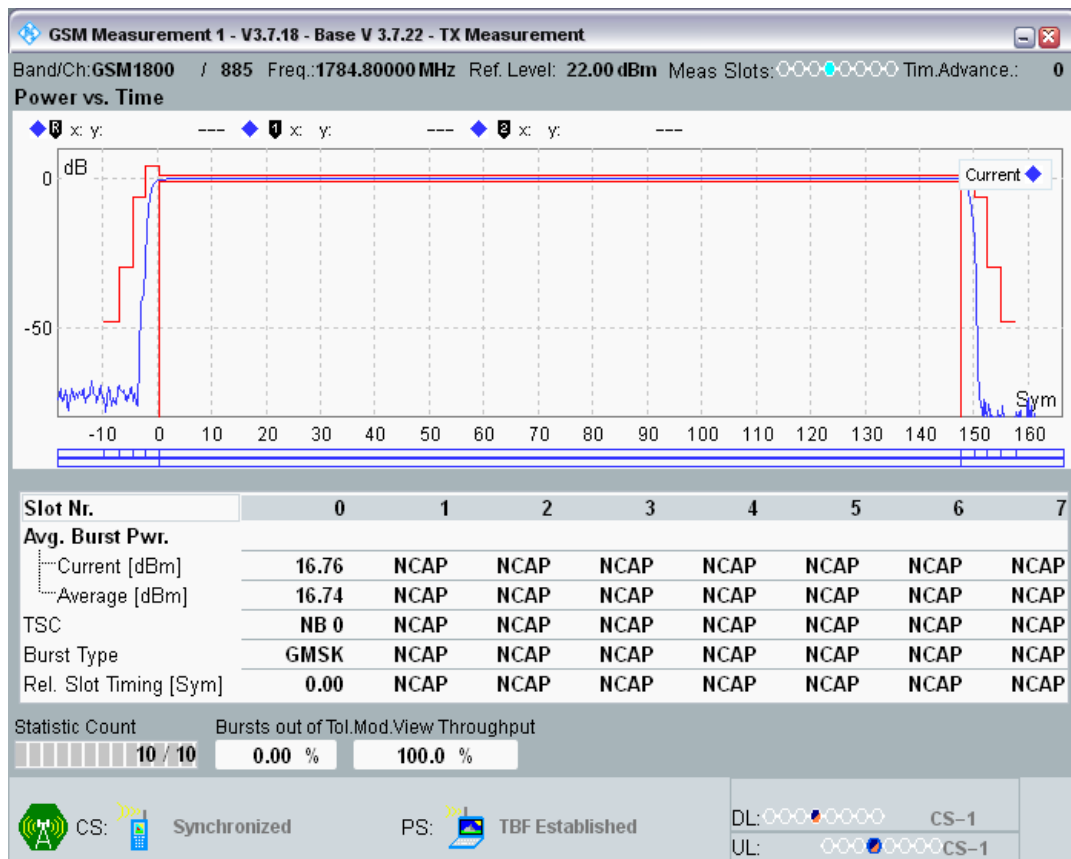


GPRS1800 Channel=885 Gamma=11;11;11;11

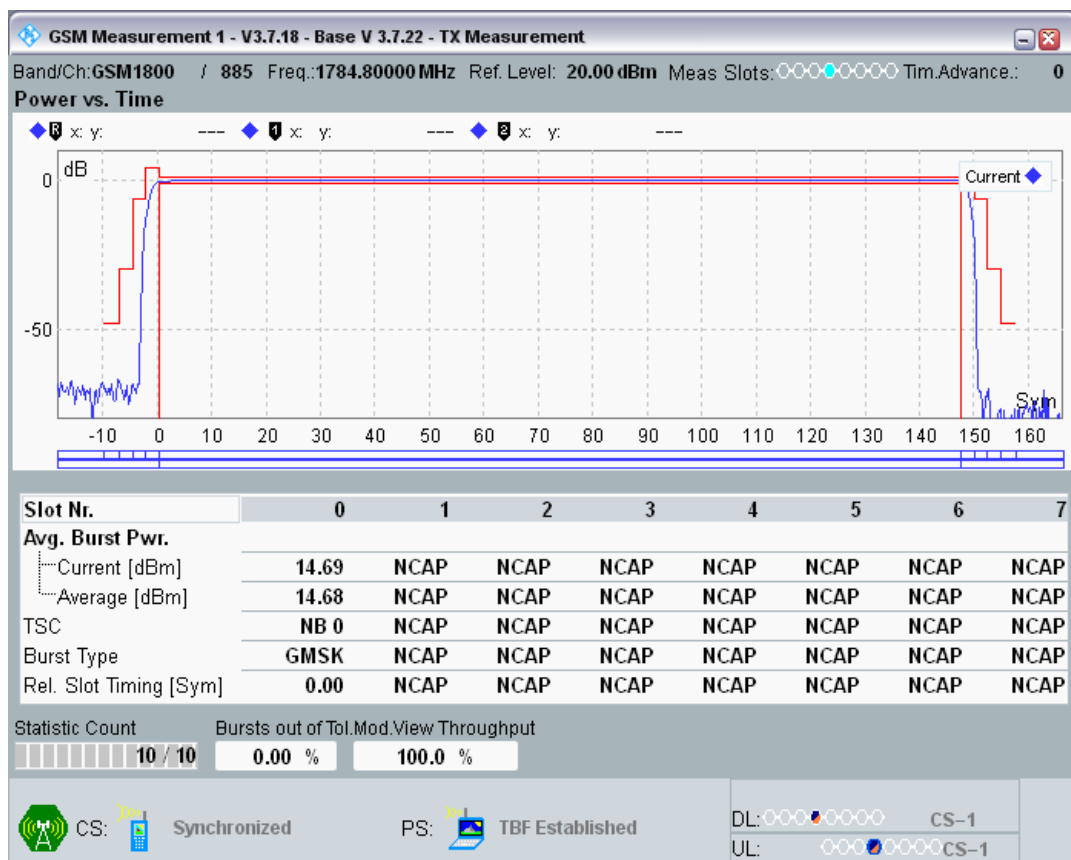


GPRS1800 Channel=885 Gamma=12;12;12;12

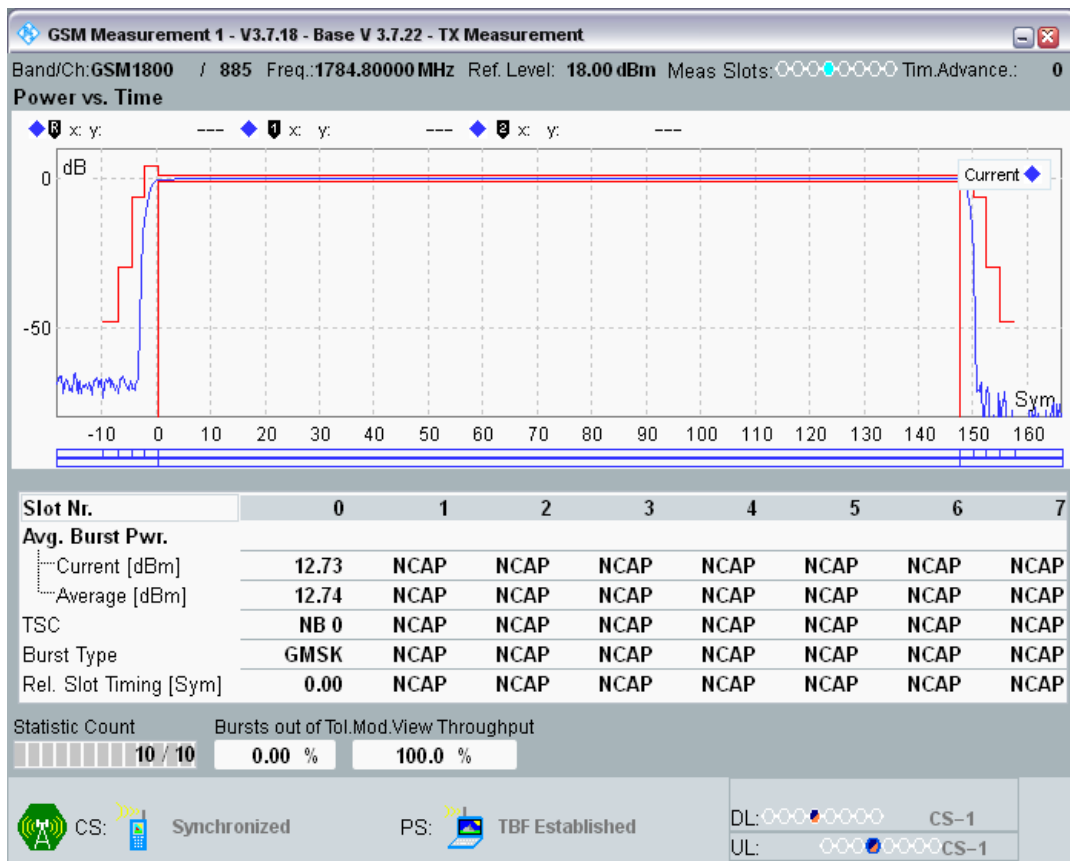


GPRS1800 Channel=885 Gamma=13;13;13;13

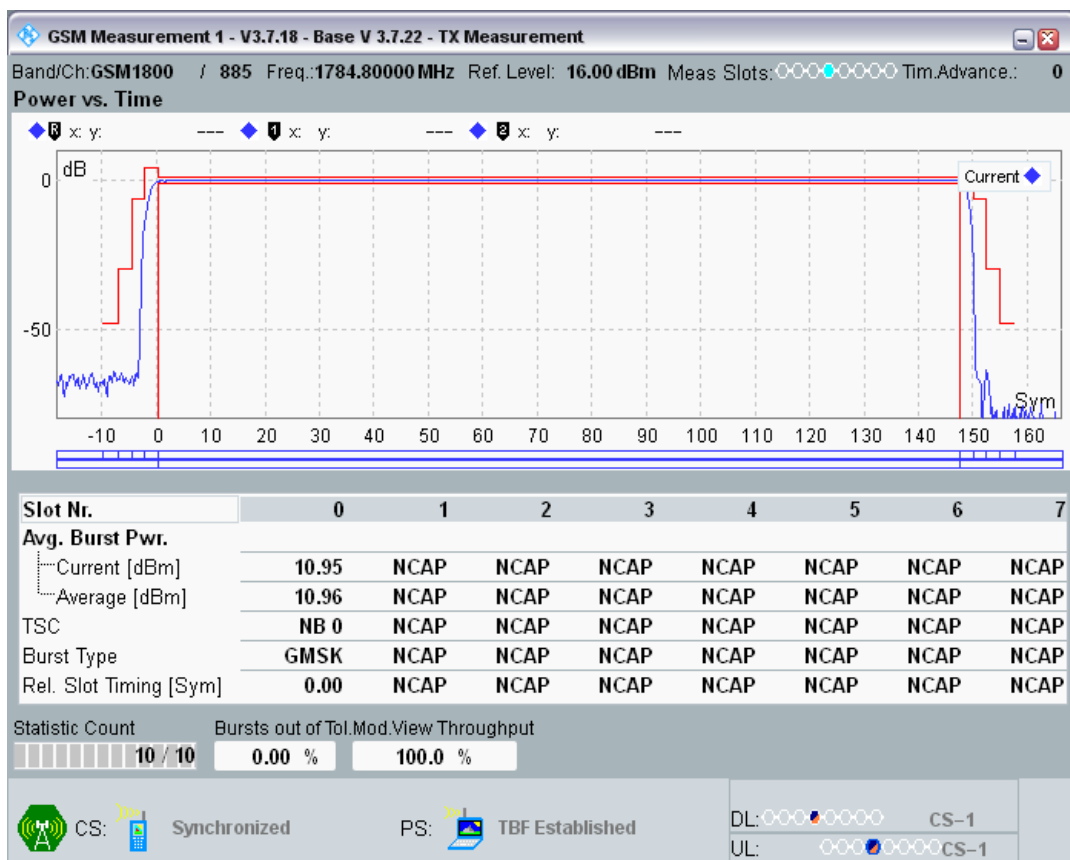


GPRS1800 Channel=885 Gamma=14;14;14;14

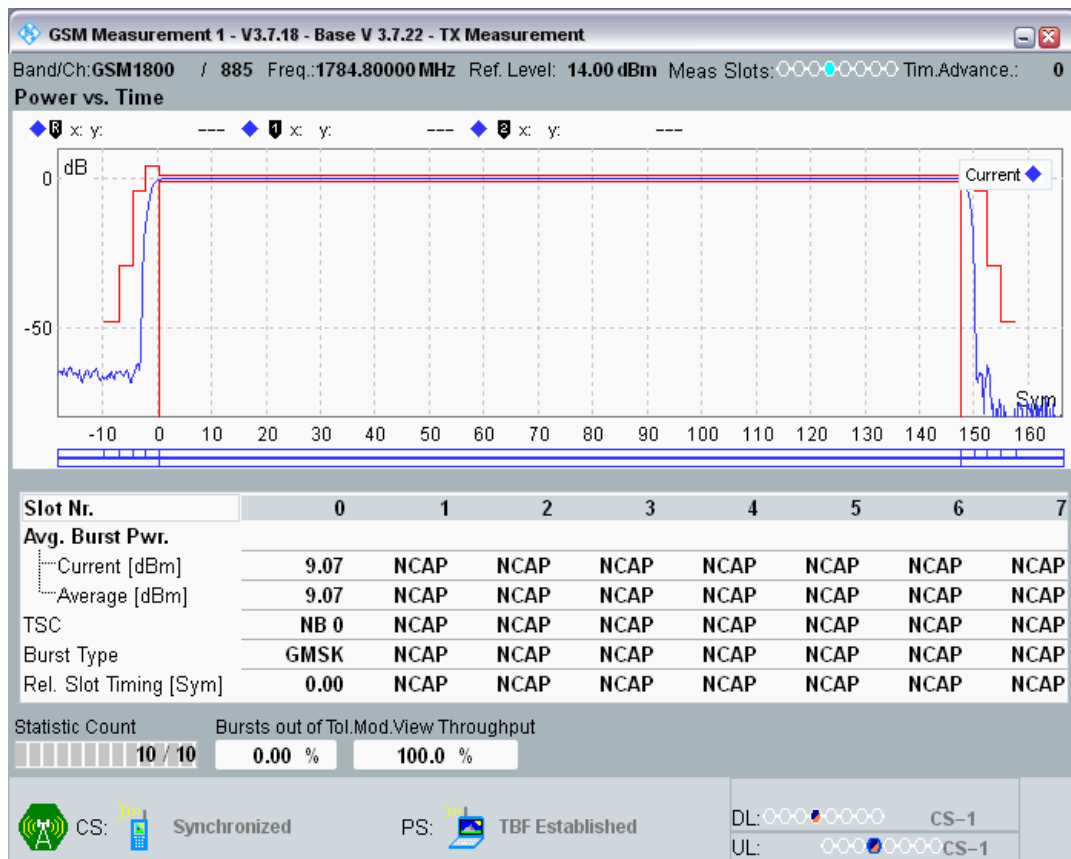

GPRS1800 Channel=885 Gamma=15;15;15;15

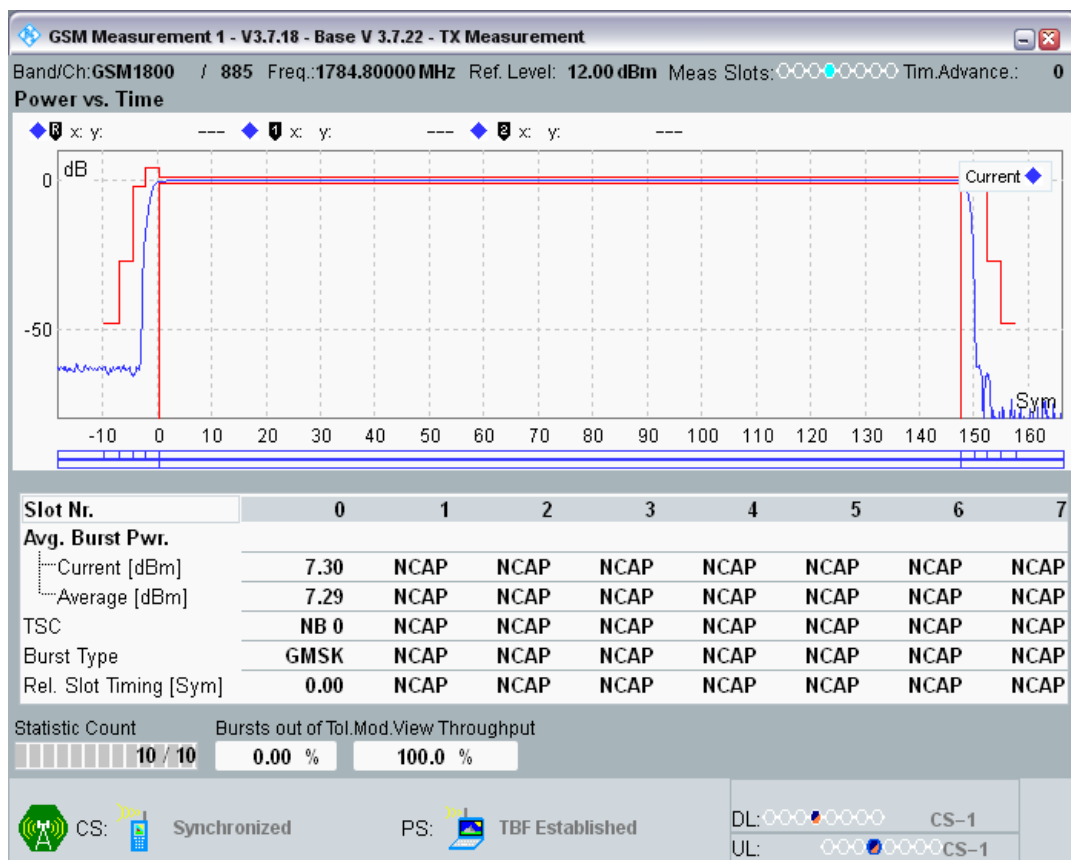


GPRS1800 Channel=885 Gamma=16;16;16;16

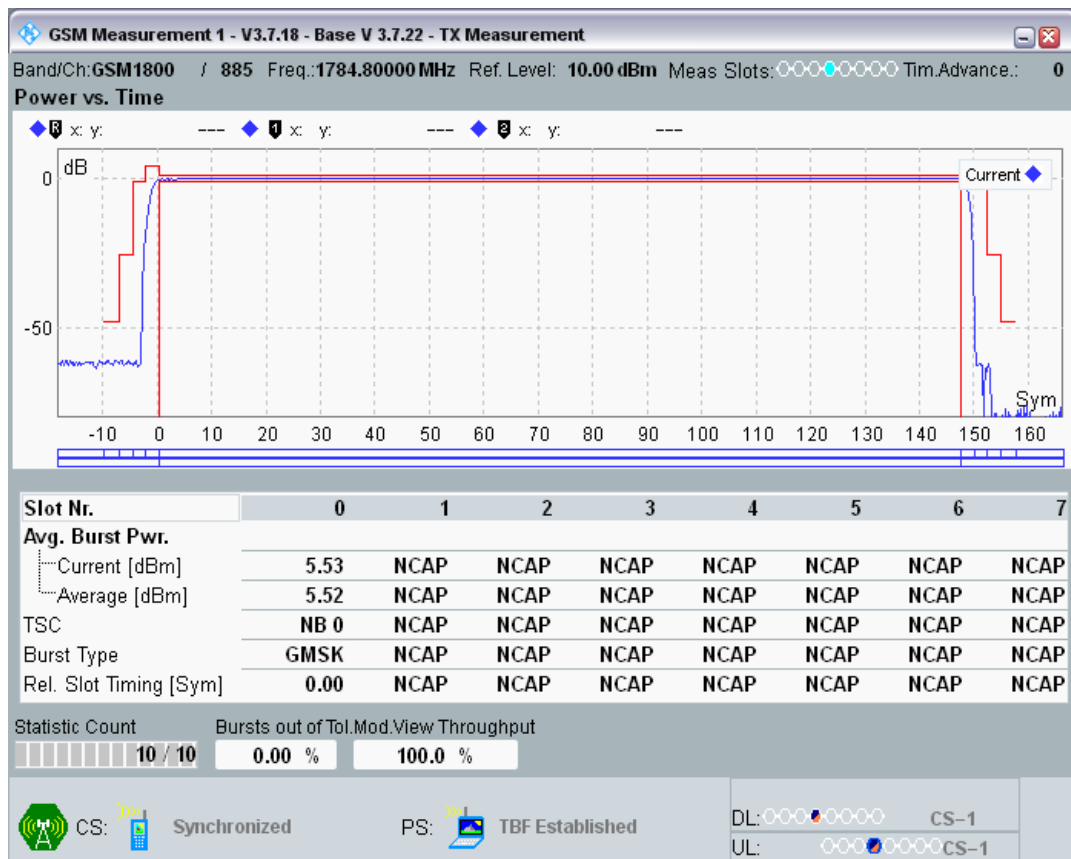


GPRS1800 Channel=885 Gamma=17;17;17;17




GPRS1800 Channel=885 Gamma=18;18;18;18

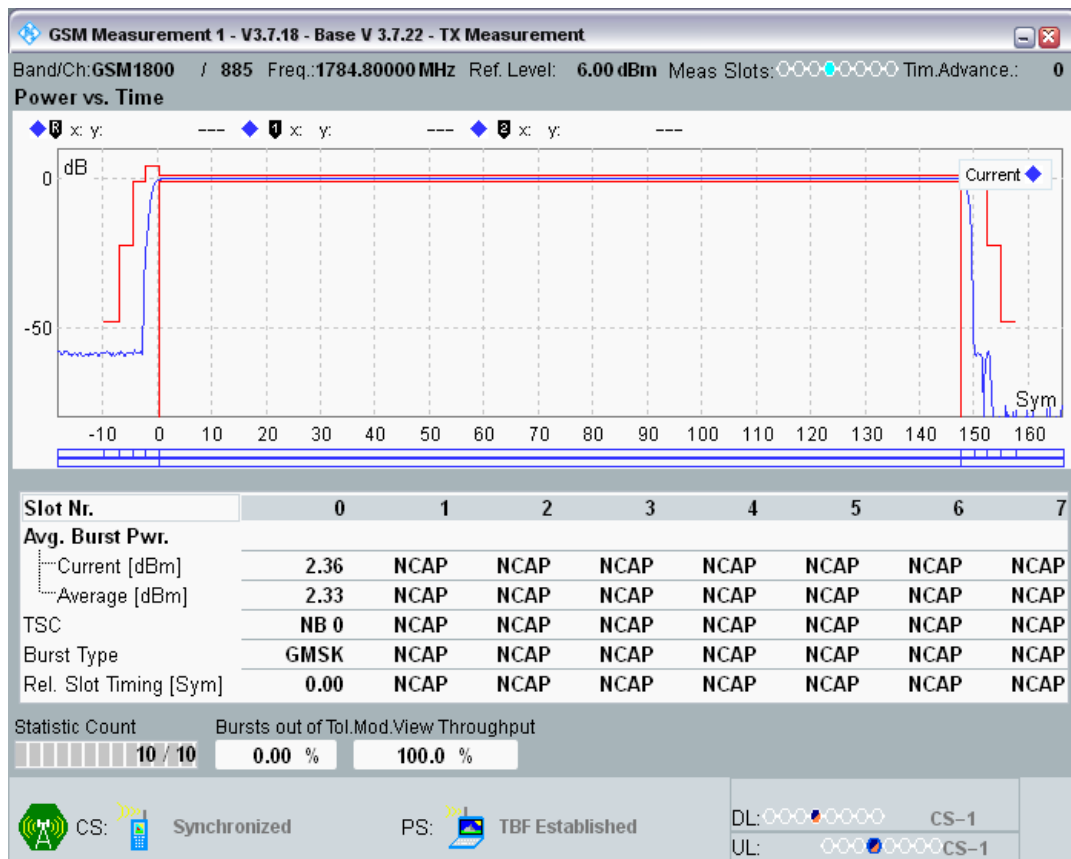


GPRS1900 Channel=512 Gamma=3;3;3;3

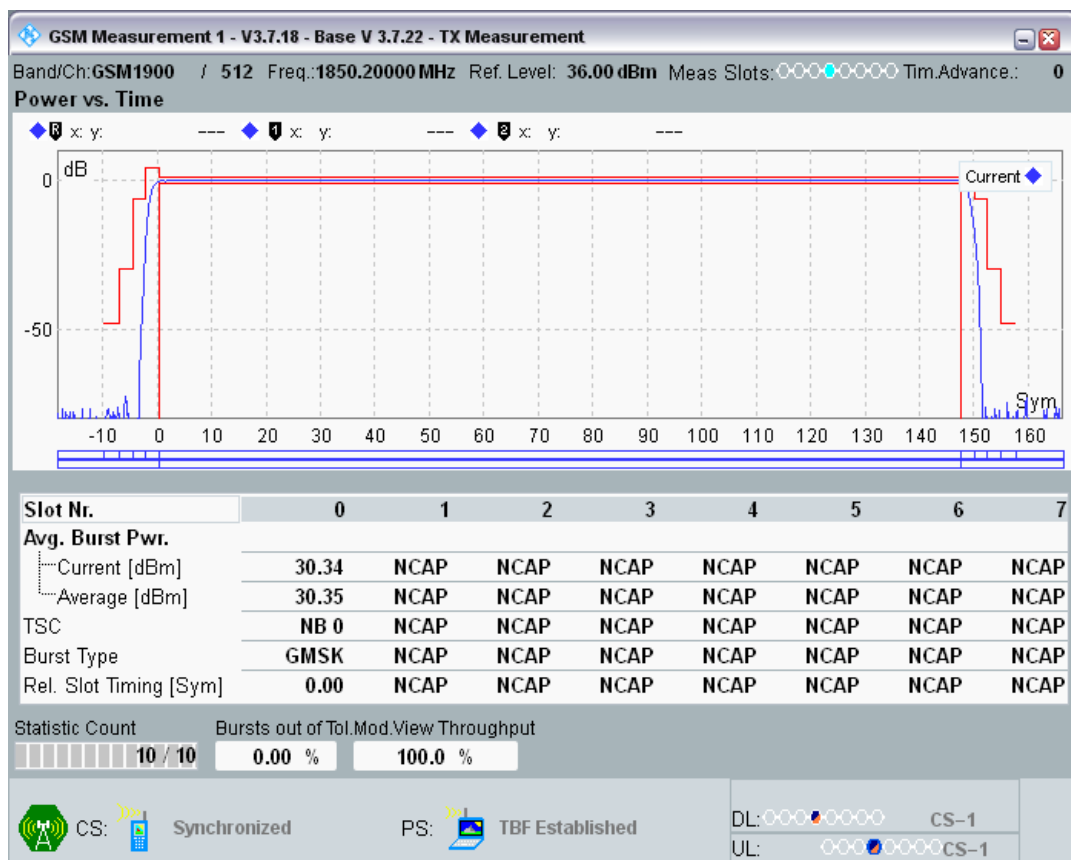

GPRS1900 Channel=512 Gamma=4;4;4;4

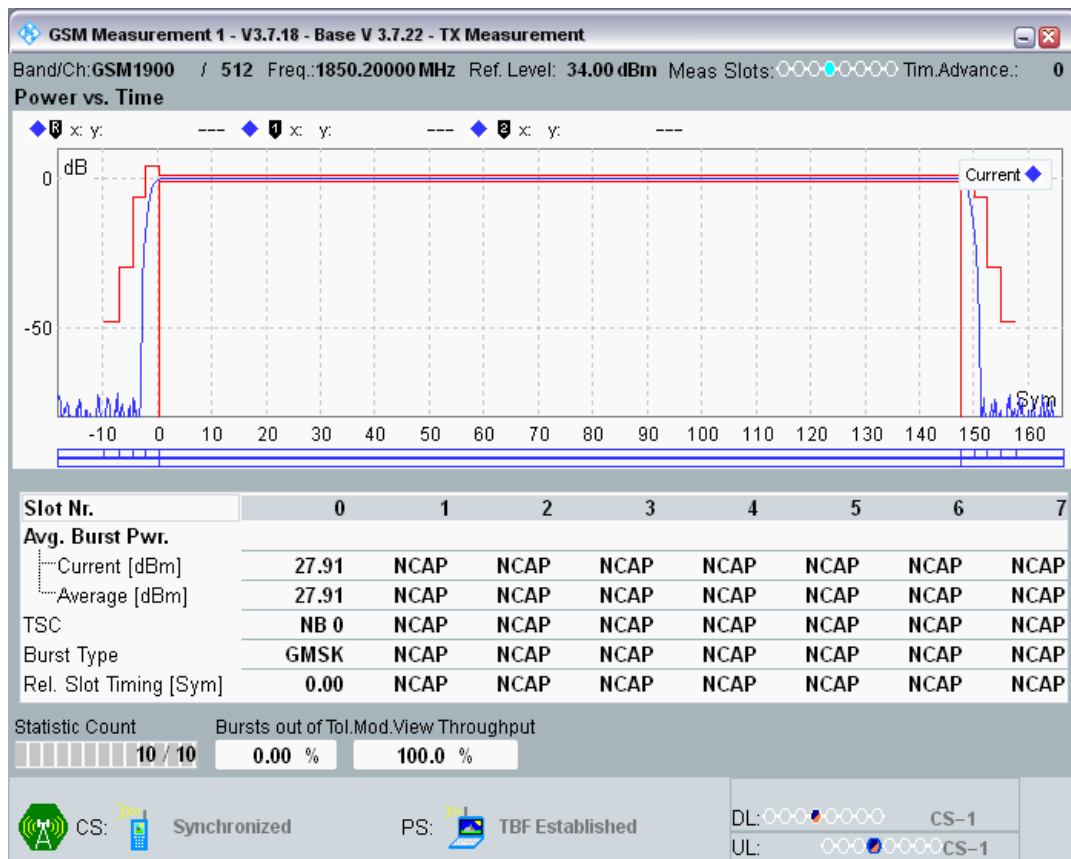


GPRS1900 Channel=512 Gamma=5;5;5;5

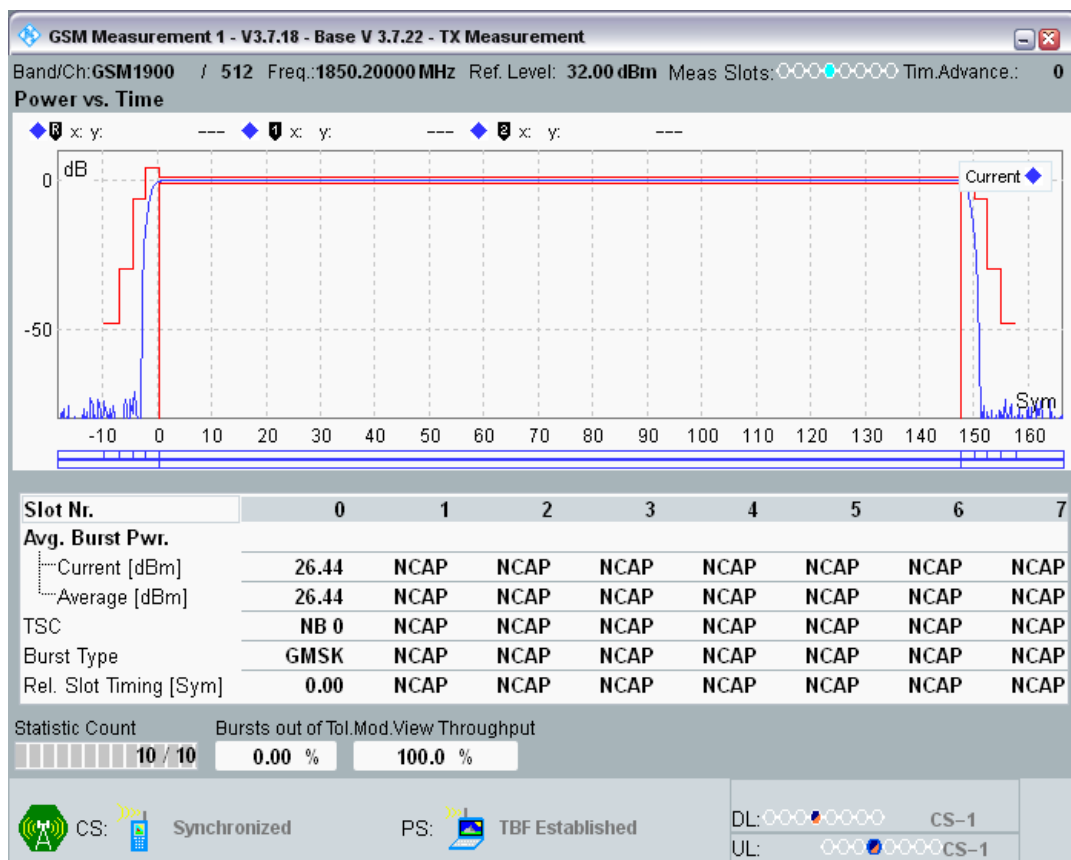


GPRS1900 Channel=512 Gamma=6;6;6;6




GPRS1900 Channel=512 Gamma=7;7;7;7

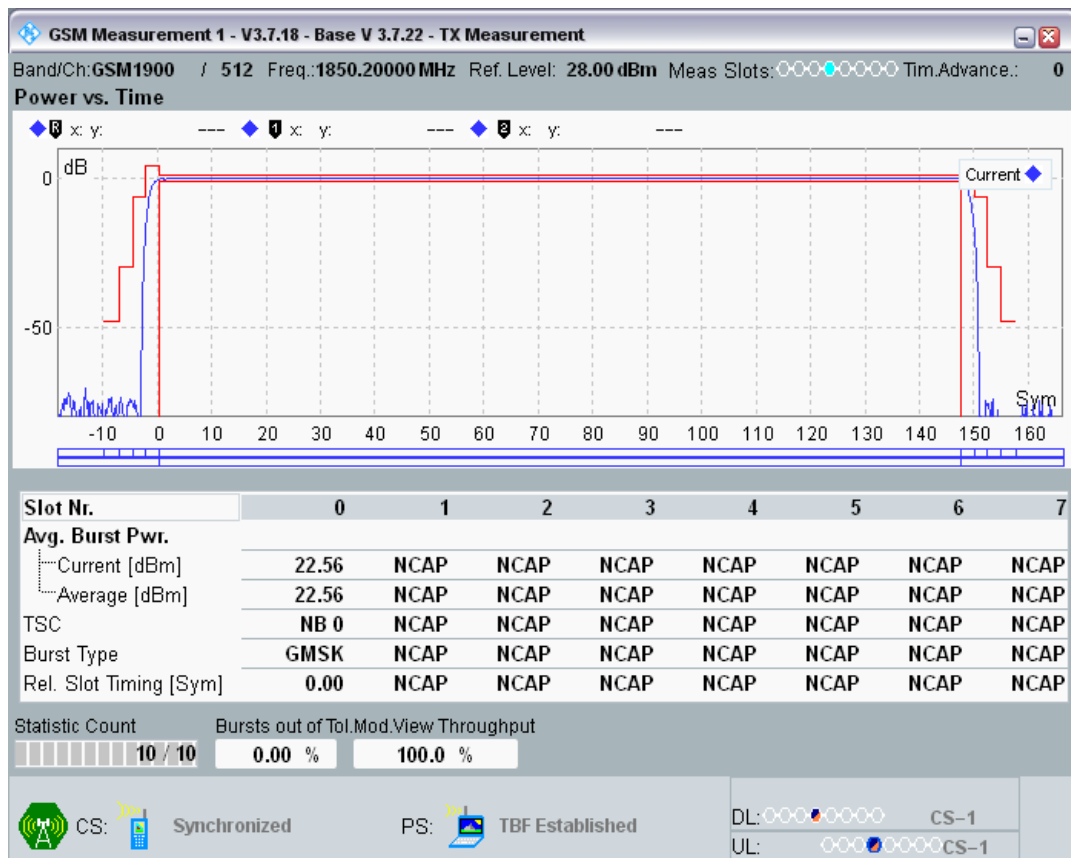


GPRS1900 Channel=512 Gamma=8;8;8;8

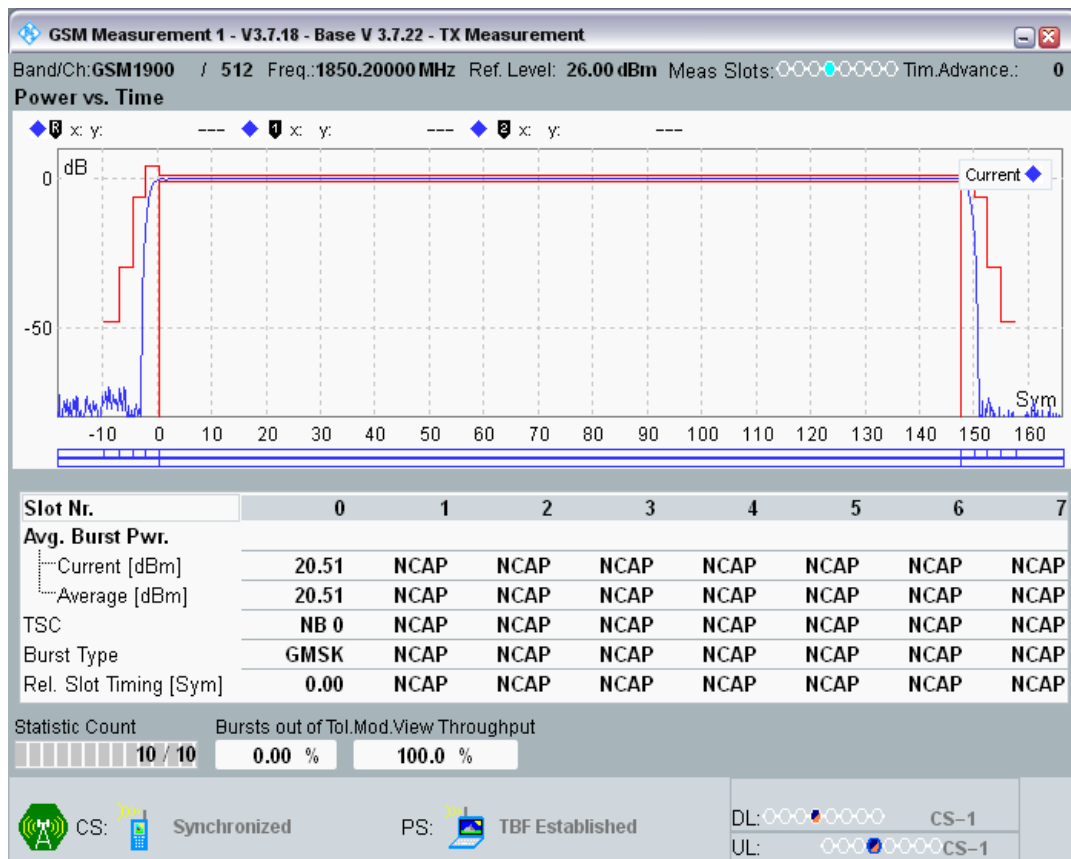


GPRS1900 Channel=512 Gamma=9;9;9;9

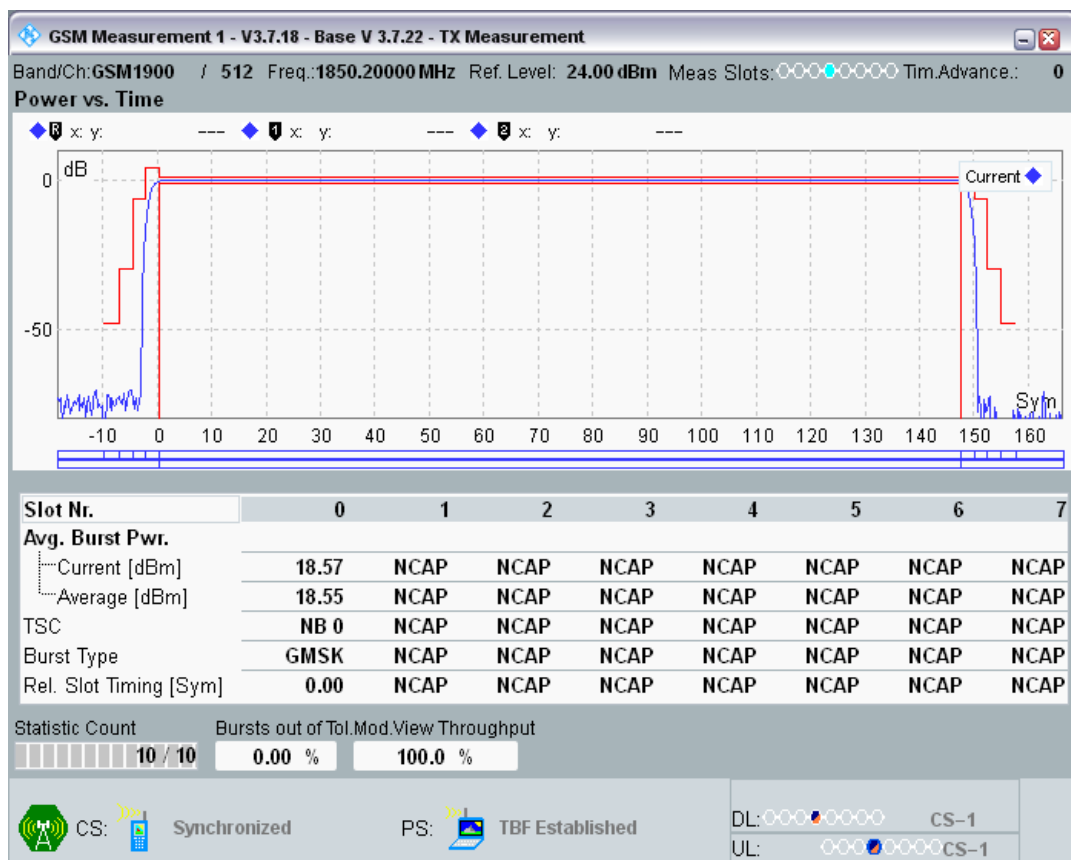


GPRS1900 Channel=512 Gamma=10;10;10;10

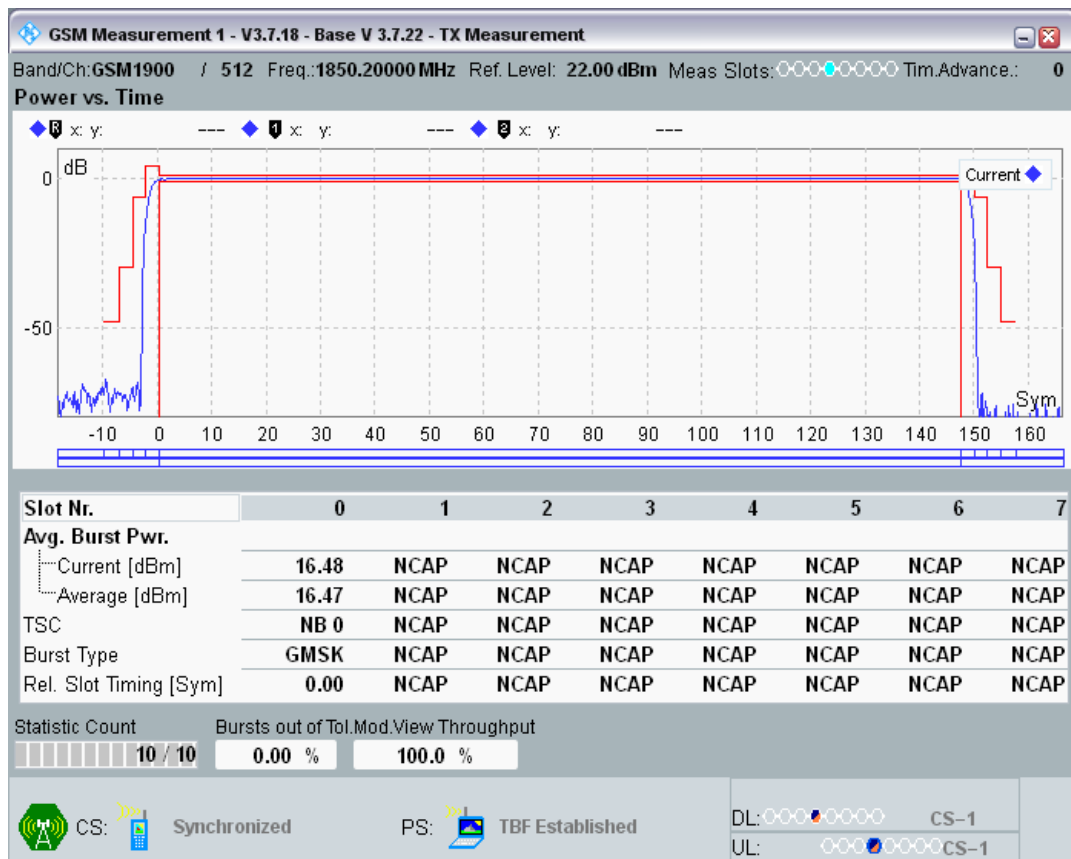


GPRS1900 Channel=512 Gamma=11;11;11;11

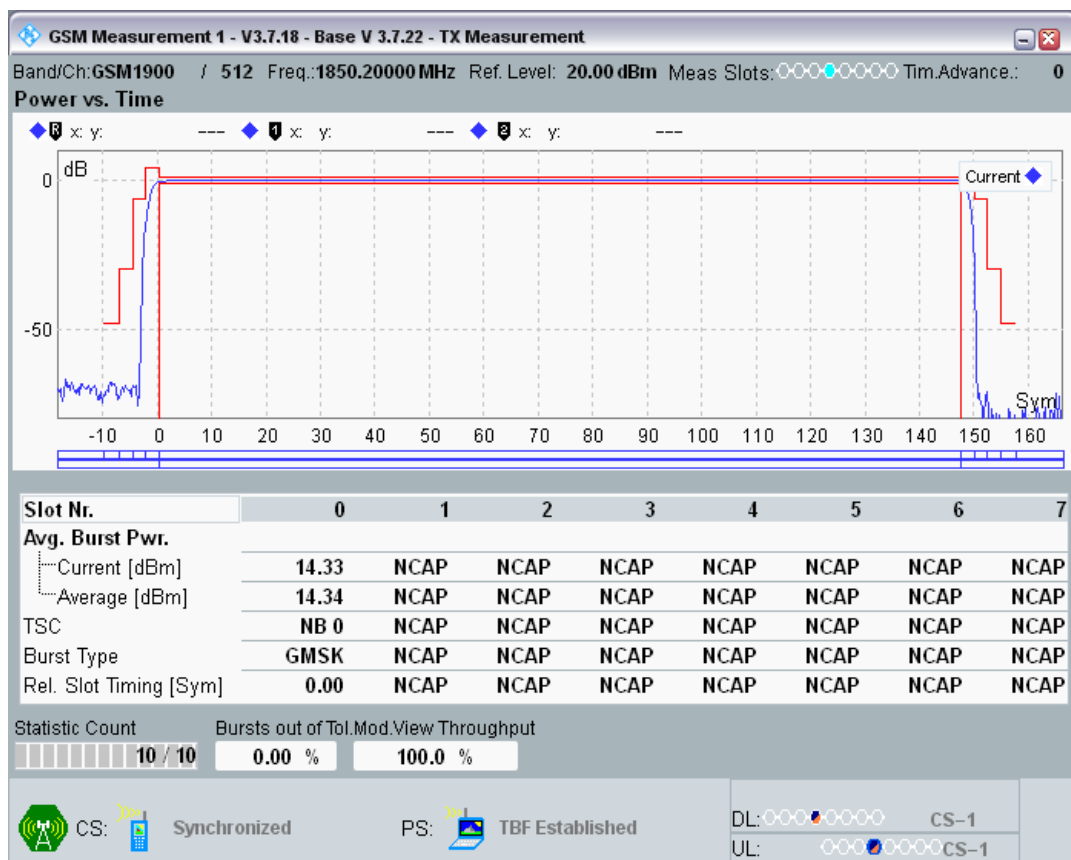


GPRS1900 Channel=512 Gamma=12;12;12;12

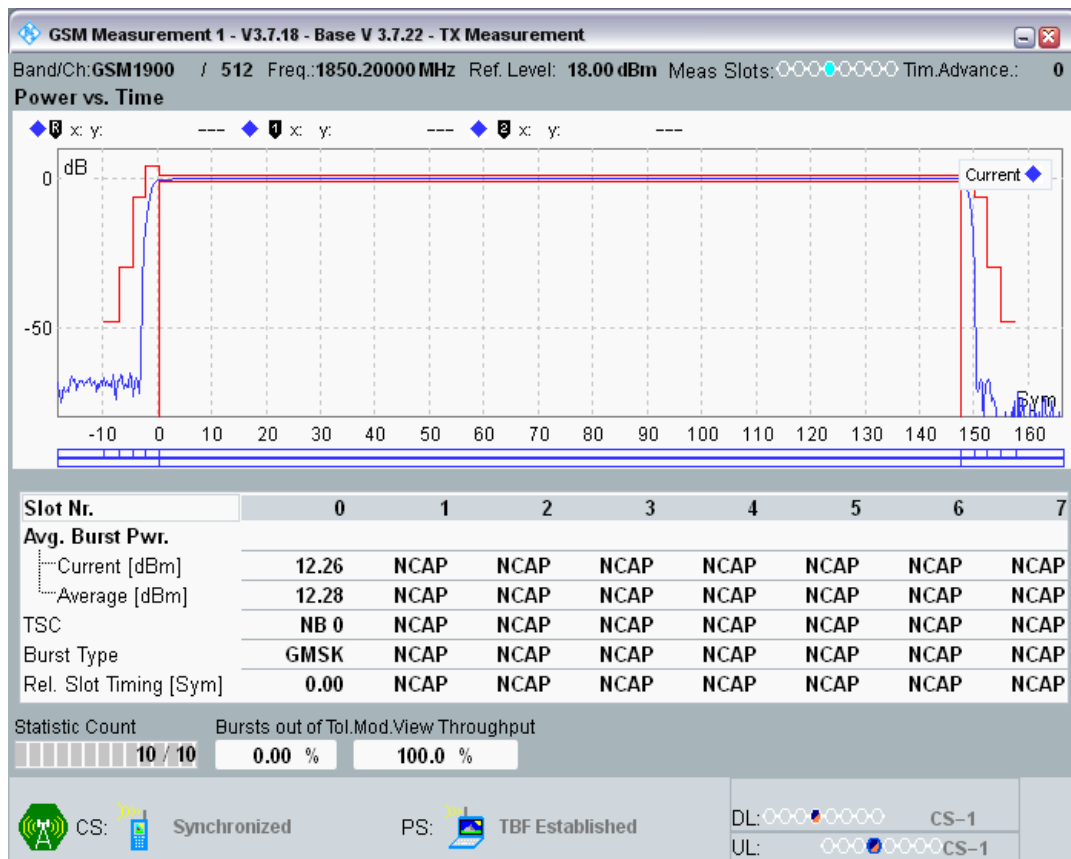


GPRS1900 Channel=512 Gamma=13;13;13;13

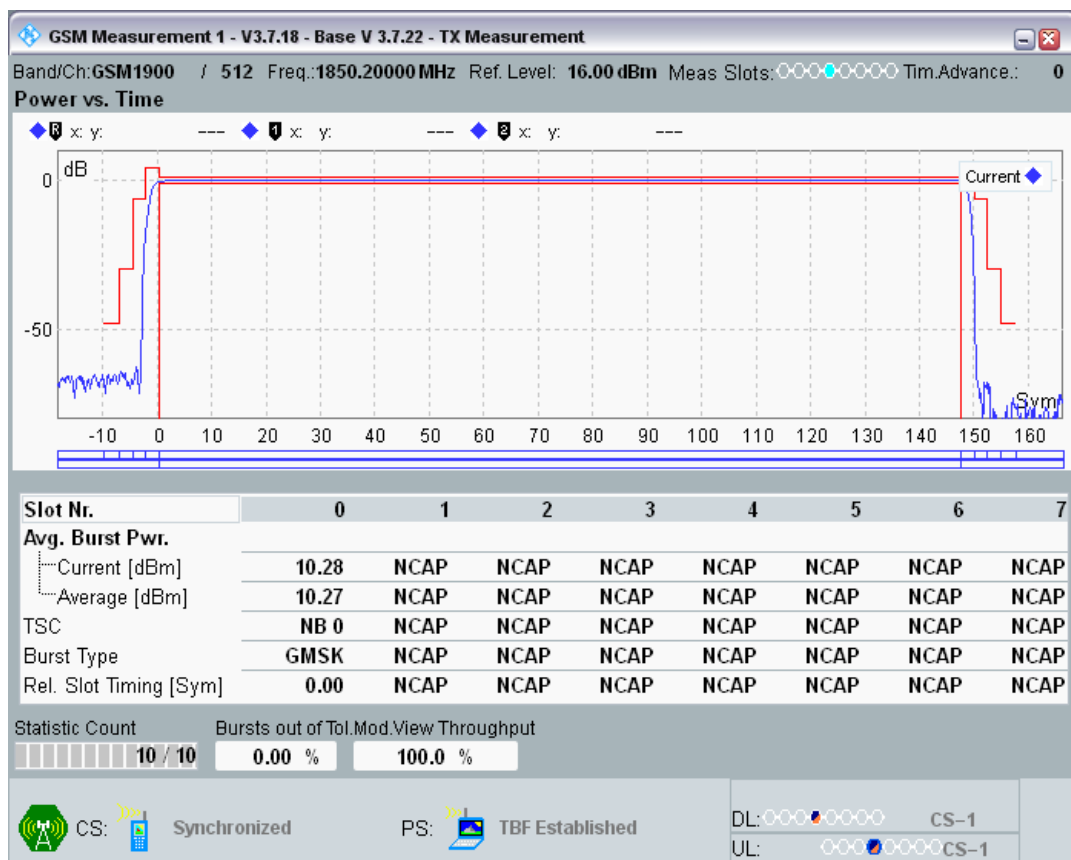


GPRS1900 Channel=512 Gamma=14;14;14;14

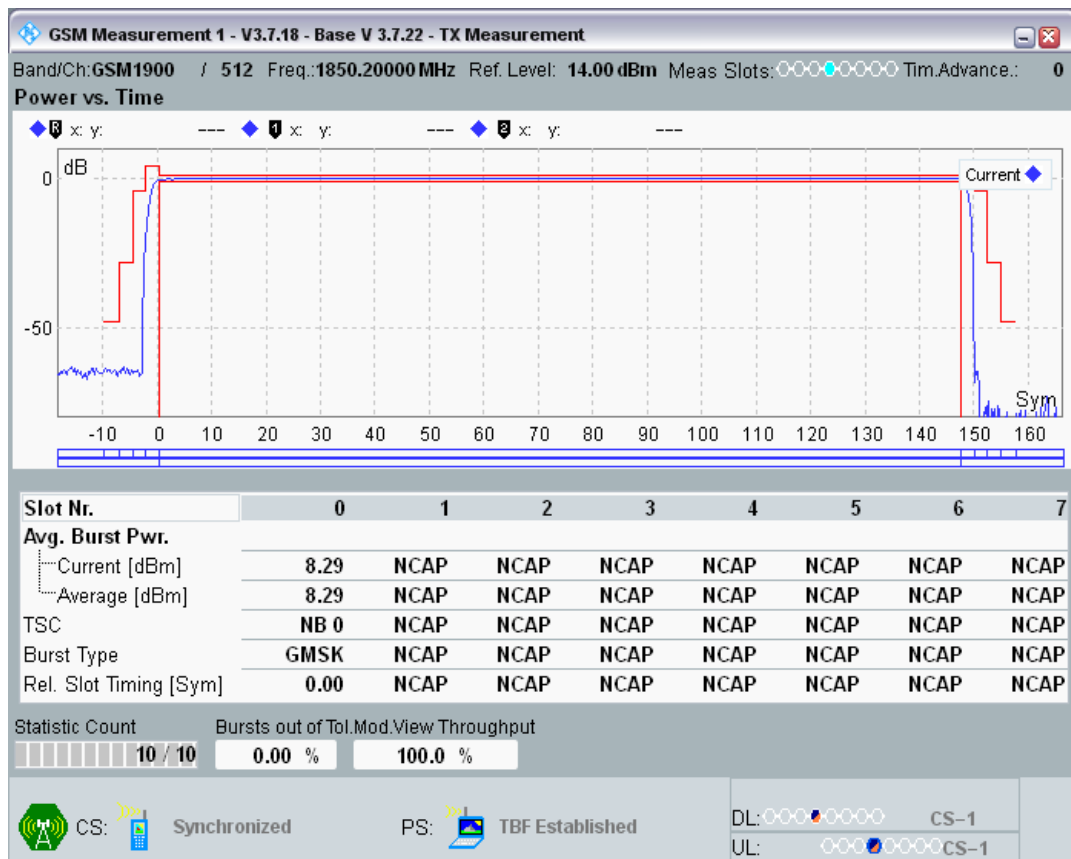

GPRS1900 Channel=512 Gamma=15;15;15;15

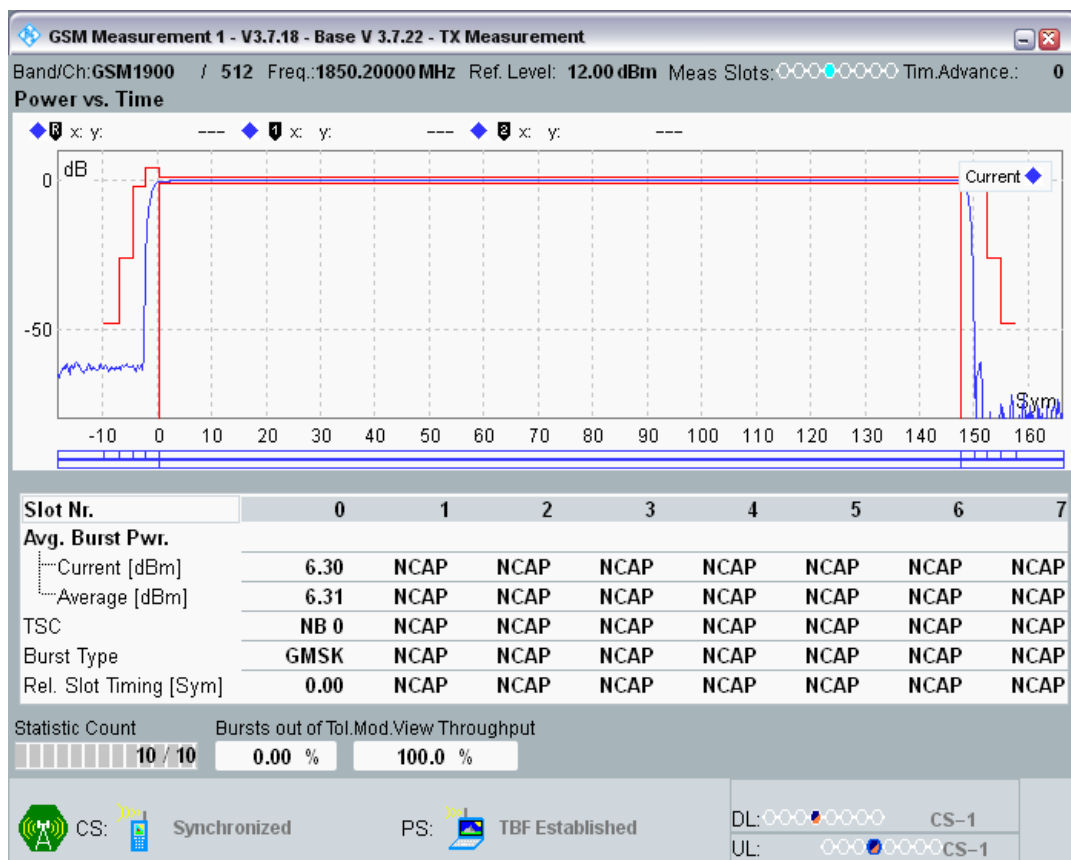


GPRS1900 Channel=512 Gamma=16;16;16;16

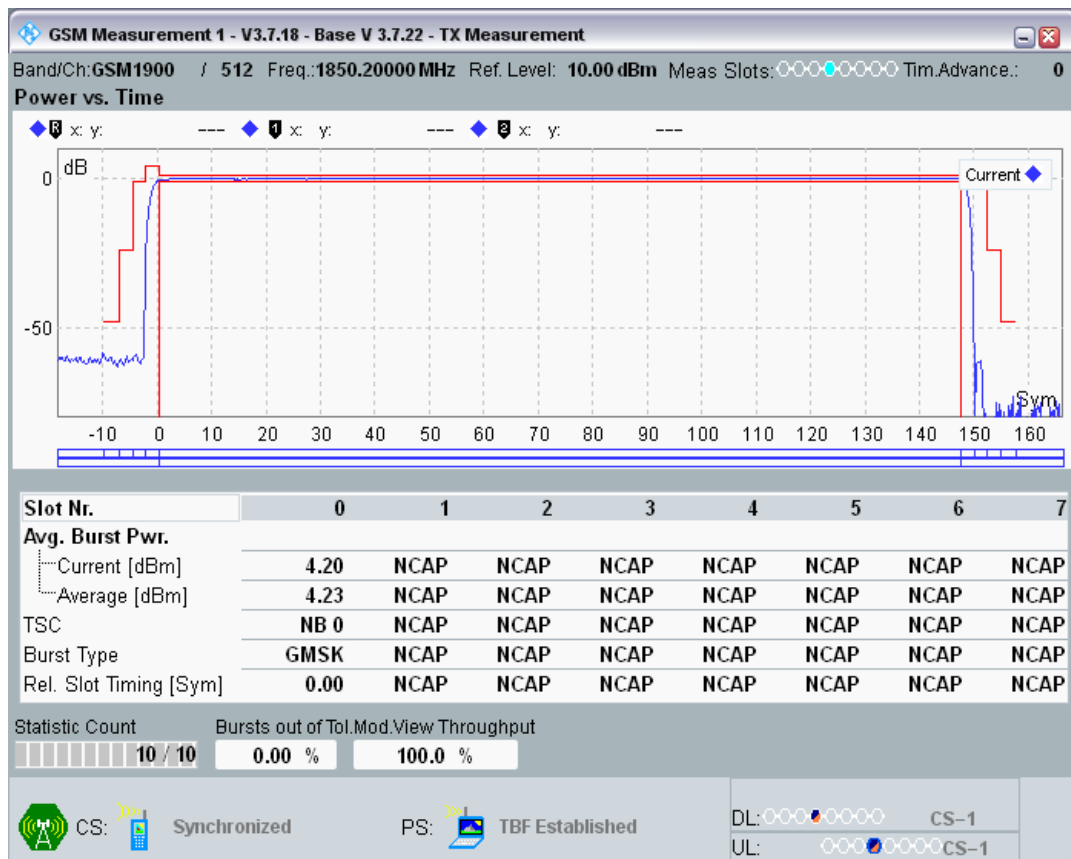


GPRS1900 Channel=512 Gamma=17;17;17;17



GPRS1900 Channel=512 Gamma=18;18;18;18

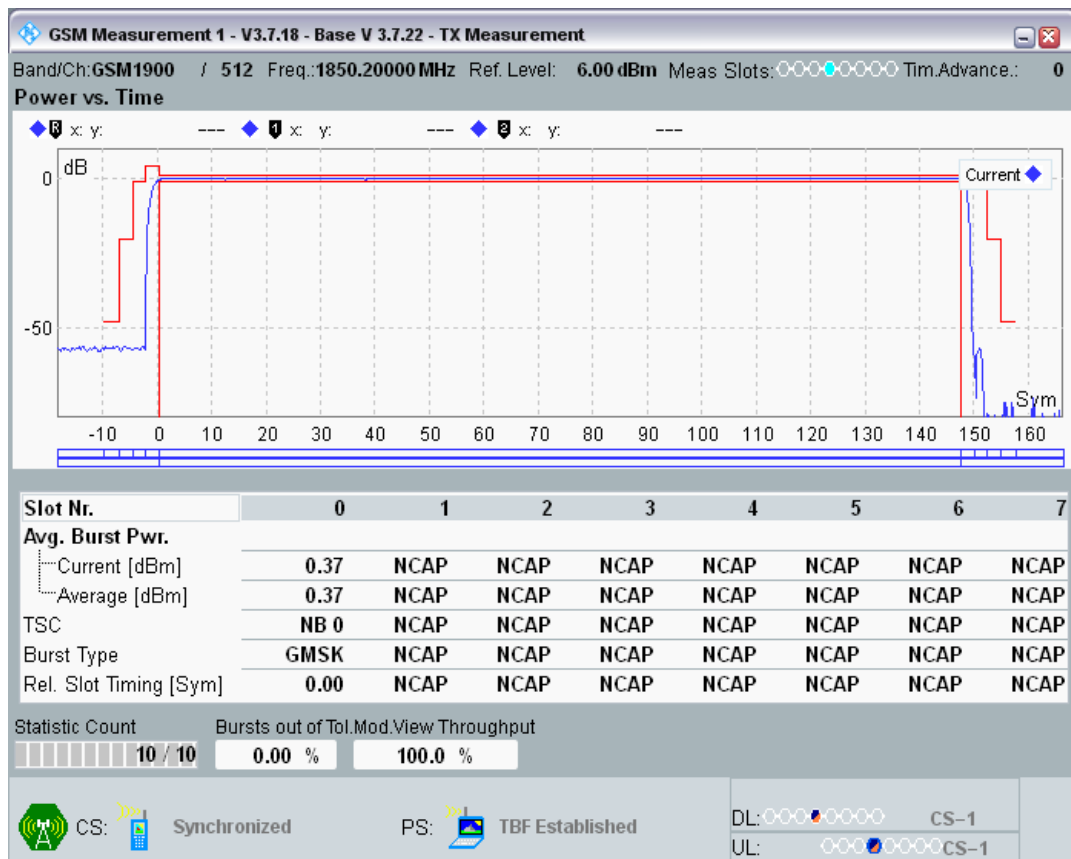


GPRS1900 Channel=661 Gamma=3;3;3;3

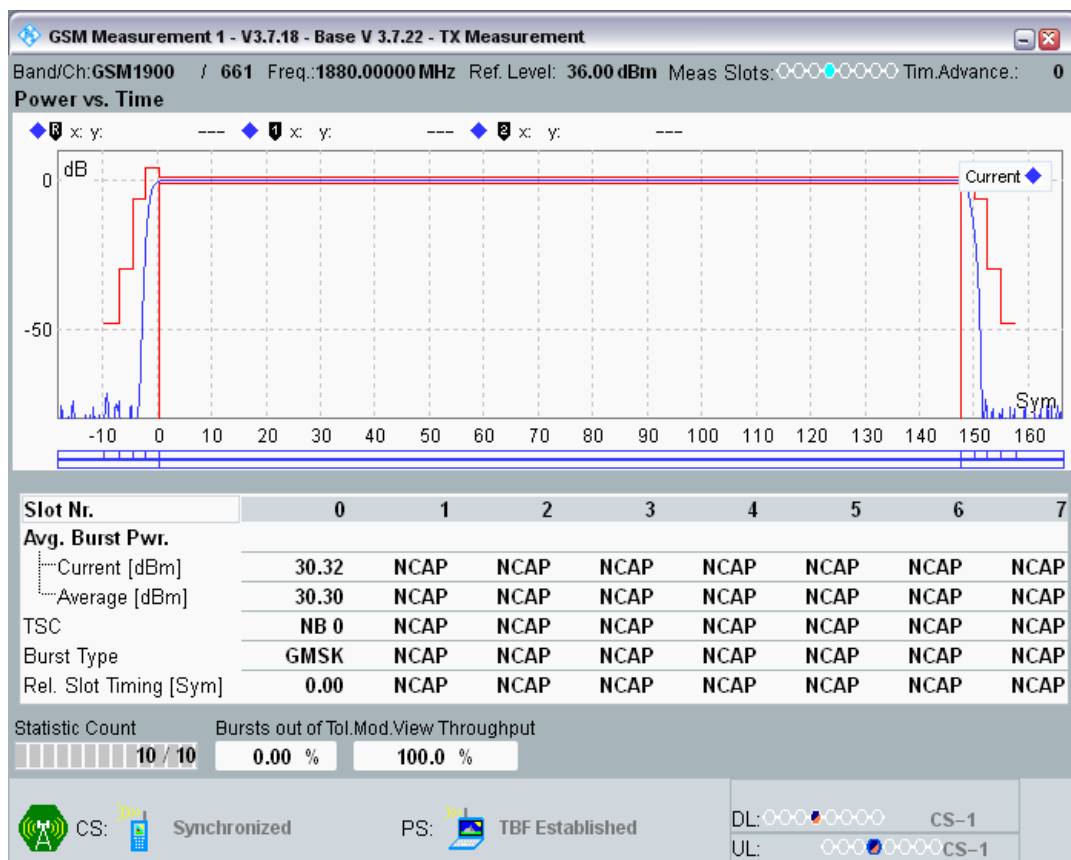

GPRS1900 Channel=661 Gamma=4;4;4;4



GPRS1900 Channel=661 Gamma=5;5;5;5

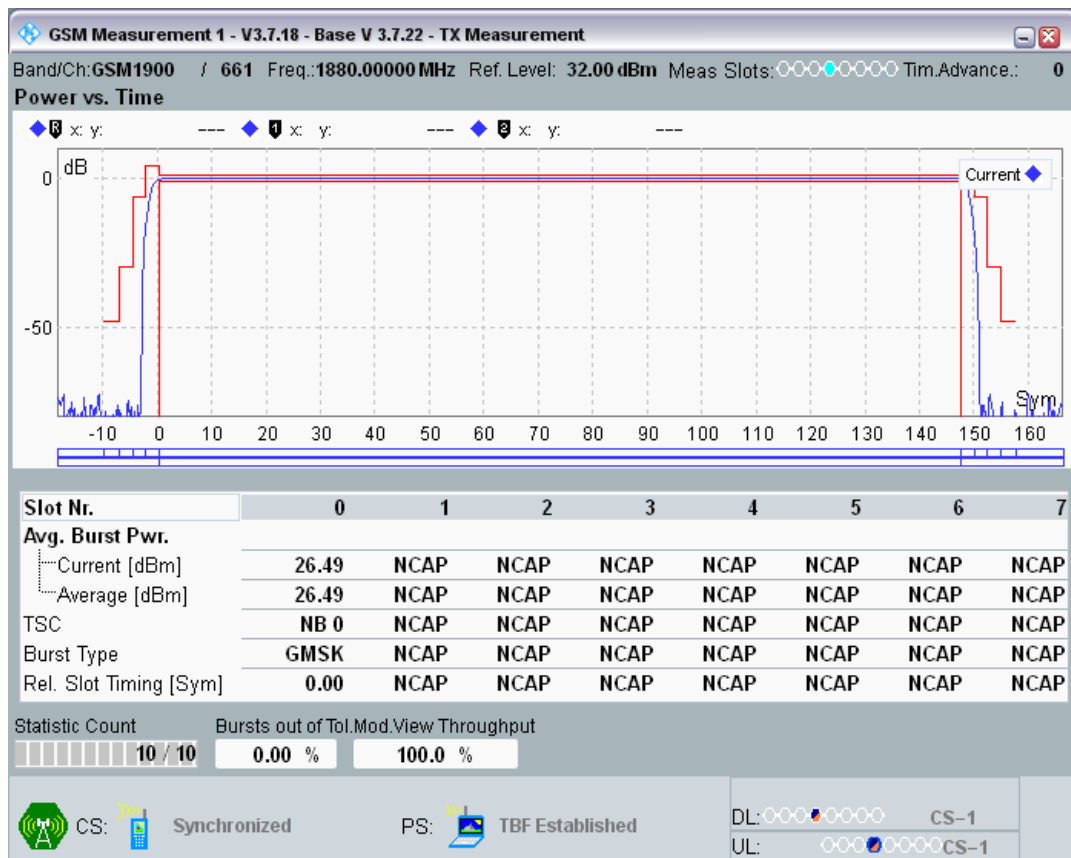

GPRS1900 Channel=661 Gamma=6;6;6;6




GPRS1900 Channel=661 Gamma=7;7;7;7



GPRS1900 Channel=661 Gamma=8;8;8;8




GPRS1900 Channel=661 Gamma=9;9;9;9

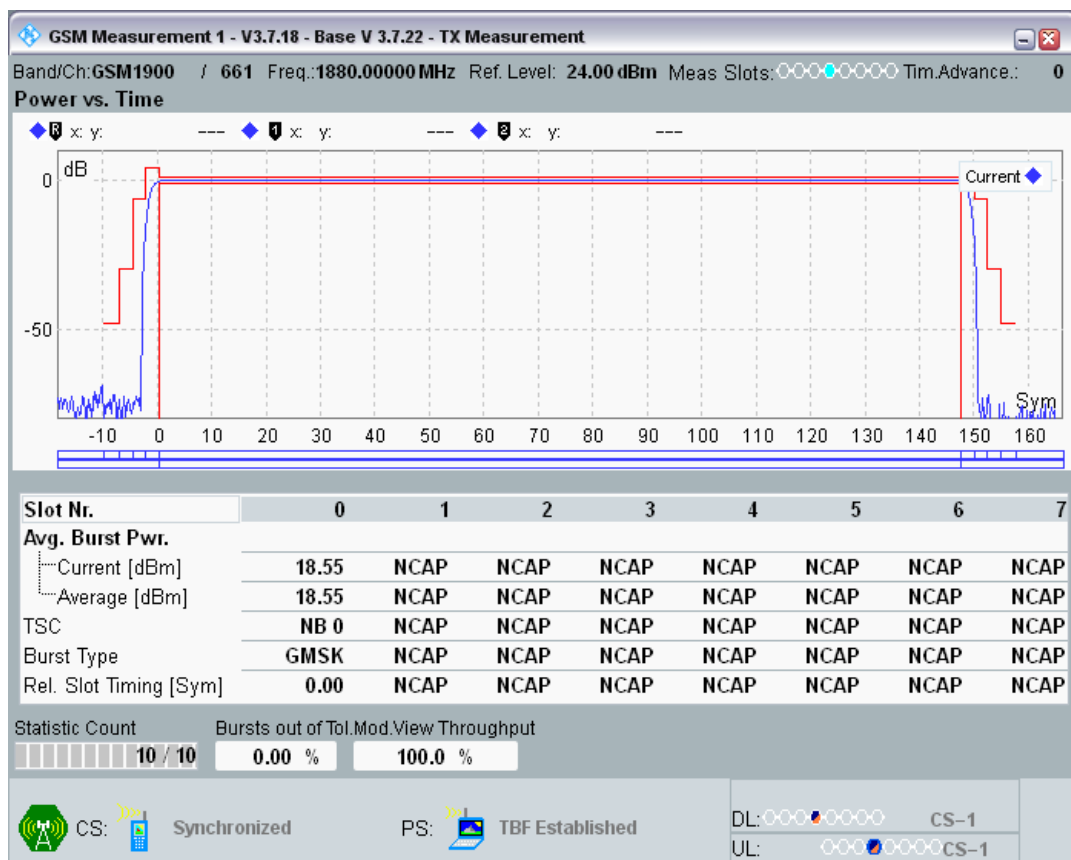


GPRS1900 Channel=661 Gamma=10;10;10;10




GPRS1900 Channel=661 Gamma=11;11;11;11

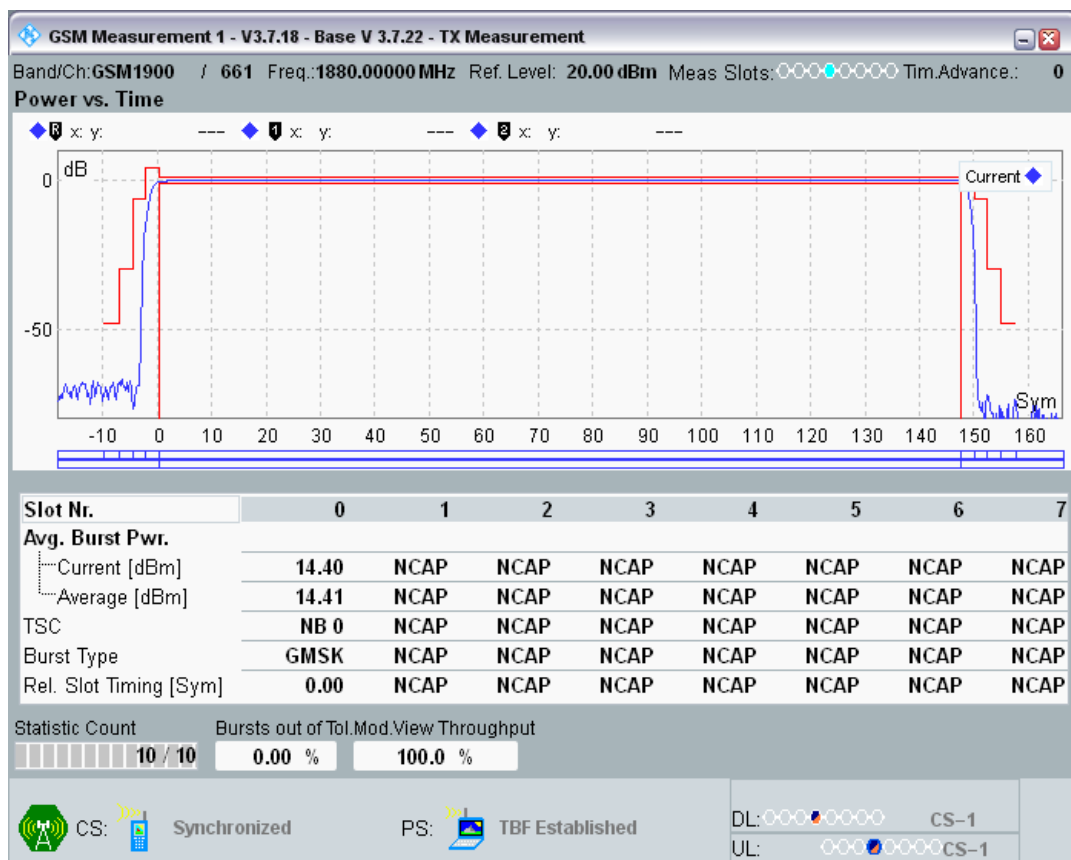


GPRS1900 Channel=661 Gamma=12;12;12;12

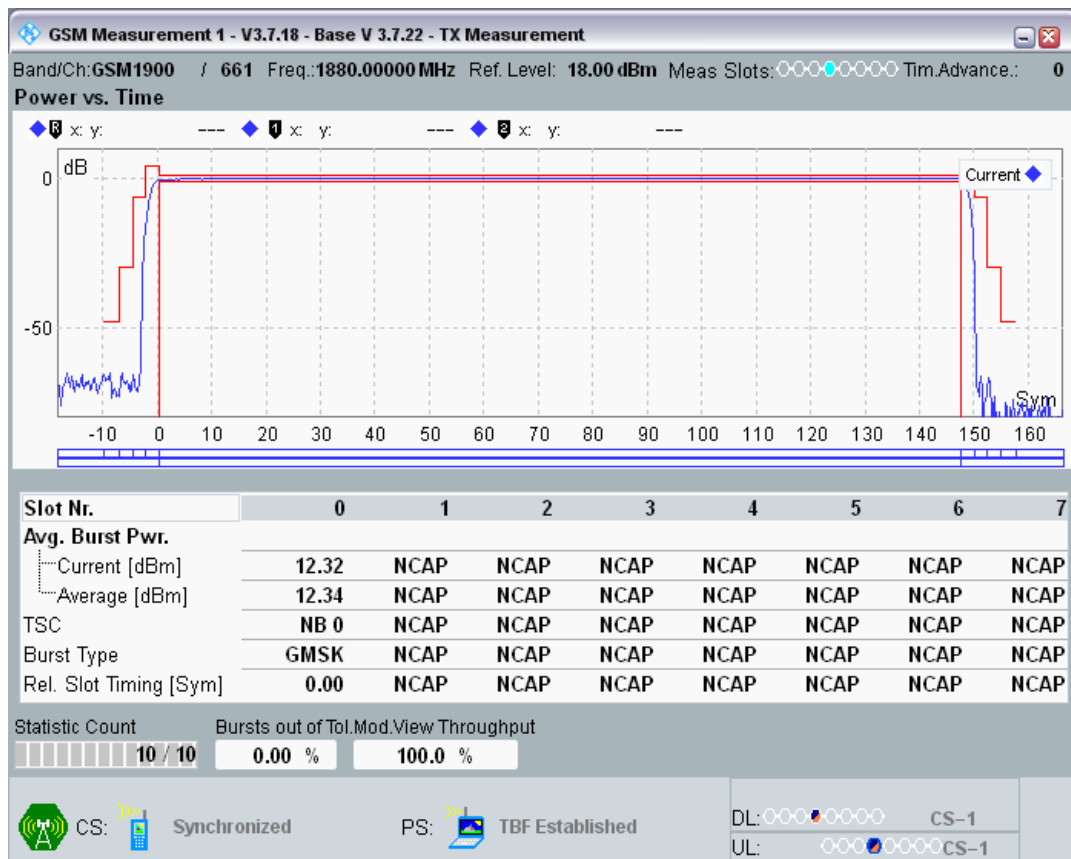


GPRS1900 Channel=661 Gamma=13;13;13;13

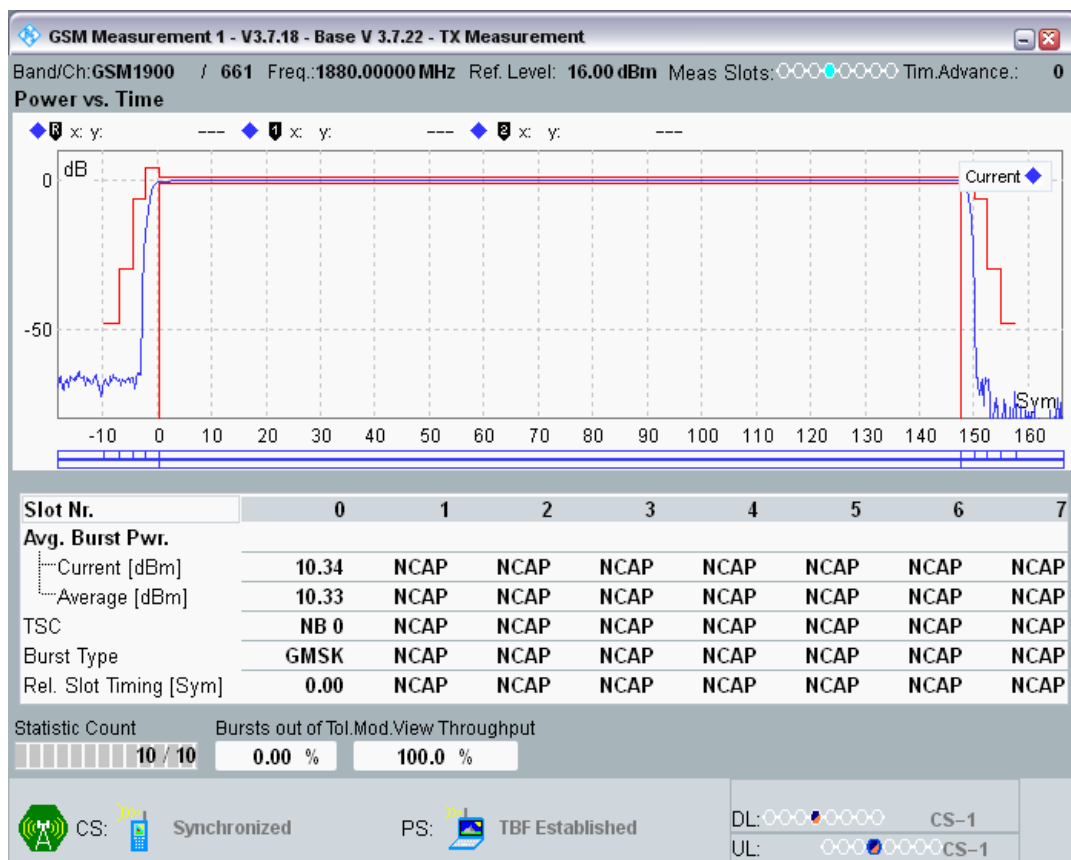


GPRS1900 Channel=661 Gamma=14;14;14;14

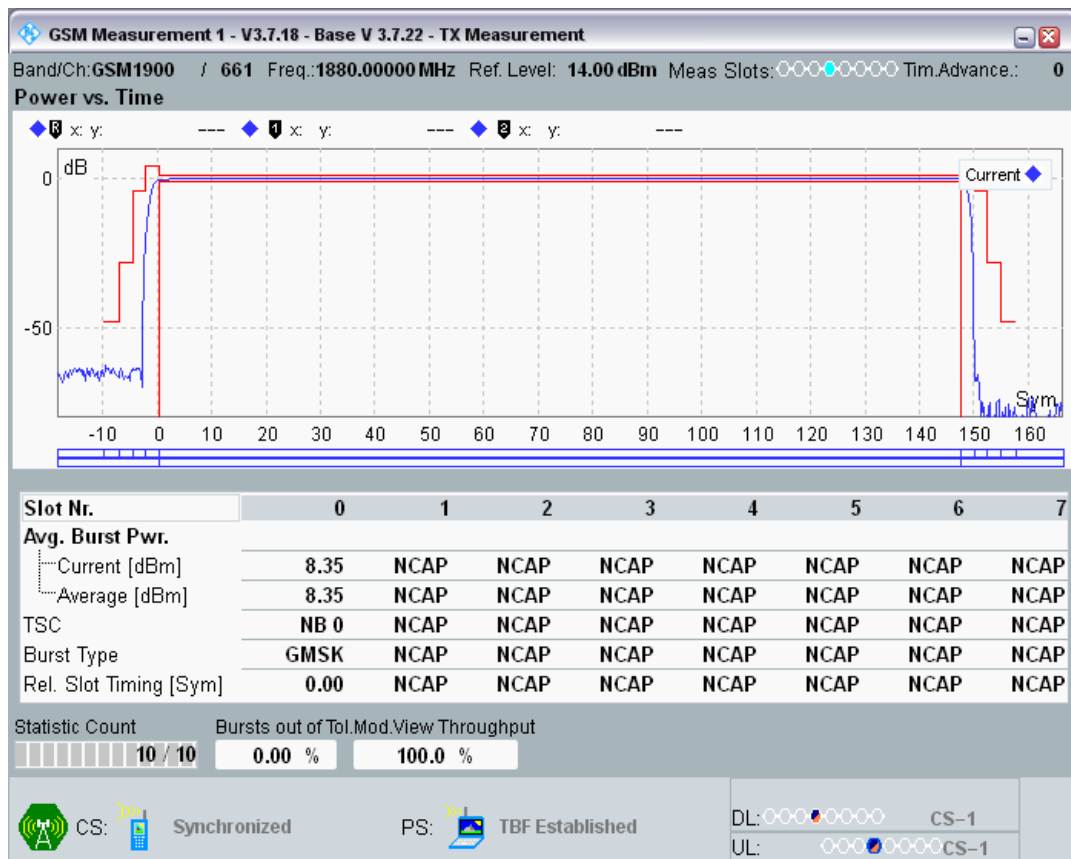

GPRS1900 Channel=661 Gamma=15;15;15;15

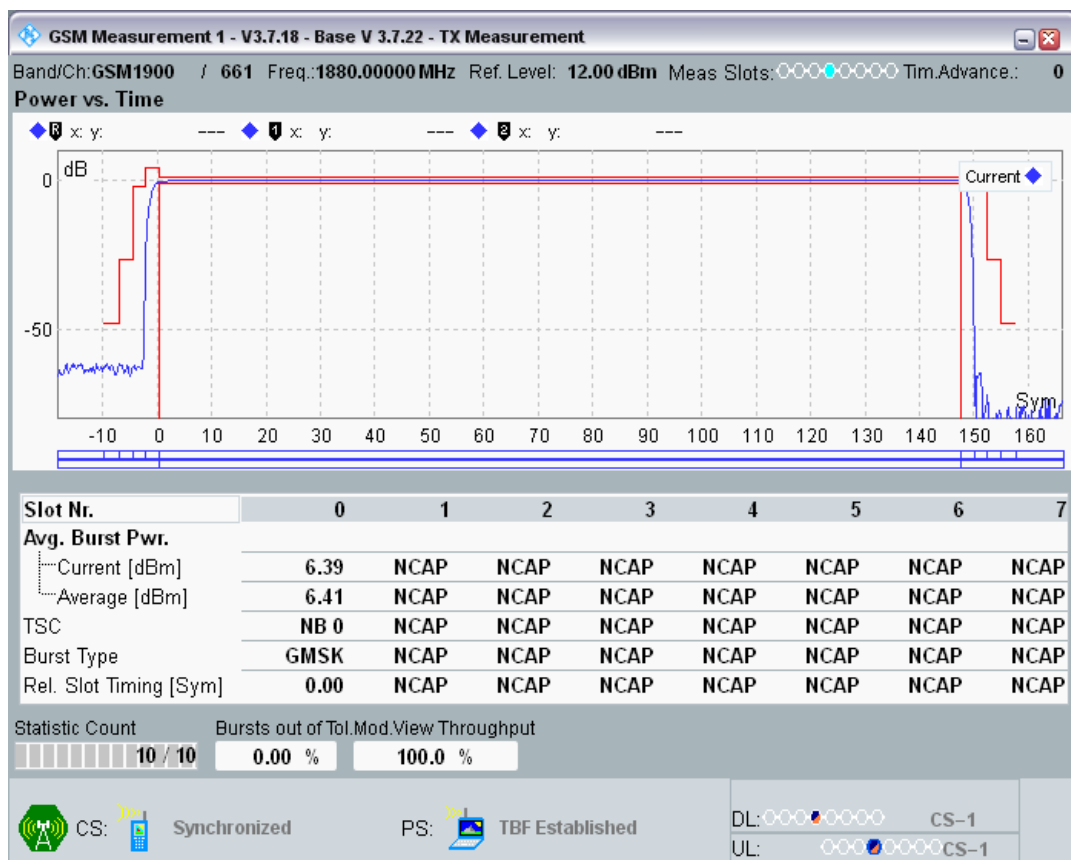


GPRS1900 Channel=661 Gamma=16;16;16;16

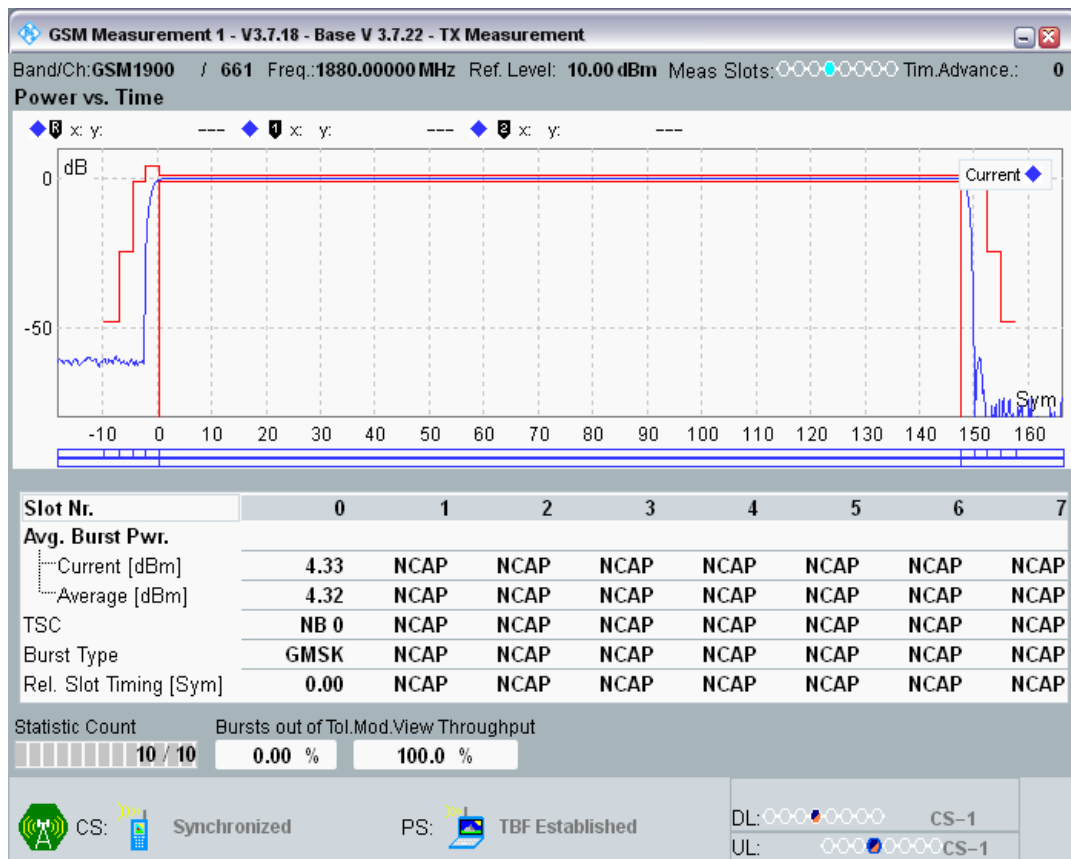


GPRS1900 Channel=661 Gamma=17;17;17;17




GPRS1900 Channel=661 Gamma=18;18;18;18

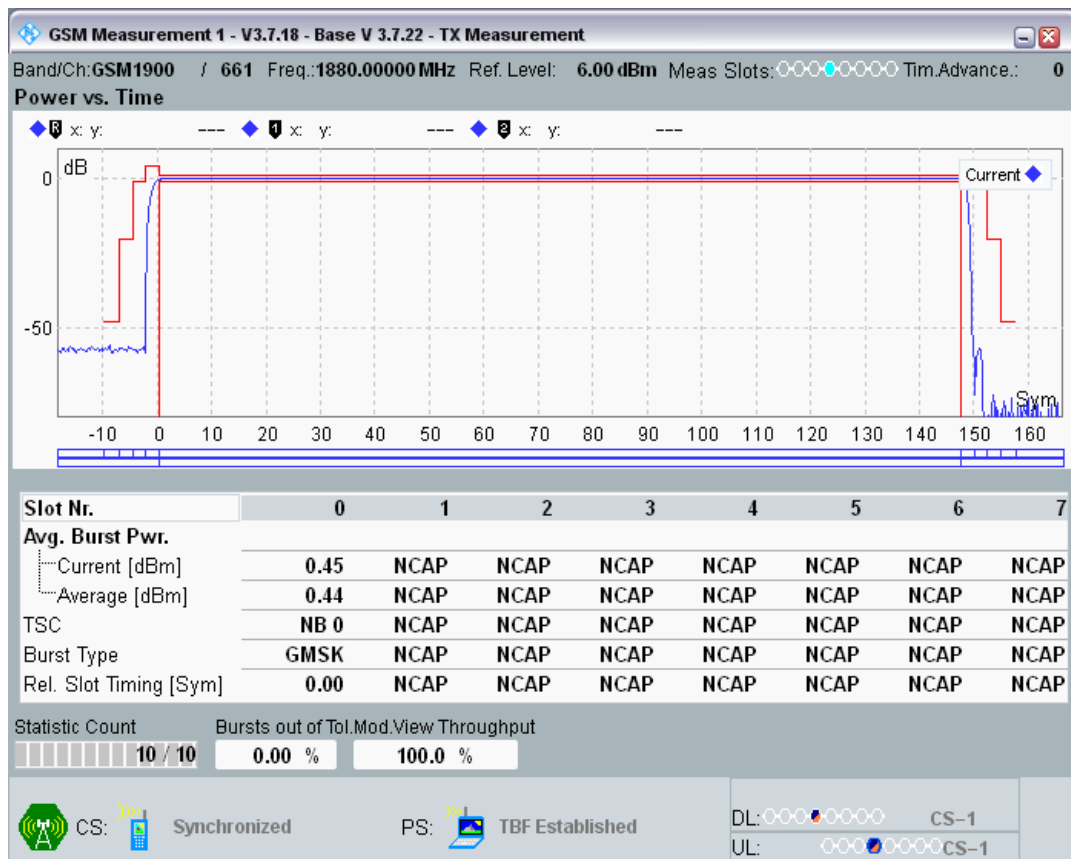


GPRS1900 Channel=810 Gamma=3;3;3;3

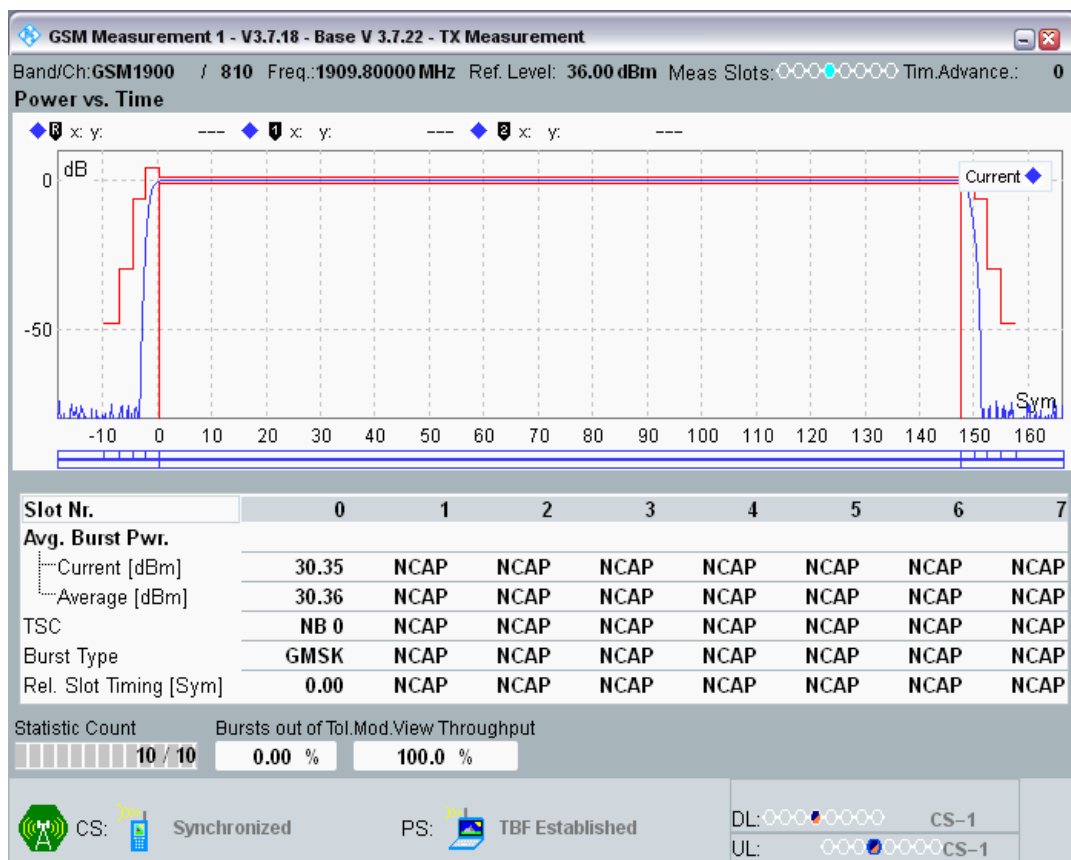


GPRS1900 Channel=810 Gamma=4;4;4;4

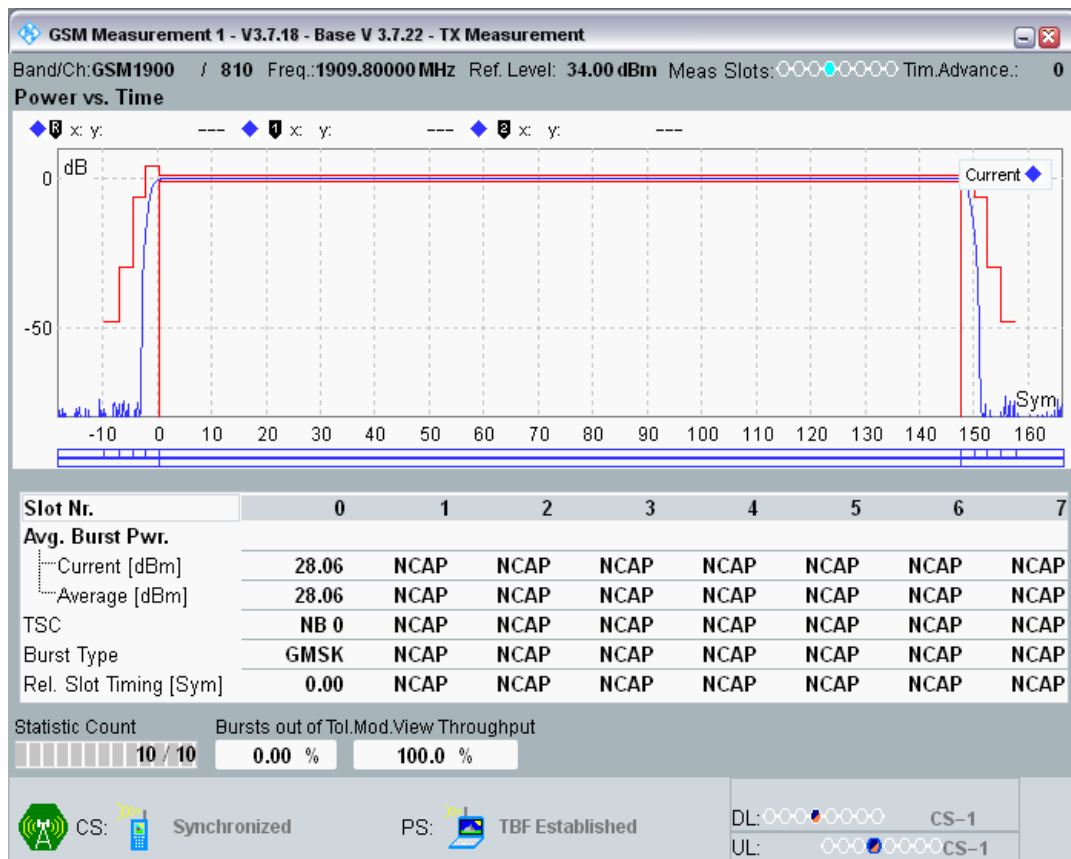


GPRS1900 Channel=810 Gamma=5;5;5;5

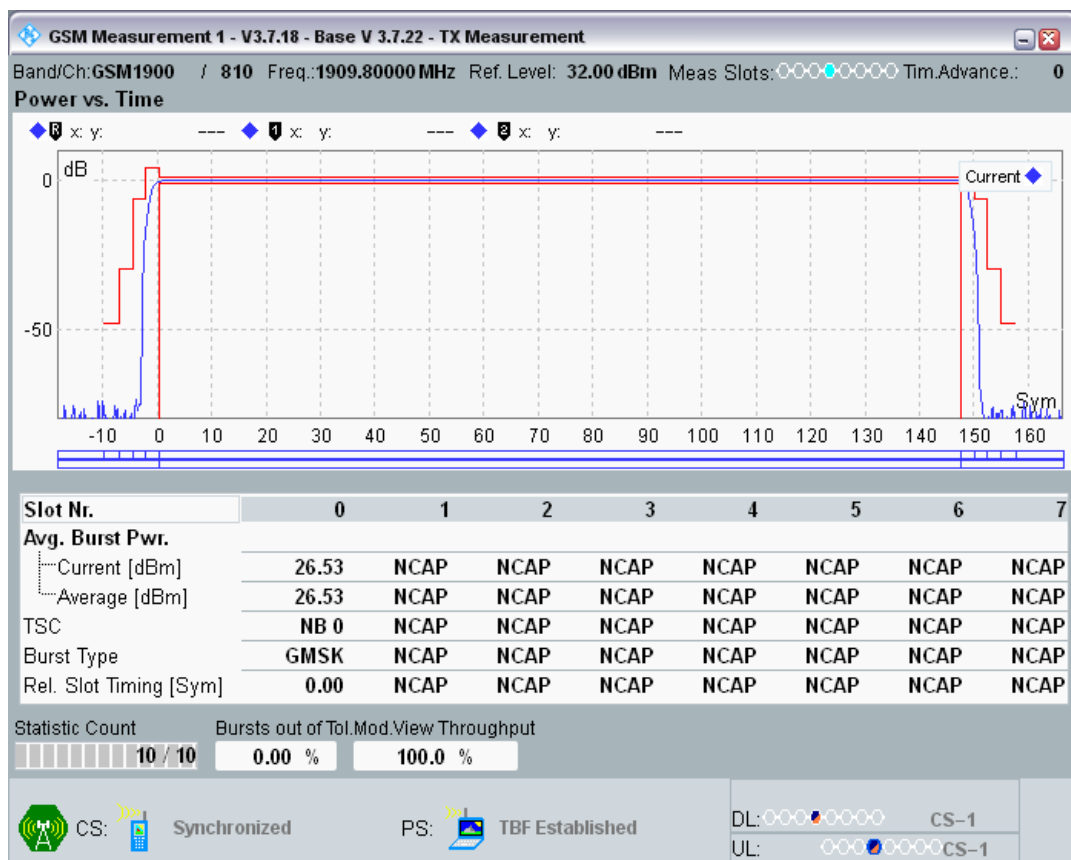

GPRS1900 Channel=810 Gamma=6;6;6;6

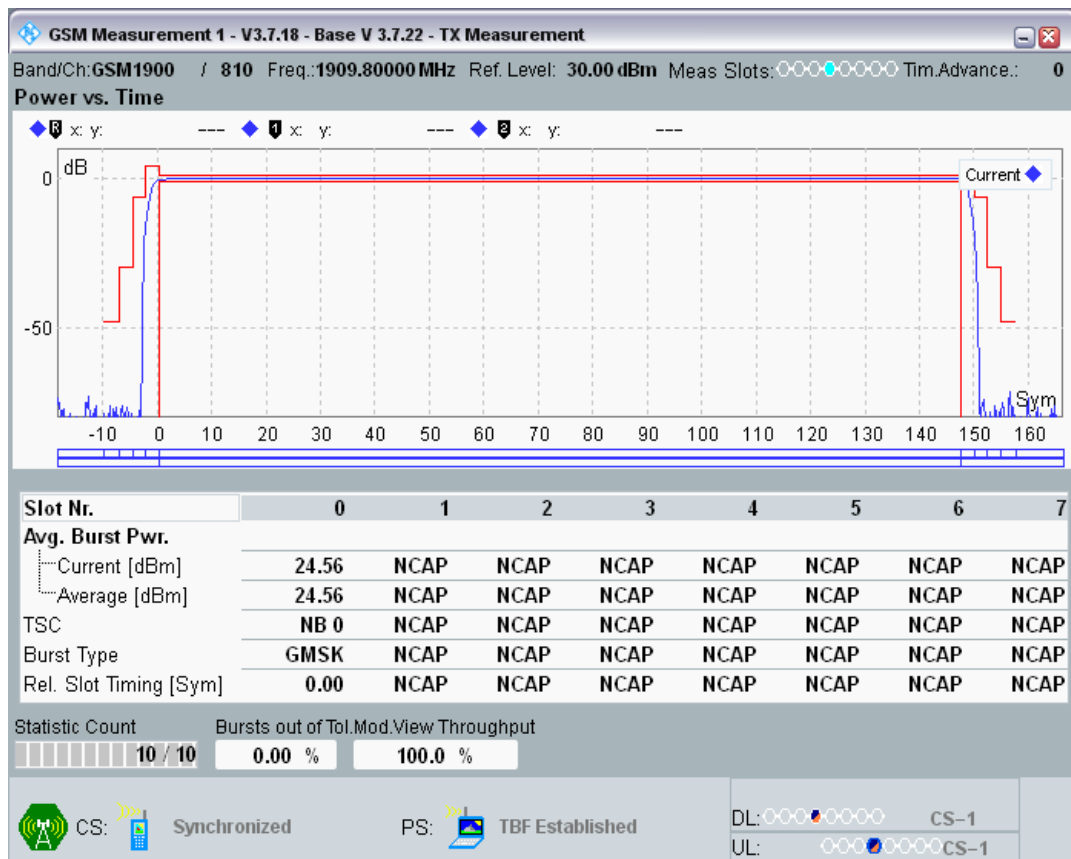


GPRS1900 Channel=810 Gamma=7;7;7;7

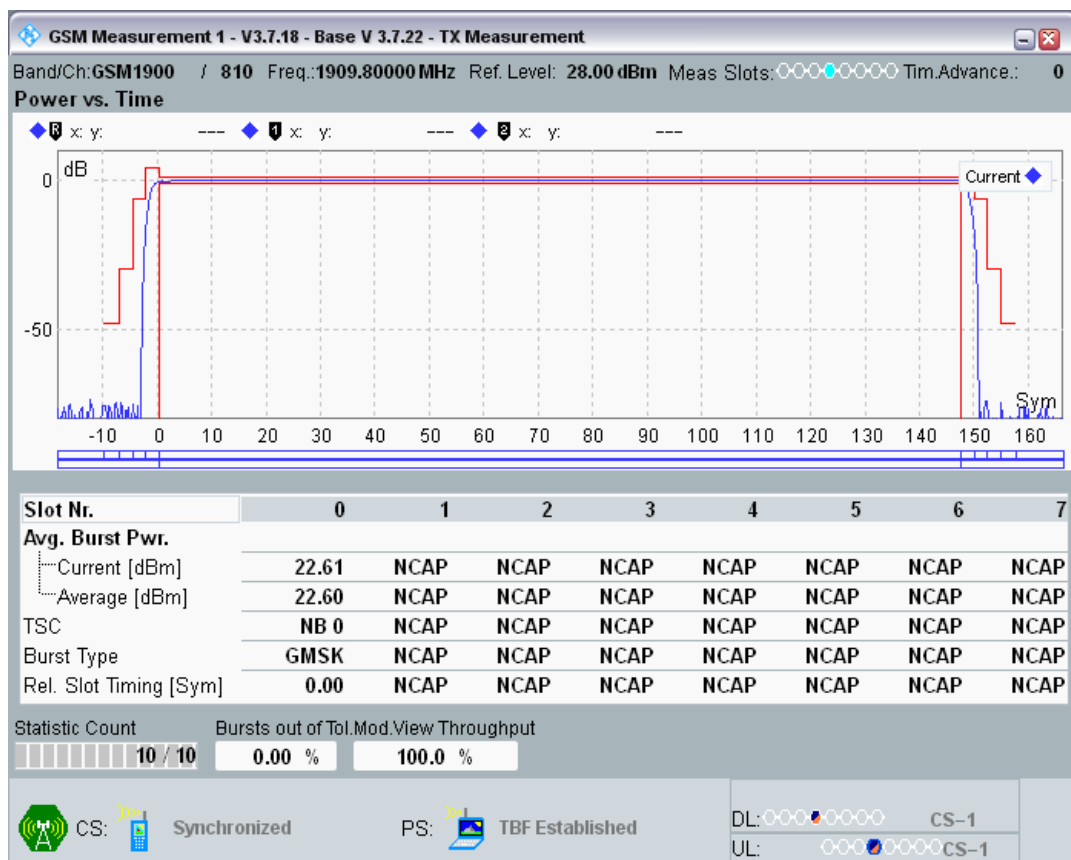


GPRS1900 Channel=810 Gamma=8;8;8;8



GPRS1900 Channel=810 Gamma=9;9;9;9

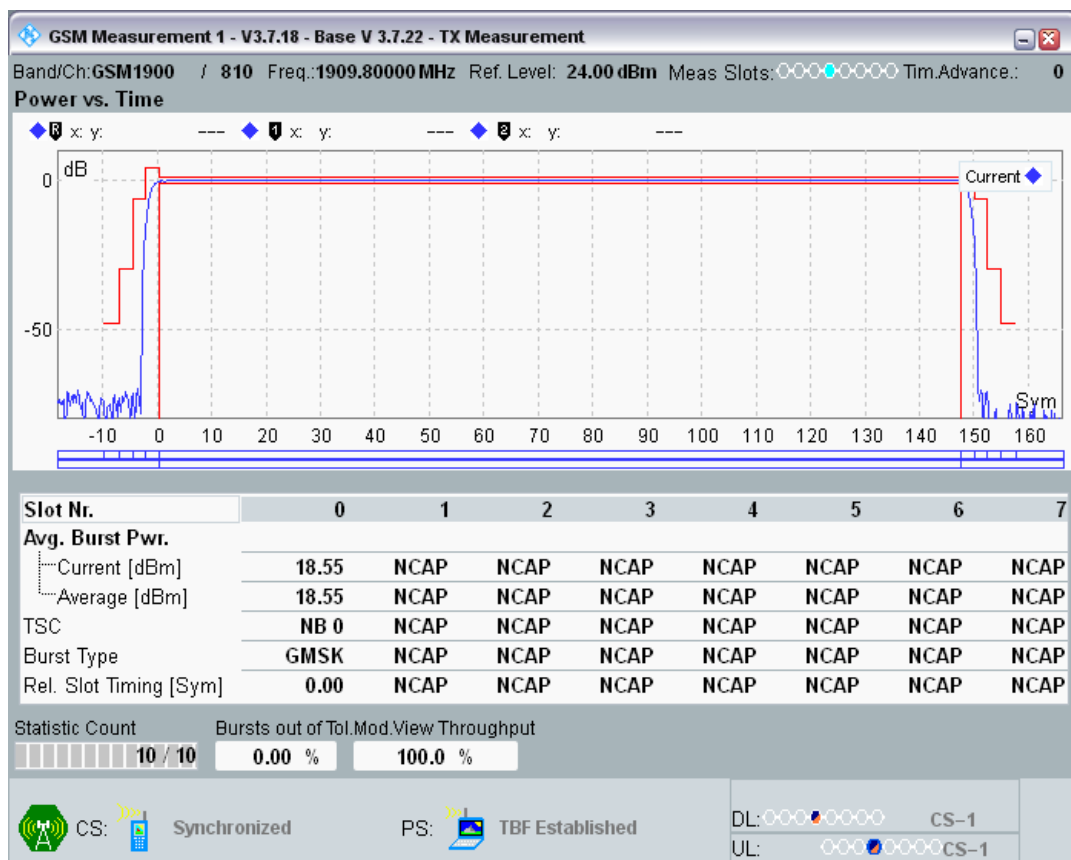


GPRS1900 Channel=810 Gamma=10;10;10;10

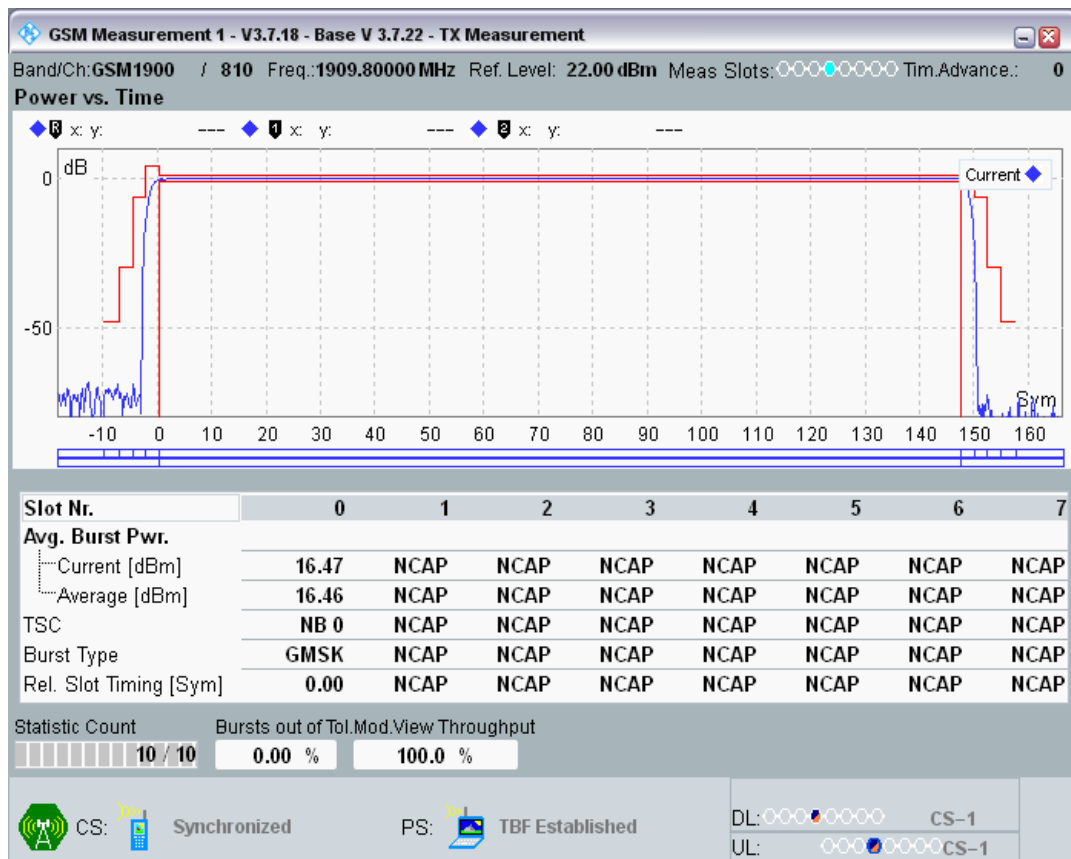


GPRS1900 Channel=810 Gamma=11;11;11;11




GPRS1900 Channel=810 Gamma=12;12;12;12

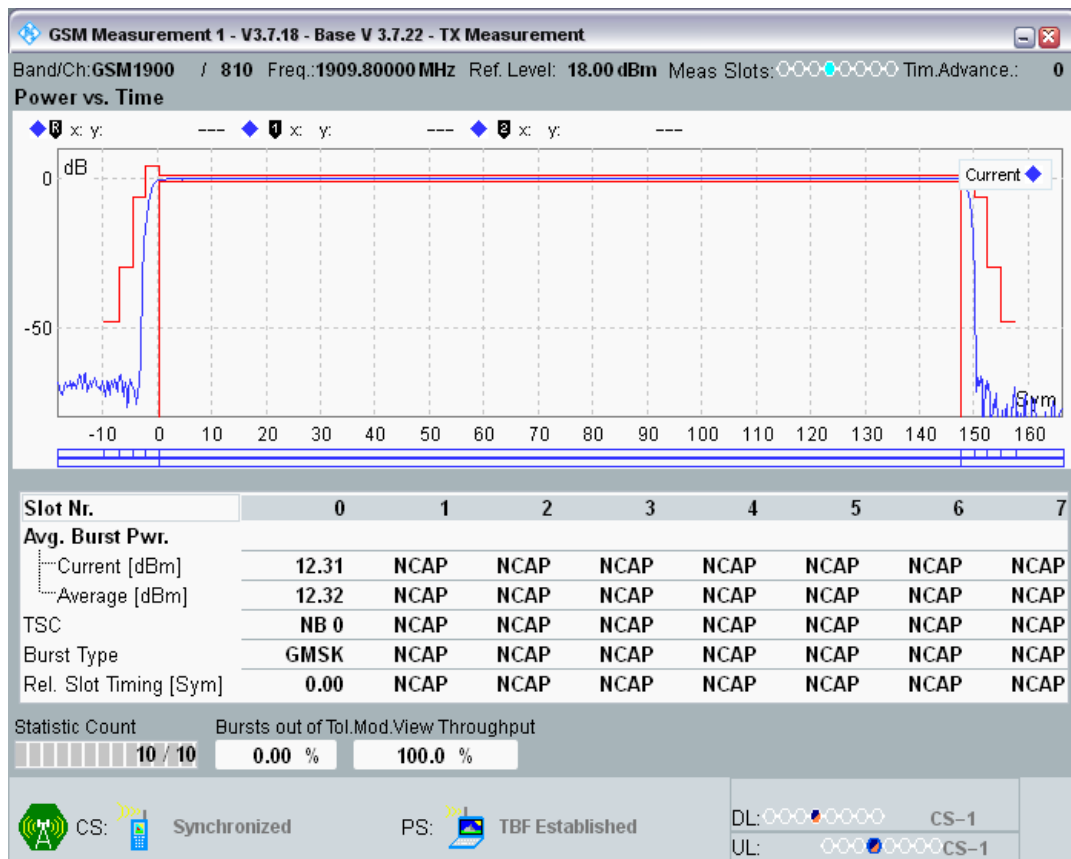


GPRS1900 Channel=810 Gamma=13;13;13;13

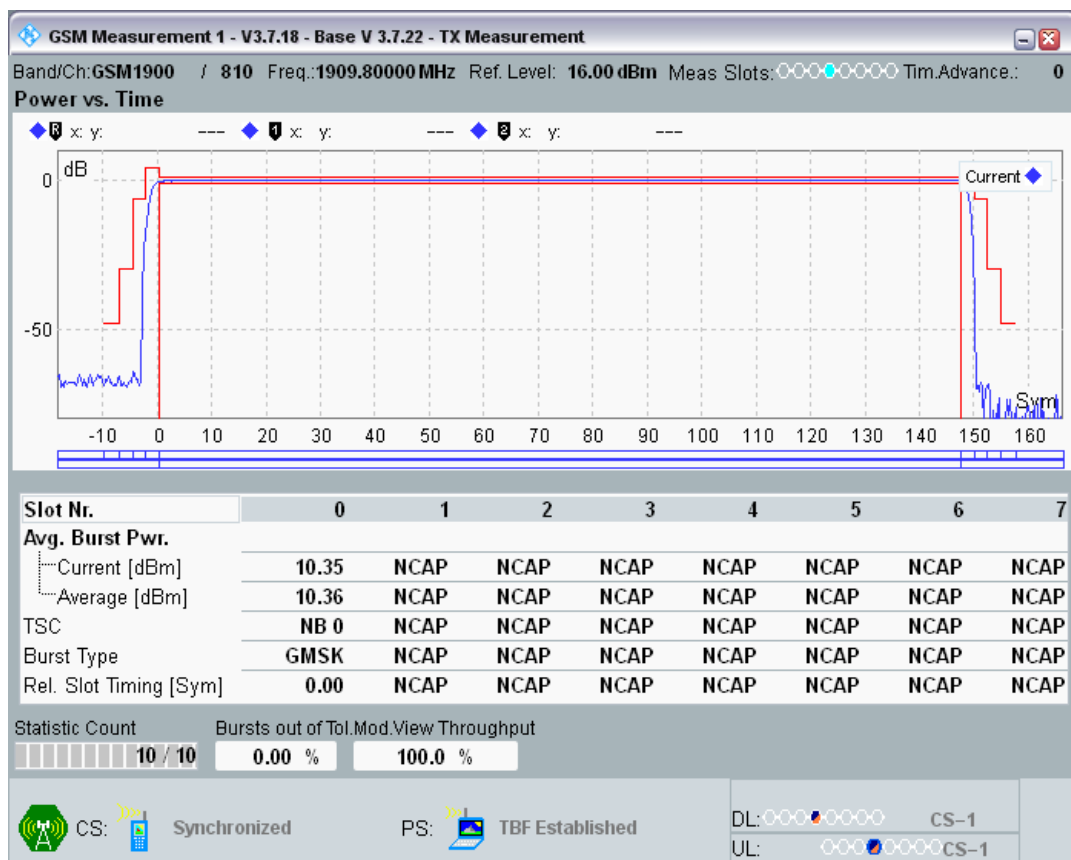


GPRS1900 Channel=810 Gamma=14;14;14;14

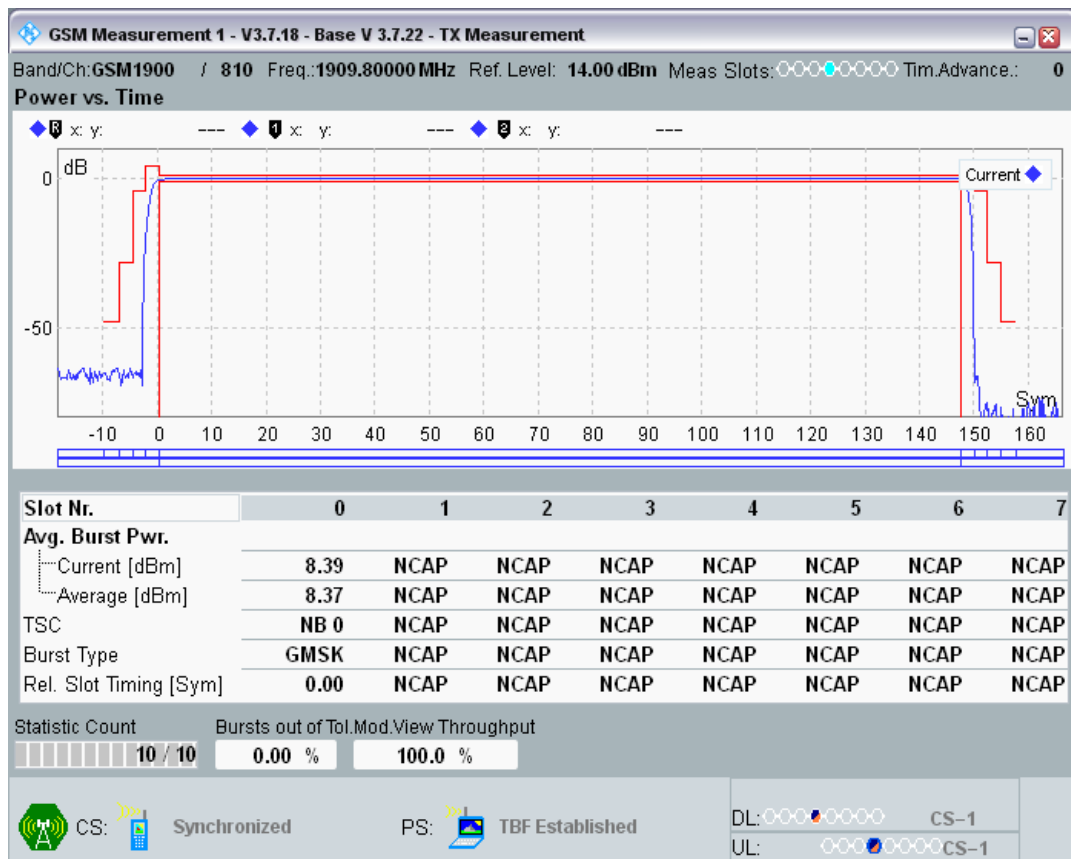


GPRS1900 Channel=810 Gamma=15;15;15;15

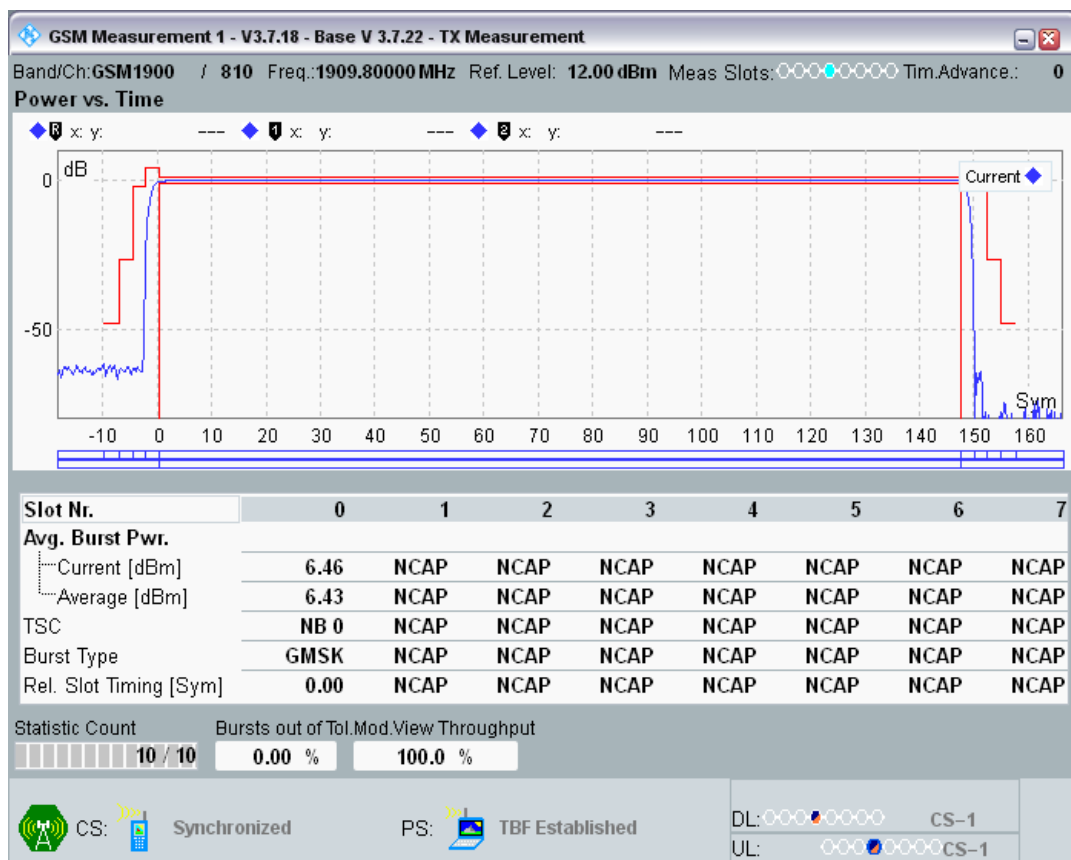


GPRS1900 Channel=810 Gamma=16;16;16;16

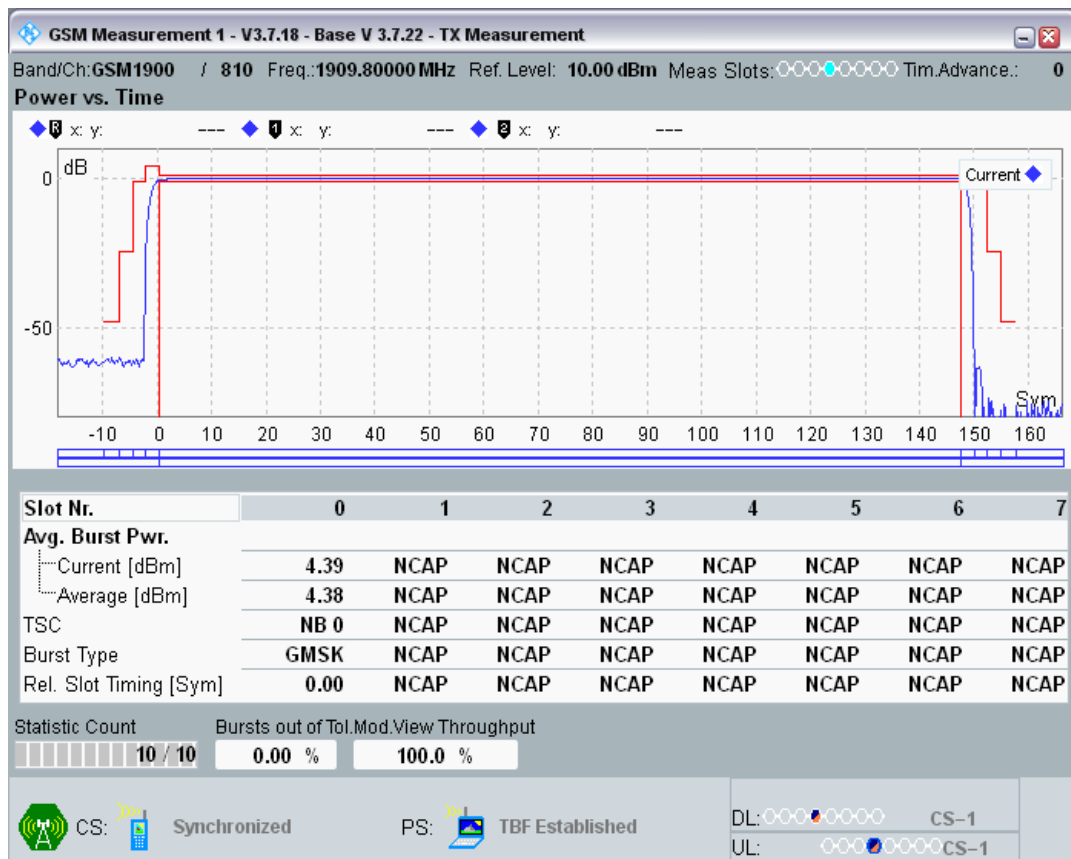


GPRS1900 Channel=810 Gamma=17;17;17;17

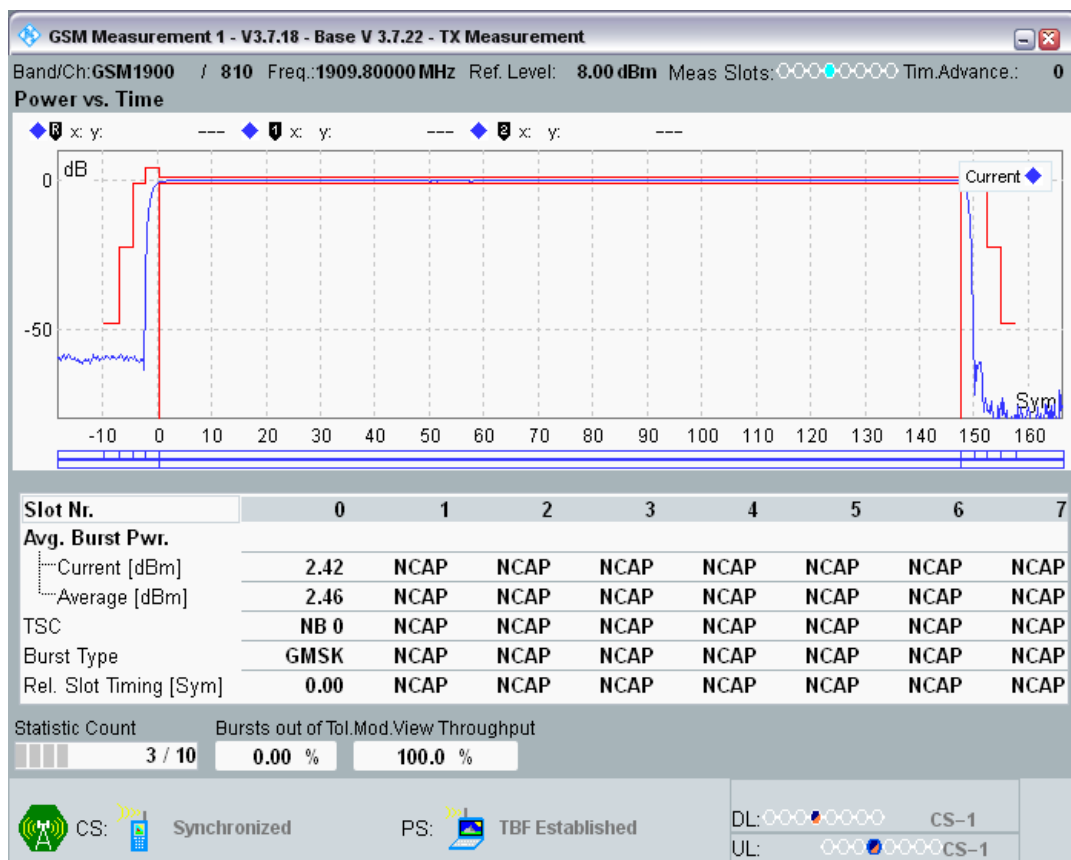

GPRS1900 Channel=810 Gamma=18;18;18;18

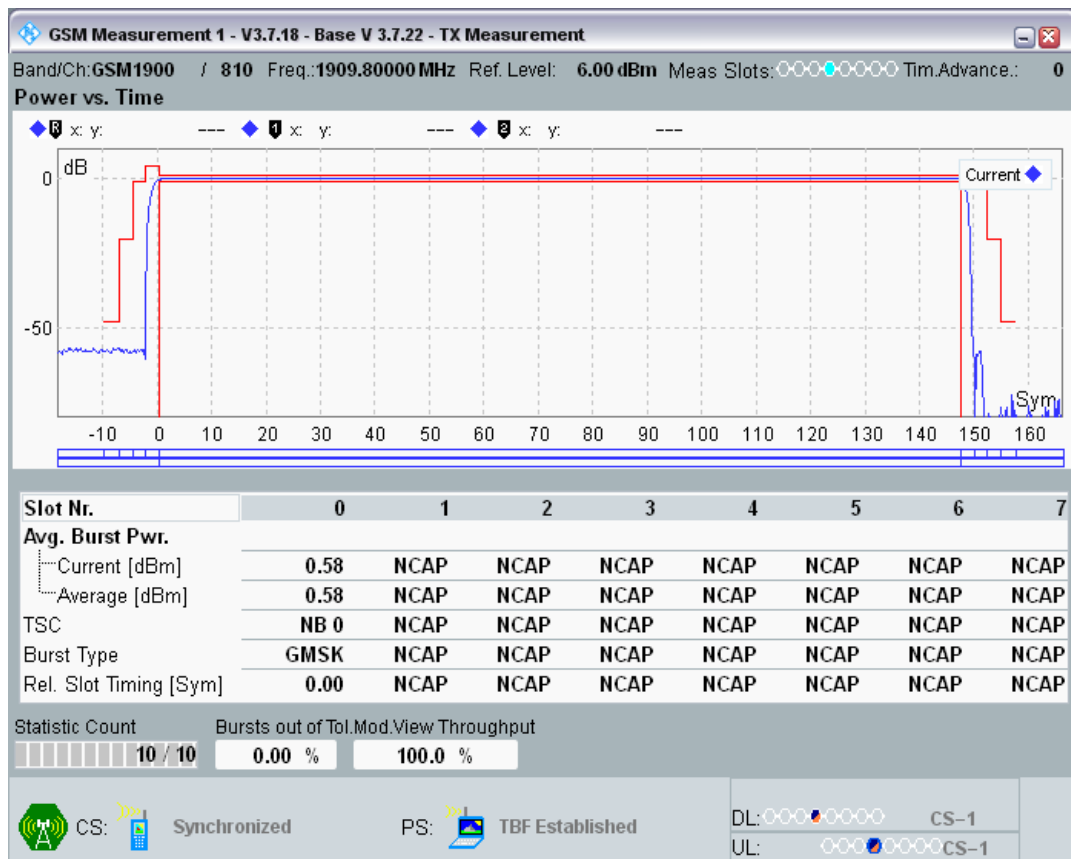

GPRS850 Channel=128 Gamma=3;3;3;3

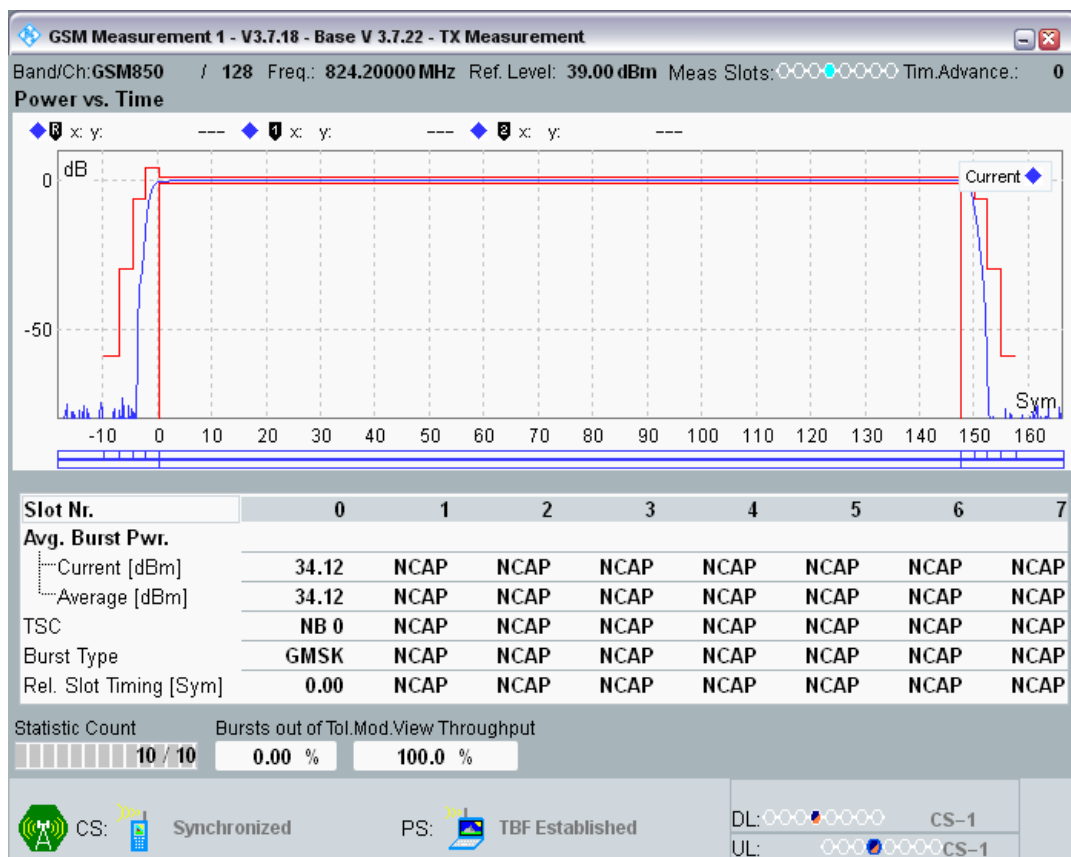

GPRS850 Channel=128 Gamma=4;4;4;4




GPRS850 Channel=128 Gamma=5;5;5;5



GPRS850 Channel=128 Gamma=6;6;6;6



GPRS850 Channel=128 Gamma=7;7;7;7

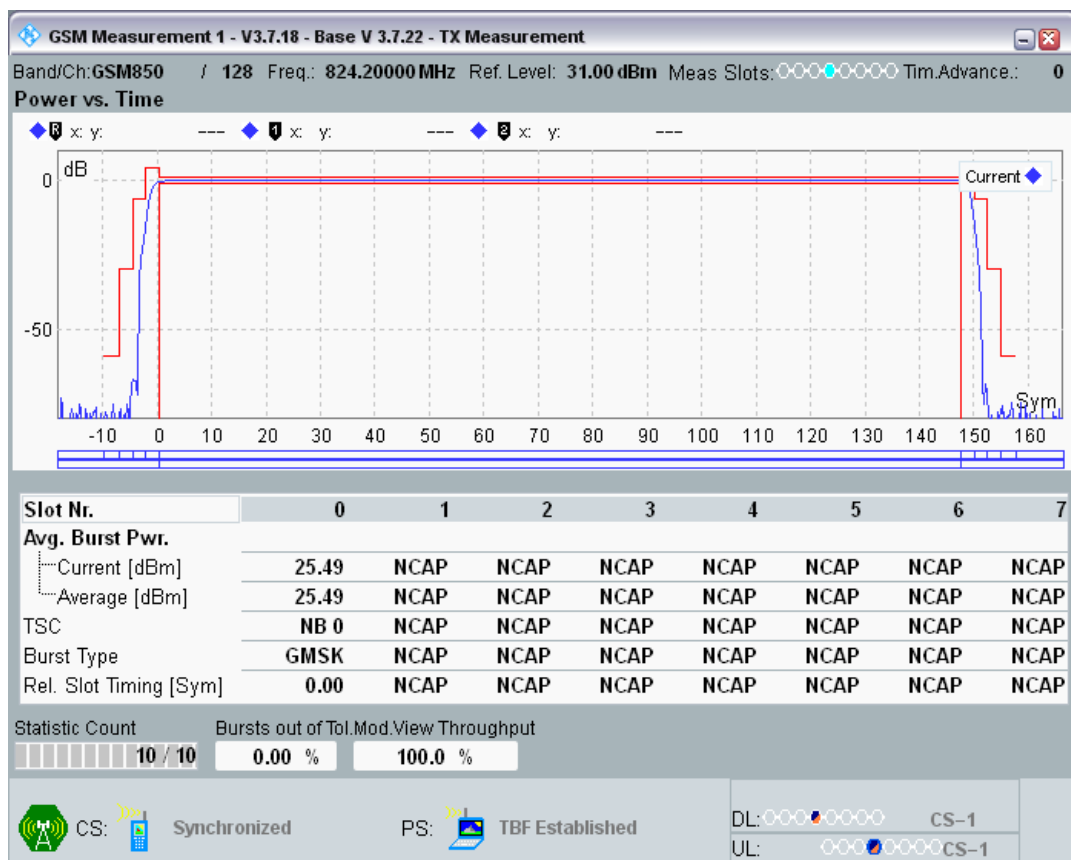

GPRS850 Channel=128 Gamma=8;8;8;8




GPRS850 Channel=128 Gamma=9;9;9;9




GPRS850 Channel=128 Gamma=10;10;10;10




GPRS850 Channel=128 Gamma=11;11;11;11

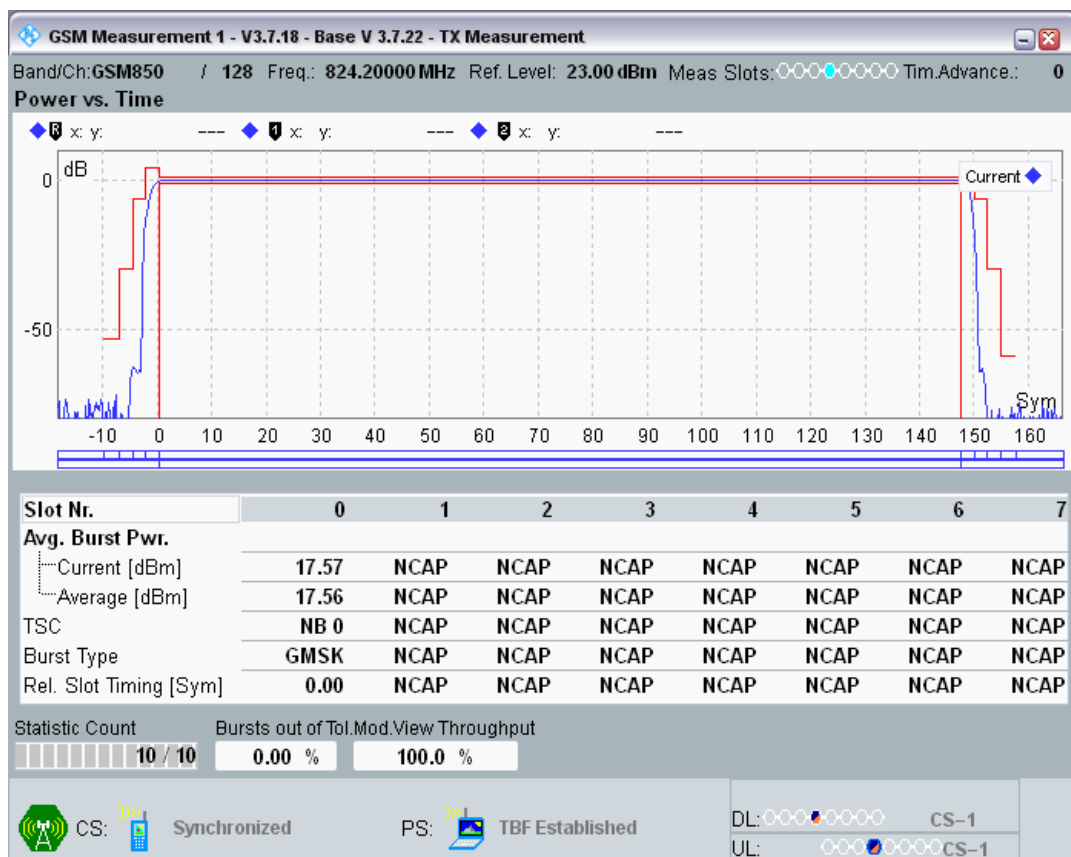

GPRS850 Channel=128 Gamma=12;12;12;12

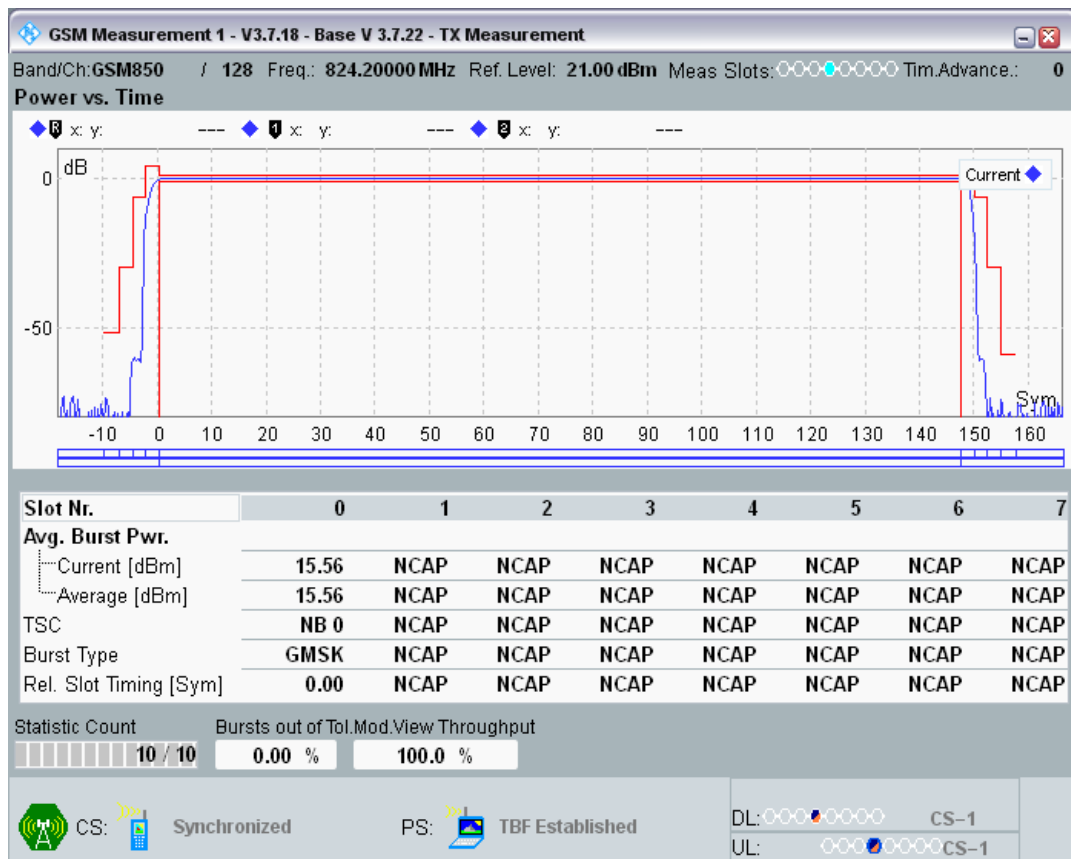

GPRS850 Channel=128 Gamma=13;13;13;13

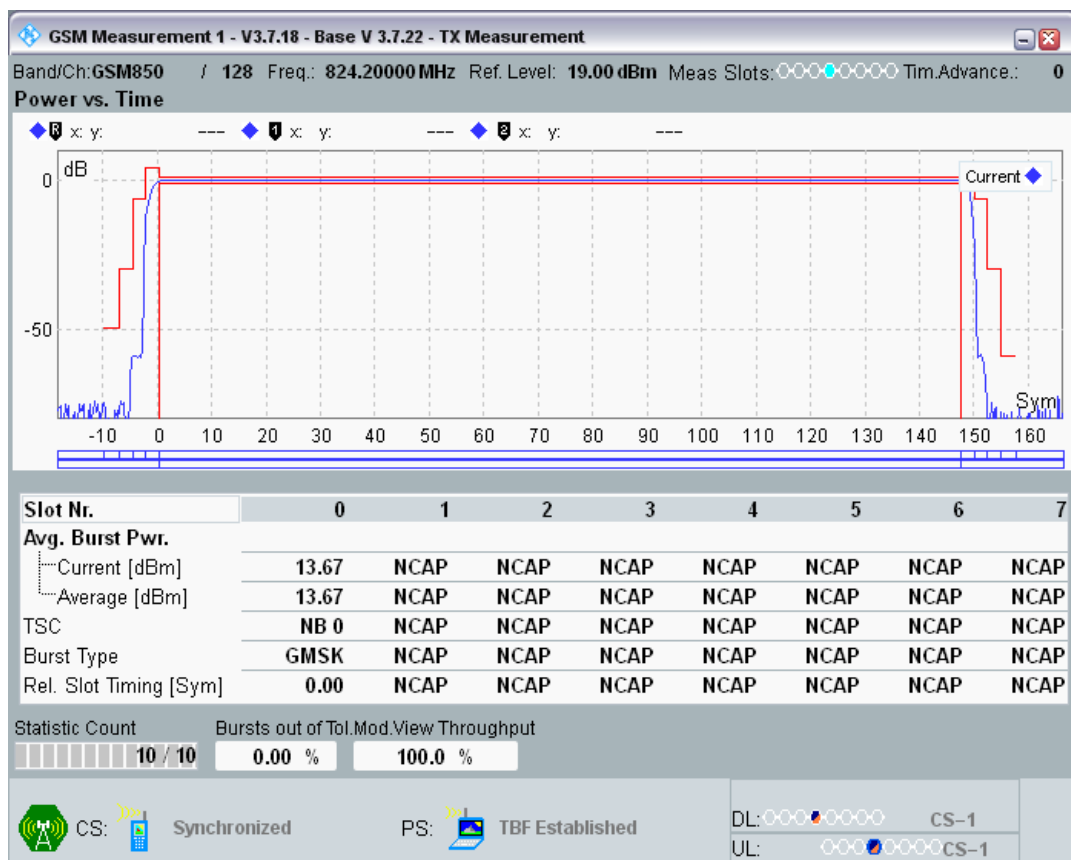

GPRS850 Channel=128 Gamma=14;14;14;14




GPRS850 Channel=128 Gamma=15;15;15;15



GPRS850 Channel=128 Gamma=16;16;16;16



GPRS850 Channel=128 Gamma=17;17;17;17

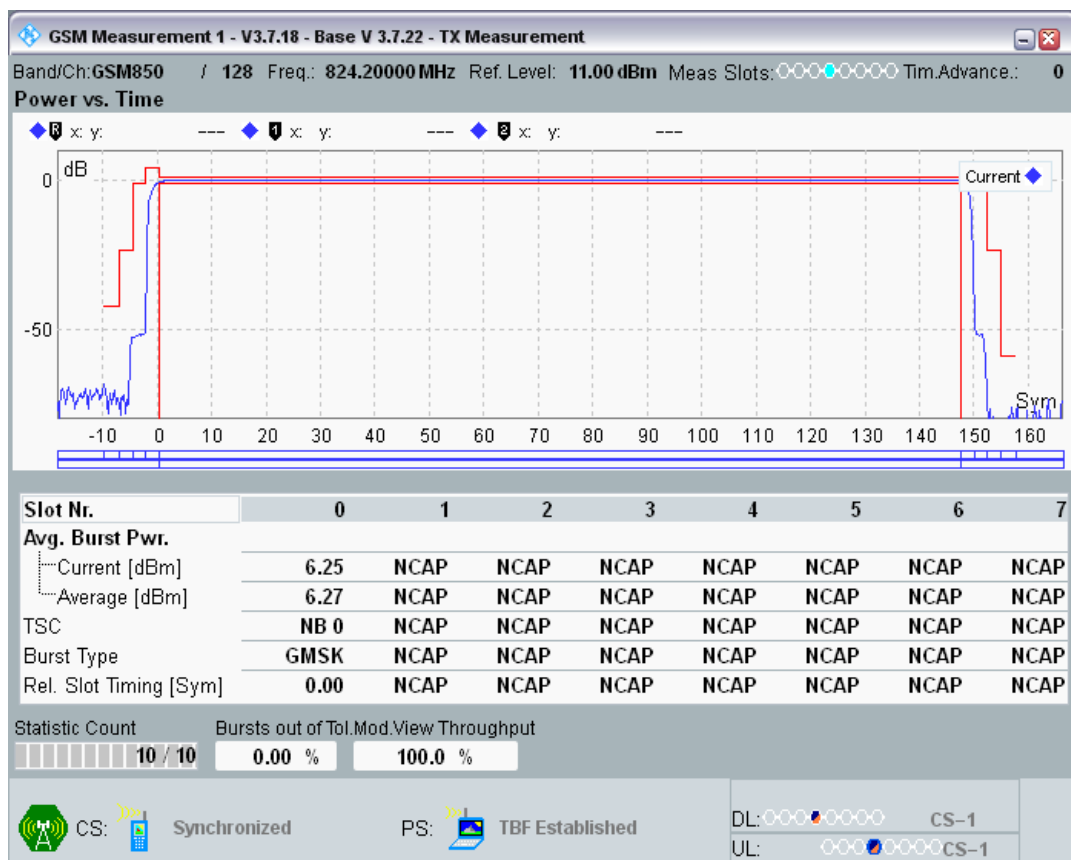

GPRS850 Channel=190 Gamma=3;3;3;3




GPRS850 Channel=190 Gamma=4;4;4;4




GPRS850 Channel=190 Gamma=5;5;5;5




GPRS850 Channel=190 Gamma=6;6;6;6

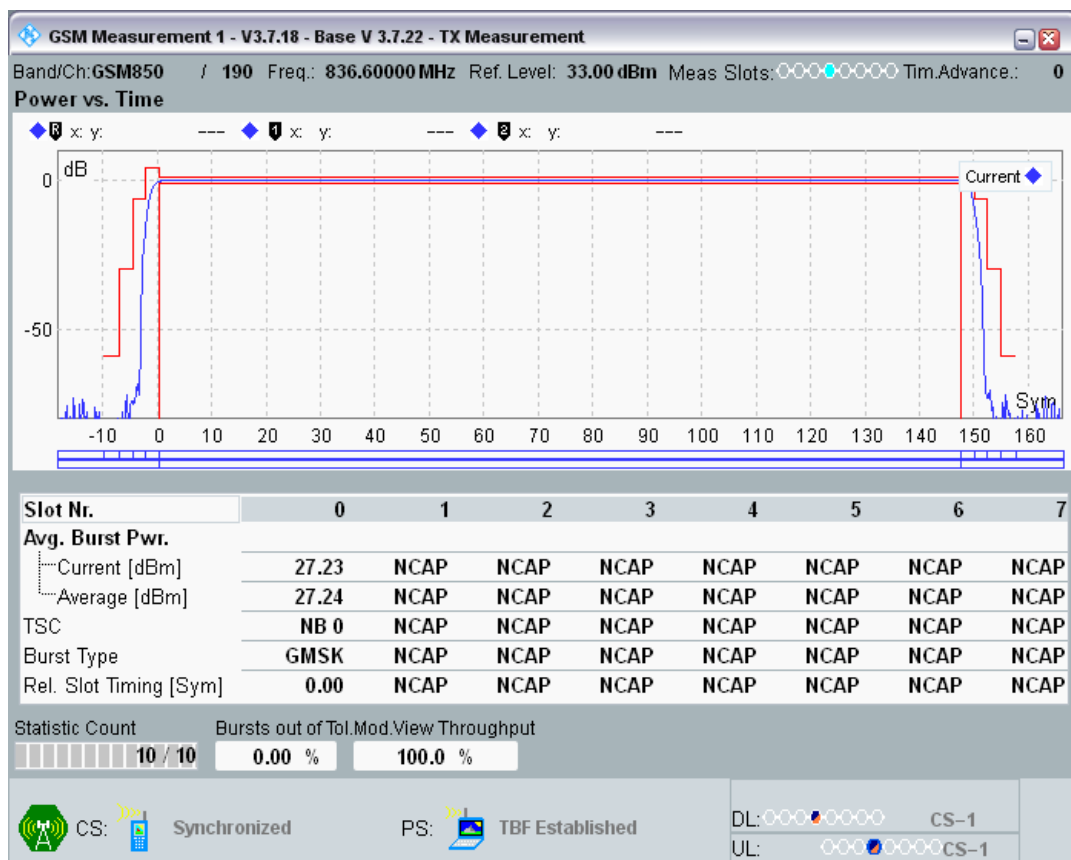

GPRS850 Channel=190 Gamma=7;7;7;7

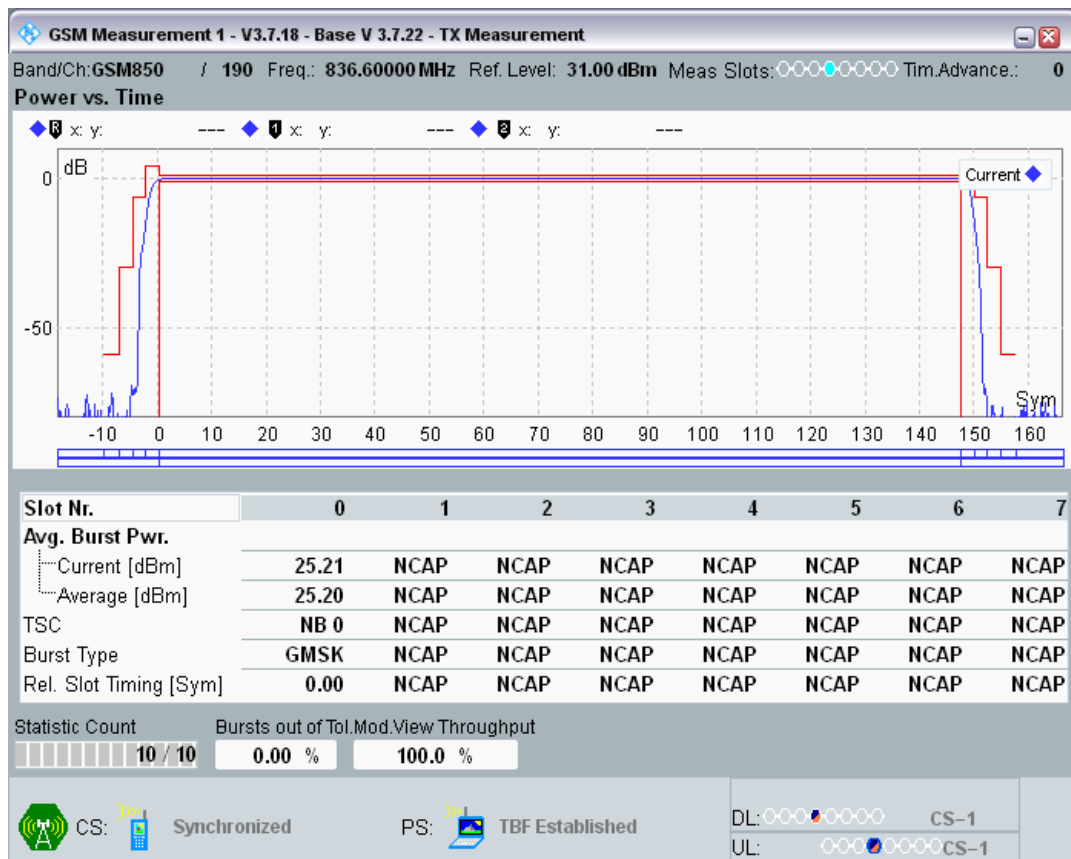


GPRS850 Channel=190 Gamma=8;8;8;8

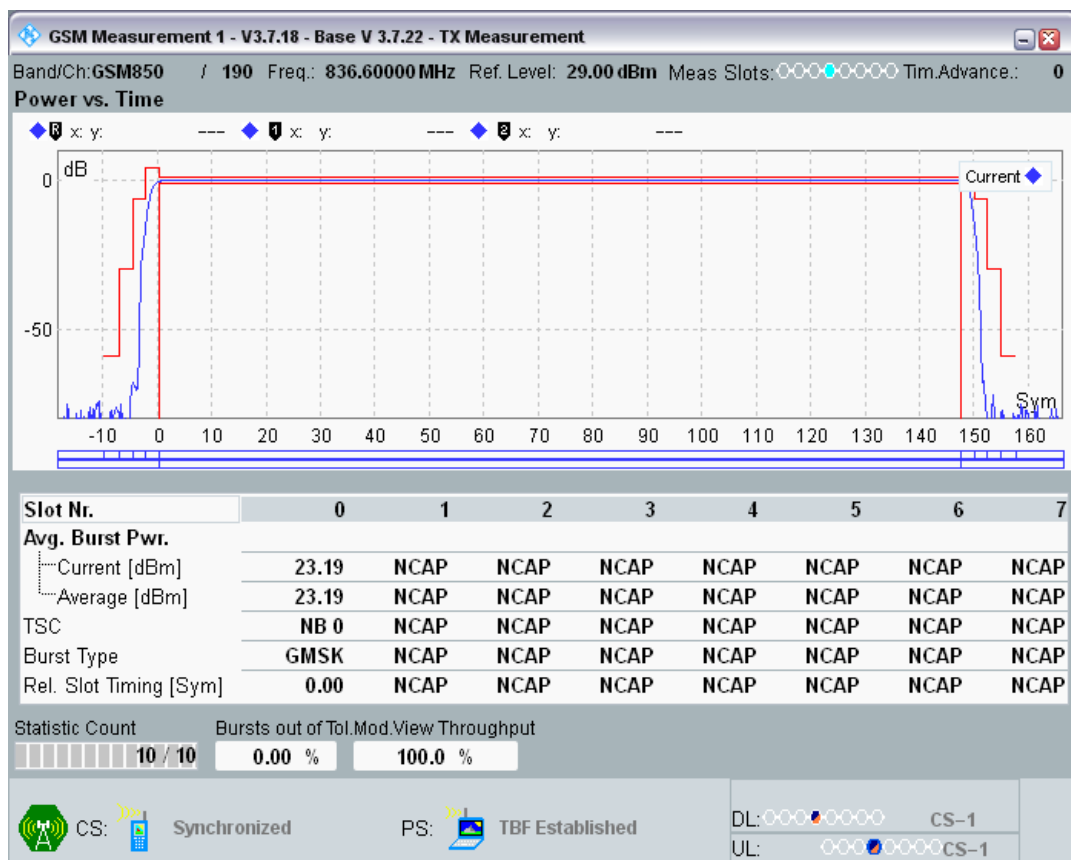


GPRS850 Channel=190 Gamma=9;9;9;9




GPRS850 Channel=190 Gamma=10;10;10;10

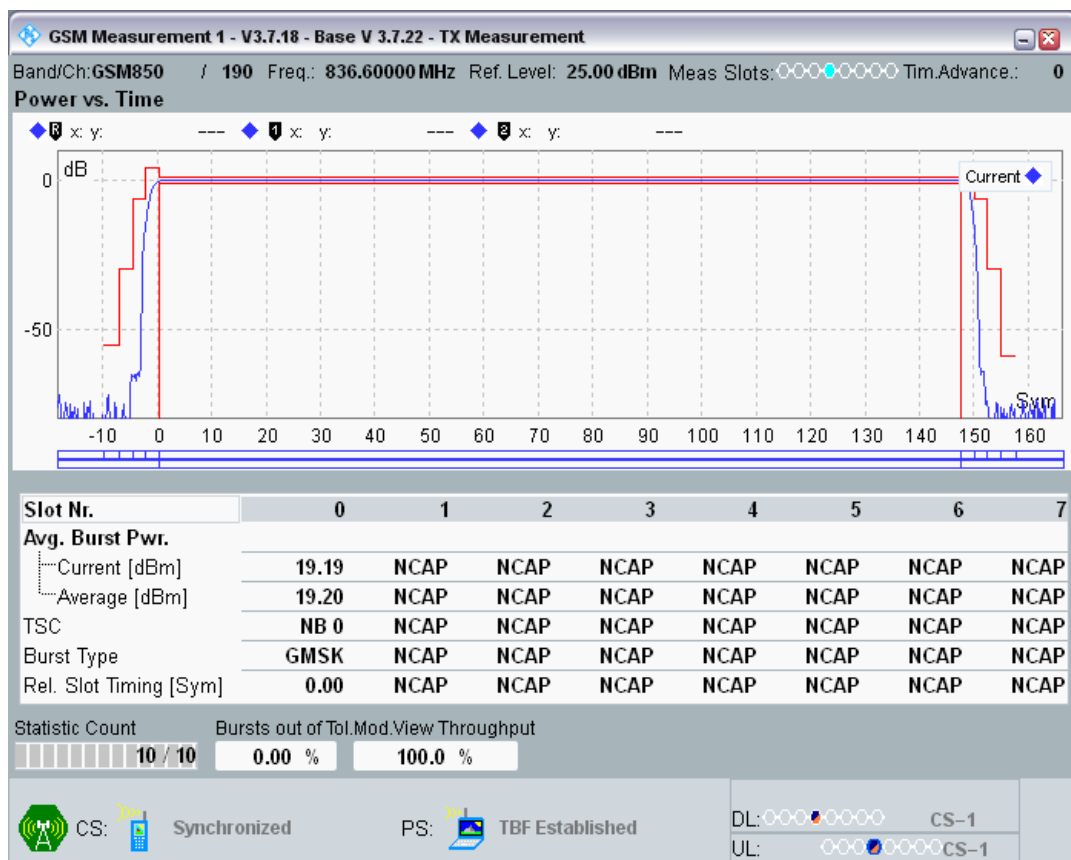

GPRS850 Channel=190 Gamma=11;11;11;11

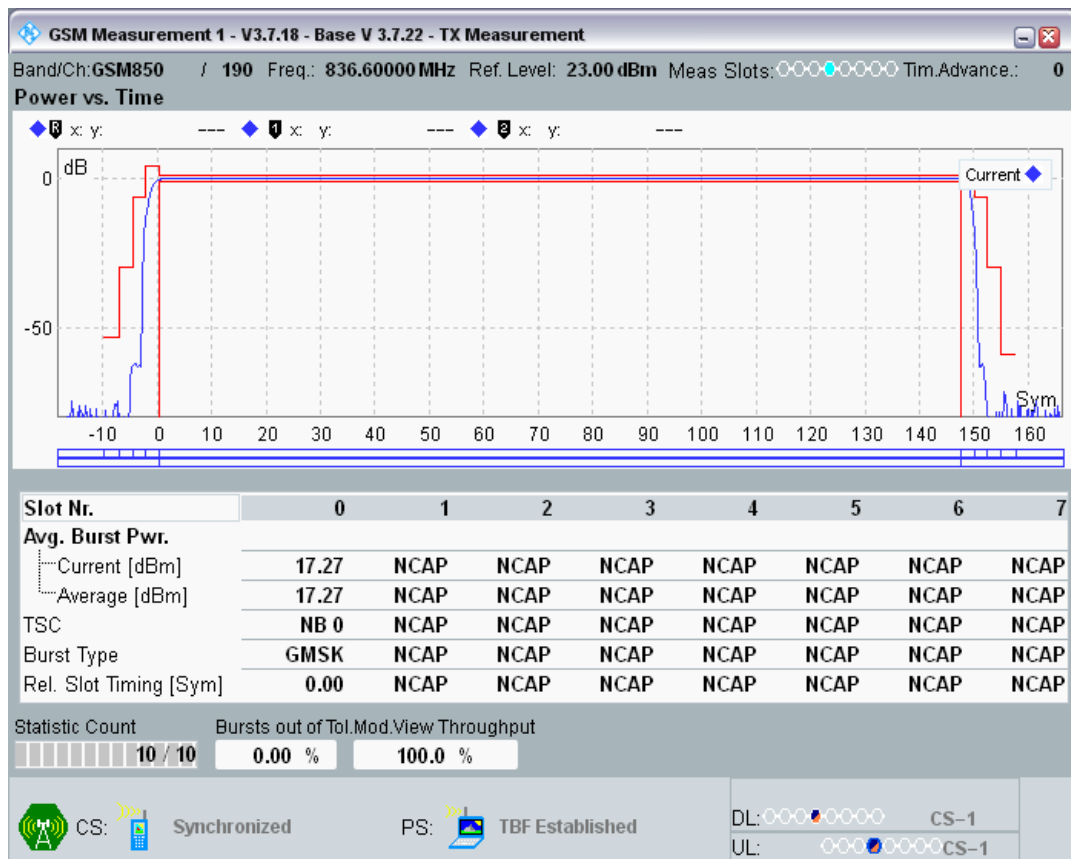


GPRS850 Channel=190 Gamma=12;12;12;12

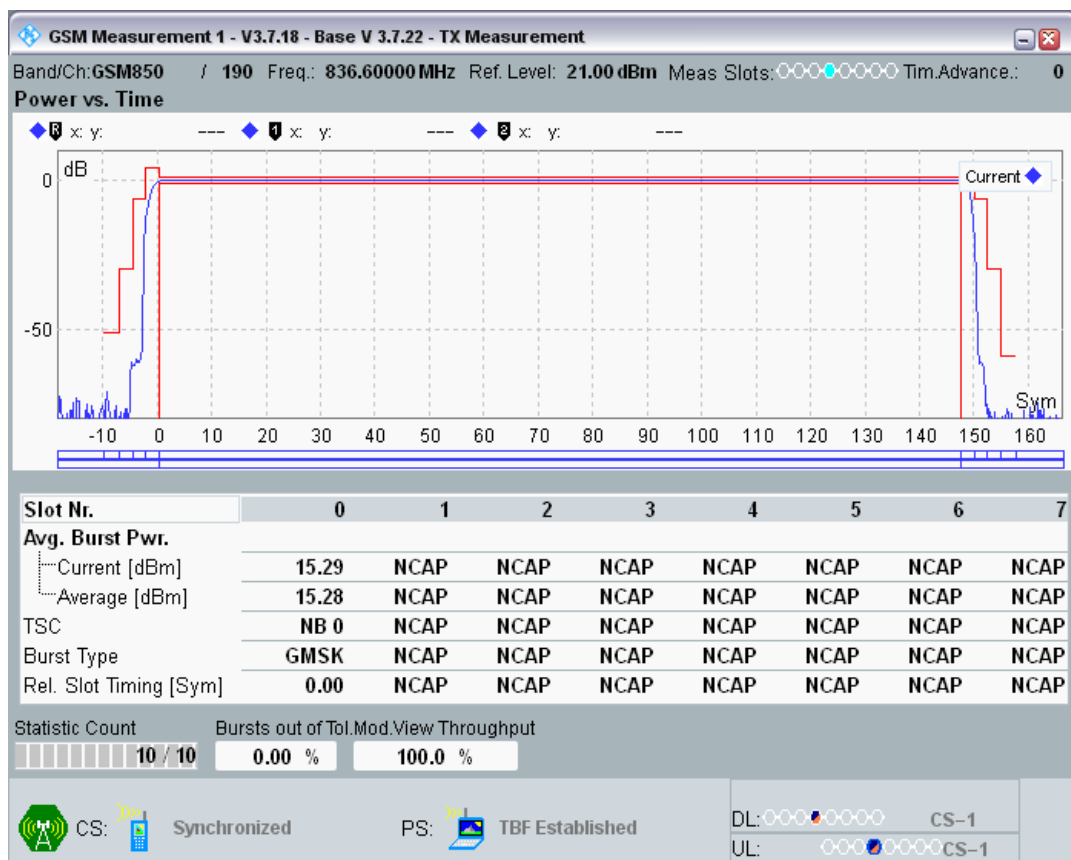

GPRS850 Channel=190 Gamma=13;13;13;13




GPRS850 Channel=190 Gamma=14;14;14;14

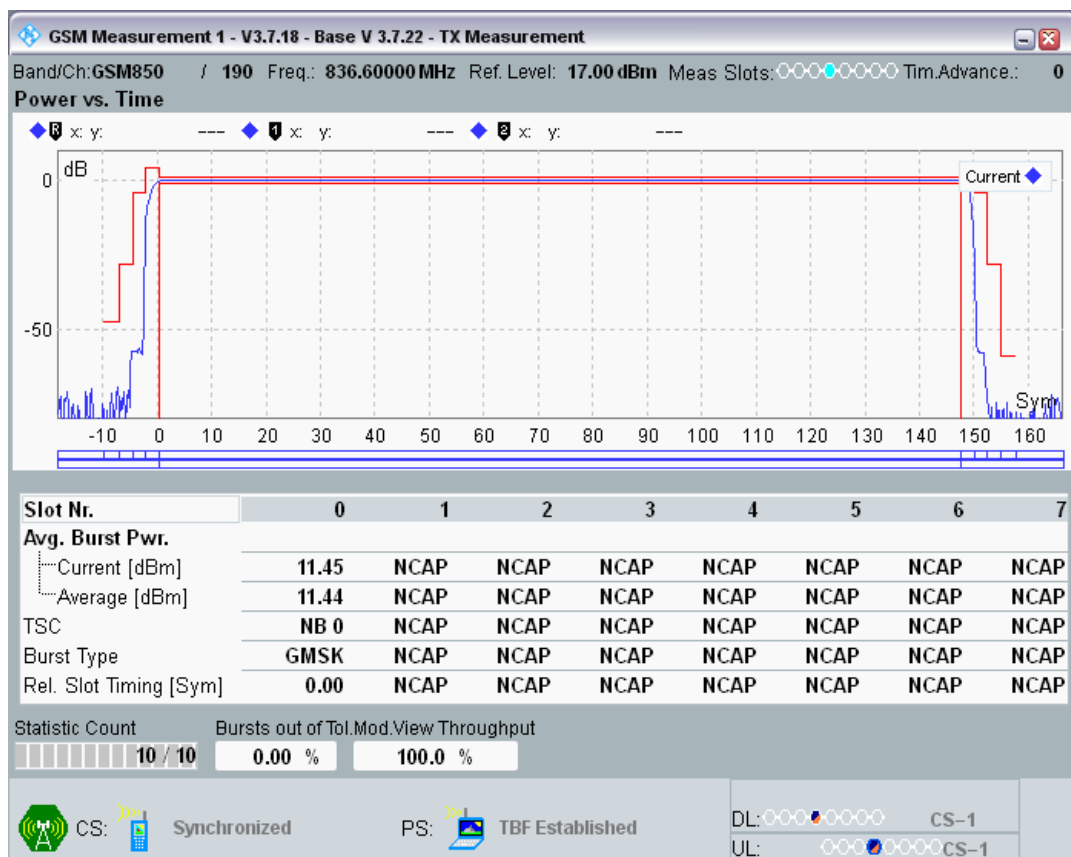


GPRS850 Channel=190 Gamma=15;15;15;15




GPRS850 Channel=190 Gamma=16;16;16;16

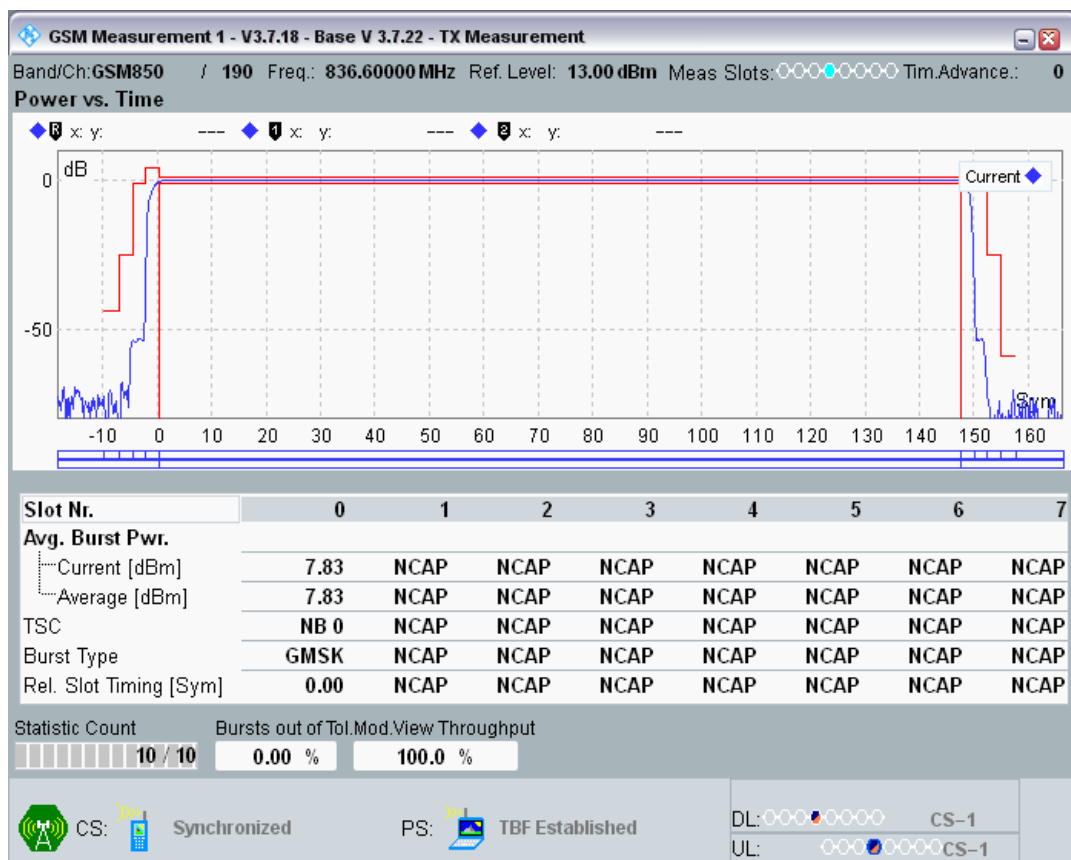

GPRS850 Channel=190 Gamma=17;17;17;17

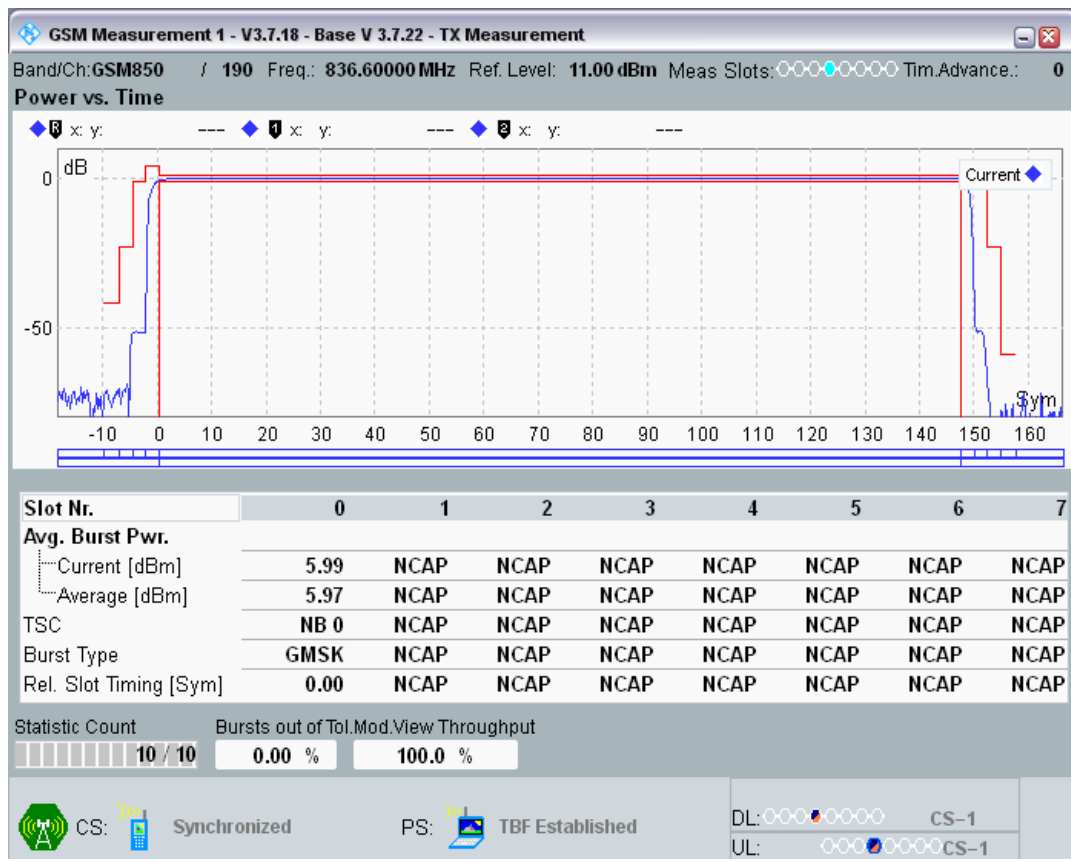

GPRS850 Channel=251 Gamma=3;3;3;3

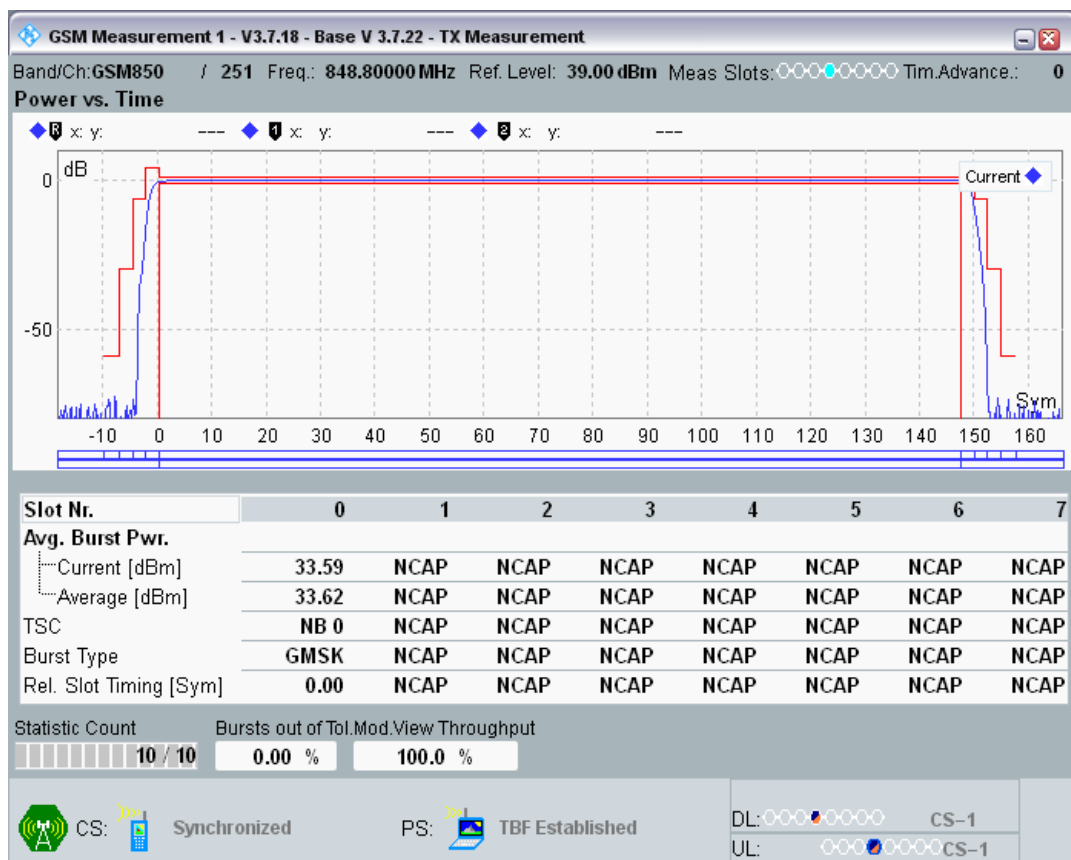


GPRS850 Channel=251 Gamma=4;4;4;4




GPRS850 Channel=251 Gamma=5;5;5;5




GPRS850 Channel=251 Gamma=6;6;6;6

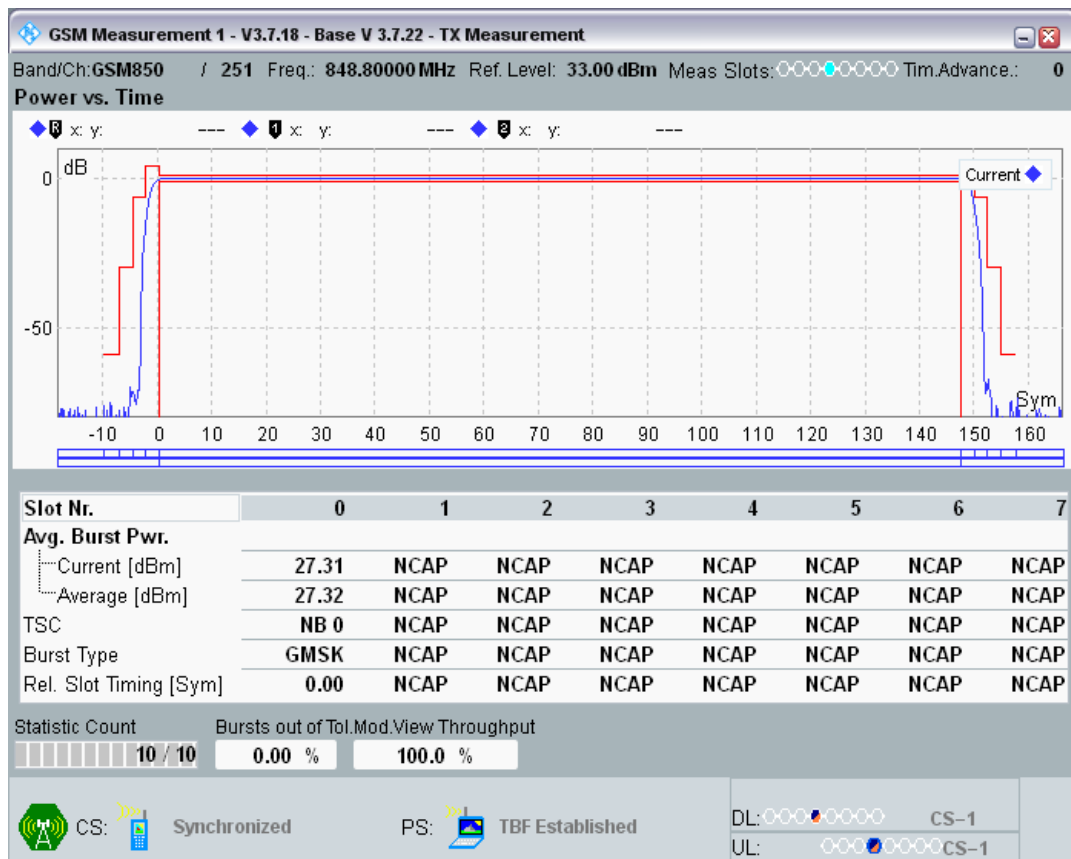


GPRS850 Channel=251 Gamma=7;7;7;7

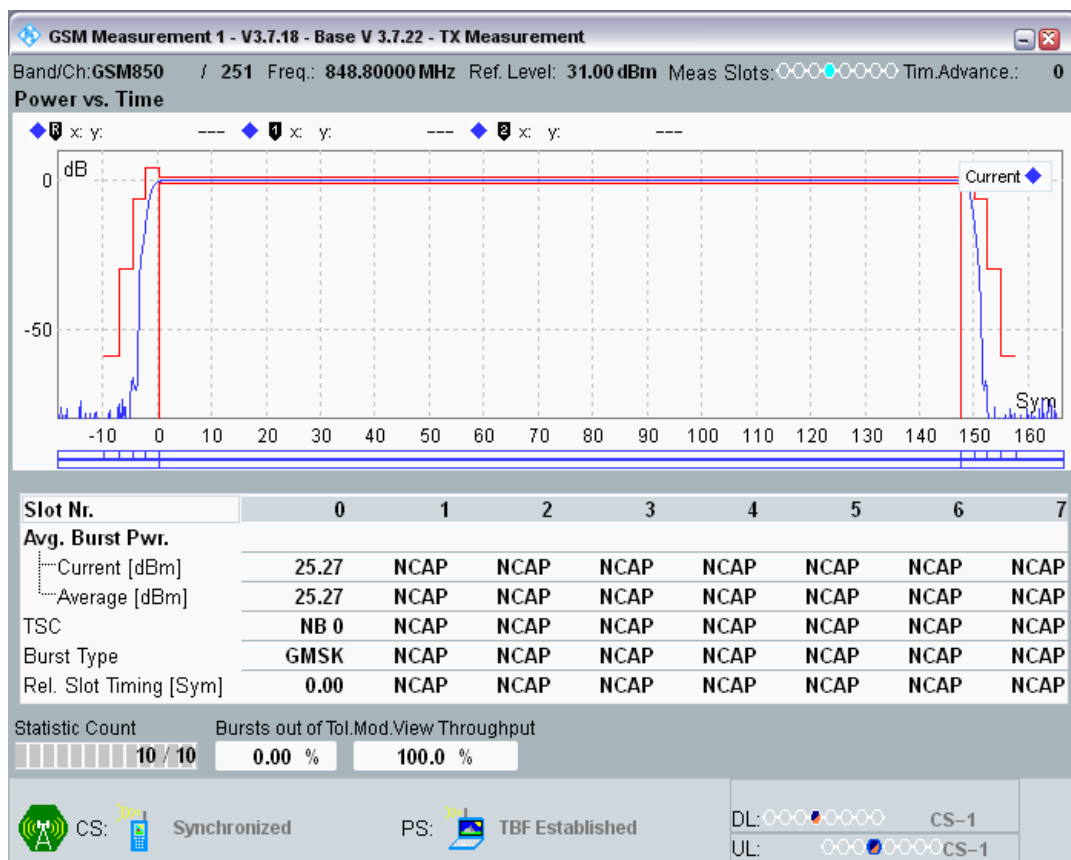

GPRS850 Channel=251 Gamma=8;8;8;8

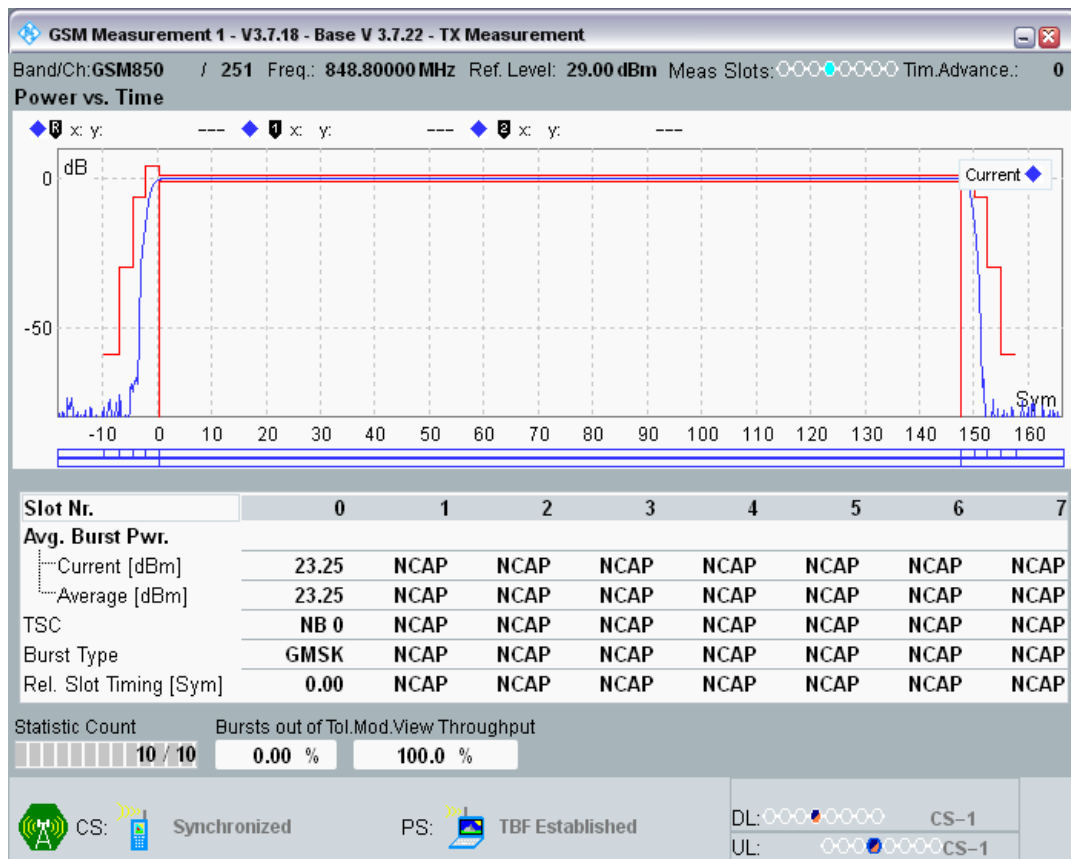

GPRS850 Channel=251 Gamma=9;9;9;9

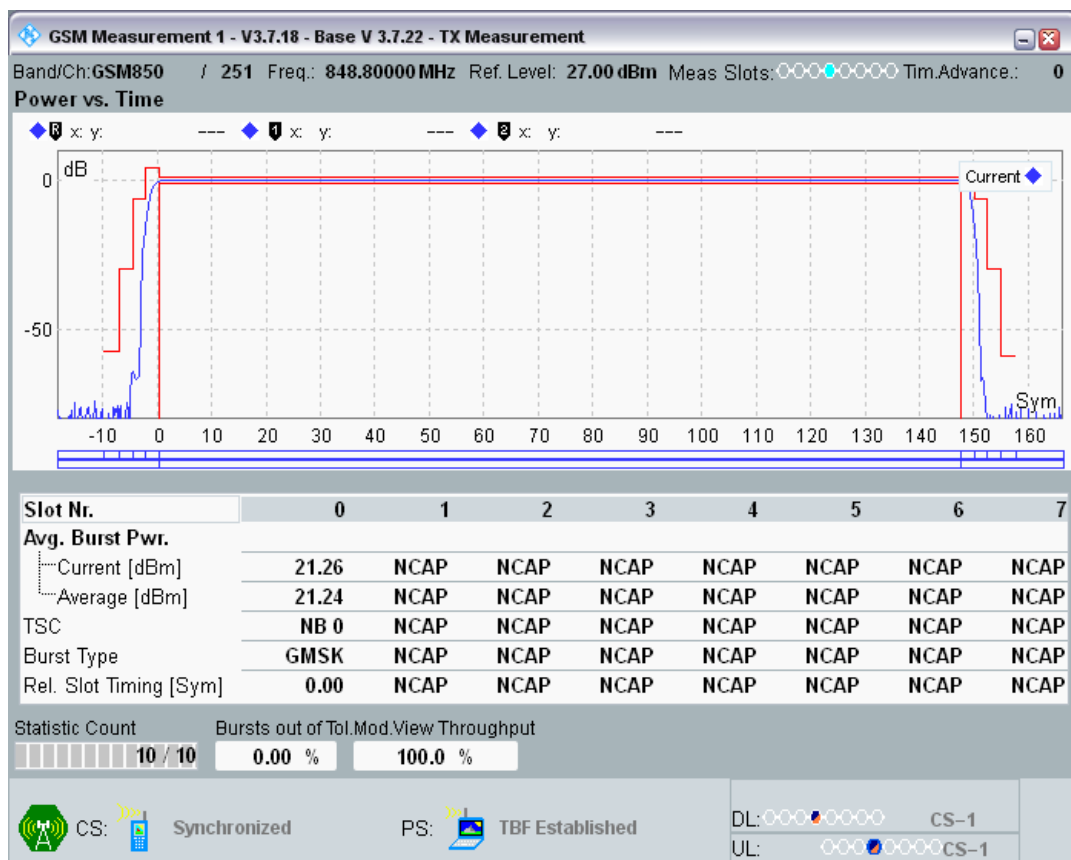


GPRS850 Channel=251 Gamma=10;10;10;10




GPRS850 Channel=251 Gamma=11;11;11;11




GPRS850 Channel=251 Gamma=12;12;12;12

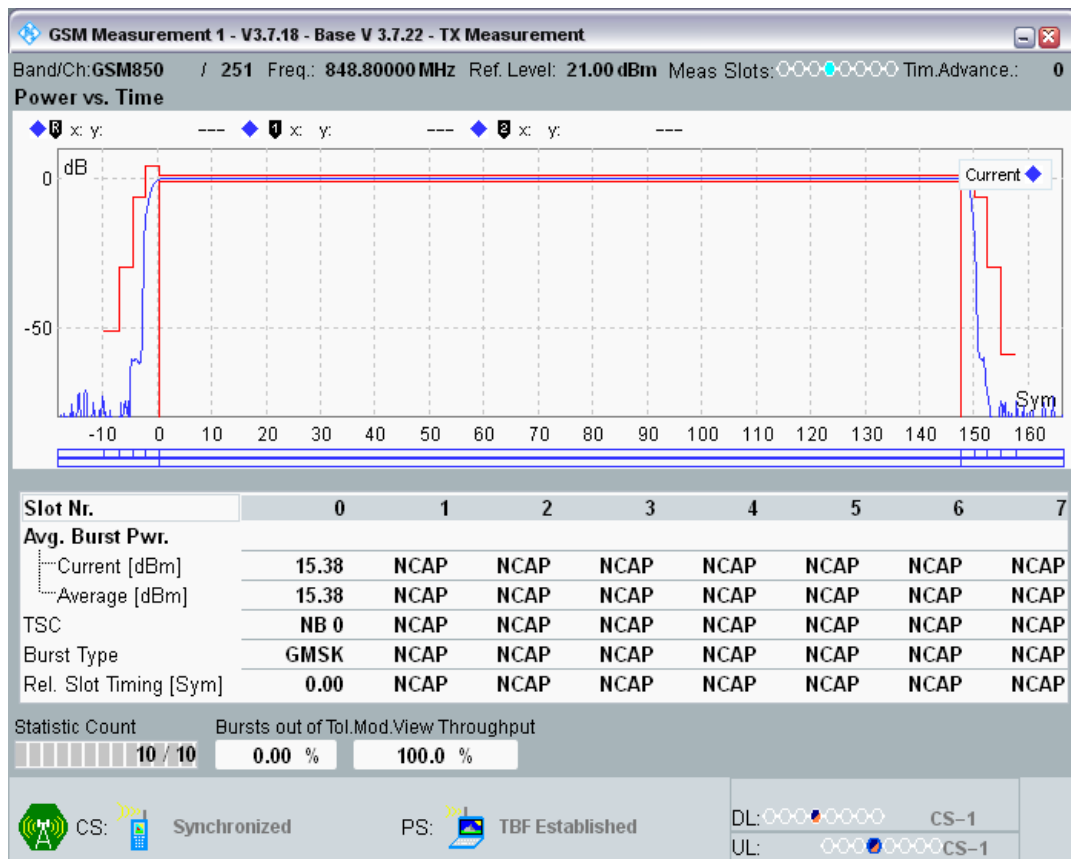


GPRS850 Channel=251 Gamma=13;13;13;13

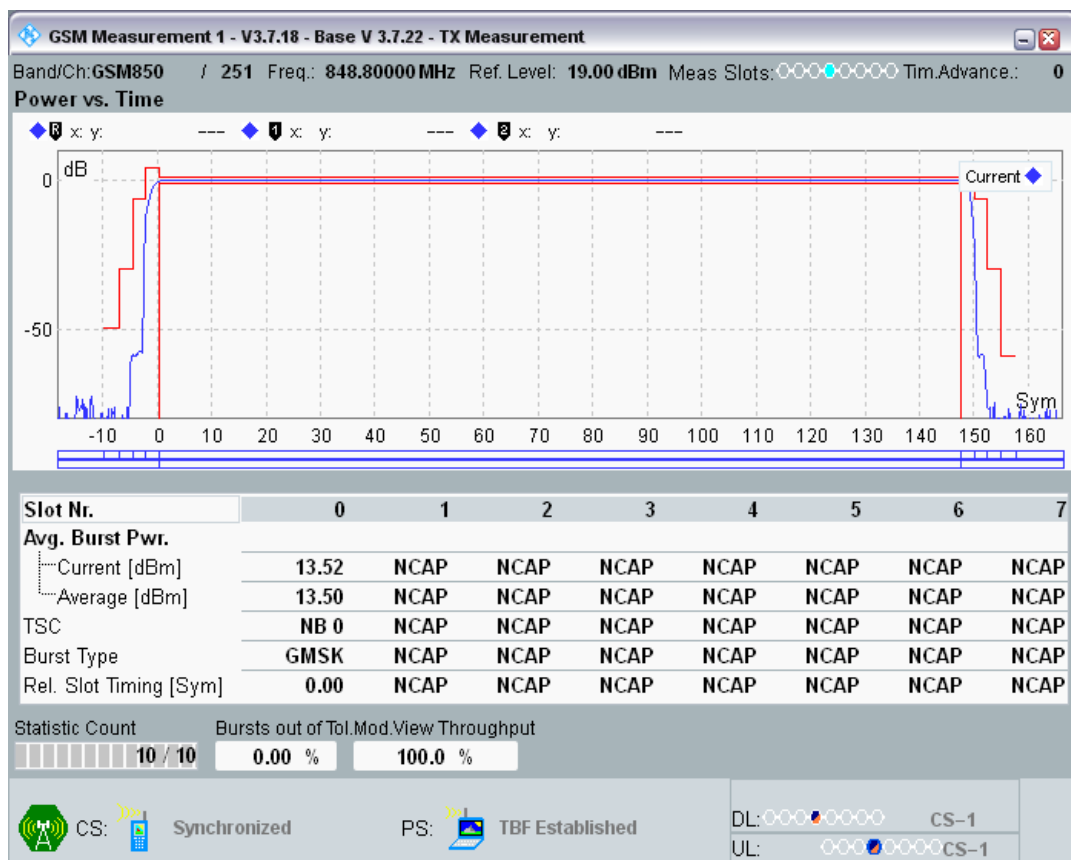


GPRS850 Channel=251 Gamma=14;14;14;14

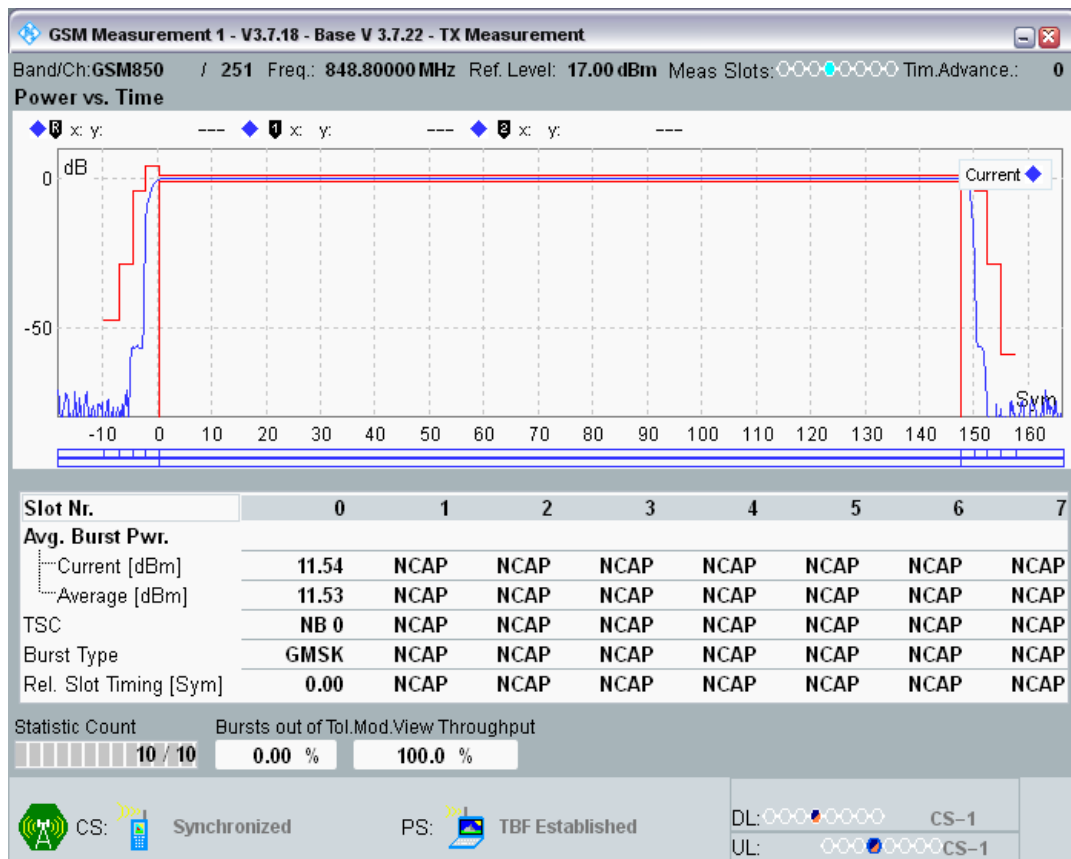

GPRS850 Channel=251 Gamma=15;15;15;15

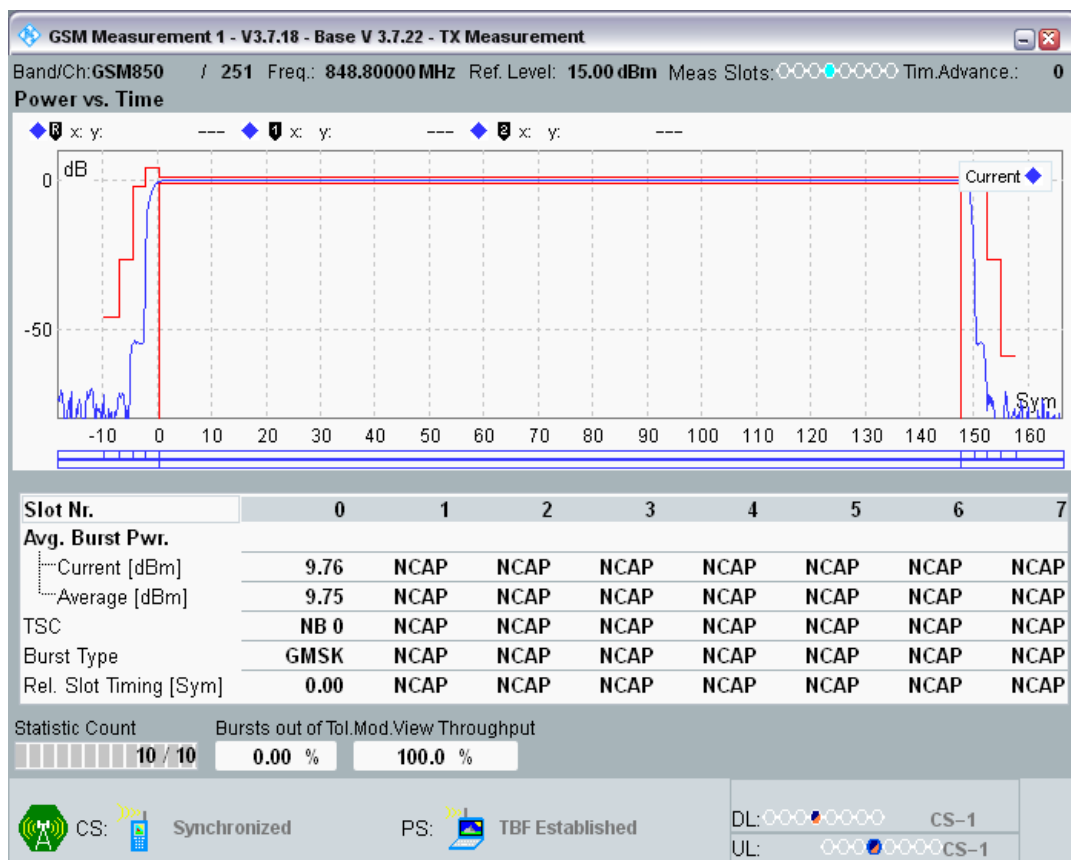


GPRS850 Channel=251 Gamma=16;16;16;16

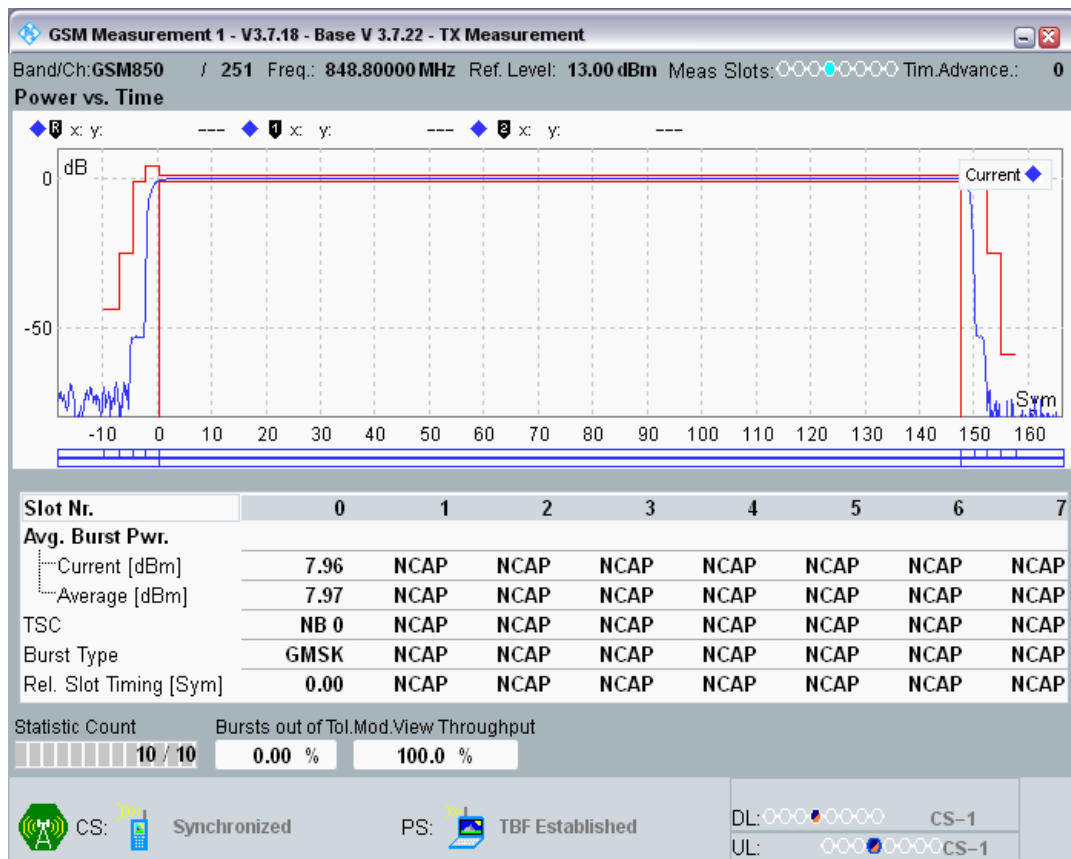


GPRS850 Channel=251 Gamma=17;17;17;17




GPRS900 Channel=975 Gamma=3;3;3;3

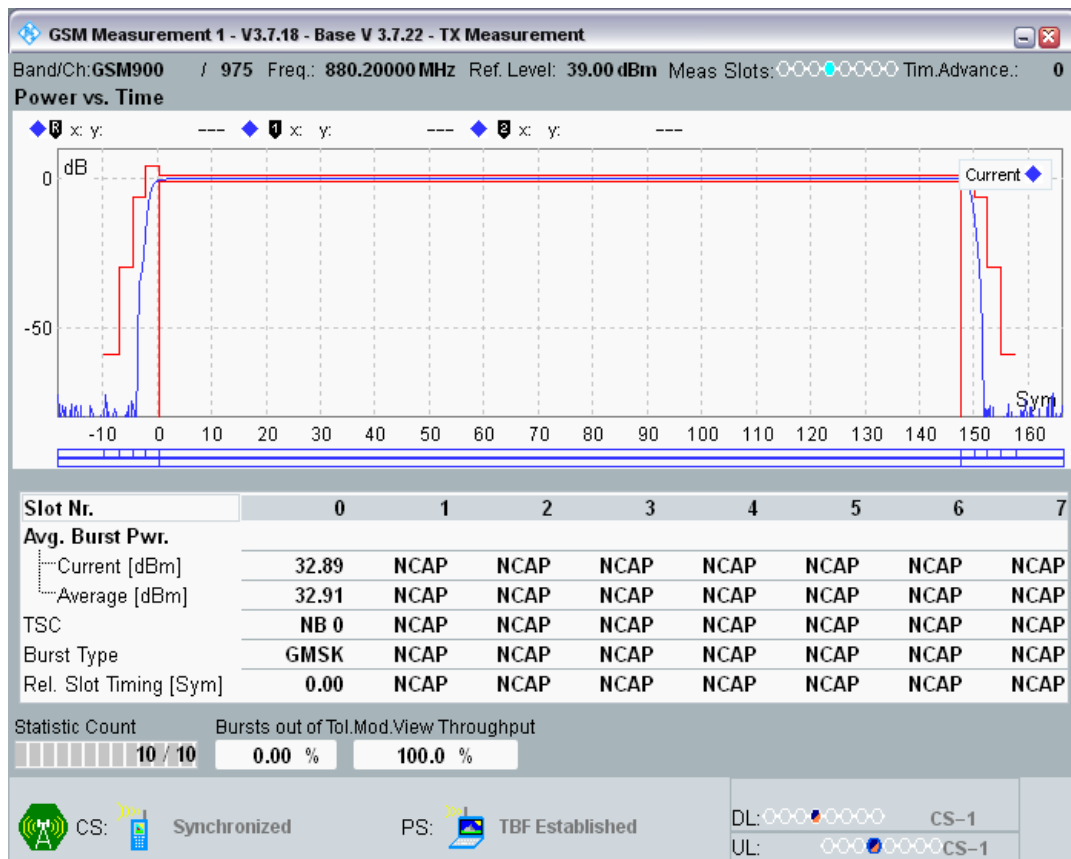


GPRS900 Channel=975 Gamma=4;4;4;4

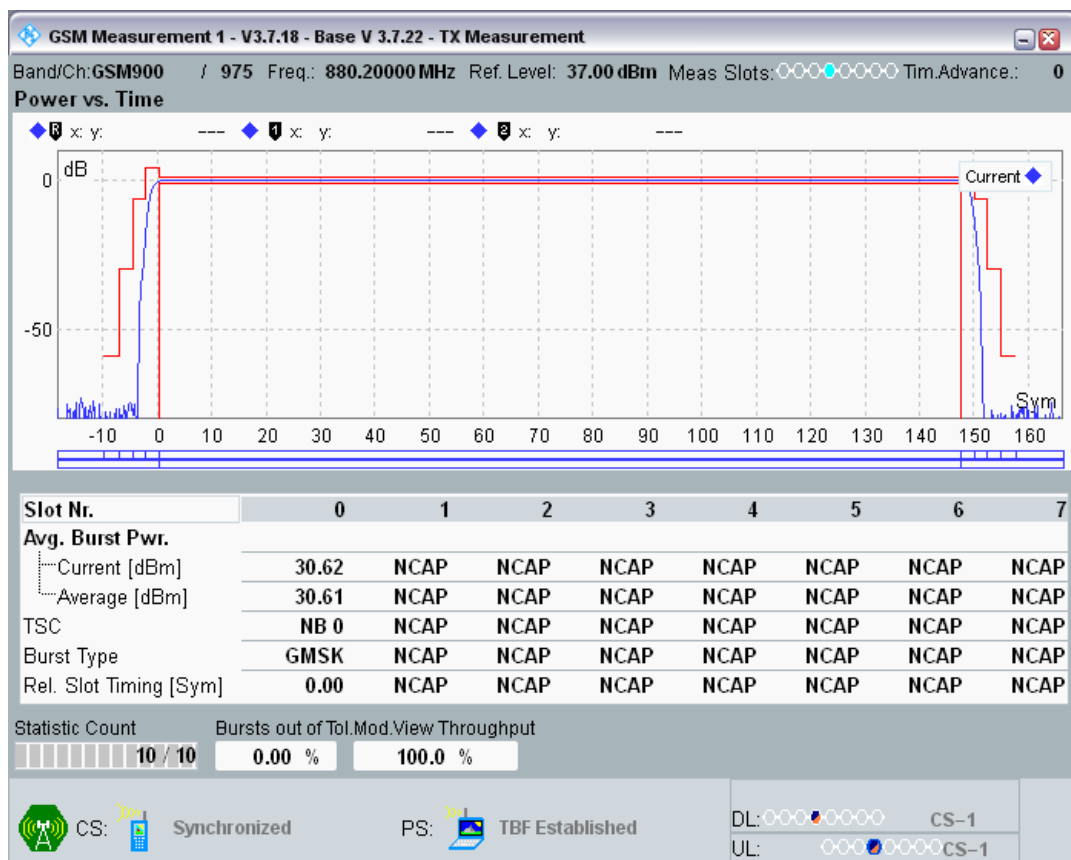

GPRS900 Channel=975 Gamma=5;5;5;5

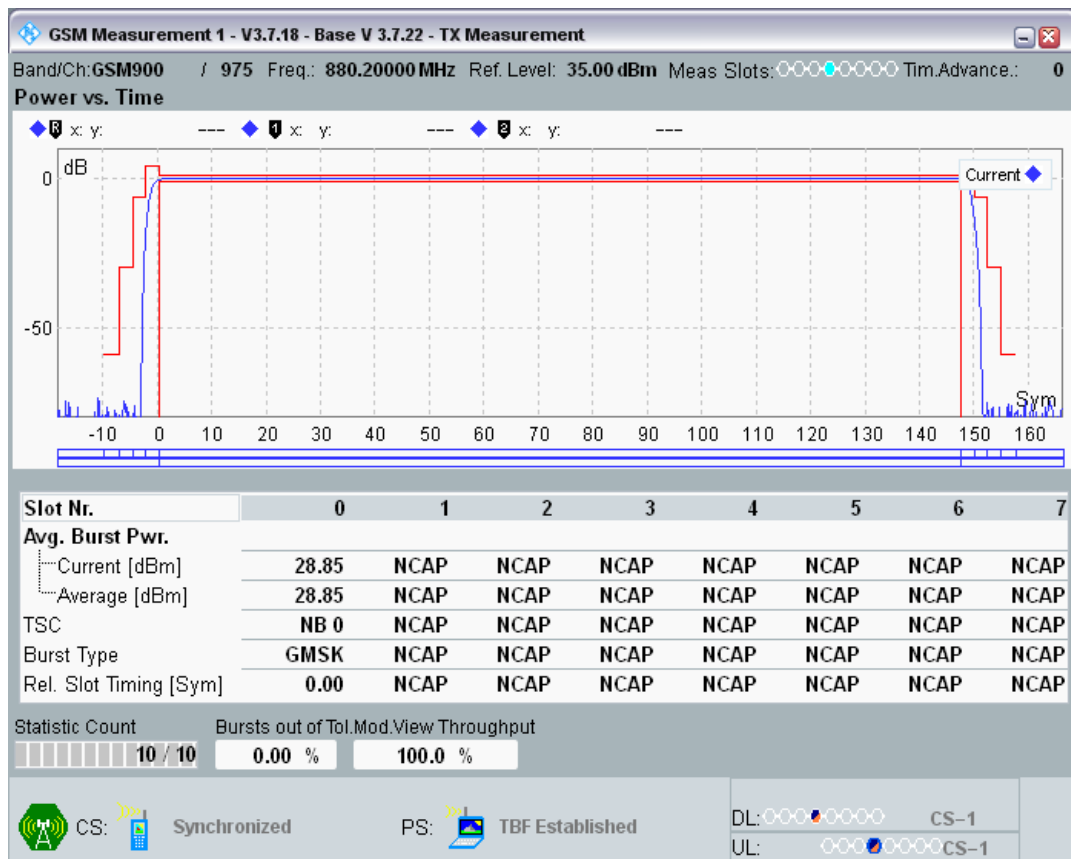


GPRS900 Channel=975 Gamma=6;6;6;6

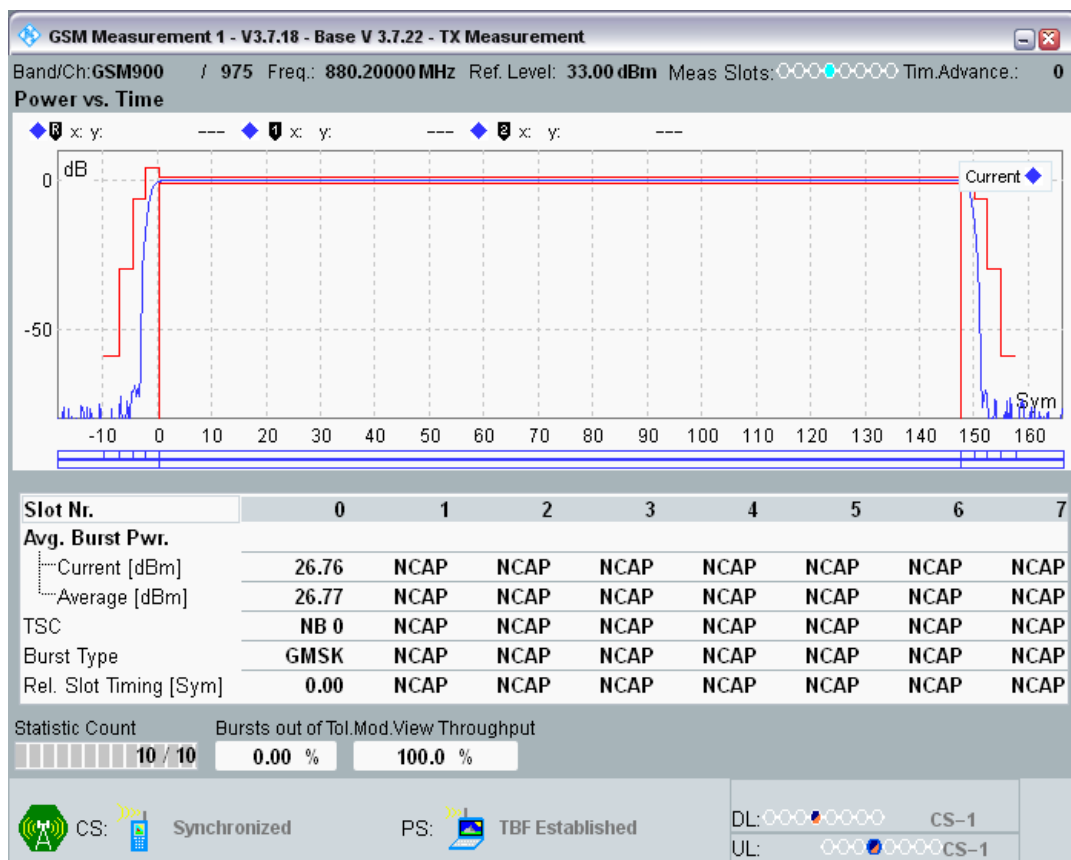


GPRS900 Channel=975 Gamma=7;7;7;7




GPRS900 Channel=975 Gamma=8;8;8;8

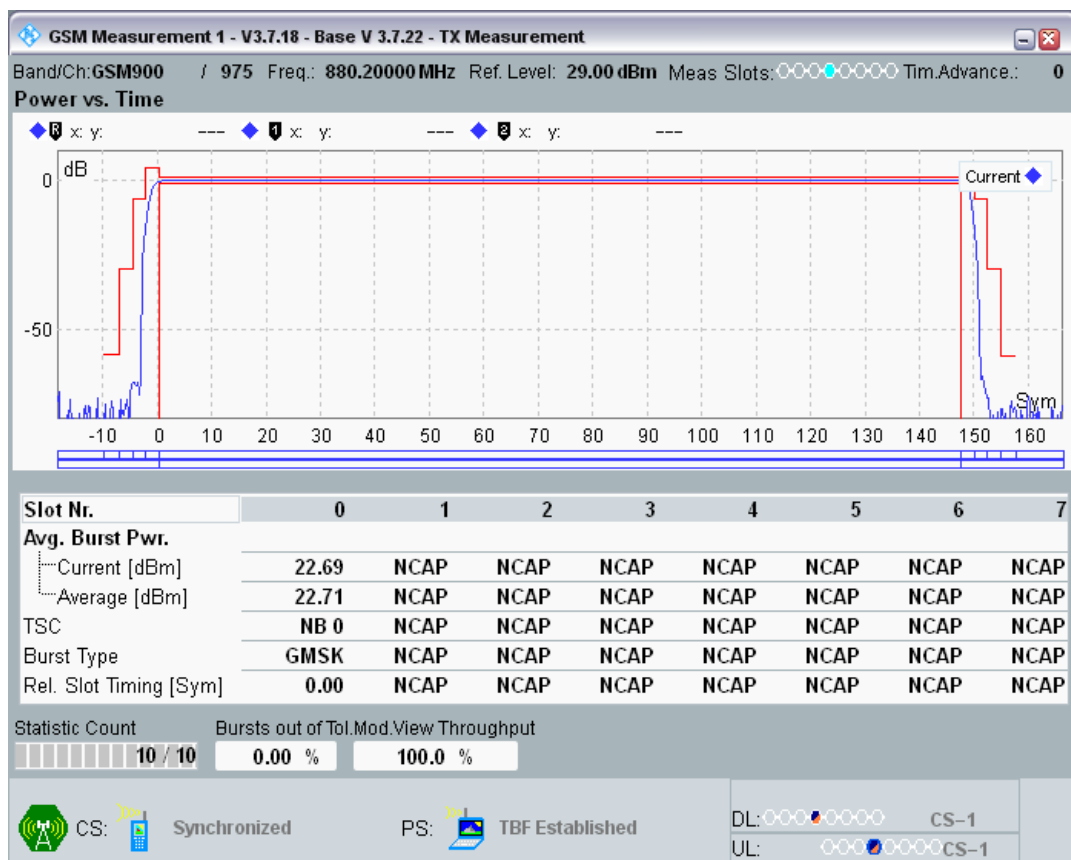

GPRS900 Channel=975 Gamma=9;9;9;9

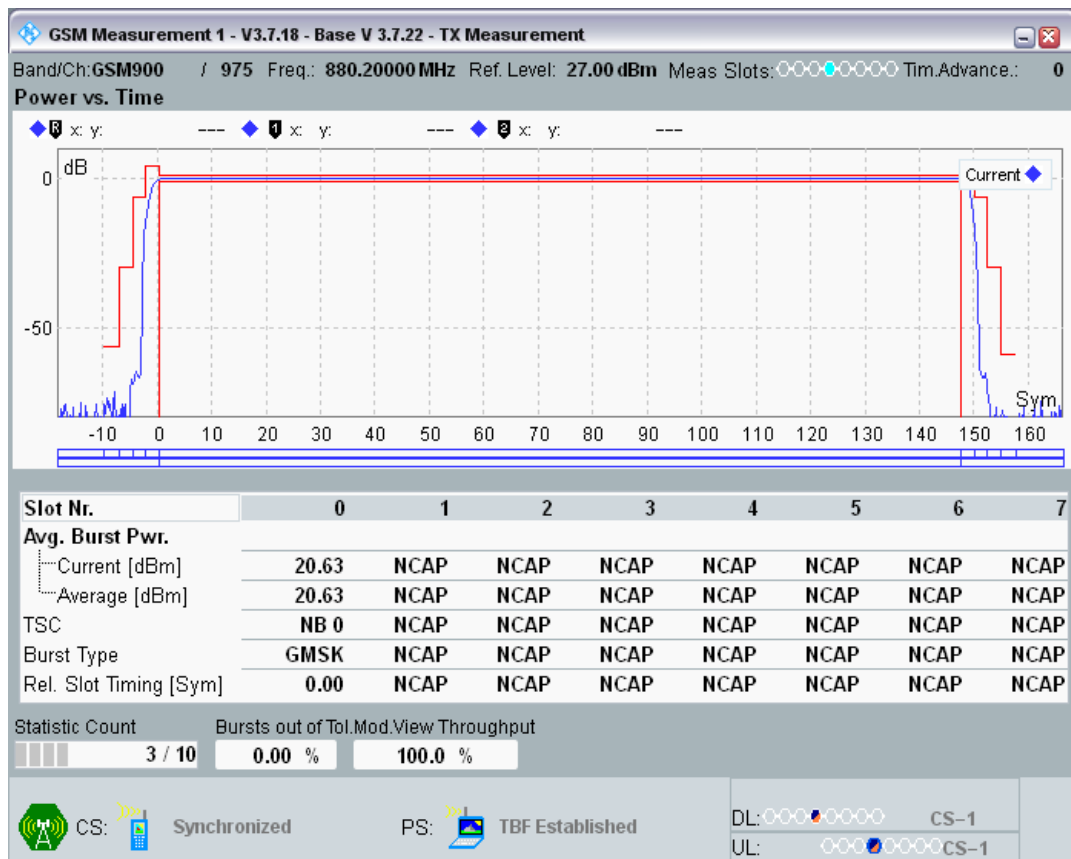


GPRS900 Channel=975 Gamma=10;10;10;10

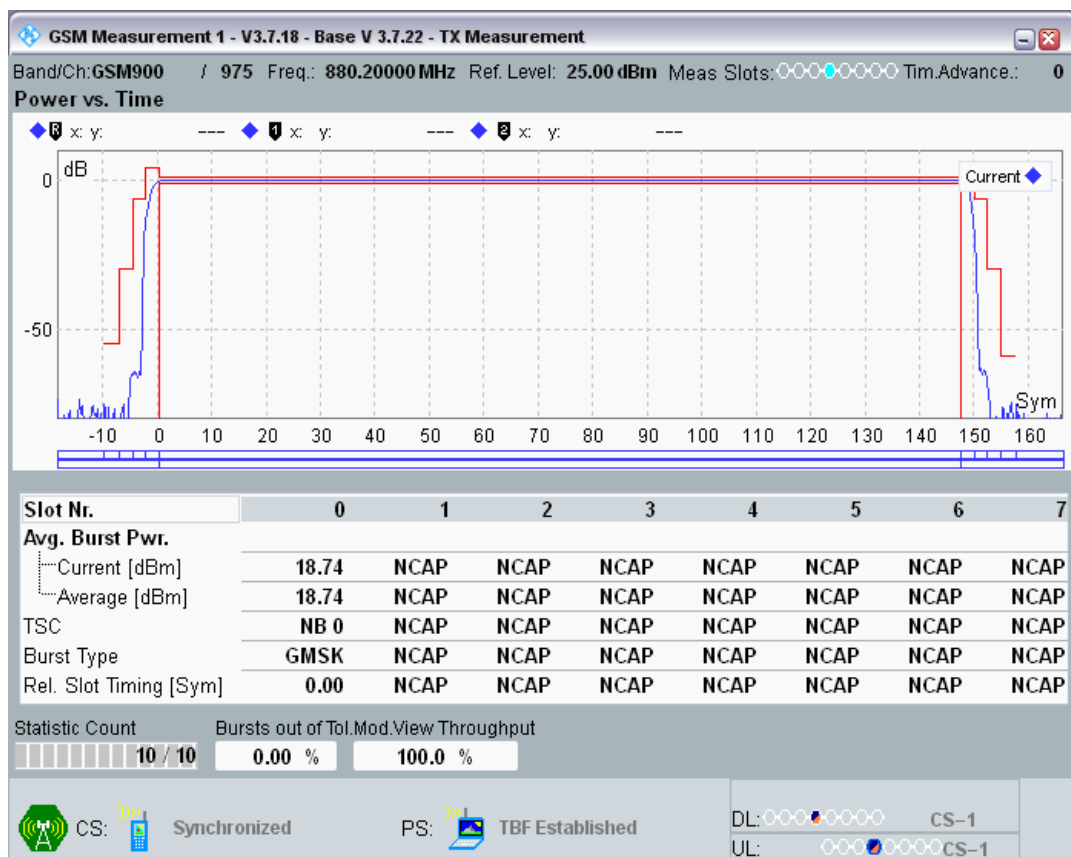


GPRS900 Channel=975 Gamma=11;11;11;11




GPRS900 Channel=975 Gamma=12;12;12;12

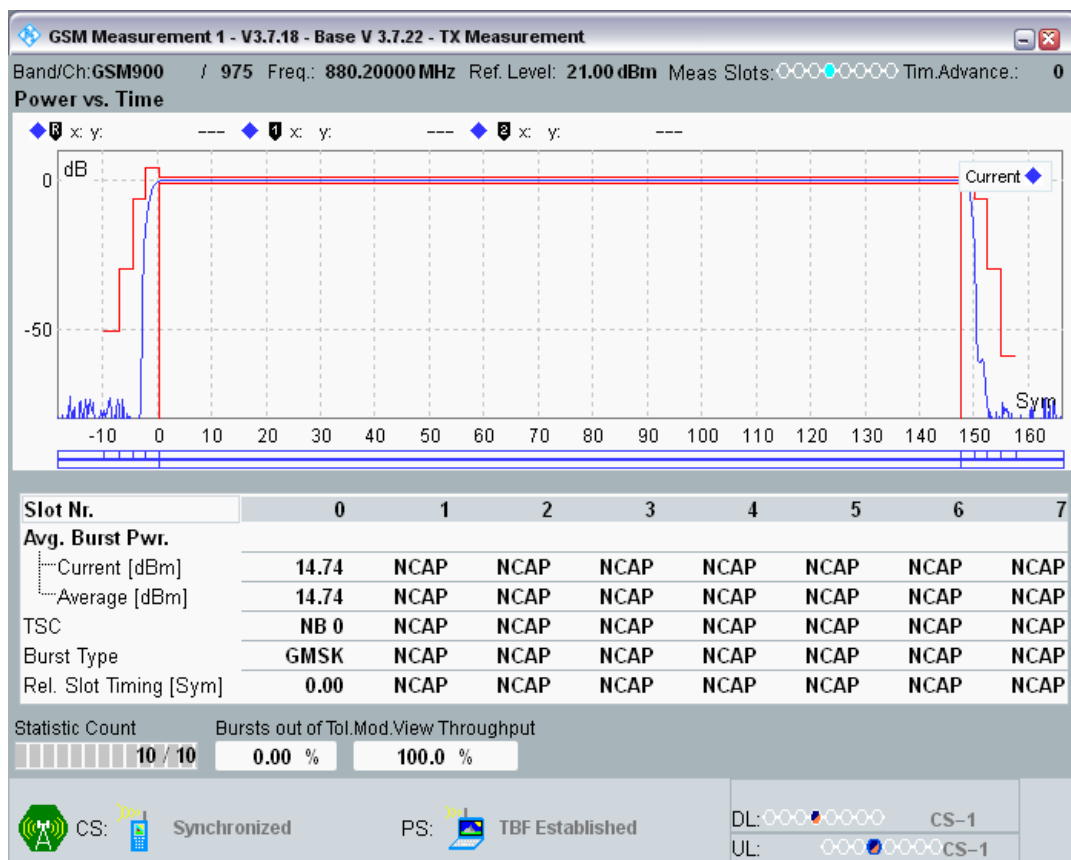


GPRS900 Channel=975 Gamma=13;13;13;13

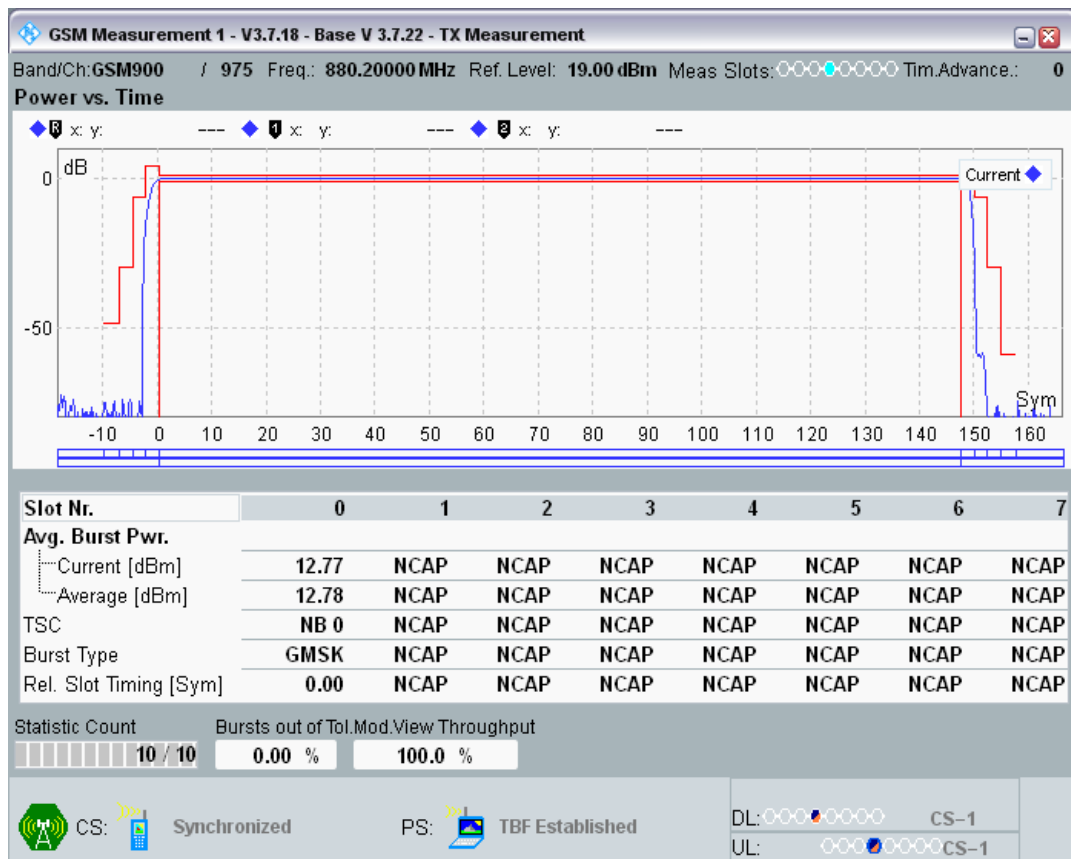


GPRS900 Channel=975 Gamma=14;14;14;14

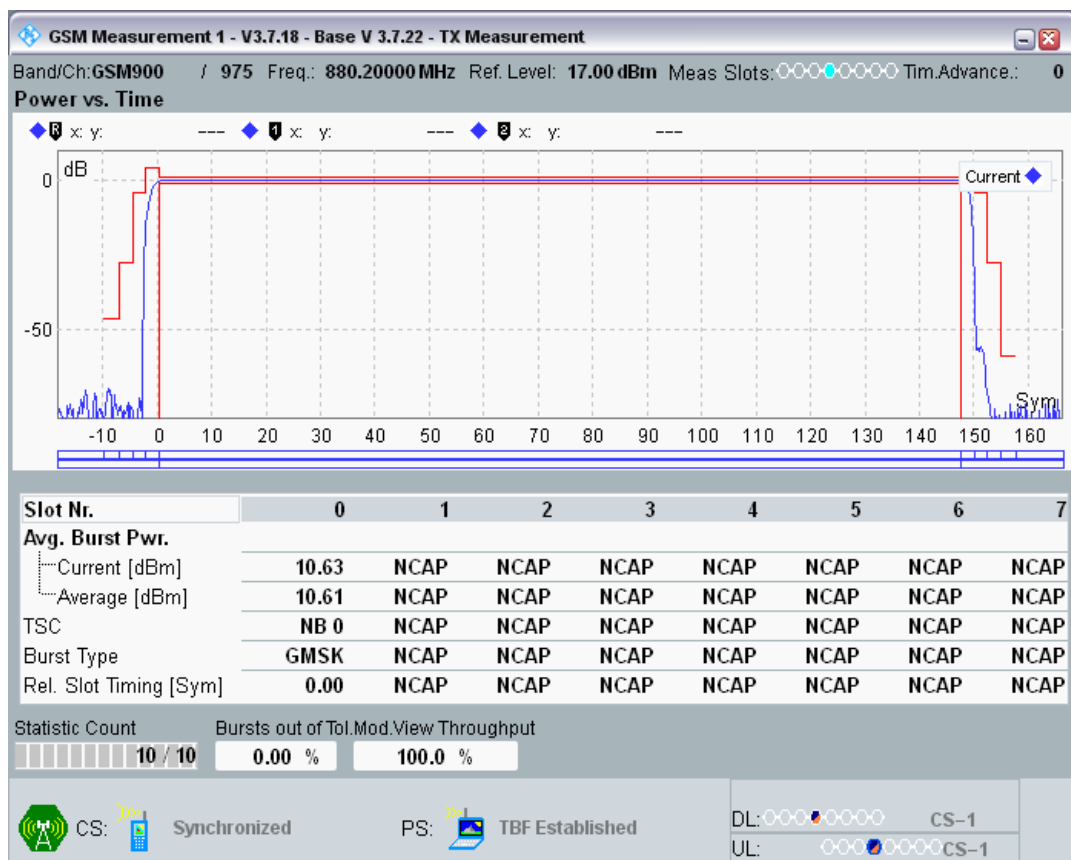

GPRS900 Channel=975 Gamma=15;15;15;15

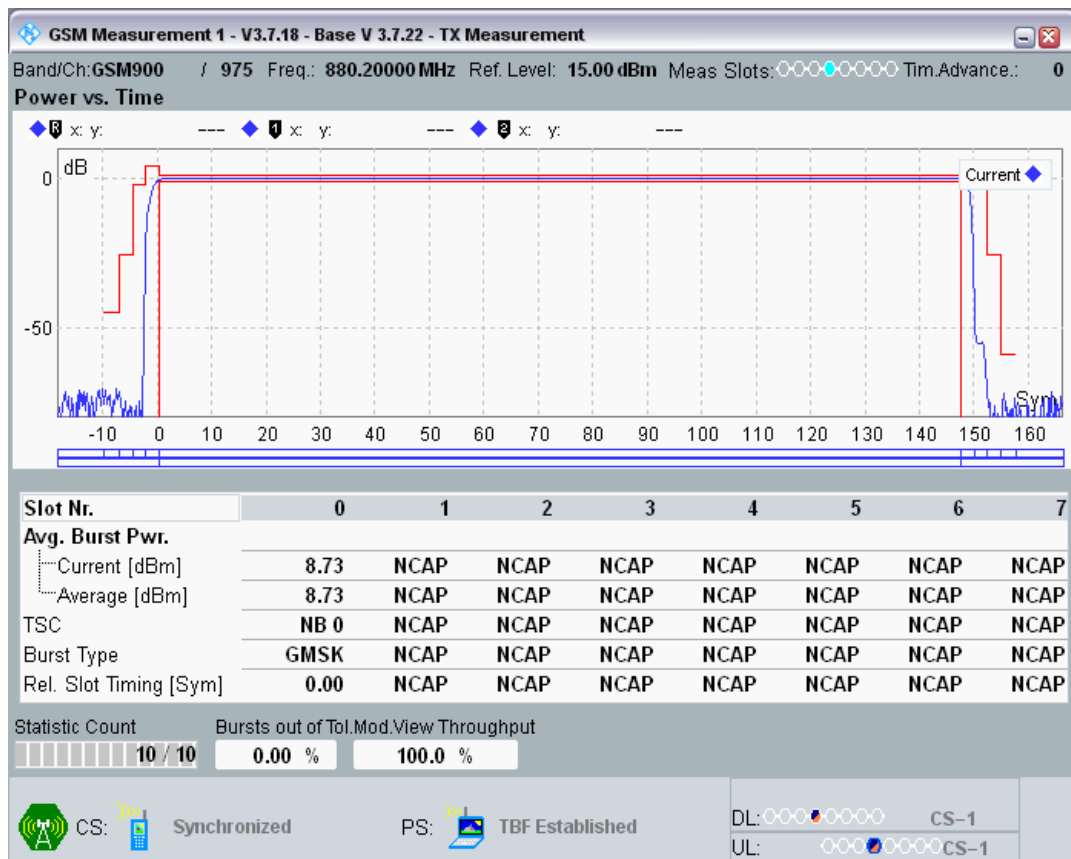


GPRS900 Channel=975 Gamma=16;16;16;16

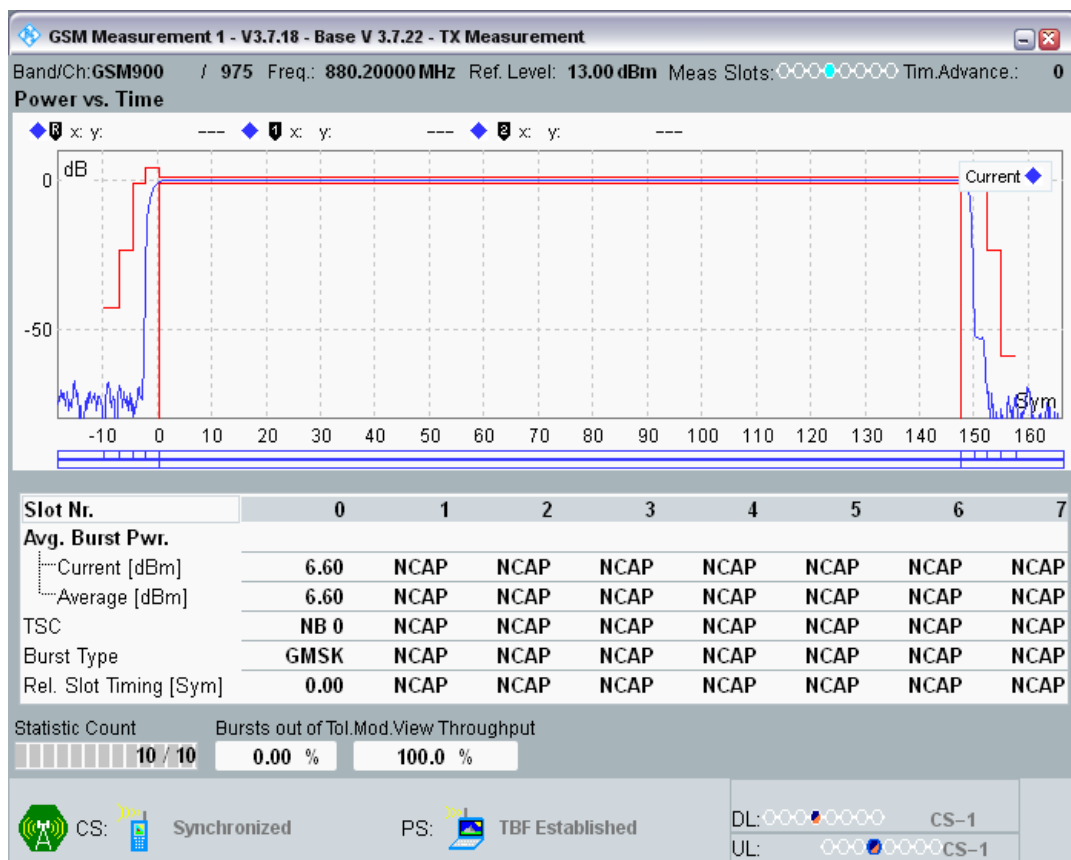


GPRS900 Channel=975 Gamma=17;17;17;17




GPRS900 Channel=38 Gamma=3;3;3;3

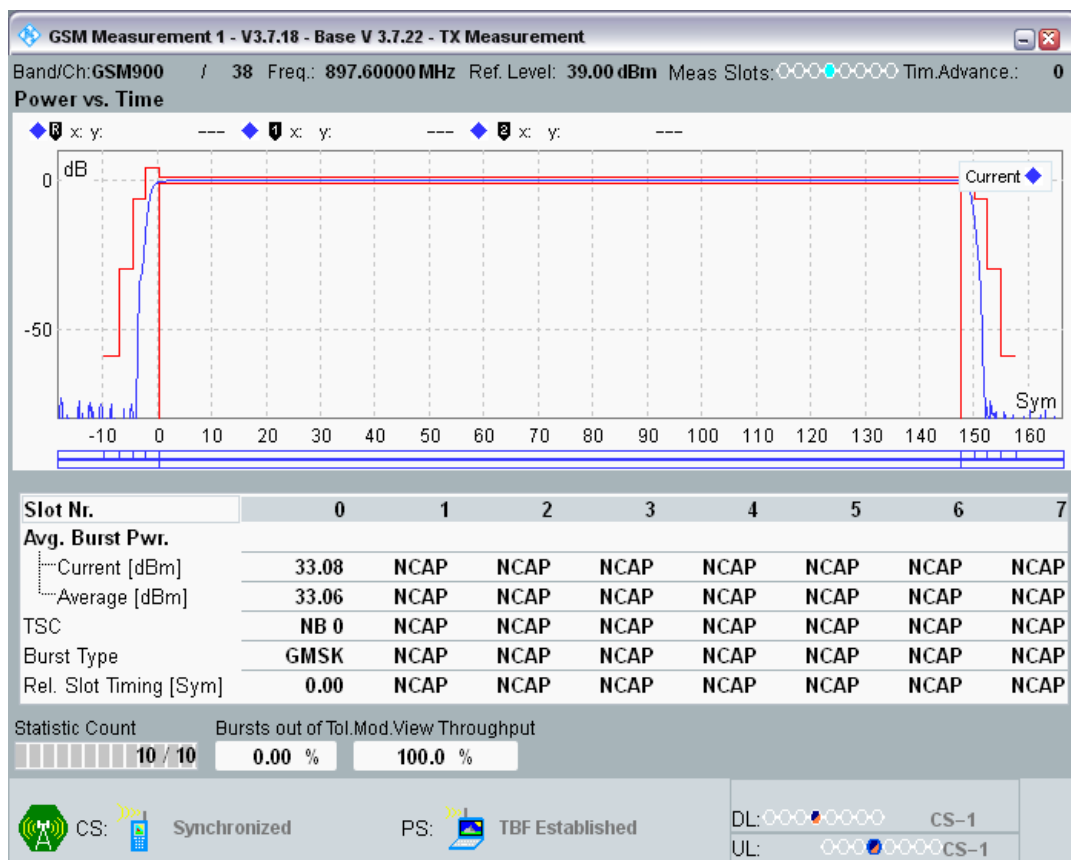


GPRS900 Channel=38 Gamma=4;4;4;4

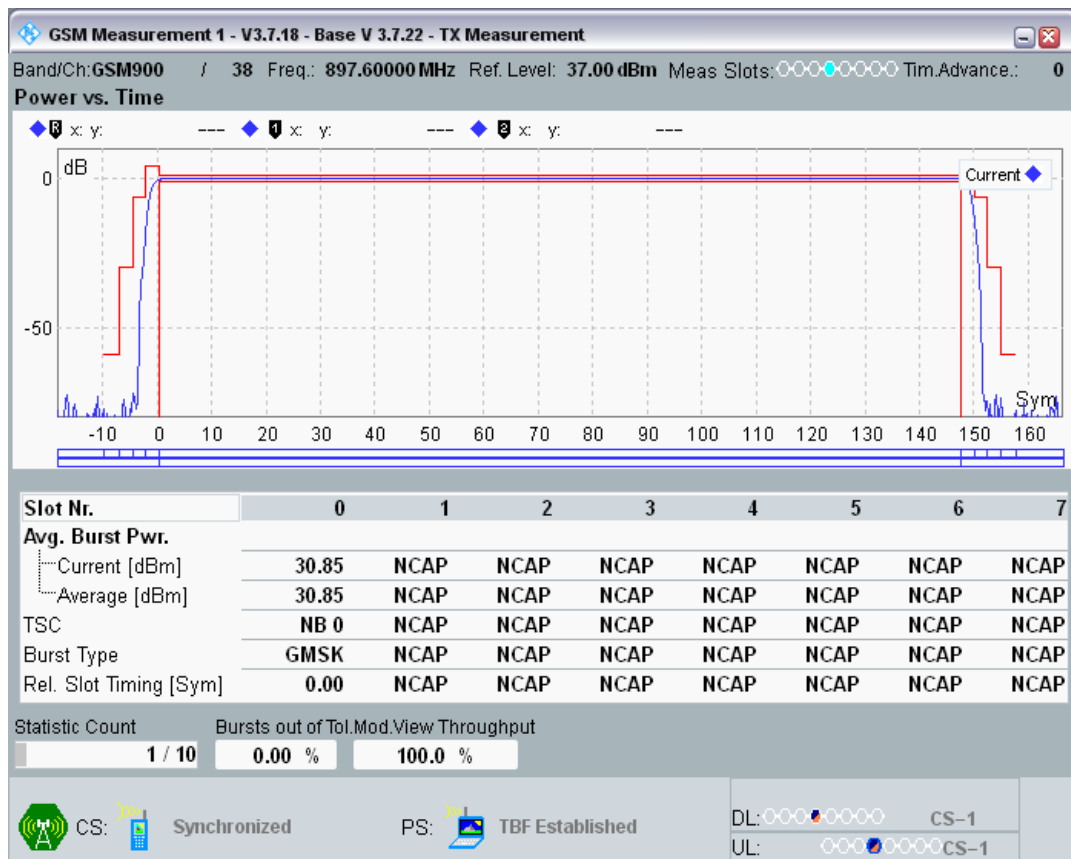


GPRS900 Channel=38 Gamma=5;5;5;5

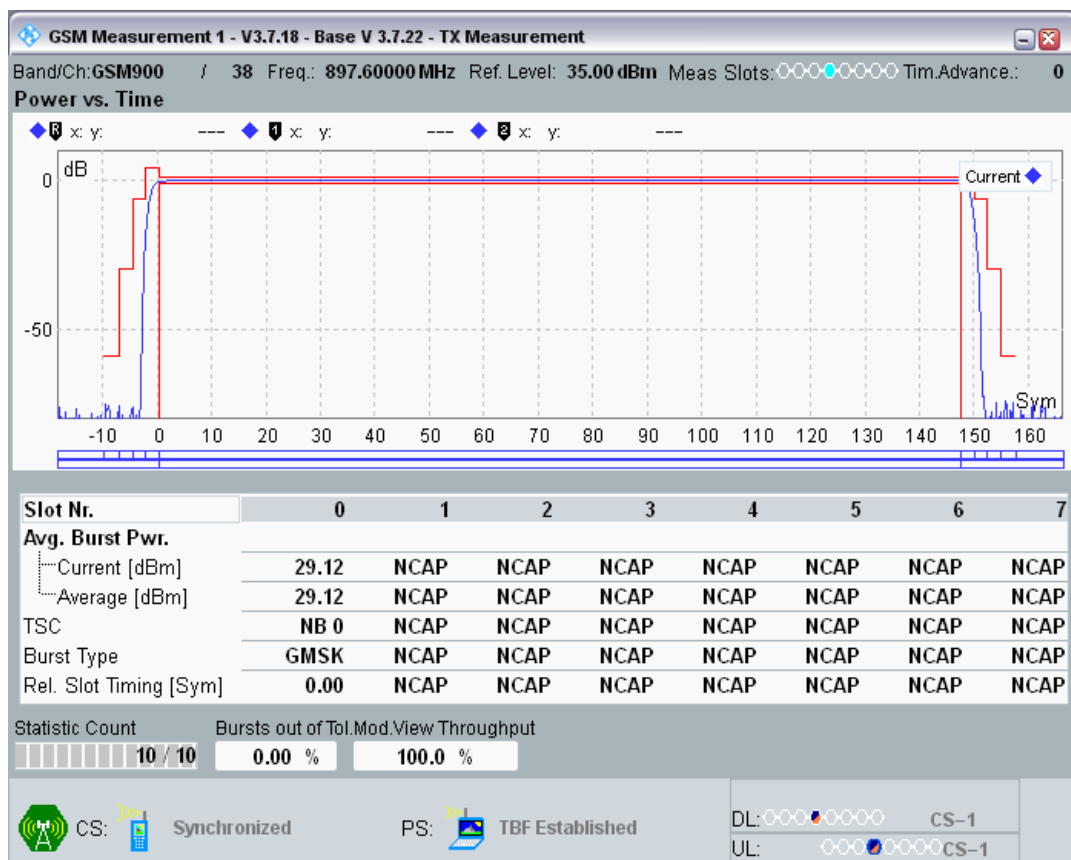

GPRS900 Channel=38 Gamma=6;6;6;6

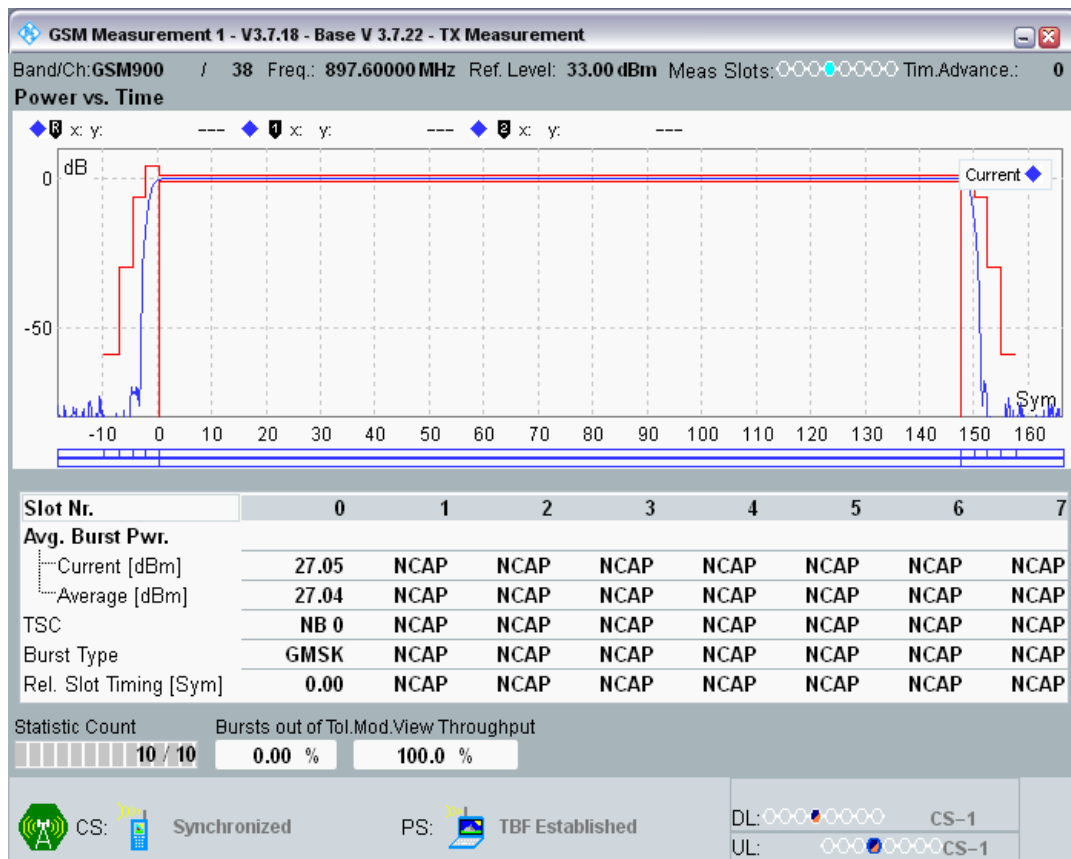


GPRS900 Channel=38 Gamma=7;7;7;7

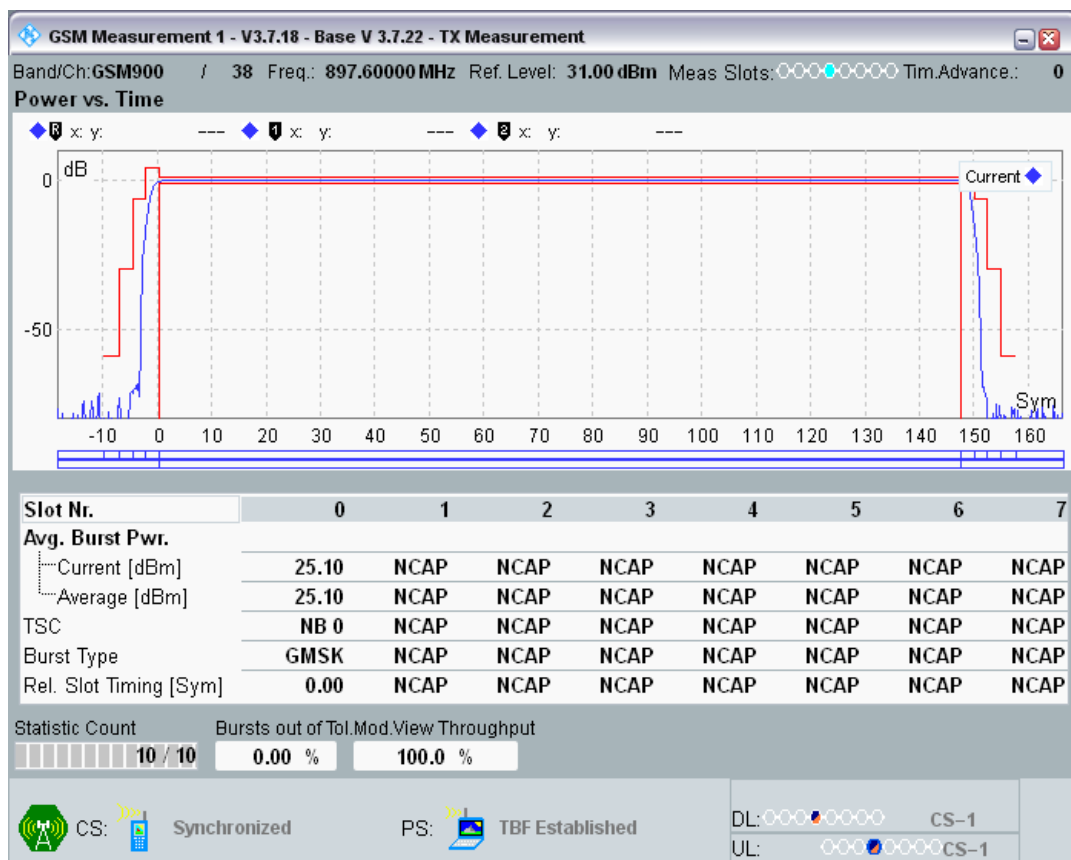


GPRS900 Channel=38 Gamma=8;8;8;8



GPRS900 Channel=38 Gamma=9;9;9;9

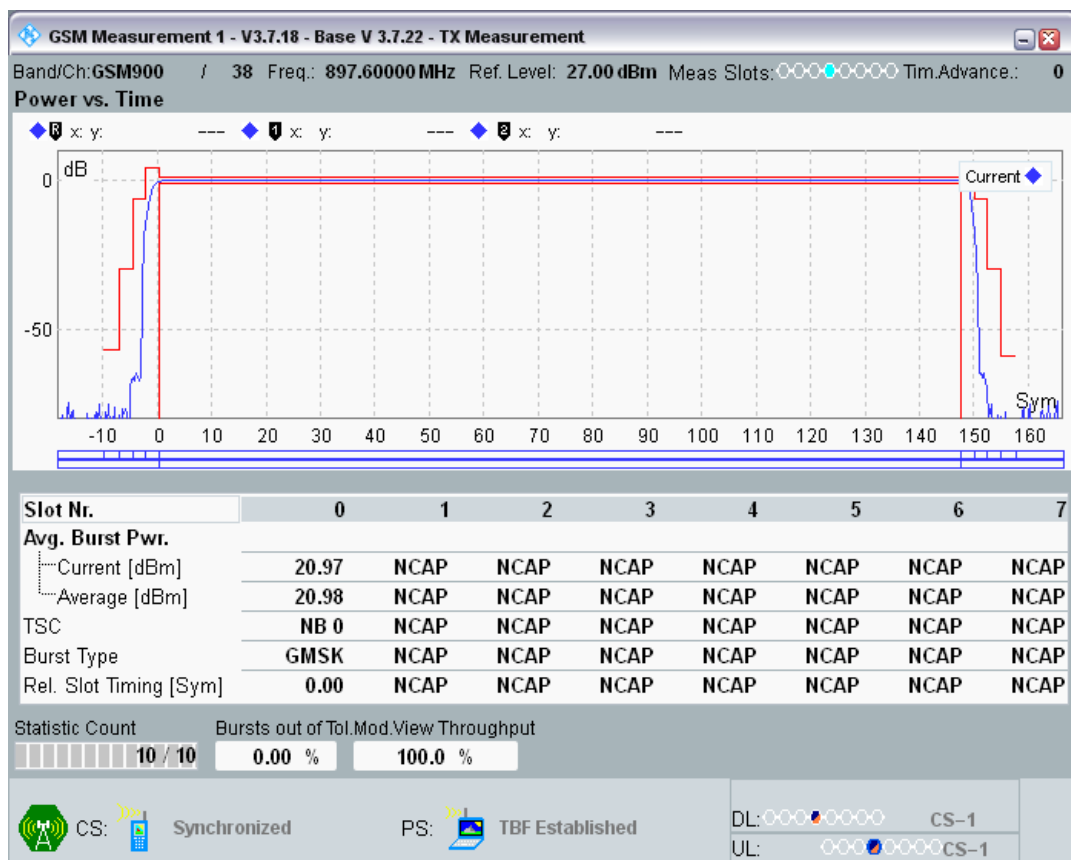

GPRS900 Channel=38 Gamma=10;10;10;10

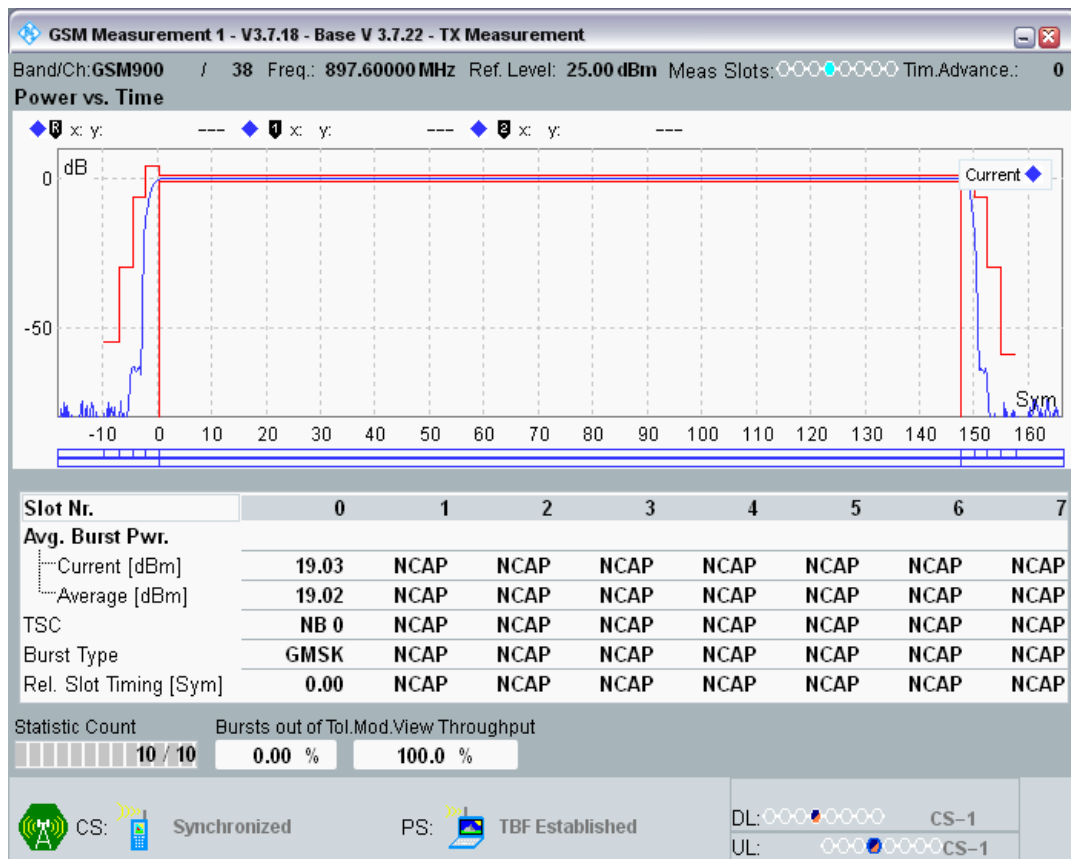

GPRS900 Channel=38 Gamma=11;11;11;11




GPRS900 Channel=38 Gamma=12;12;12;12




GPRS900 Channel=38 Gamma=13;13;13;13




GPRS900 Channel=38 Gamma=14;14;14;14

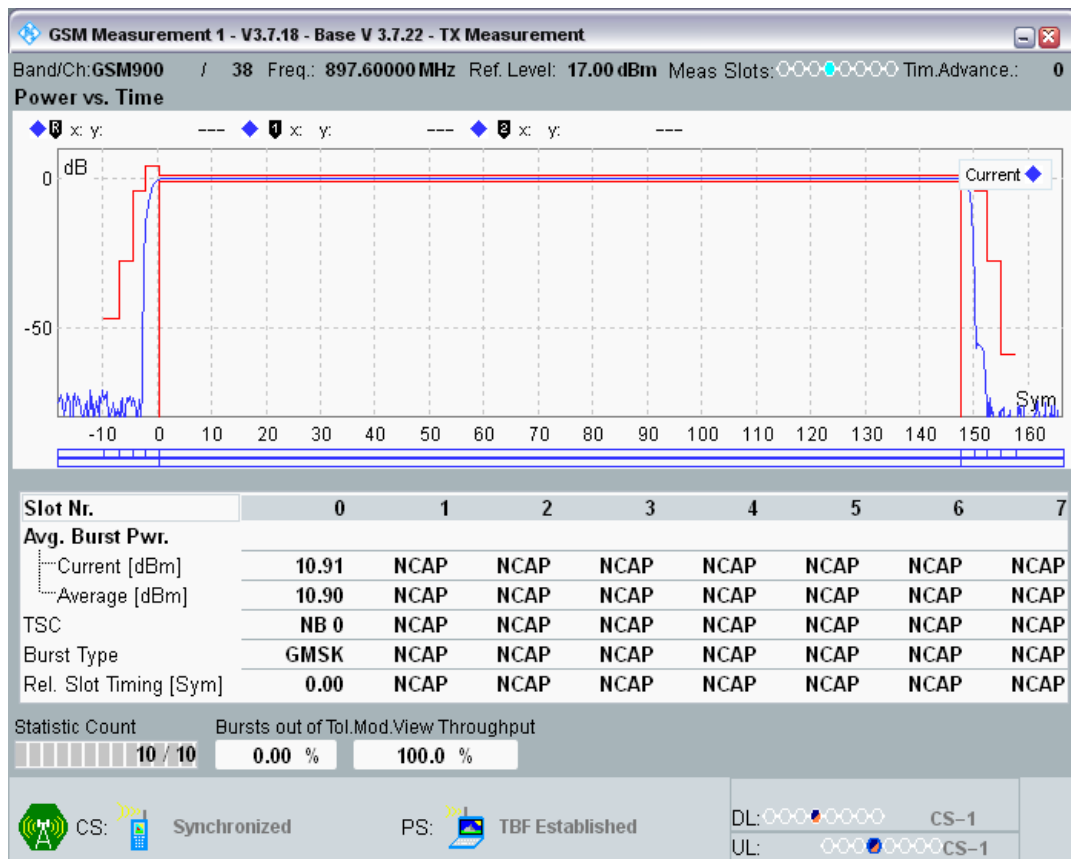


GPRS900 Channel=38 Gamma=15;15;15;15

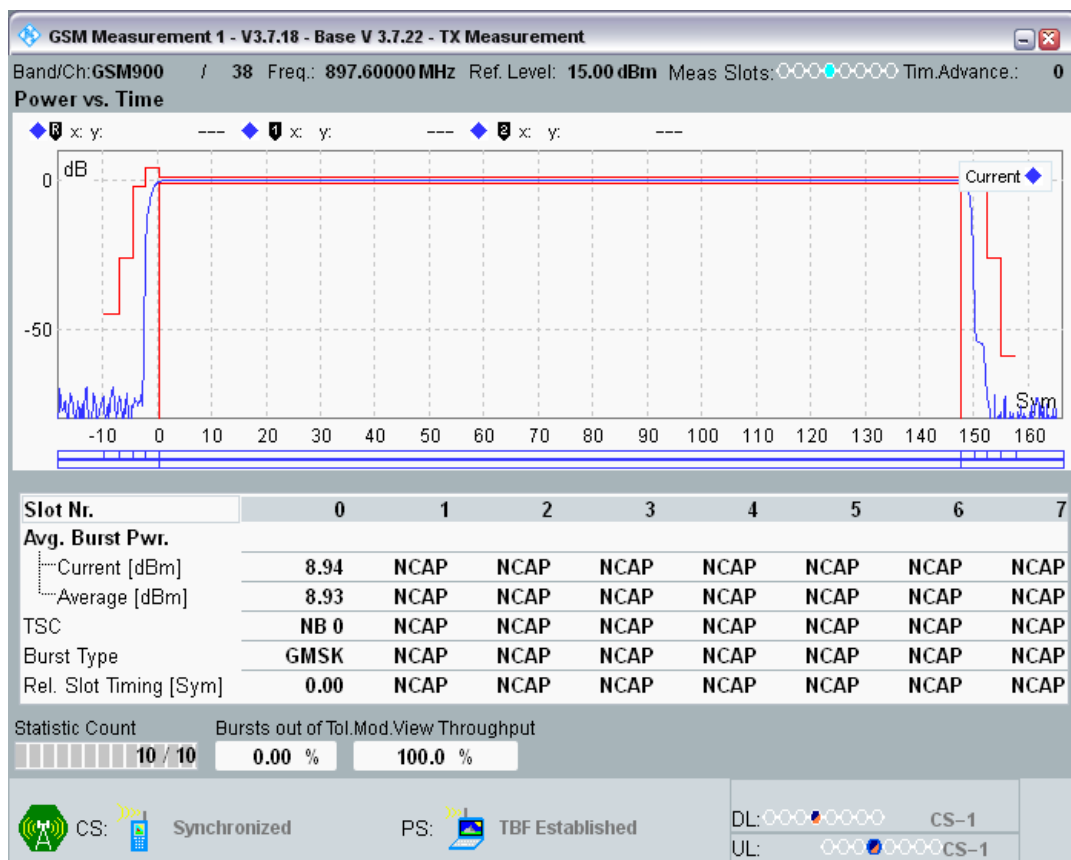


GPRS900 Channel=38 Gamma=16;16;16;16

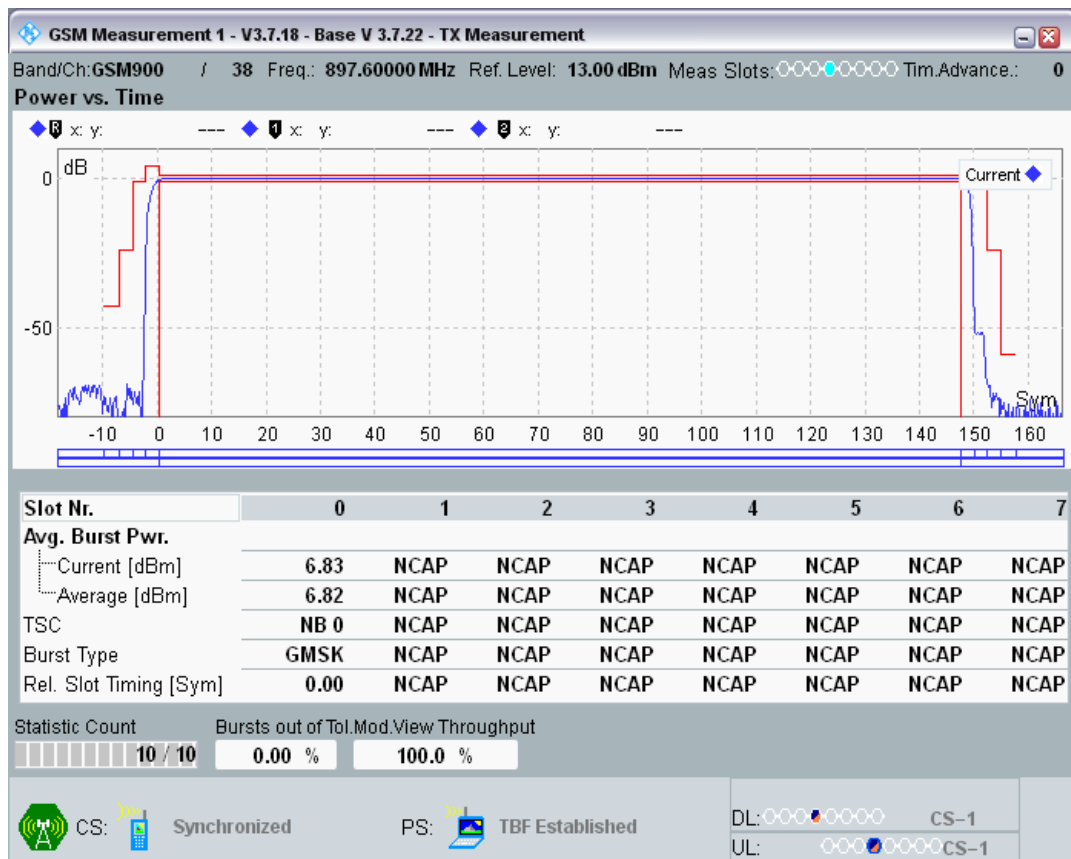


GPRS900 Channel=38 Gamma=17;17;17;17

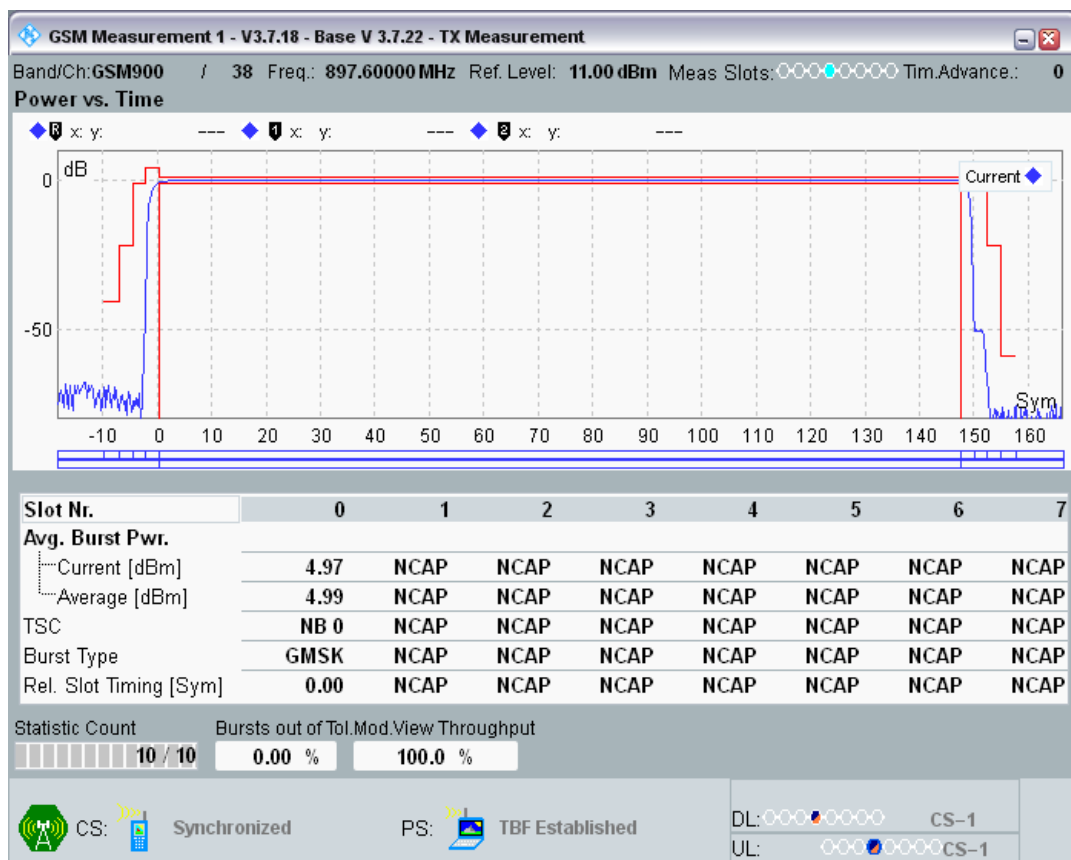


GPRS900 Channel=124 Gamma=3;3;3;3

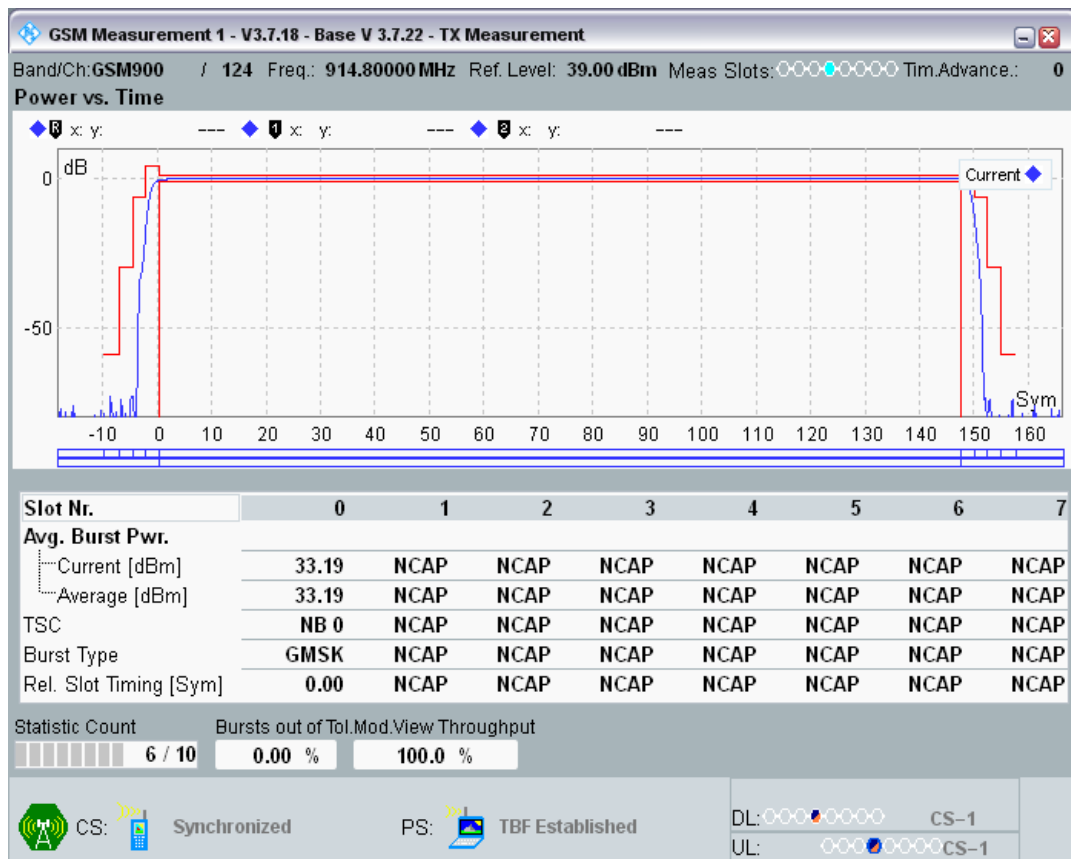


GPRS900 Channel=124 Gamma=4;4;4;4

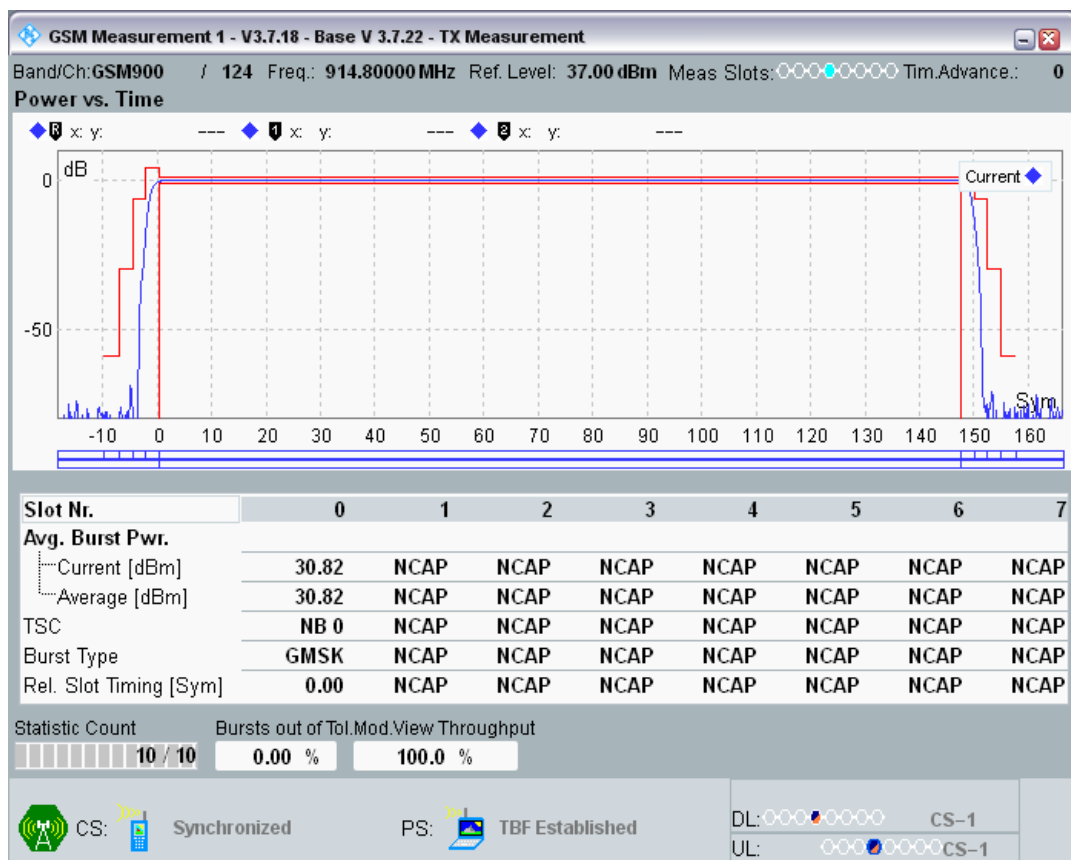


GPRS900 Channel=124 Gamma=5;5;5;5

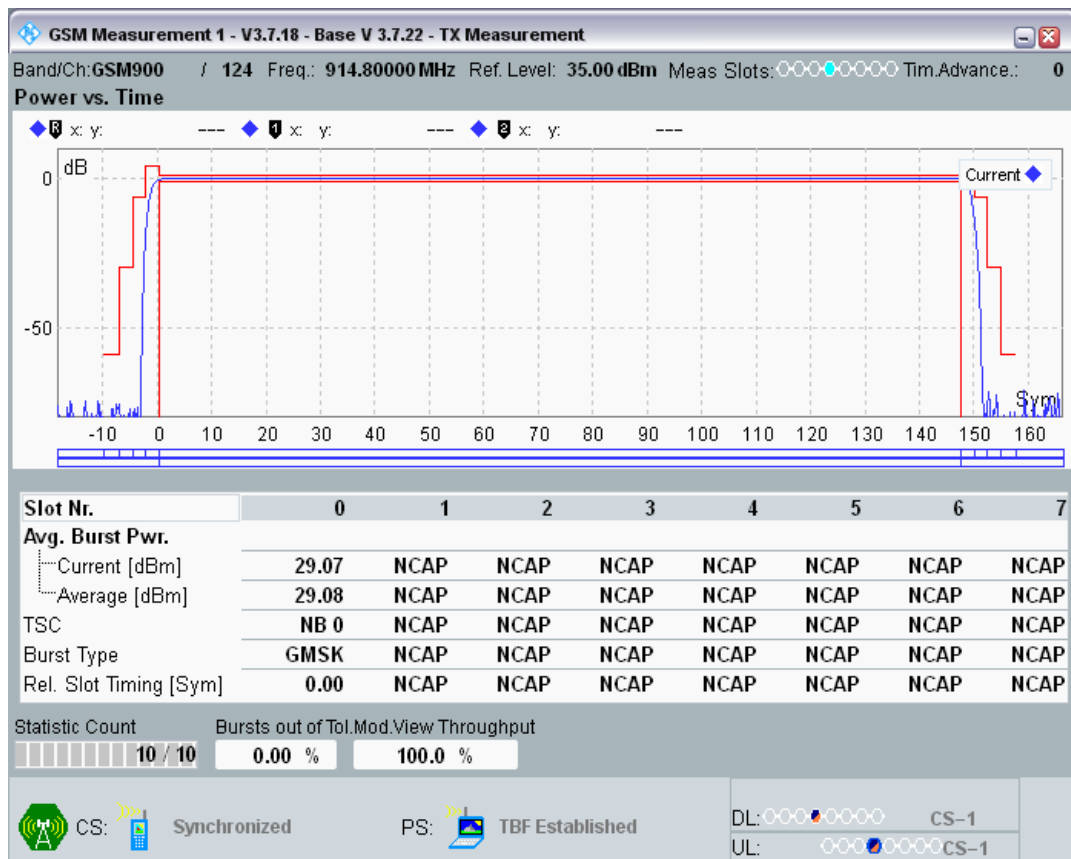

GPRS900 Channel=124 Gamma=6;6;6;6

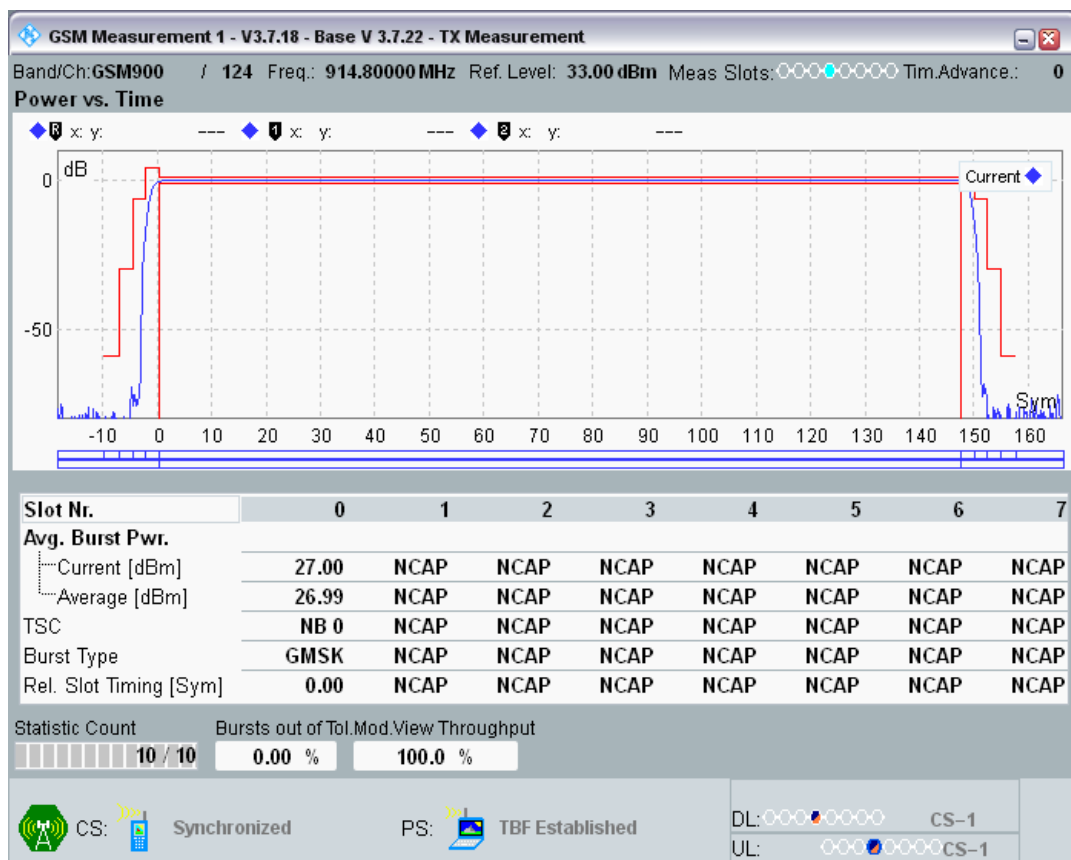


GPRS900 Channel=124 Gamma=7;7;7;7

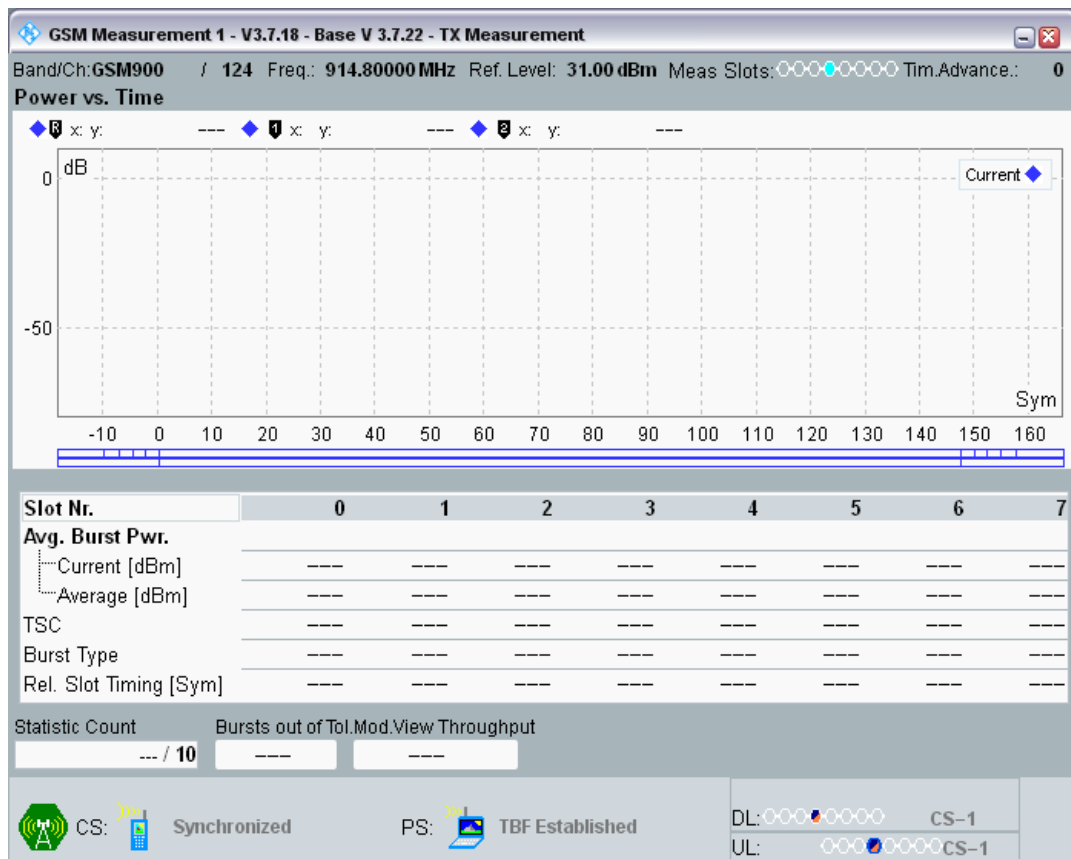


GPRS900 Channel=124 Gamma=8;8;8;8




GPRS900 Channel=124 Gamma=9;9;9;9

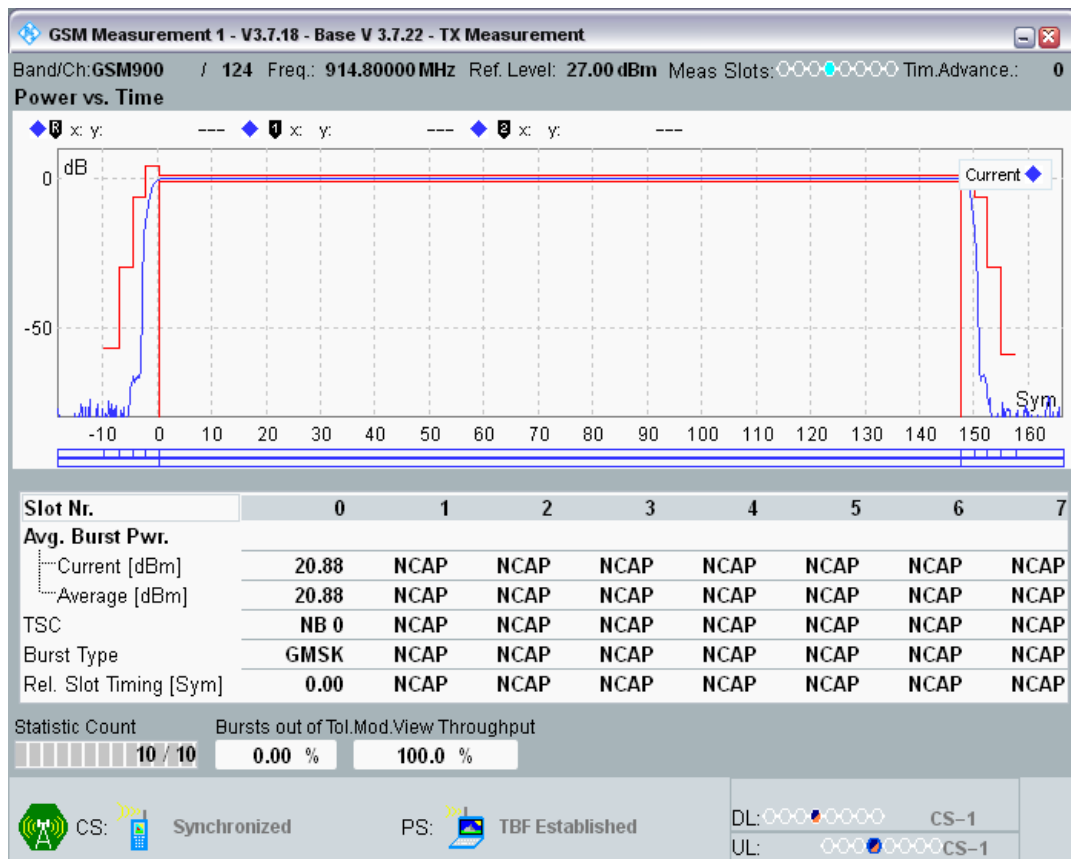


GPRS900 Channel=124 Gamma=10;10;10;10

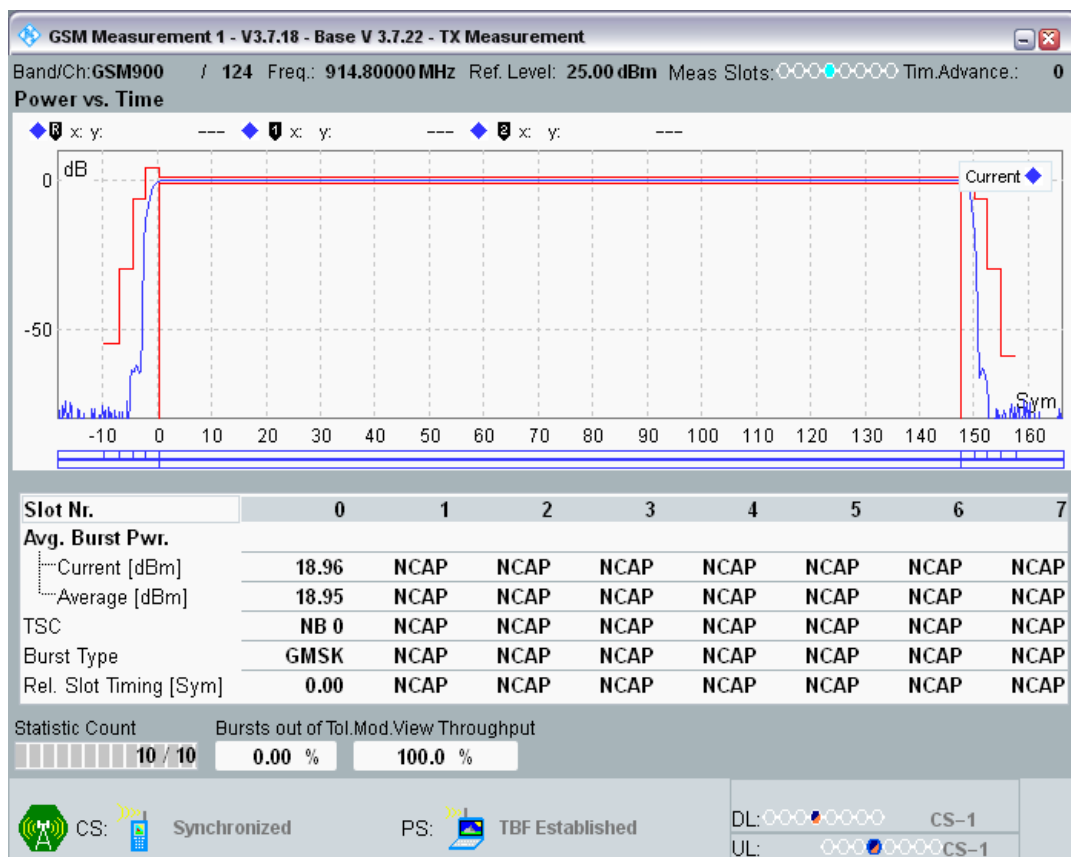


GPRS900 Channel=124 Gamma=11;11;11;11

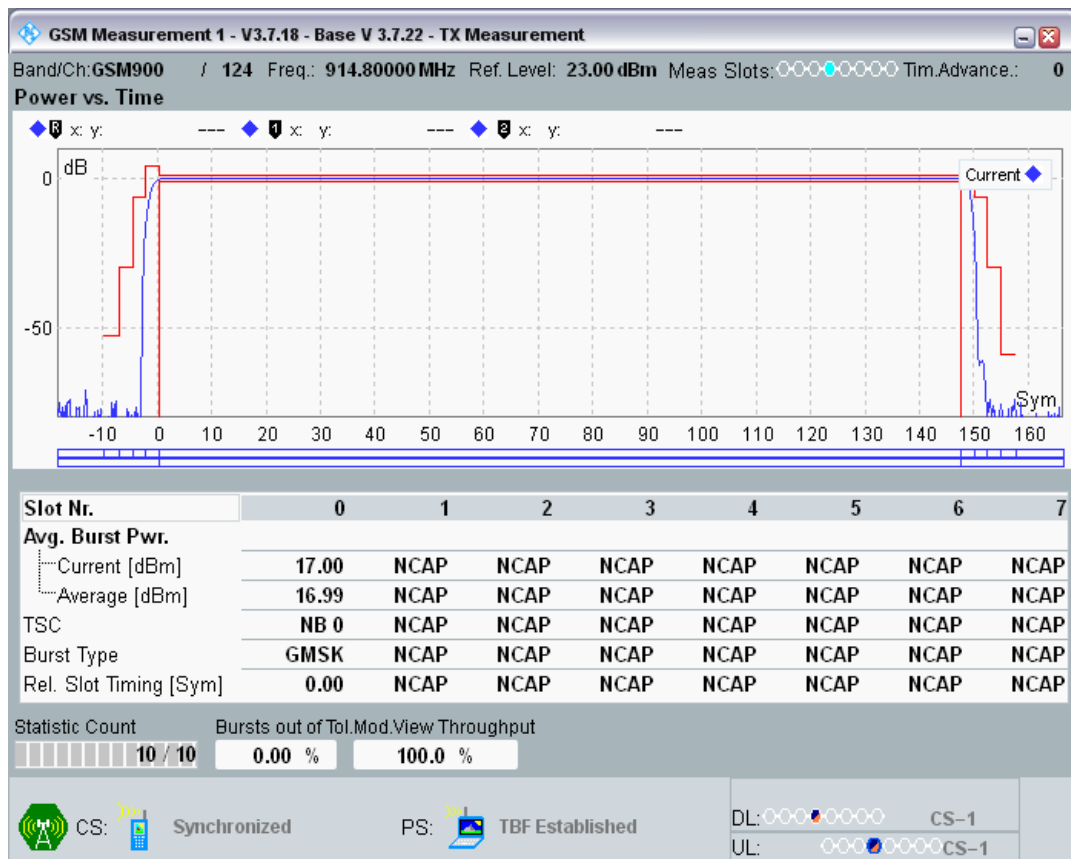


GPRS900 Channel=124 Gamma=12;12;12;12

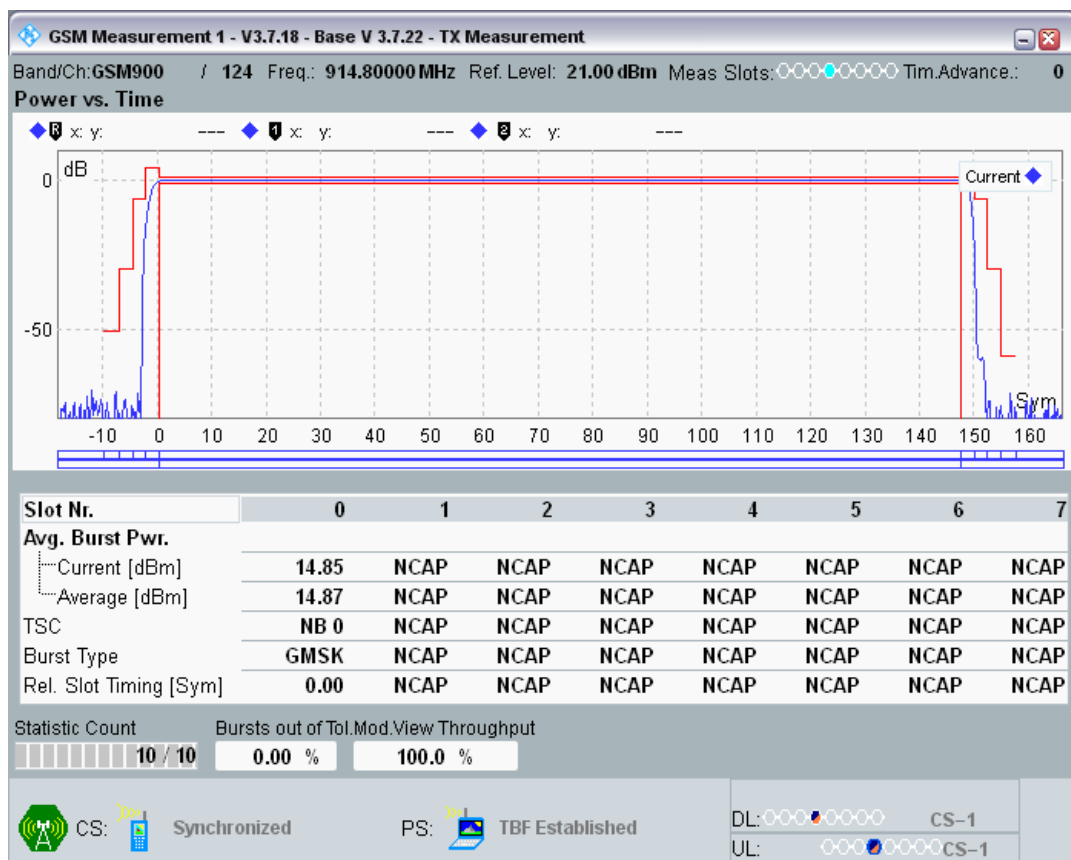


GPRS900 Channel=124 Gamma=13;13;13;13

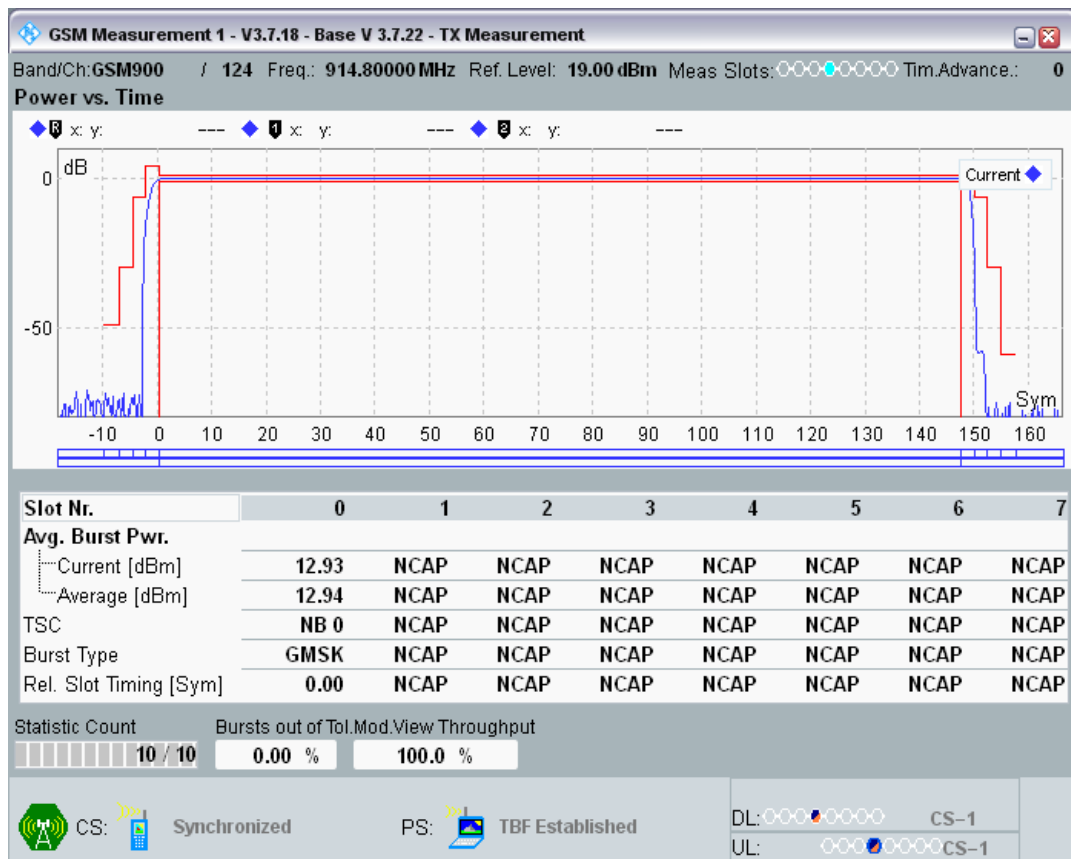


GPRS900 Channel=124 Gamma=14;14;14;14

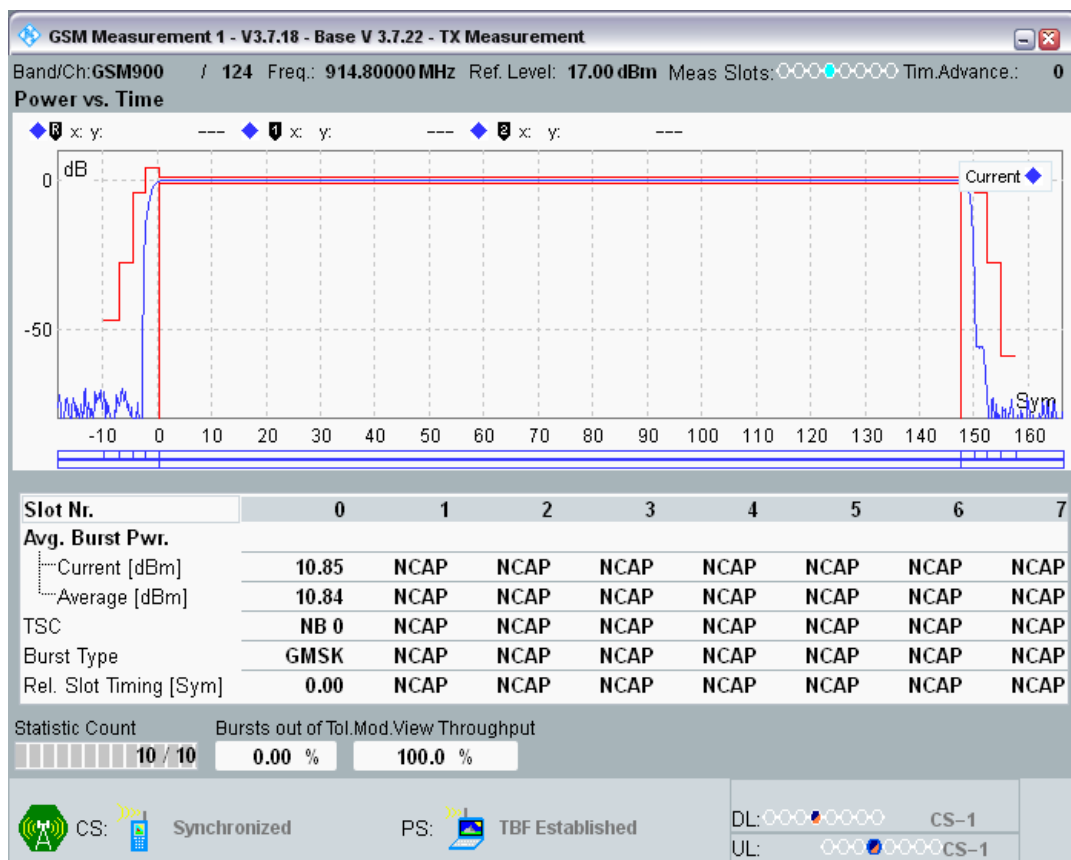


GPRS900 Channel=124 Gamma=15;15;15;15

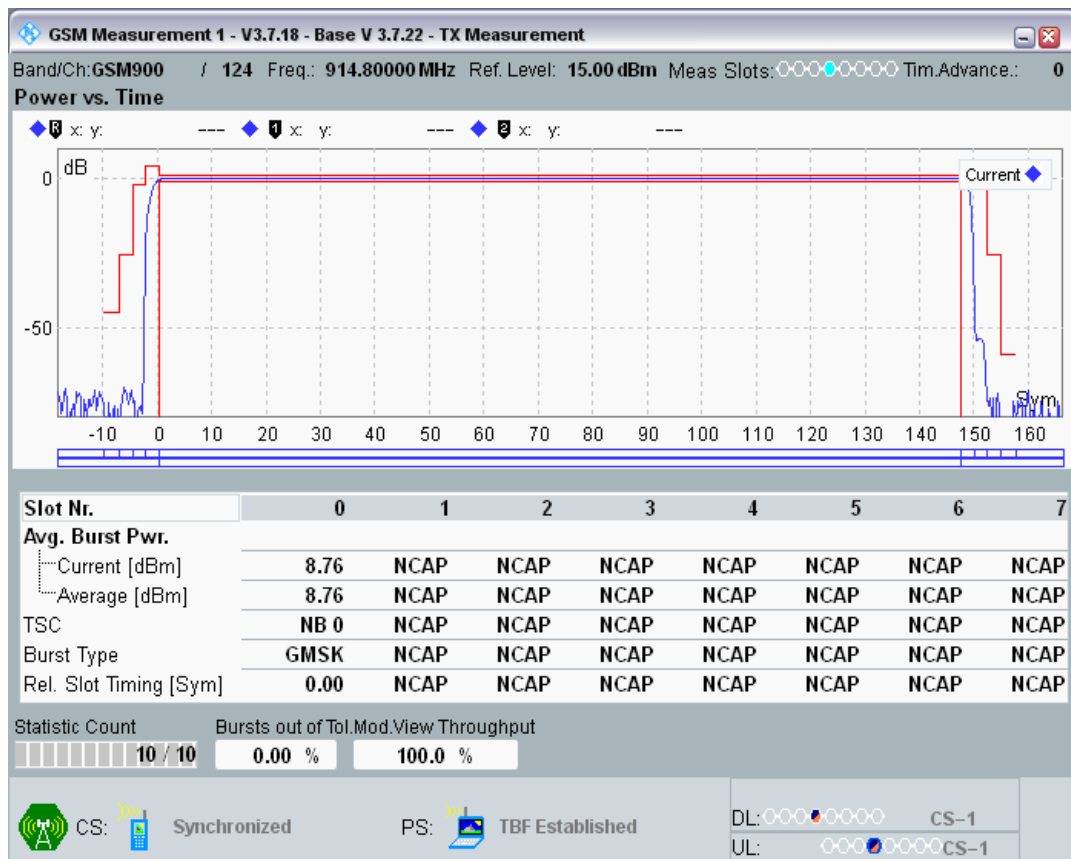

GPRS900 Channel=124 Gamma=16;16;16;16

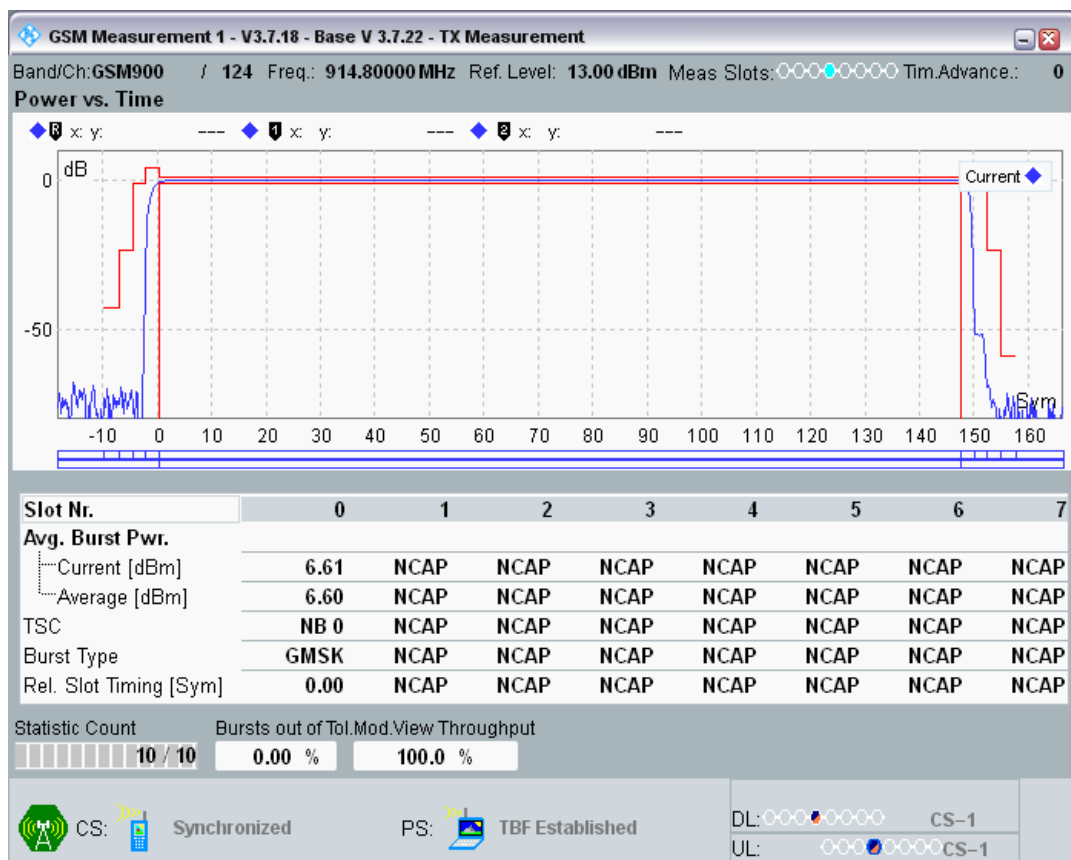

GPRS900 Channel=124 Gamma=17;17;17;17

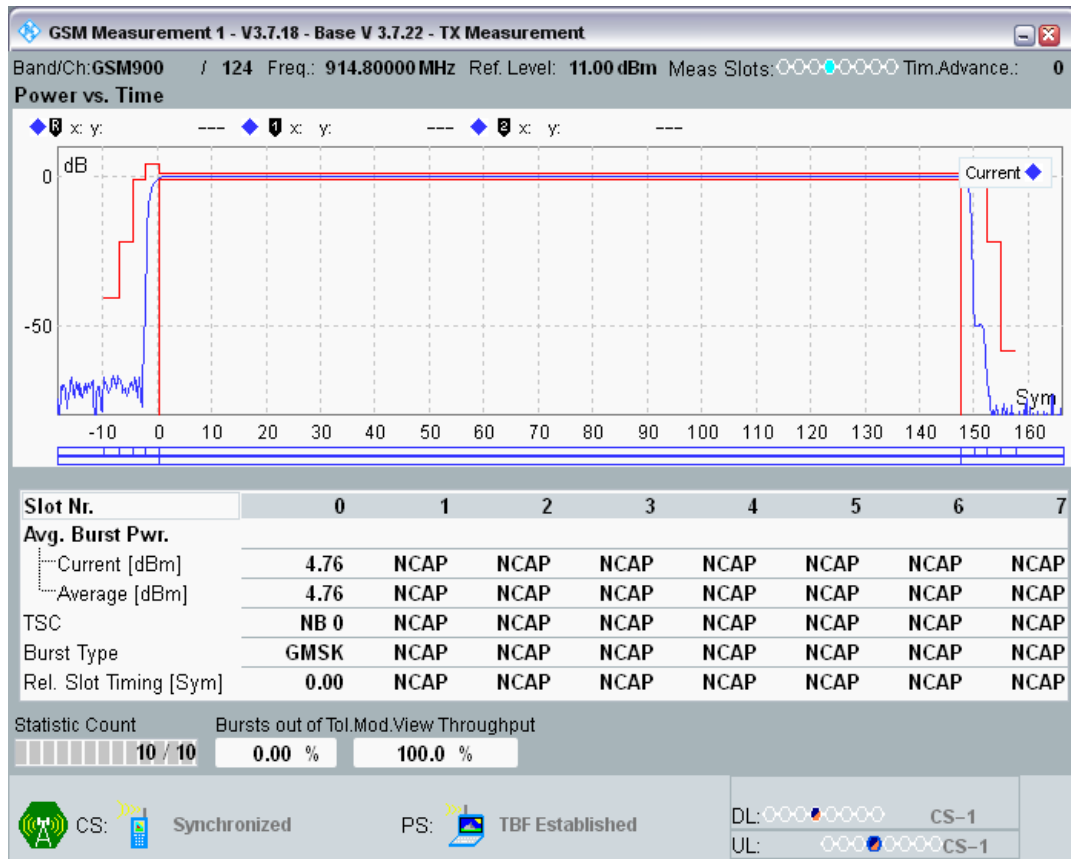

Clause 4.2.11 Modulation Spectrum in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (kHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GPRS1800	512	1710.2	3;3;3;3	-1800	-78.11	-60	-54.59	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	-1600	-76.39	-60	-52.87	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	-1400	-74.61	-60	-51.09	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	-1200	-74.38	-60	-50.86	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	-1000	-73.06	-60	-49.54	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	-800	-72.41	-60	-48.90	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	-600	-70.25	-60	-46.73	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	-400	-62.99	-60	-39.47	-36	PASS
GPRS1800	512	1710.2	3;3;3;3	-250	-41.62	-33	-18.10	-36	PASS
GPRS1800	512	1710.2	3;3;3;3	-200	-37.18	-30	-13.66	-36	PASS
GPRS1800	512	1710.2	3;3;3;3	-100	-10.45	0.5	13.07	-36	PASS
GPRS1800	512	1710.2	3;3;3;3	100	-9.45	0.5	14.07	-36	PASS
GPRS1800	512	1710.2	3;3;3;3	200	-37.40	-30	-13.89	-36	PASS
GPRS1800	512	1710.2	3;3;3;3	250	-41.19	-33	-17.67	-36	PASS
GPRS1800	512	1710.2	3;3;3;3	400	-63.10	-60	-39.58	-36	PASS
GPRS1800	512	1710.2	3;3;3;3	600	-70.07	-60	-46.55	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	800	-71.86	-60	-48.34	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	1000	-72.98	-60	-49.46	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	1200	-73.71	-60	-50.20	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	1400	-74.18	-60	-50.66	-55	PASS

GPRS1800	512	1710.2	3;3;3;3	1600	-76.18	-60	-52.66	-55	PASS
GPRS1800	512	1710.2	3;3;3;3	1800	-77.84	-60	-54.32	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	-1800	-68.28	-60	-74.18	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	-1600	-66.60	-60	-72.50	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	-1400	-66.37	-60	-72.27	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	-1200	-67.05	-60	-72.94	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	-1000	-66.45	-60	-72.35	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	-800	-67.73	-60	-73.62	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	-600	-66.38	-60	-72.27	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	-400	-61.15	-60	-67.05	-36	PASS
GPRS1800	512	1710.2	18;18;18;18	-250	-39.83	-33	-45.73	-36	PASS
GPRS1800	512	1710.2	18;18;18;18	-200	-36.50	-30	-42.40	-36	PASS
GPRS1800	512	1710.2	18;18;18;18	-100	-8.27	0.5	-14.17	-36	PASS
GPRS1800	512	1710.2	18;18;18;18	100	-8.44	0.5	-14.33	-36	PASS
GPRS1800	512	1710.2	18;18;18;18	200	-36.30	-30	-42.20	-36	PASS
GPRS1800	512	1710.2	18;18;18;18	250	-40.65	-33	-46.55	-36	PASS
GPRS1800	512	1710.2	18;18;18;18	400	-61.35	-60	-67.24	-36	PASS
GPRS1800	512	1710.2	18;18;18;18	600	-65.08	-60	-70.98	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	800	-67.90	-60	-73.80	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	1000	-65.52	-60	-71.42	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	1200	-66.85	-60	-72.75	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	1400	-66.17	-60	-72.07	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	1600	-65.92	-60	-71.82	-55	PASS
GPRS1800	512	1710.2	18;18;18;18	1800	-67.90	-60	-73.80	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	-1800	-79.37	-60	-55.40	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	-1600	-75.55	-60	-51.58	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	-1400	-75.67	-60	-51.70	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	-1200	-73.20	-60	-49.24	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	-1000	-74.24	-60	-50.27	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	-800	-72.68	-60	-48.71	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	-600	-71.32	-60	-47.36	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	-400	-64.64	-60	-40.67	-36	PASS
GPRS1800	698	1747.4	3;3;3;3	-250	-42.93	-33	-18.96	-36	PASS
GPRS1800	698	1747.4	3;3;3;3	-200	-37.61	-30	-13.64	-36	PASS
GPRS1800	698	1747.4	3;3;3;3	-100	-9.88	0.5	14.08	-36	PASS
GPRS1800	698	1747.4	3;3;3;3	100	-9.39	0.5	14.57	-36	PASS
GPRS1800	698	1747.4	3;3;3;3	200	-37.84	-30	-13.88	-36	PASS
GPRS1800	698	1747.4	3;3;3;3	250	-42.59	-33	-18.63	-36	PASS
GPRS1800	698	1747.4	3;3;3;3	400	-65.00	-60	-41.04	-36	PASS
GPRS1800	698	1747.4	3;3;3;3	600	-71.32	-60	-47.35	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	800	-71.09	-60	-47.13	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	1000	-74.64	-60	-50.67	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	1200	-72.91	-60	-48.94	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	1400	-75.98	-60	-52.01	-55	PASS

GPRS1800	698	1747.4	3;3;3;3	1600	-75.25	-60	-51.28	-55	PASS
GPRS1800	698	1747.4	3;3;3;3	1800	-78.09	-60	-54.13	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	-1800	-67.80	-60	-73.64	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	-1600	-67.69	-60	-73.53	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	-1400	-65.88	-60	-71.72	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	-1200	-68.18	-60	-74.02	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	-1000	-66.32	-60	-72.16	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	-800	-68.04	-60	-73.88	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	-600	-67.47	-60	-73.31	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	-400	-63.12	-60	-68.96	-36	PASS
GPRS1800	698	1747.4	18;18;18;18	-250	-41.28	-33	-47.12	-36	PASS
GPRS1800	698	1747.4	18;18;18;18	-200	-36.96	-30	-42.80	-36	PASS
GPRS1800	698	1747.4	18;18;18;18	-100	-9.15	0.5	-14.99	-36	PASS
GPRS1800	698	1747.4	18;18;18;18	100	-8.69	0.5	-14.53	-36	PASS
GPRS1800	698	1747.4	18;18;18;18	200	-36.30	-30	-42.14	-36	PASS
GPRS1800	698	1747.4	18;18;18;18	250	-41.20	-33	-47.05	-36	PASS
GPRS1800	698	1747.4	18;18;18;18	400	-62.22	-60	-68.06	-36	PASS
GPRS1800	698	1747.4	18;18;18;18	600	-66.24	-60	-72.09	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	800	-68.54	-60	-74.38	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	1000	-65.44	-60	-71.29	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	1200	-67.24	-60	-73.08	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	1400	-65.11	-60	-70.95	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	1600	-67.83	-60	-73.67	-55	PASS
GPRS1800	698	1747.4	18;18;18;18	1800	-68.13	-60	-73.97	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	-1800	-78.18	-60	-54.63	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	-1600	-75.27	-60	-51.71	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	-1400	-75.85	-60	-52.30	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	-1200	-72.74	-60	-49.19	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	-1000	-73.37	-60	-49.82	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	-800	-70.43	-60	-46.88	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	-600	-70.35	-60	-46.80	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	-400	-63.25	-60	-39.69	-36	PASS
GPRS1800	885	1784.8	3;3;3;3	-250	-40.80	-33	-17.24	-36	PASS
GPRS1800	885	1784.8	3;3;3;3	-200	-36.84	-30	-13.28	-36	PASS
GPRS1800	885	1784.8	3;3;3;3	-100	-8.50	0.5	15.06	-36	PASS
GPRS1800	885	1784.8	3;3;3;3	100	-9.50	0.5	14.05	-36	PASS
GPRS1800	885	1784.8	3;3;3;3	200	-36.80	-30	-13.24	-36	PASS
GPRS1800	885	1784.8	3;3;3;3	250	-40.94	-33	-17.39	-36	PASS
GPRS1800	885	1784.8	3;3;3;3	400	-64.25	-60	-40.69	-36	PASS
GPRS1800	885	1784.8	3;3;3;3	600	-70.56	-60	-47.01	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	800	-69.97	-60	-46.41	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	1000	-73.76	-60	-50.20	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	1200	-71.96	-60	-48.41	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	1400	-75.96	-60	-52.40	-55	PASS

GPRS1800	885	1784.8	3;3;3;3	1600	-74.89	-60	-51.34	-55	PASS
GPRS1800	885	1784.8	3;3;3;3	1800	-79.03	-60	-55.48	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	-1800	-68.96	-60	-74.00	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	-1600	-68.51	-60	-73.55	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	-1400	-67.29	-60	-72.34	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	-1200	-68.79	-60	-73.83	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	-1000	-65.66	-60	-70.70	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	-800	-68.47	-60	-73.51	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	-600	-67.13	-60	-72.17	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	-400	-63.27	-60	-68.31	-36	PASS
GPRS1800	885	1784.8	18;18;18;18	-250	-41.76	-33	-46.80	-36	PASS
GPRS1800	885	1784.8	18;18;18;18	-200	-37.94	-30	-42.99	-36	PASS
GPRS1800	885	1784.8	18;18;18;18	-100	-9.48	0.5	-14.53	-36	PASS
GPRS1800	885	1784.8	18;18;18;18	100	-9.72	0.5	-14.76	-36	PASS
GPRS1800	885	1784.8	18;18;18;18	200	-37.40	-30	-42.44	-36	PASS
GPRS1800	885	1784.8	18;18;18;18	250	-41.37	-33	-46.41	-36	PASS
GPRS1800	885	1784.8	18;18;18;18	400	-63.33	-60	-68.37	-36	PASS
GPRS1800	885	1784.8	18;18;18;18	600	-67.33	-60	-72.37	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	800	-68.33	-60	-73.37	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	1000	-65.64	-60	-70.69	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	1200	-68.21	-60	-73.25	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	1400	-66.80	-60	-71.84	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	1600	-67.99	-60	-73.03	-55	PASS
GPRS1800	885	1784.8	18;18;18;18	1800	-67.77	-60	-72.82	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	-1800	-79.55	-60	-56.54	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	-1600	-78.11	-60	-55.10	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	-1400	-76.75	-60	-53.74	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	-1200	-75.14	-60	-52.13	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	-1000	-75.29	-60	-52.28	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	-800	-73.38	-60	-50.37	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	-600	-71.39	-60	-48.38	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	-400	-64.68	-60	-41.67	-36	PASS
GPRS1900	512	1850.2	3;3;3;3	-250	-42.68	-33	-19.67	-36	PASS
GPRS1900	512	1850.2	3;3;3;3	-200	-37.18	-30	-14.17	-36	PASS
GPRS1900	512	1850.2	3;3;3;3	-100	-9.78	0.5	13.23	-36	PASS
GPRS1900	512	1850.2	3;3;3;3	100	-10.33	0.5	12.68	-36	PASS
GPRS1900	512	1850.2	3;3;3;3	200	-37.18	-30	-14.17	-36	PASS
GPRS1900	512	1850.2	3;3;3;3	250	-41.38	-33	-18.37	-36	PASS
GPRS1900	512	1850.2	3;3;3;3	400	-64.61	-60	-41.60	-36	PASS
GPRS1900	512	1850.2	3;3;3;3	600	-71.37	-60	-48.36	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	800	-71.23	-60	-48.22	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	1000	-75.12	-60	-52.11	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	1200	-74.21	-60	-51.20	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	1400	-76.81	-60	-53.80	-55	PASS

GPRS1900	512	1850.2	3;3;3;3	1600	-77.26	-60	-54.25	-55	PASS
GPRS1900	512	1850.2	3;3;3;3	1800	-79.68	-60	-56.67	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	-1800	-67.49	-60	-74.95	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	-1600	-68.20	-60	-75.66	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	-1400	-66.76	-60	-74.22	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	-1200	-67.11	-60	-74.57	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	-1000	-66.66	-60	-74.12	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	-800	-65.62	-60	-73.08	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	-600	-67.50	-60	-74.96	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	-400	-61.17	-60	-68.63	-36	PASS
GPRS1900	512	1850.2	18;18;18;18	-250	-40.82	-33	-48.28	-36	PASS
GPRS1900	512	1850.2	18;18;18;18	-200	-37.04	-30	-44.50	-36	PASS
GPRS1900	512	1850.2	18;18;18;18	-100	-7.78	0.5	-15.24	-36	PASS
GPRS1900	512	1850.2	18;18;18;18	100	-9.96	0.5	-17.42	-36	PASS
GPRS1900	512	1850.2	18;18;18;18	200	-37.12	-30	-44.58	-36	PASS
GPRS1900	512	1850.2	18;18;18;18	250	-41.25	-33	-48.71	-36	PASS
GPRS1900	512	1850.2	18;18;18;18	400	-62.66	-60	-70.13	-36	PASS
GPRS1900	512	1850.2	18;18;18;18	600	-67.52	-60	-74.98	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	800	-66.98	-60	-74.45	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	1000	-66.95	-60	-74.41	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	1200	-66.72	-60	-74.18	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	1400	-66.28	-60	-73.74	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	1600	-67.19	-60	-74.65	-55	PASS
GPRS1900	512	1850.2	18;18;18;18	1800	-67.55	-60	-75.01	-55	PASS
GPRS1900	661	1880	3;3;3;3	-1800	-78.09	-60	-55.80	-55	PASS
GPRS1900	661	1880	3;3;3;3	-1600	-76.81	-60	-54.52	-55	PASS
GPRS1900	661	1880	3;3;3;3	-1400	-76.16	-60	-53.87	-55	PASS
GPRS1900	661	1880	3;3;3;3	-1200	-74.13	-60	-51.84	-55	PASS
GPRS1900	661	1880	3;3;3;3	-1000	-73.70	-60	-51.41	-55	PASS
GPRS1900	661	1880	3;3;3;3	-800	-71.23	-60	-48.93	-55	PASS
GPRS1900	661	1880	3;3;3;3	-600	-69.68	-60	-47.39	-55	PASS
GPRS1900	661	1880	3;3;3;3	-400	-63.37	-60	-41.08	-36	PASS
GPRS1900	661	1880	3;3;3;3	-250	-40.85	-33	-18.56	-36	PASS
GPRS1900	661	1880	3;3;3;3	-200	-36.42	-30	-14.13	-36	PASS
GPRS1900	661	1880	3;3;3;3	-100	-8.10	0.5	14.19	-36	PASS
GPRS1900	661	1880	3;3;3;3	100	-8.71	0.5	13.58	-36	PASS
GPRS1900	661	1880	3;3;3;3	200	-35.72	-30	-13.43	-36	PASS
GPRS1900	661	1880	3;3;3;3	250	-41.49	-33	-19.20	-36	PASS
GPRS1900	661	1880	3;3;3;3	400	-63.94	-60	-41.65	-36	PASS
GPRS1900	661	1880	3;3;3;3	600	-70.23	-60	-47.94	-55	PASS
GPRS1900	661	1880	3;3;3;3	800	-70.05	-60	-47.76	-55	PASS
GPRS1900	661	1880	3;3;3;3	1000	-73.95	-60	-51.66	-55	PASS
GPRS1900	661	1880	3;3;3;3	1200	-73.18	-60	-50.89	-55	PASS
GPRS1900	661	1880	3;3;3;3	1400	-76.87	-60	-54.58	-55	PASS

GPRS1900	661	1880	3;3;3;3	1600	-76.31	-60	-54.02	-55	PASS
GPRS1900	661	1880	3;3;3;3	1800	-78.48	-60	-56.19	-55	PASS
GPRS1900	661	1880	18;18;18;18	-1800	-66.77	-60	-74.77	-55	PASS
GPRS1900	661	1880	18;18;18;18	-1600	-66.89	-60	-74.89	-55	PASS
GPRS1900	661	1880	18;18;18;18	-1400	-65.33	-60	-73.34	-55	PASS
GPRS1900	661	1880	18;18;18;18	-1200	-66.76	-60	-74.77	-55	PASS
GPRS1900	661	1880	18;18;18;18	-1000	-65.73	-60	-73.74	-55	PASS
GPRS1900	661	1880	18;18;18;18	-800	-66.84	-60	-74.84	-55	PASS
GPRS1900	661	1880	18;18;18;18	-600	-66.00	-60	-74.00	-55	PASS
GPRS1900	661	1880	18;18;18;18	-400	-61.04	-60	-69.04	-36	PASS
GPRS1900	661	1880	18;18;18;18	-250	-40.67	-33	-48.67	-36	PASS
GPRS1900	661	1880	18;18;18;18	-200	-35.81	-30	-43.82	-36	PASS
GPRS1900	661	1880	18;18;18;18	-100	-8.64	0.5	-16.65	-36	PASS
GPRS1900	661	1880	18;18;18;18	100	-8.01	0.5	-16.01	-36	PASS
GPRS1900	661	1880	18;18;18;18	200	-36.03	-30	-44.03	-36	PASS
GPRS1900	661	1880	18;18;18;18	250	-40.91	-33	-48.92	-36	PASS
GPRS1900	661	1880	18;18;18;18	400	-61.13	-60	-69.14	-36	PASS
GPRS1900	661	1880	18;18;18;18	600	-66.37	-60	-74.37	-55	PASS
GPRS1900	661	1880	18;18;18;18	800	-65.98	-60	-73.99	-55	PASS
GPRS1900	661	1880	18;18;18;18	1000	-66.12	-60	-74.12	-55	PASS
GPRS1900	661	1880	18;18;18;18	1200	-66.83	-60	-74.84	-55	PASS
GPRS1900	661	1880	18;18;18;18	1400	-65.36	-60	-73.37	-55	PASS
GPRS1900	661	1880	18;18;18;18	1600	-67.28	-60	-75.28	-55	PASS
GPRS1900	661	1880	18;18;18;18	1800	-66.50	-60	-74.51	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	-1800	-77.35	-60	-55.09	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	-1600	-76.40	-60	-54.15	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	-1400	-76.39	-60	-54.13	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	-1200	-73.26	-60	-51.01	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	-1000	-73.57	-60	-51.31	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	-800	-71.53	-60	-49.28	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	-600	-70.50	-60	-48.25	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	-400	-62.48	-60	-40.23	-36	PASS
GPRS1900	810	1909.8	3;3;3;3	-250	-40.91	-33	-18.66	-36	PASS
GPRS1900	810	1909.8	3;3;3;3	-200	-36.53	-30	-14.28	-36	PASS
GPRS1900	810	1909.8	3;3;3;3	-100	-8.44	0.5	13.81	-36	PASS
GPRS1900	810	1909.8	3;3;3;3	100	-8.87	0.5	13.38	-36	PASS
GPRS1900	810	1909.8	3;3;3;3	200	-36.22	-30	-13.96	-36	PASS
GPRS1900	810	1909.8	3;3;3;3	250	-42.37	-33	-20.12	-36	PASS
GPRS1900	810	1909.8	3;3;3;3	400	-63.20	-60	-40.95	-36	PASS
GPRS1900	810	1909.8	3;3;3;3	600	-69.46	-60	-47.21	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	800	-70.51	-60	-48.26	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	1000	-74.23	-60	-51.97	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	1200	-72.83	-60	-50.57	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	1400	-75.58	-60	-53.32	-55	PASS

GPRS1900	810	1909.8	3;3;3;3	1600	-75.75	-60	-53.49	-55	PASS
GPRS1900	810	1909.8	3;3;3;3	1800	-78.22	-60	-55.96	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	-1800	-67.98	-60	-75.45	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	-1600	-68.18	-60	-75.64	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	-1400	-66.02	-60	-73.48	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	-1200	-67.37	-60	-74.83	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	-1000	-66.99	-60	-74.45	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	-800	-66.28	-60	-73.74	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	-600	-66.86	-60	-74.32	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	-400	-61.17	-60	-68.64	-36	PASS
GPRS1900	810	1909.8	18;18;18;18	-250	-41.47	-33	-48.94	-36	PASS
GPRS1900	810	1909.8	18;18;18;18	-200	-36.99	-30	-44.45	-36	PASS
GPRS1900	810	1909.8	18;18;18;18	-100	-8.42	0.5	-15.88	-36	PASS
GPRS1900	810	1909.8	18;18;18;18	100	-9.11	0.5	-16.57	-36	PASS
GPRS1900	810	1909.8	18;18;18;18	200	-36.39	-30	-43.85	-36	PASS
GPRS1900	810	1909.8	18;18;18;18	250	-41.26	-33	-48.72	-36	PASS
GPRS1900	810	1909.8	18;18;18;18	400	-61.48	-60	-68.95	-36	PASS
GPRS1900	810	1909.8	18;18;18;18	600	-66.43	-60	-73.90	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	800	-66.59	-60	-74.05	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	1000	-65.69	-60	-73.16	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	1200	-66.64	-60	-74.10	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	1400	-65.93	-60	-73.39	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	1600	-67.80	-60	-75.26	-55	PASS
GPRS1900	810	1909.8	18;18;18;18	1800	-67.33	-60	-74.80	-55	PASS
GPRS850	128	824.2	3;3;3;3	-1800	-79.73	-60	-53.46	-51	PASS
GPRS850	128	824.2	3;3;3;3	-1600	-79.91	-60	-53.64	-51	PASS
GPRS850	128	824.2	3;3;3;3	-1400	-77.30	-60	-51.03	-51	PASS
GPRS850	128	824.2	3;3;3;3	-1200	-76.87	-60	-50.60	-51	PASS
GPRS850	128	824.2	3;3;3;3	-1000	-74.98	-60	-48.71	-51	PASS
GPRS850	128	824.2	3;3;3;3	-800	-73.94	-60	-47.67	-51	PASS
GPRS850	128	824.2	3;3;3;3	-600	-72.84	-60	-46.57	-51	PASS
GPRS850	128	824.2	3;3;3;3	-400	-66.92	-60	-40.65	-36	PASS
GPRS850	128	824.2	3;3;3;3	-250	-41.16	-33	-14.89	-36	PASS
GPRS850	128	824.2	3;3;3;3	-200	-37.01	-30	-10.74	-36	PASS
GPRS850	128	824.2	3;3;3;3	-100	-8.66	0.5	17.61	-36	PASS
GPRS850	128	824.2	3;3;3;3	100	-9.49	0.5	16.78	-36	PASS
GPRS850	128	824.2	3;3;3;3	200	-37.20	-30	-10.93	-36	PASS
GPRS850	128	824.2	3;3;3;3	250	-41.07	-33	-14.80	-36	PASS
GPRS850	128	824.2	3;3;3;3	400	-66.48	-60	-40.21	-36	PASS
GPRS850	128	824.2	3;3;3;3	600	-72.30	-60	-46.03	-51	PASS
GPRS850	128	824.2	3;3;3;3	800	-73.68	-60	-47.41	-51	PASS
GPRS850	128	824.2	3;3;3;3	1000	-74.64	-60	-48.37	-51	PASS
GPRS850	128	824.2	3;3;3;3	1200	-76.50	-60	-50.23	-51	PASS
GPRS850	128	824.2	3;3;3;3	1400	-75.91	-60	-49.64	-51	PASS

GPRS850	128	824.2	3;3;3;3	1600	-79.61	-60	-53.35	-51	PASS
GPRS850	128	824.2	3;3;3;3	1800	-80.36	-60	-54.09	-51	PASS
GPRS850	128	824.2	17;17;17;17	-1800	-70.39	-60	-71.89	-51	PASS
GPRS850	128	824.2	17;17;17;17	-1600	-70.38	-60	-71.88	-51	PASS
GPRS850	128	824.2	17;17;17;17	-1400	-65.82	-60	-67.31	-51	PASS
GPRS850	128	824.2	17;17;17;17	-1200	-68.77	-60	-70.27	-51	PASS
GPRS850	128	824.2	17;17;17;17	-1000	-66.73	-60	-68.23	-51	PASS
GPRS850	128	824.2	17;17;17;17	-800	-67.68	-60	-69.18	-51	PASS
GPRS850	128	824.2	17;17;17;17	-600	-68.53	-60	-70.02	-51	PASS
GPRS850	128	824.2	17;17;17;17	-400	-63.43	-60	-64.92	-36	PASS
GPRS850	128	824.2	17;17;17;17	-250	-40.85	-33	-42.35	-36	PASS
GPRS850	128	824.2	17;17;17;17	-200	-37.28	-30	-38.78	-36	PASS
GPRS850	128	824.2	17;17;17;17	-100	-8.94	0.5	-10.44	-36	PASS
GPRS850	128	824.2	17;17;17;17	100	-8.34	0.5	-9.84	-36	PASS
GPRS850	128	824.2	17;17;17;17	200	-37.14	-30	-38.64	-36	PASS
GPRS850	128	824.2	17;17;17;17	250	-41.65	-33	-43.14	-36	PASS
GPRS850	128	824.2	17;17;17;17	400	-64.56	-60	-66.06	-36	PASS
GPRS850	128	824.2	17;17;17;17	600	-69.41	-60	-70.91	-51	PASS
GPRS850	128	824.2	17;17;17;17	800	-67.54	-60	-69.04	-51	PASS
GPRS850	128	824.2	17;17;17;17	1000	-66.95	-60	-68.44	-51	PASS
GPRS850	128	824.2	17;17;17;17	1200	-69.58	-60	-71.08	-51	PASS
GPRS850	128	824.2	17;17;17;17	1400	-65.63	-60	-67.13	-51	PASS
GPRS850	128	824.2	17;17;17;17	1600	-70.55	-60	-72.04	-51	PASS
GPRS850	128	824.2	17;17;17;17	1800	-69.94	-60	-71.44	-51	PASS
GPRS850	190	836.6	3;3;3;3	-1800	-79.91	-60	-54.55	-51	PASS
GPRS850	190	836.6	3;3;3;3	-1600	-79.14	-60	-53.77	-51	PASS
GPRS850	190	836.6	3;3;3;3	-1400	-76.52	-60	-51.15	-51	PASS
GPRS850	190	836.6	3;3;3;3	-1200	-77.41	-60	-52.04	-51	PASS
GPRS850	190	836.6	3;3;3;3	-1000	-74.26	-60	-48.90	-51	PASS
GPRS850	190	836.6	3;3;3;3	-800	-74.26	-60	-48.90	-51	PASS
GPRS850	190	836.6	3;3;3;3	-600	-72.75	-60	-47.39	-51	PASS
GPRS850	190	836.6	3;3;3;3	-400	-65.77	-60	-40.41	-36	PASS
GPRS850	190	836.6	3;3;3;3	-250	-41.04	-33	-15.67	-36	PASS
GPRS850	190	836.6	3;3;3;3	-200	-36.26	-30	-10.90	-36	PASS
GPRS850	190	836.6	3;3;3;3	-100	-8.31	0.5	17.05	-36	PASS
GPRS850	190	836.6	3;3;3;3	100	-8.49	0.5	16.87	-36	PASS
GPRS850	190	836.6	3;3;3;3	200	-36.90	-30	-11.54	-36	PASS
GPRS850	190	836.6	3;3;3;3	250	-41.53	-33	-16.16	-36	PASS
GPRS850	190	836.6	3;3;3;3	400	-65.99	-60	-40.62	-36	PASS
GPRS850	190	836.6	3;3;3;3	600	-72.77	-60	-47.40	-51	PASS
GPRS850	190	836.6	3;3;3;3	800	-73.02	-60	-47.66	-51	PASS
GPRS850	190	836.6	3;3;3;3	1000	-73.87	-60	-48.51	-51	PASS
GPRS850	190	836.6	3;3;3;3	1200	-76.16	-60	-50.80	-51	PASS
GPRS850	190	836.6	3;3;3;3	1400	-74.98	-60	-49.62	-51	PASS

GPRS850	190	836.6	3;3;3;3	1600	-79.37	-60	-54.00	-51	PASS
GPRS850	190	836.6	3;3;3;3	1800	-79.13	-60	-53.76	-51	PASS
GPRS850	190	836.6	17;17;17;17	-1800	-69.73	-60	-72.11	-51	PASS
GPRS850	190	836.6	17;17;17;17	-1600	-69.67	-60	-72.05	-51	PASS
GPRS850	190	836.6	17;17;17;17	-1400	-65.33	-60	-67.71	-51	PASS
GPRS850	190	836.6	17;17;17;17	-1200	-68.08	-60	-70.46	-51	PASS
GPRS850	190	836.6	17;17;17;17	-1000	-67.07	-60	-69.45	-51	PASS
GPRS850	190	836.6	17;17;17;17	-800	-66.28	-60	-68.66	-51	PASS
GPRS850	190	836.6	17;17;17;17	-600	-69.06	-60	-71.44	-51	PASS
GPRS850	190	836.6	17;17;17;17	-400	-62.29	-60	-64.67	-36	PASS
GPRS850	190	836.6	17;17;17;17	-250	-40.65	-33	-43.03	-36	PASS
GPRS850	190	836.6	17;17;17;17	-200	-36.73	-30	-39.11	-36	PASS
GPRS850	190	836.6	17;17;17;17	-100	-7.94	0.5	-10.32	-36	PASS
GPRS850	190	836.6	17;17;17;17	100	-8.77	0.5	-11.15	-36	PASS
GPRS850	190	836.6	17;17;17;17	200	-36.97	-30	-39.35	-36	PASS
GPRS850	190	836.6	17;17;17;17	250	-41.26	-33	-43.64	-36	PASS
GPRS850	190	836.6	17;17;17;17	400	-63.97	-60	-66.35	-36	PASS
GPRS850	190	836.6	17;17;17;17	600	-68.30	-60	-70.68	-51	PASS
GPRS850	190	836.6	17;17;17;17	800	-67.68	-60	-70.06	-51	PASS
GPRS850	190	836.6	17;17;17;17	1000	-66.13	-60	-68.51	-51	PASS
GPRS850	190	836.6	17;17;17;17	1200	-67.73	-60	-70.11	-51	PASS
GPRS850	190	836.6	17;17;17;17	1400	-65.95	-60	-68.33	-51	PASS
GPRS850	190	836.6	17;17;17;17	1600	-69.42	-60	-71.80	-51	PASS
GPRS850	190	836.6	17;17;17;17	1800	-68.89	-60	-71.27	-51	PASS
GPRS850	251	848.8	3;3;3;3	-1800	-80.65	-60	-54.69	-51	PASS
GPRS850	251	848.8	3;3;3;3	-1600	-80.04	-60	-54.08	-51	PASS
GPRS850	251	848.8	3;3;3;3	-1400	-77.15	-60	-51.18	-51	PASS
GPRS850	251	848.8	3;3;3;3	-1200	-77.94	-60	-51.98	-51	PASS
GPRS850	251	848.8	3;3;3;3	-1000	-75.69	-60	-49.73	-51	PASS
GPRS850	251	848.8	3;3;3;3	-800	-74.15	-60	-48.19	-51	PASS
GPRS850	251	848.8	3;3;3;3	-600	-73.50	-60	-47.53	-51	PASS
GPRS850	251	848.8	3;3;3;3	-400	-65.88	-60	-39.92	-36	PASS
GPRS850	251	848.8	3;3;3;3	-250	-40.89	-33	-14.92	-36	PASS
GPRS850	251	848.8	3;3;3;3	-200	-37.17	-30	-11.21	-36	PASS
GPRS850	251	848.8	3;3;3;3	-100	-9.18	0.5	16.78	-36	PASS
GPRS850	251	848.8	3;3;3;3	100	-8.80	0.5	17.16	-36	PASS
GPRS850	251	848.8	3;3;3;3	200	-37.75	-30	-11.79	-36	PASS
GPRS850	251	848.8	3;3;3;3	250	-40.78	-33	-14.82	-36	PASS
GPRS850	251	848.8	3;3;3;3	400	-66.87	-60	-40.91	-36	PASS
GPRS850	251	848.8	3;3;3;3	600	-72.57	-60	-46.61	-51	PASS
GPRS850	251	848.8	3;3;3;3	800	-73.89	-60	-47.93	-51	PASS
GPRS850	251	848.8	3;3;3;3	1000	-74.54	-60	-48.58	-51	PASS
GPRS850	251	848.8	3;3;3;3	1200	-77.60	-60	-51.64	-51	PASS
GPRS850	251	848.8	3;3;3;3	1400	-76.36	-60	-50.40	-51	PASS


GPRS850	251	848.8	3;3;3;3	1600	-79.65	-60	-53.69	-51	PASS
GPRS850	251	848.8	3;3;3;3	1800	-79.62	-60	-53.65	-51	PASS
GPRS850	251	848.8	17;17;17;17	-1800	-69.82	-60	-71.48	-51	PASS
GPRS850	251	848.8	17;17;17;17	-1600	-70.42	-60	-72.08	-51	PASS
GPRS850	251	848.8	17;17;17;17	-1400	-65.65	-60	-67.31	-51	PASS
GPRS850	251	848.8	17;17;17;17	-1200	-69.41	-60	-71.07	-51	PASS
GPRS850	251	848.8	17;17;17;17	-1000	-66.73	-60	-68.39	-51	PASS
GPRS850	251	848.8	17;17;17;17	-800	-67.94	-60	-69.60	-51	PASS
GPRS850	251	848.8	17;17;17;17	-600	-68.80	-60	-70.45	-51	PASS
GPRS850	251	848.8	17;17;17;17	-400	-62.90	-60	-64.56	-36	PASS
GPRS850	251	848.8	17;17;17;17	-250	-40.57	-33	-42.22	-36	PASS
GPRS850	251	848.8	17;17;17;17	-200	-37.20	-30	-38.86	-36	PASS
GPRS850	251	848.8	17;17;17;17	-100	-9.50	0.5	-11.16	-36	PASS
GPRS850	251	848.8	17;17;17;17	100	-8.39	0.5	-10.05	-36	PASS
GPRS850	251	848.8	17;17;17;17	200	-37.34	-30	-39.00	-36	PASS
GPRS850	251	848.8	17;17;17;17	250	-41.03	-33	-42.69	-36	PASS
GPRS850	251	848.8	17;17;17;17	400	-64.83	-60	-66.49	-36	PASS
GPRS850	251	848.8	17;17;17;17	600	-69.03	-60	-70.69	-51	PASS
GPRS850	251	848.8	17;17;17;17	800	-68.42	-60	-70.08	-51	PASS
GPRS850	251	848.8	17;17;17;17	1000	-67.30	-60	-68.96	-51	PASS
GPRS850	251	848.8	17;17;17;17	1200	-68.55	-60	-70.21	-51	PASS
GPRS850	251	848.8	17;17;17;17	1400	-66.27	-60	-67.93	-51	PASS
GPRS850	251	848.8	17;17;17;17	1600	-70.48	-60	-72.14	-51	PASS
GPRS850	251	848.8	17;17;17;17	1800	-69.52	-60	-71.18	-51	PASS
GPRS900	975	880.2	3;3;3;3	-1800	-80.47	-60	-56.21	-51	PASS
GPRS900	975	880.2	3;3;3;3	-1600	-80.20	-60	-55.94	-51	PASS
GPRS900	975	880.2	3;3;3;3	-1400	-79.05	-60	-54.79	-51	PASS
GPRS900	975	880.2	3;3;3;3	-1200	-79.18	-60	-54.92	-51	PASS
GPRS900	975	880.2	3;3;3;3	-1000	-76.22	-60	-51.96	-51	PASS
GPRS900	975	880.2	3;3;3;3	-800	-74.92	-60	-50.67	-51	PASS
GPRS900	975	880.2	3;3;3;3	-600	-73.92	-60	-49.66	-51	PASS
GPRS900	975	880.2	3;3;3;3	-400	-66.80	-60	-42.54	-36	PASS
GPRS900	975	880.2	3;3;3;3	-250	-42.08	-33	-17.82	-36	PASS
GPRS900	975	880.2	3;3;3;3	-200	-36.44	-30	-12.18	-36	PASS
GPRS900	975	880.2	3;3;3;3	-100	-8.01	0.5	16.25	-36	PASS
GPRS900	975	880.2	3;3;3;3	100	-8.03	0.5	16.23	-36	PASS
GPRS900	975	880.2	3;3;3;3	200	-37.15	-30	-12.89	-36	PASS
GPRS900	975	880.2	3;3;3;3	250	-40.84	-33	-16.58	-36	PASS
GPRS900	975	880.2	3;3;3;3	400	-66.90	-60	-42.64	-36	PASS
GPRS900	975	880.2	3;3;3;3	600	-72.98	-60	-48.72	-51	PASS
GPRS900	975	880.2	3;3;3;3	800	-74.35	-60	-50.09	-51	PASS
GPRS900	975	880.2	3;3;3;3	1000	-75.35	-60	-51.09	-51	PASS
GPRS900	975	880.2	3;3;3;3	1200	-77.61	-60	-53.35	-51	PASS
GPRS900	975	880.2	3;3;3;3	1400	-78.19	-60	-53.93	-51	PASS

GPRS900	975	880.2	3;3;3;3	1600	-80.33	-60	-56.07	-51	PASS
GPRS900	975	880.2	3;3;3;3	1800	-80.08	-60	-55.82	-51	PASS
GPRS900	975	880.2	17;17;17;17	-1800	-74.09	-60	-76.97	-51	PASS
GPRS900	975	880.2	17;17;17;17	-1600	-72.82	-60	-75.70	-51	PASS
GPRS900	975	880.2	17;17;17;17	-1400	-67.99	-60	-70.87	-51	PASS
GPRS900	975	880.2	17;17;17;17	-1200	-67.67	-60	-70.55	-51	PASS
GPRS900	975	880.2	17;17;17;17	-1000	-71.10	-60	-73.98	-51	PASS
GPRS900	975	880.2	17;17;17;17	-800	-70.53	-60	-73.41	-51	PASS
GPRS900	975	880.2	17;17;17;17	-600	-65.14	-60	-68.02	-51	PASS
GPRS900	975	880.2	17;17;17;17	-400	-65.77	-60	-68.64	-36	PASS
GPRS900	975	880.2	17;17;17;17	-250	-41.67	-33	-44.55	-36	PASS
GPRS900	975	880.2	17;17;17;17	-200	-37.34	-30	-40.22	-36	PASS
GPRS900	975	880.2	17;17;17;17	-100	-9.15	0.5	-12.02	-36	PASS
GPRS900	975	880.2	17;17;17;17	100	-9.38	0.5	-12.25	-36	PASS
GPRS900	975	880.2	17;17;17;17	200	-37.21	-30	-40.09	-36	PASS
GPRS900	975	880.2	17;17;17;17	250	-41.82	-33	-44.69	-36	PASS
GPRS900	975	880.2	17;17;17;17	400	-66.55	-60	-69.43	-36	PASS
GPRS900	975	880.2	17;17;17;17	600	-64.81	-60	-67.69	-51	PASS
GPRS900	975	880.2	17;17;17;17	800	-69.97	-60	-72.85	-51	PASS
GPRS900	975	880.2	17;17;17;17	1000	-70.83	-60	-73.71	-51	PASS
GPRS900	975	880.2	17;17;17;17	1200	-68.04	-60	-70.92	-51	PASS
GPRS900	975	880.2	17;17;17;17	1400	-67.44	-60	-70.32	-51	PASS
GPRS900	975	880.2	17;17;17;17	1600	-72.68	-60	-75.56	-51	PASS
GPRS900	975	880.2	17;17;17;17	1800	-74.46	-60	-77.33	-51	PASS
GPRS900	38	897.6	3;3;3;3	-1800	-81.20	-60	-56.25	-51	PASS
GPRS900	38	897.6	3;3;3;3	-1600	-81.09	-60	-56.15	-51	PASS
GPRS900	38	897.6	3;3;3;3	-1400	-80.11	-60	-55.16	-51	PASS
GPRS900	38	897.6	3;3;3;3	-1200	-79.02	-60	-54.08	-51	PASS
GPRS900	38	897.6	3;3;3;3	-1000	-76.61	-60	-51.66	-51	PASS
GPRS900	38	897.6	3;3;3;3	-800	-75.82	-60	-50.87	-51	PASS
GPRS900	38	897.6	3;3;3;3	-600	-74.13	-60	-49.19	-51	PASS
GPRS900	38	897.6	3;3;3;3	-400	-67.14	-60	-42.19	-36	PASS
GPRS900	38	897.6	3;3;3;3	-250	-41.24	-33	-16.30	-36	PASS
GPRS900	38	897.6	3;3;3;3	-200	-37.15	-30	-12.21	-36	PASS
GPRS900	38	897.6	3;3;3;3	-100	-8.78	0.5	16.17	-36	PASS
GPRS900	38	897.6	3;3;3;3	100	-8.04	0.5	16.91	-36	PASS
GPRS900	38	897.6	3;3;3;3	200	-37.28	-30	-12.33	-36	PASS
GPRS900	38	897.6	3;3;3;3	250	-41.45	-33	-16.51	-36	PASS
GPRS900	38	897.6	3;3;3;3	400	-67.34	-60	-42.39	-36	PASS
GPRS900	38	897.6	3;3;3;3	600	-74.02	-60	-49.07	-51	PASS
GPRS900	38	897.6	3;3;3;3	800	-75.30	-60	-50.35	-51	PASS
GPRS900	38	897.6	3;3;3;3	1000	-75.83	-60	-50.88	-51	PASS
GPRS900	38	897.6	3;3;3;3	1200	-79.32	-60	-54.37	-51	PASS
GPRS900	38	897.6	3;3;3;3	1400	-79.55	-60	-54.61	-51	PASS


GPRS900	38	897.6	3;3;3;3	1600	-80.94	-60	-55.99	-51	PASS
GPRS900	38	897.6	3;3;3;3	1800	-80.96	-60	-56.01	-51	PASS
GPRS900	38	897.6	17;17;17;17	-1800	-74.99	-60	-77.85	-51	PASS
GPRS900	38	897.6	17;17;17;17	-1600	-73.16	-60	-76.02	-51	PASS
GPRS900	38	897.6	17;17;17;17	-1400	-65.52	-60	-68.39	-51	PASS
GPRS900	38	897.6	17;17;17;17	-1200	-68.62	-60	-71.48	-51	PASS
GPRS900	38	897.6	17;17;17;17	-1000	-70.80	-60	-73.66	-51	PASS
GPRS900	38	897.6	17;17;17;17	-800	-69.60	-60	-72.46	-51	PASS
GPRS900	38	897.6	17;17;17;17	-600	-66.29	-60	-69.16	-51	PASS
GPRS900	38	897.6	17;17;17;17	-400	-66.55	-60	-69.41	-36	PASS
GPRS900	38	897.6	17;17;17;17	-250	-41.75	-33	-44.61	-36	PASS
GPRS900	38	897.6	17;17;17;17	-200	-37.24	-30	-40.10	-36	PASS
GPRS900	38	897.6	17;17;17;17	-100	-9.33	0.5	-12.19	-36	PASS
GPRS900	38	897.6	17;17;17;17	100	-8.71	0.5	-11.57	-36	PASS
GPRS900	38	897.6	17;17;17;17	200	-37.74	-30	-40.60	-36	PASS
GPRS900	38	897.6	17;17;17;17	250	-42.83	-33	-45.69	-36	PASS
GPRS900	38	897.6	17;17;17;17	400	-65.72	-60	-68.58	-36	PASS
GPRS900	38	897.6	17;17;17;17	600	-66.00	-60	-68.86	-51	PASS
GPRS900	38	897.6	17;17;17;17	800	-69.21	-60	-72.07	-51	PASS
GPRS900	38	897.6	17;17;17;17	1000	-70.48	-60	-73.34	-51	PASS
GPRS900	38	897.6	17;17;17;17	1200	-68.98	-60	-71.85	-51	PASS
GPRS900	38	897.6	17;17;17;17	1400	-66.16	-60	-69.02	-51	PASS
GPRS900	38	897.6	17;17;17;17	1600	-71.92	-60	-74.78	-51	PASS
GPRS900	38	897.6	17;17;17;17	1800	-74.41	-60	-77.27	-51	PASS
GPRS900	124	914.8	3;3;3;3	-1800	-80.69	-60	-55.16	-51	PASS
GPRS900	124	914.8	3;3;3;3	-1600	-82.19	-60	-56.66	-51	PASS
GPRS900	124	914.8	3;3;3;3	-1400	-80.24	-60	-54.71	-51	PASS
GPRS900	124	914.8	3;3;3;3	-1200	-79.32	-60	-53.79	-51	PASS
GPRS900	124	914.8	3;3;3;3	-1000	-78.30	-60	-52.77	-51	PASS
GPRS900	124	914.8	3;3;3;3	-800	-76.87	-60	-51.34	-51	PASS
GPRS900	124	914.8	3;3;3;3	-600	-74.76	-60	-49.23	-51	PASS
GPRS900	124	914.8	3;3;3;3	-400	-67.51	-60	-41.98	-36	PASS
GPRS900	124	914.8	3;3;3;3	-250	-41.46	-33	-15.93	-36	PASS
GPRS900	124	914.8	3;3;3;3	-200	-37.54	-30	-12.01	-36	PASS
GPRS900	124	914.8	3;3;3;3	-100	-9.52	0.5	16.01	-36	PASS
GPRS900	124	914.8	3;3;3;3	100	-9.12	0.5	16.41	-36	PASS
GPRS900	124	914.8	3;3;3;3	200	-37.18	-30	-11.65	-36	PASS
GPRS900	124	914.8	3;3;3;3	250	-41.87	-33	-16.34	-36	PASS
GPRS900	124	914.8	3;3;3;3	400	-67.19	-60	-41.66	-36	PASS
GPRS900	124	914.8	3;3;3;3	600	-74.93	-60	-49.40	-51	PASS
GPRS900	124	914.8	3;3;3;3	800	-76.03	-60	-50.50	-51	PASS
GPRS900	124	914.8	3;3;3;3	1000	-75.51	-60	-49.98	-51	PASS
GPRS900	124	914.8	3;3;3;3	1200	-78.54	-60	-53.01	-51	PASS
GPRS900	124	914.8	3;3;3;3	1400	-80.41	-60	-54.88	-51	PASS

GPRS900	124	914.8	3;3;3;3	1600	-81.31	-60	-55.78	-51	PASS
GPRS900	124	914.8	3;3;3;3	1800	-80.75	-60	-55.22	-51	PASS
GPRS900	124	914.8	17;17;17;17	-1800	-74.00	-60	-77.14	-51	PASS
GPRS900	124	914.8	17;17;17;17	-1600	-73.47	-60	-76.61	-51	PASS
GPRS900	124	914.8	17;17;17;17	-1400	-66.75	-60	-69.88	-51	PASS
GPRS900	124	914.8	17;17;17;17	-1200	-69.07	-60	-72.21	-51	PASS
GPRS900	124	914.8	17;17;17;17	-1000	-70.56	-60	-73.70	-51	PASS
GPRS900	124	914.8	17;17;17;17	-800	-69.49	-60	-72.62	-51	PASS
GPRS900	124	914.8	17;17;17;17	-600	-66.03	-60	-69.17	-51	PASS
GPRS900	124	914.8	17;17;17;17	-400	-66.32	-60	-69.46	-36	PASS
GPRS900	124	914.8	17;17;17;17	-250	-41.21	-33	-44.35	-36	PASS
GPRS900	124	914.8	17;17;17;17	-200	-36.95	-30	-40.09	-36	PASS
GPRS900	124	914.8	17;17;17;17	-100	-9.37	0.5	-12.51	-36	PASS
GPRS900	124	914.8	17;17;17;17	100	-8.84	0.5	-11.98	-36	PASS
GPRS900	124	914.8	17;17;17;17	200	-36.88	-30	-40.02	-36	PASS
GPRS900	124	914.8	17;17;17;17	250	-41.31	-33	-44.45	-36	PASS
GPRS900	124	914.8	17;17;17;17	400	-65.52	-60	-68.66	-36	PASS
GPRS900	124	914.8	17;17;17;17	600	-65.69	-60	-68.83	-51	PASS
GPRS900	124	914.8	17;17;17;17	800	-70.03	-60	-73.17	-51	PASS
GPRS900	124	914.8	17;17;17;17	1000	-70.90	-60	-74.04	-51	PASS
GPRS900	124	914.8	17;17;17;17	1200	-68.60	-60	-71.74	-51	PASS
GPRS900	124	914.8	17;17;17;17	1400	-66.28	-60	-69.42	-51	PASS
GPRS900	124	914.8	17;17;17;17	1600	-72.54	-60	-75.68	-51	PASS
GPRS900	124	914.8	17;17;17;17	1800	-73.93	-60	-77.07	-51	PASS


GPRS1800 Channel=512 Gamma=3;3;3;3

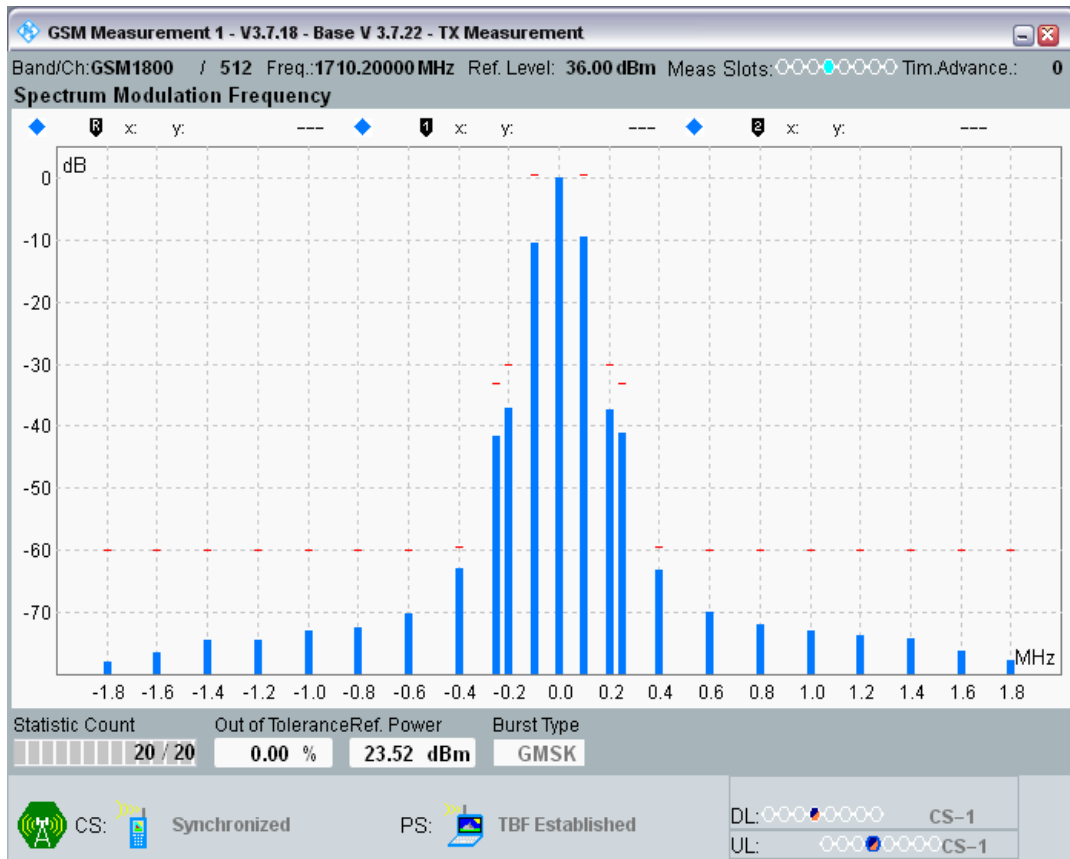


GPRS1800 Channel=512 Gamma=18;18;18;18

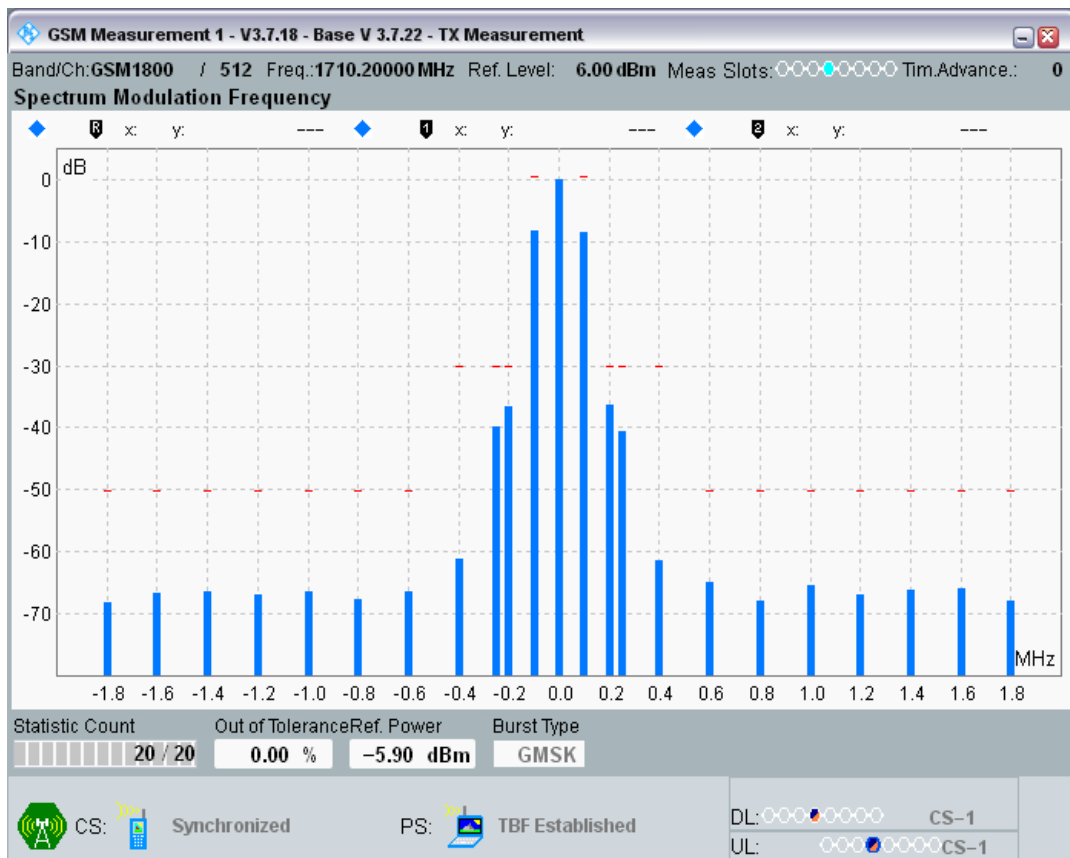


GPRS1800 Channel=698 Gamma=3;3;3;3

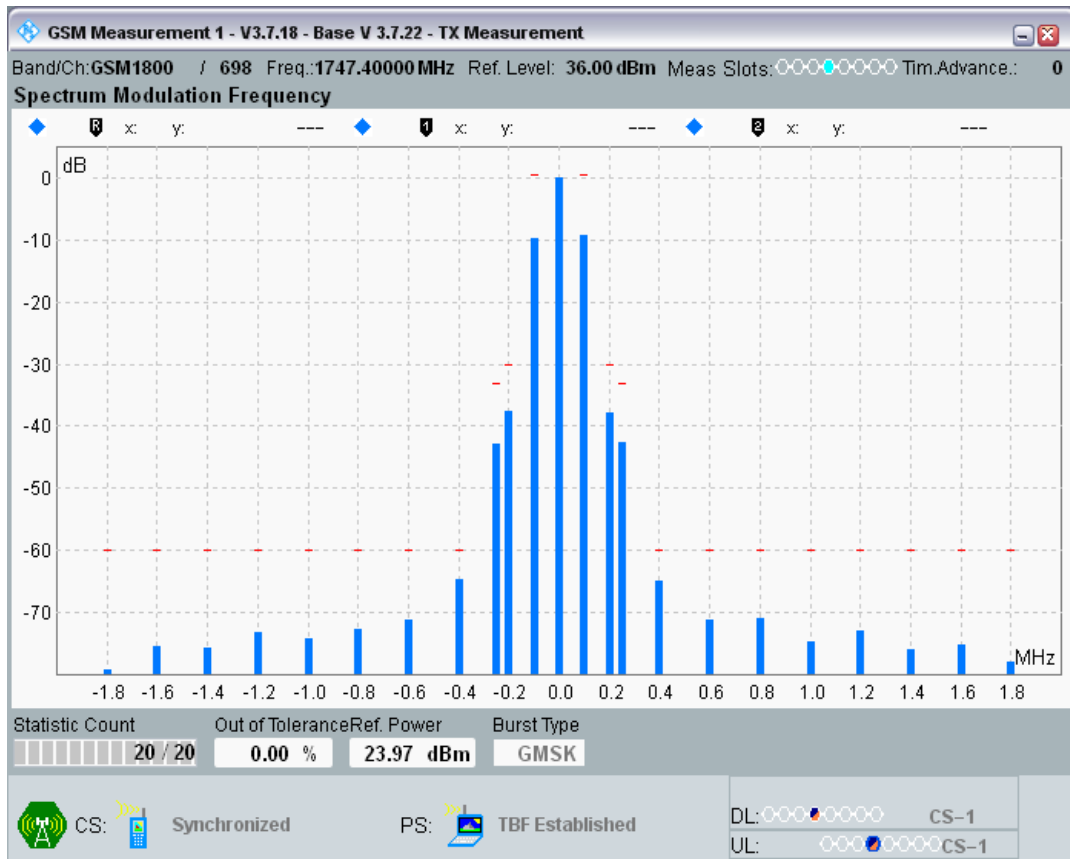


GPRS1800 Channel=698 Gamma=18;18;18;18

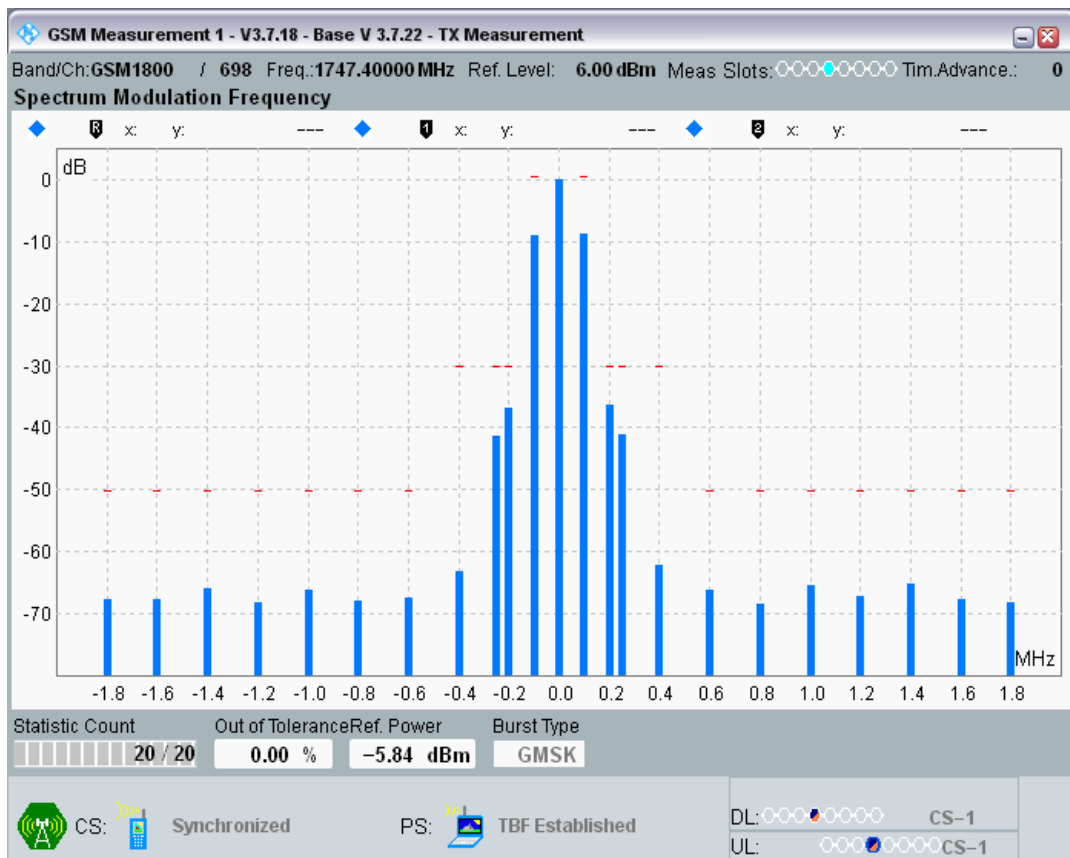


GPRS1800 Channel=885 Gamma=3;3;3;3

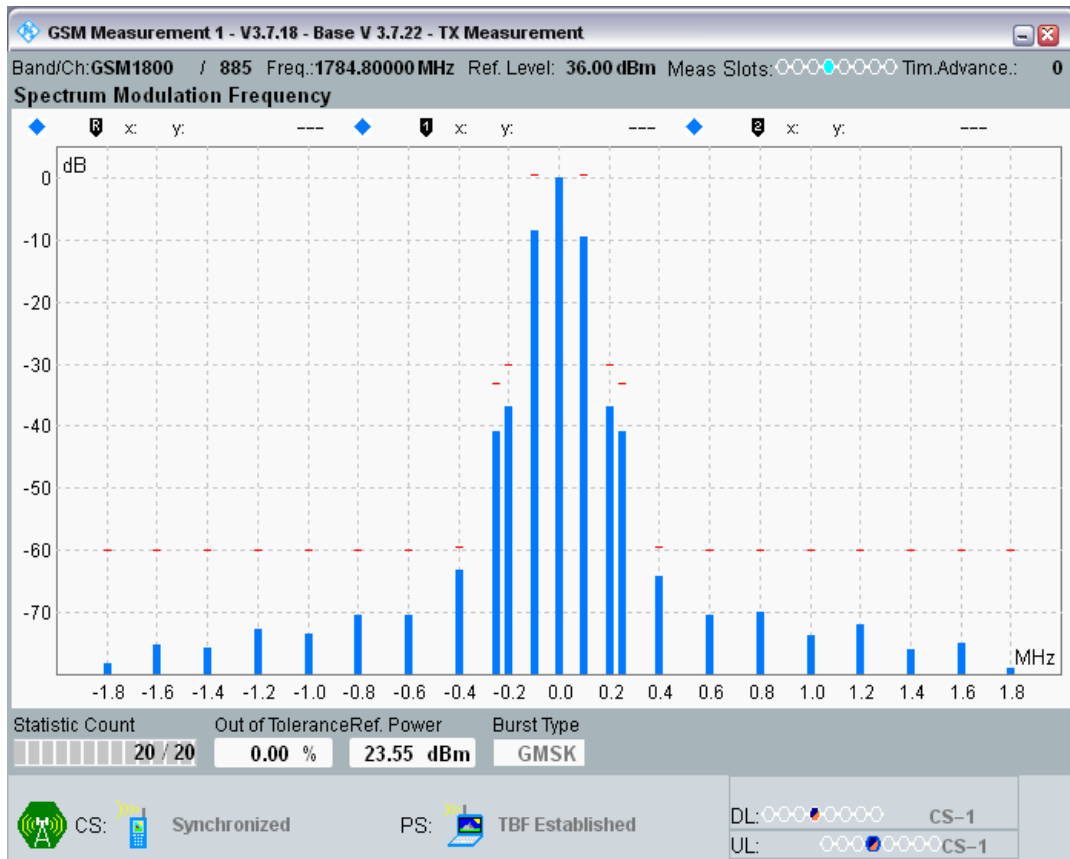


GPRS1800 Channel=885 Gamma=18;18;18;18

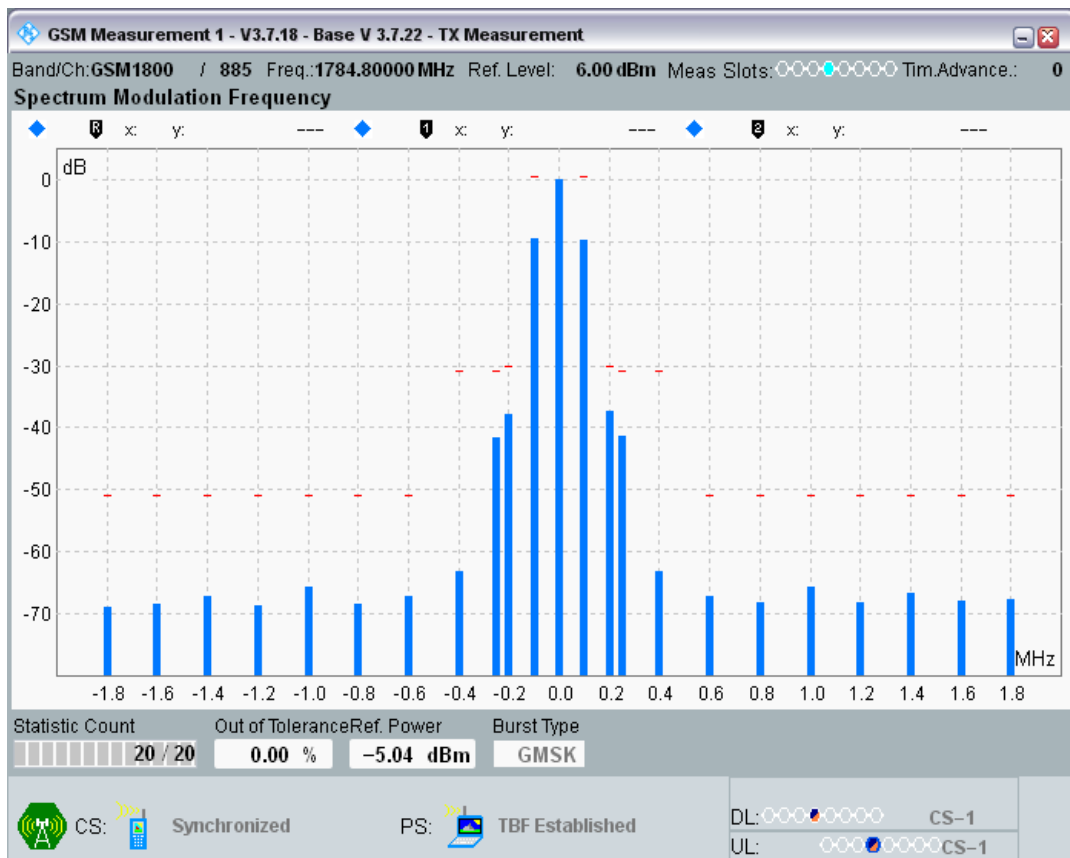


GPRS1900 Channel=512 Gamma=3;3;3;3

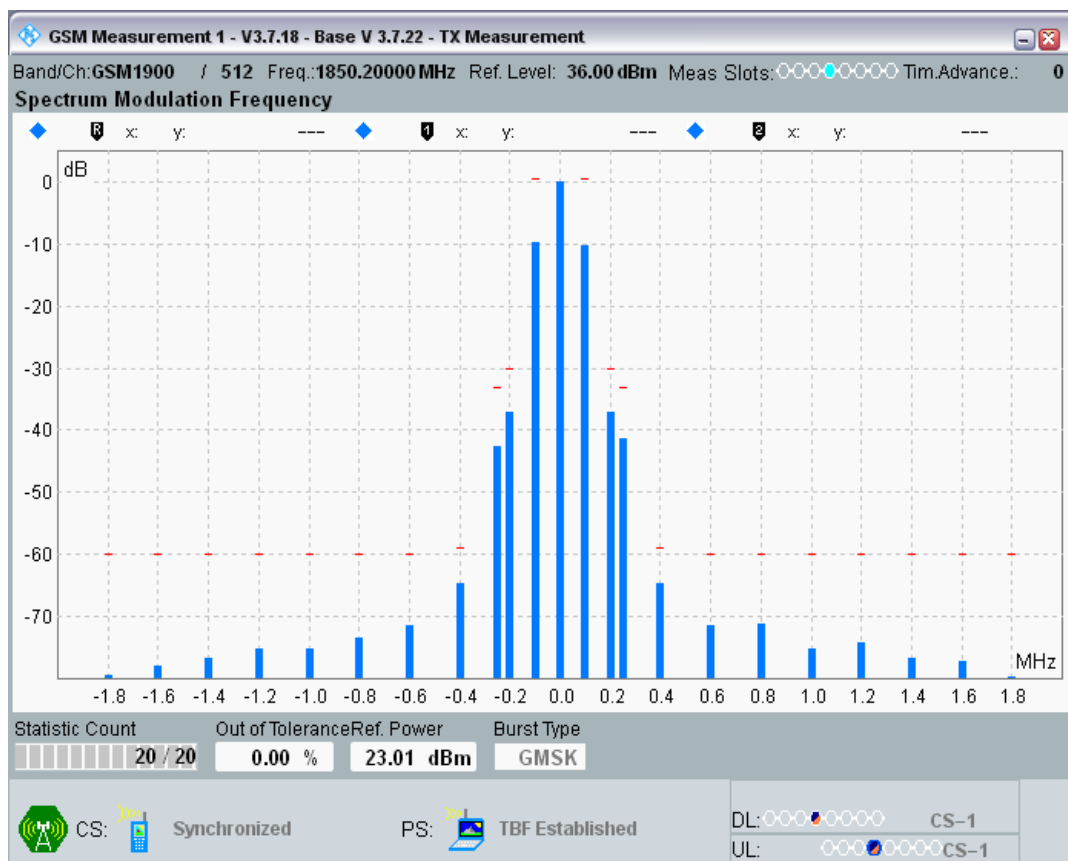


GPRS1900 Channel=512 Gamma=18;18;18;18

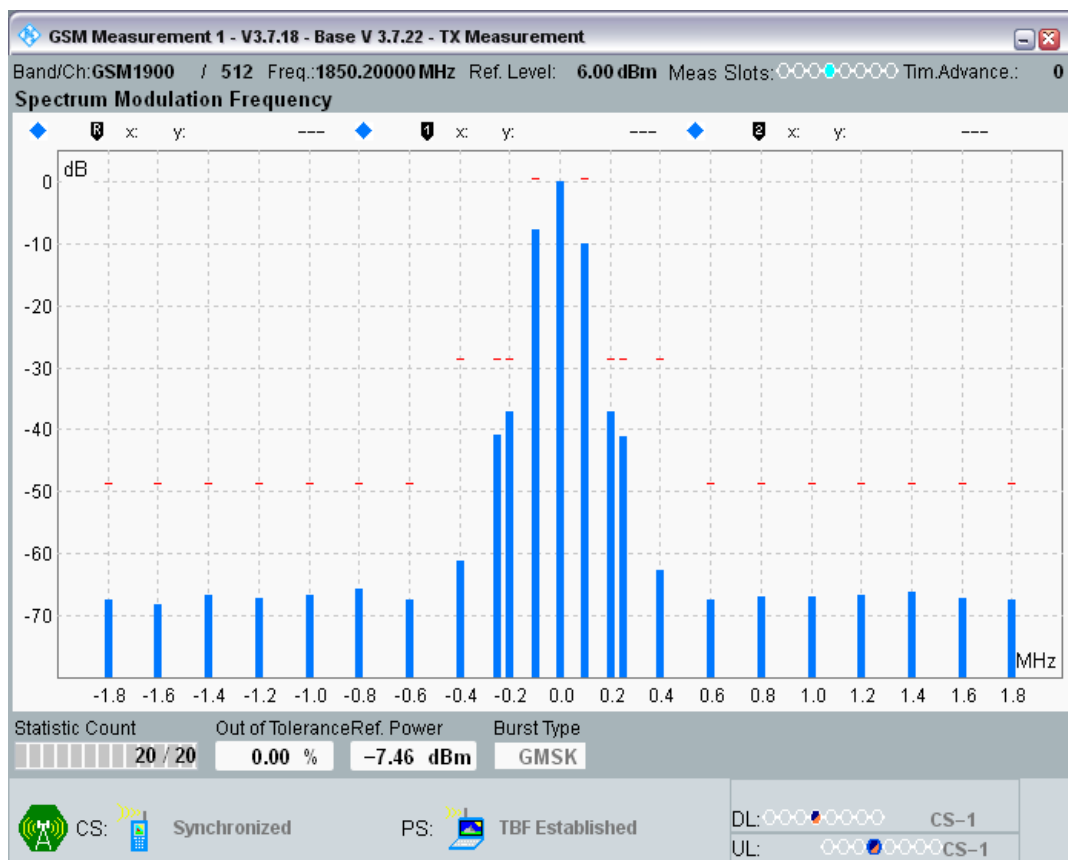


GPRS1900 Channel=661 Gamma=3;3;3;3

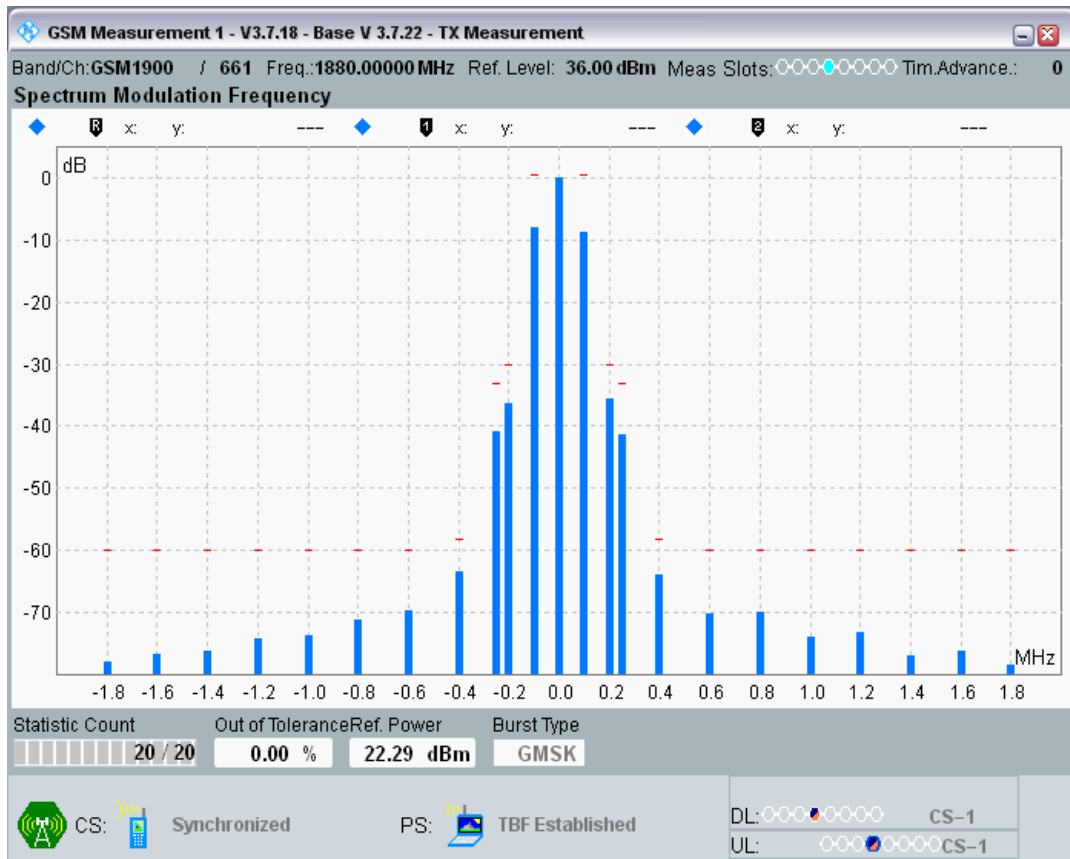


GPRS1900 Channel=661 Gamma=18;18;18;18

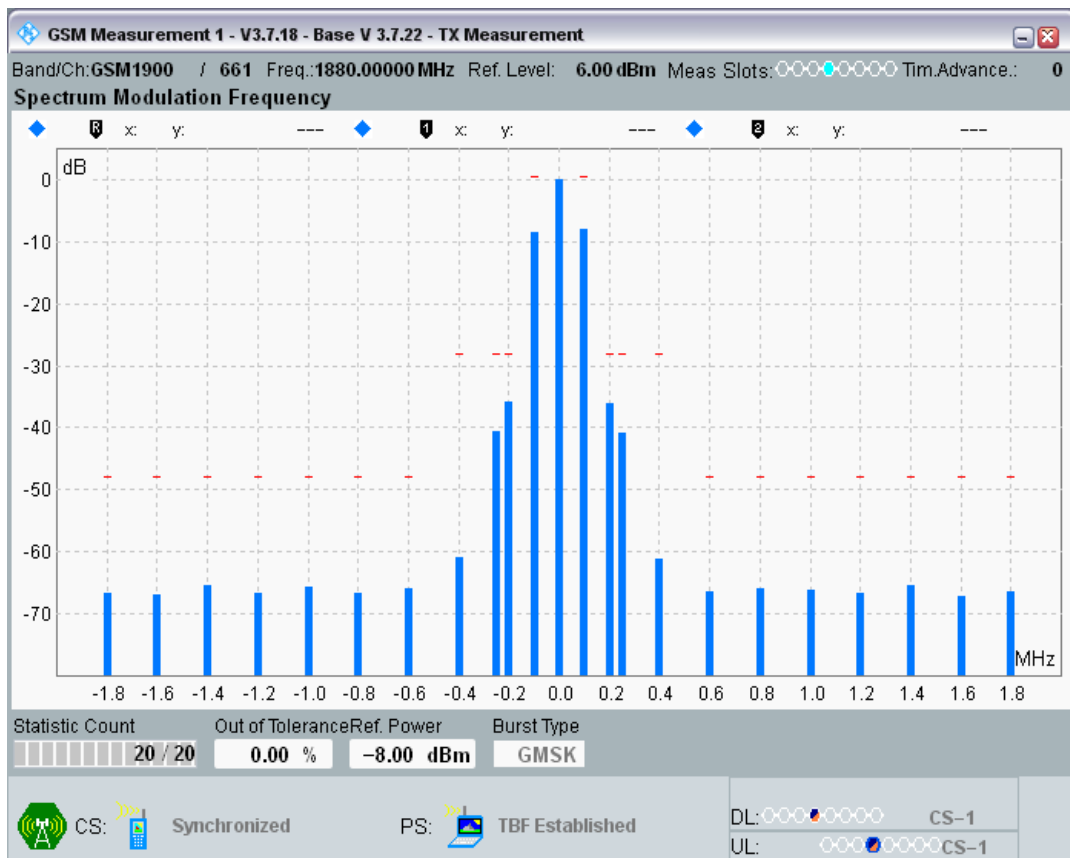


GPRS1900 Channel=810 Gamma=3;3;3;3

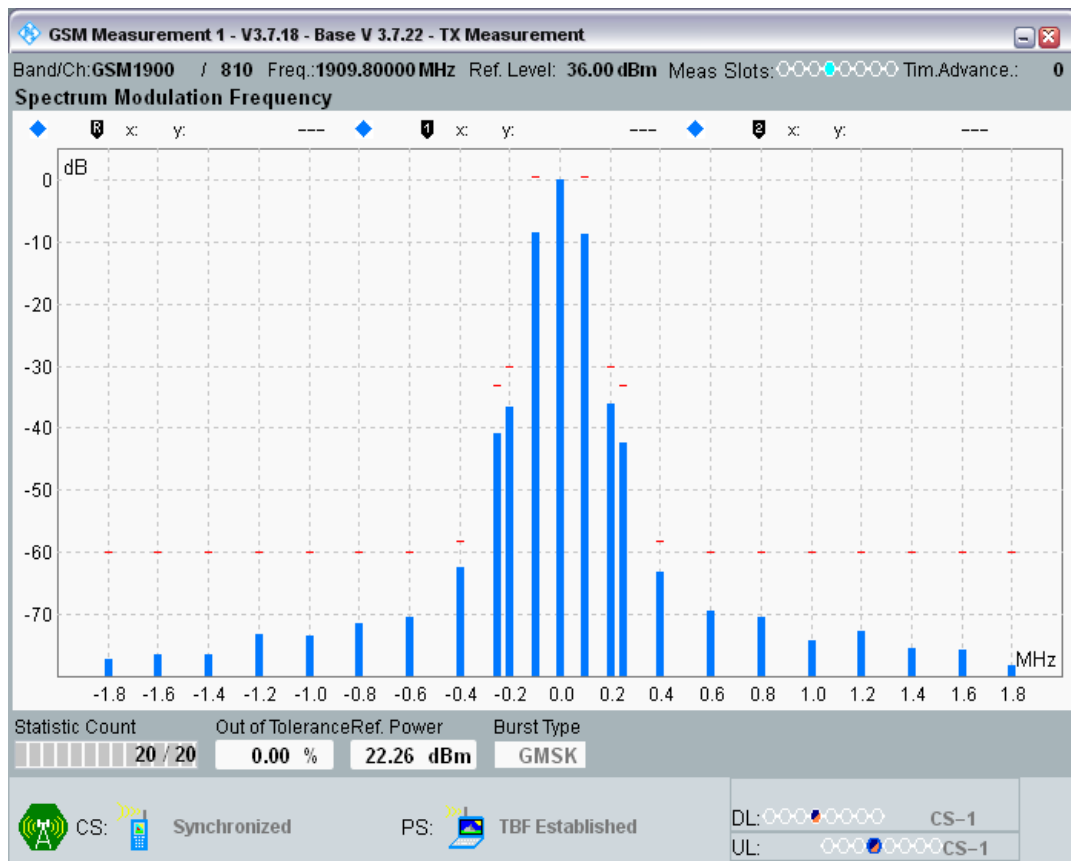


GPRS1900 Channel=810 Gamma=18;18;18;18

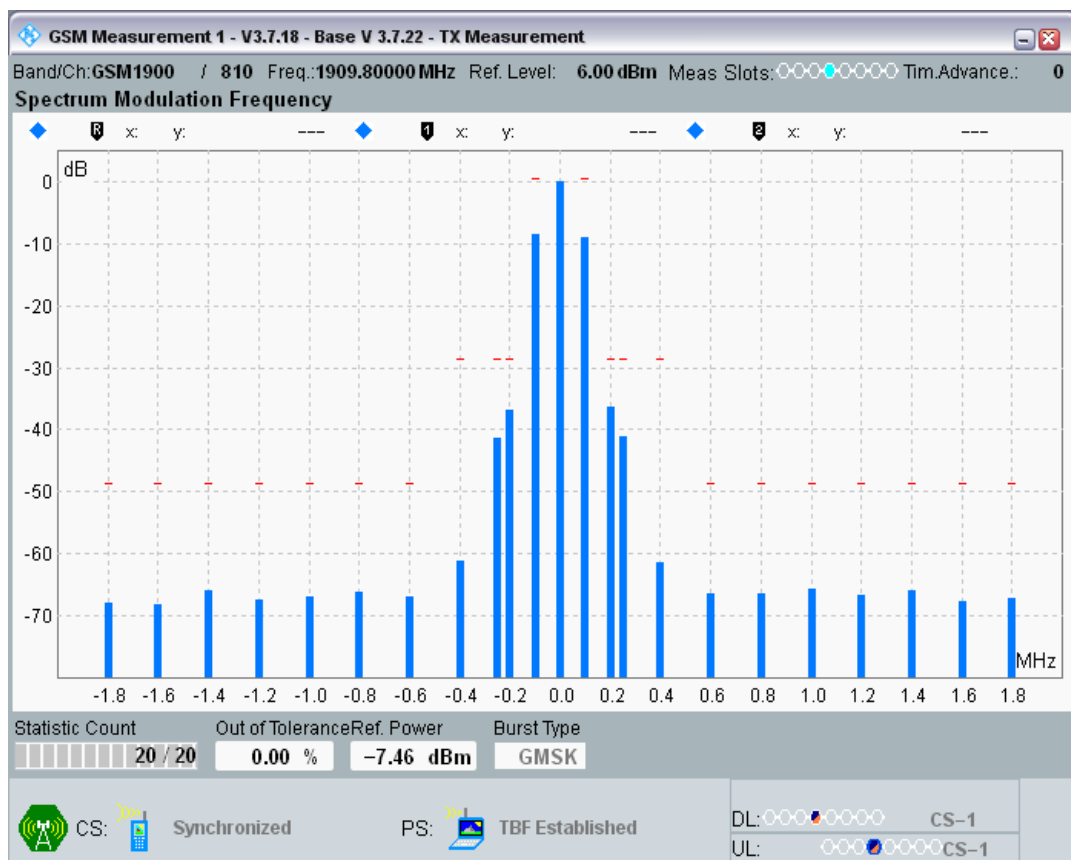


GPRS850 Channel=128 Gamma=3;3;3;3

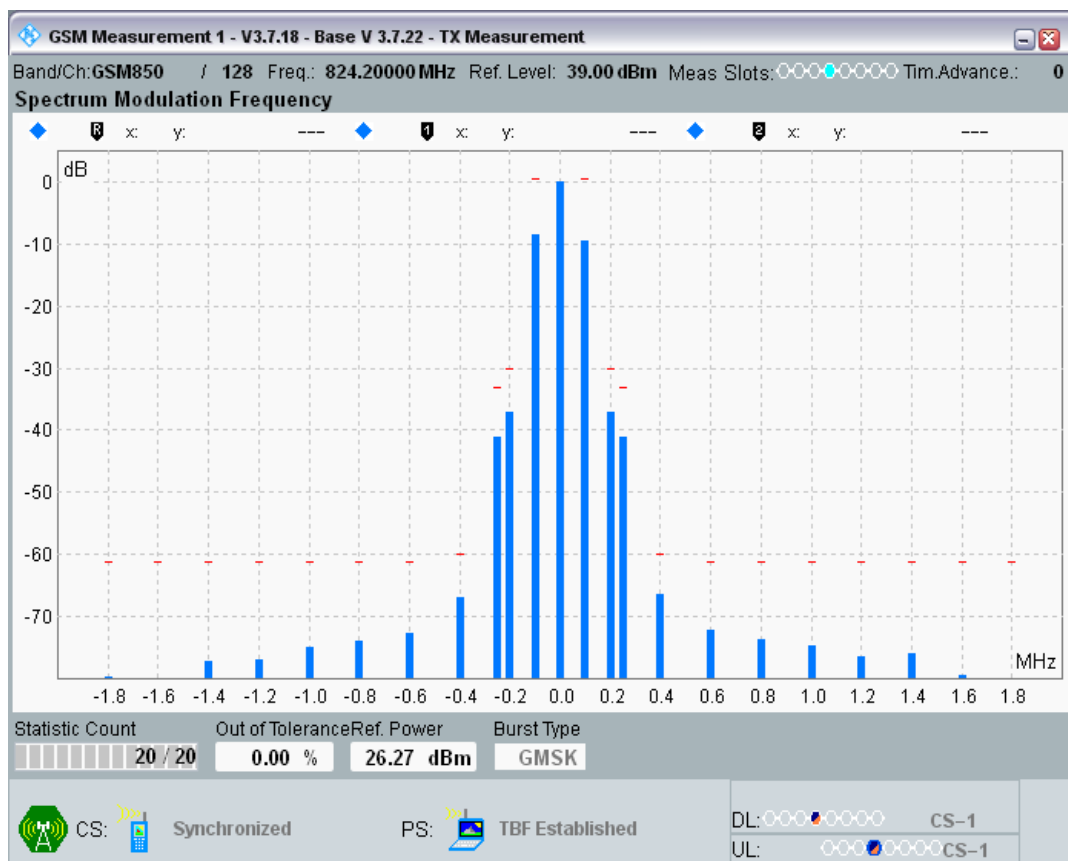


GPRS850 Channel=128 Gamma=17;17;17;17

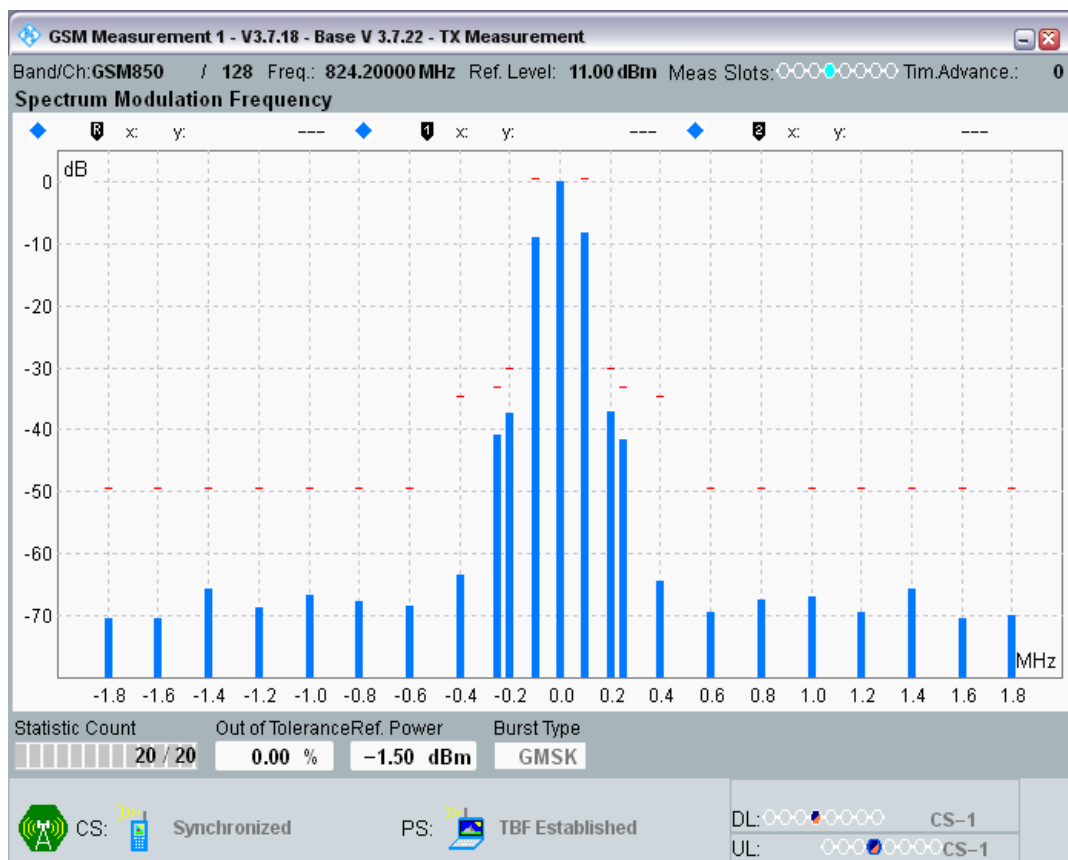


GPRS850 Channel=190 Gamma=3;3;3;3

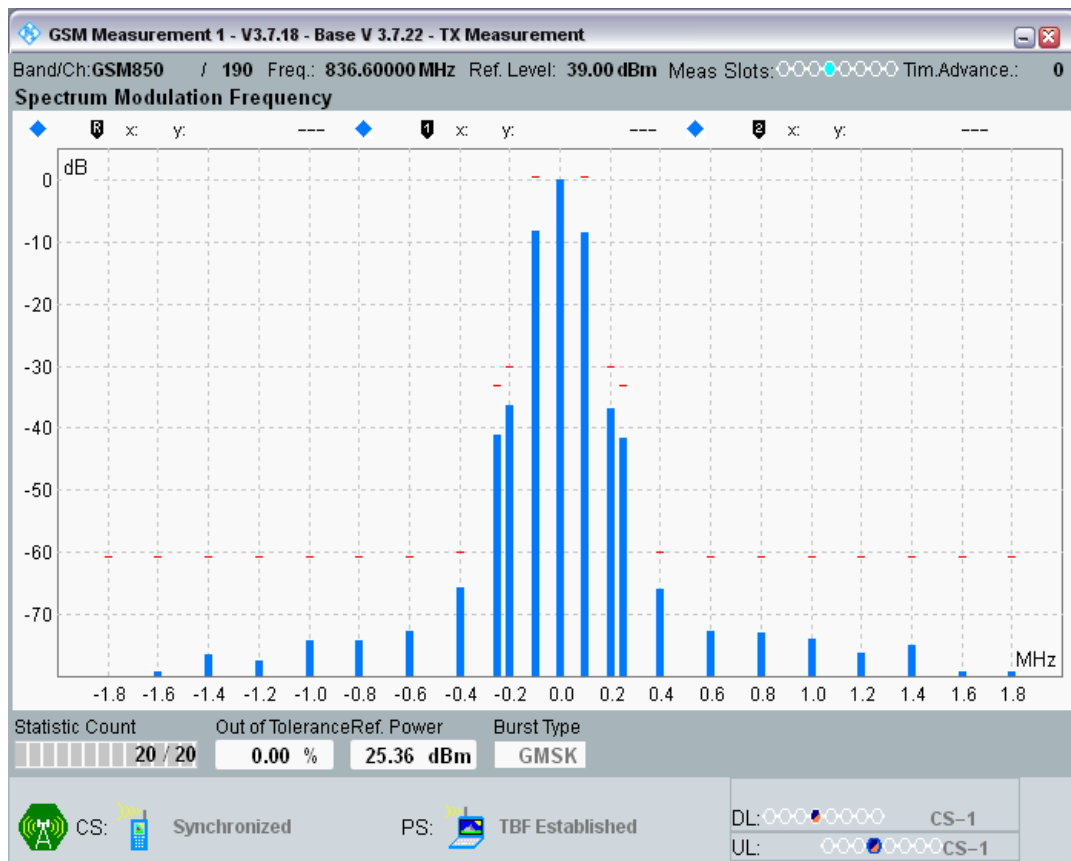


GPRS850 Channel=190 Gamma=17;17;17;17

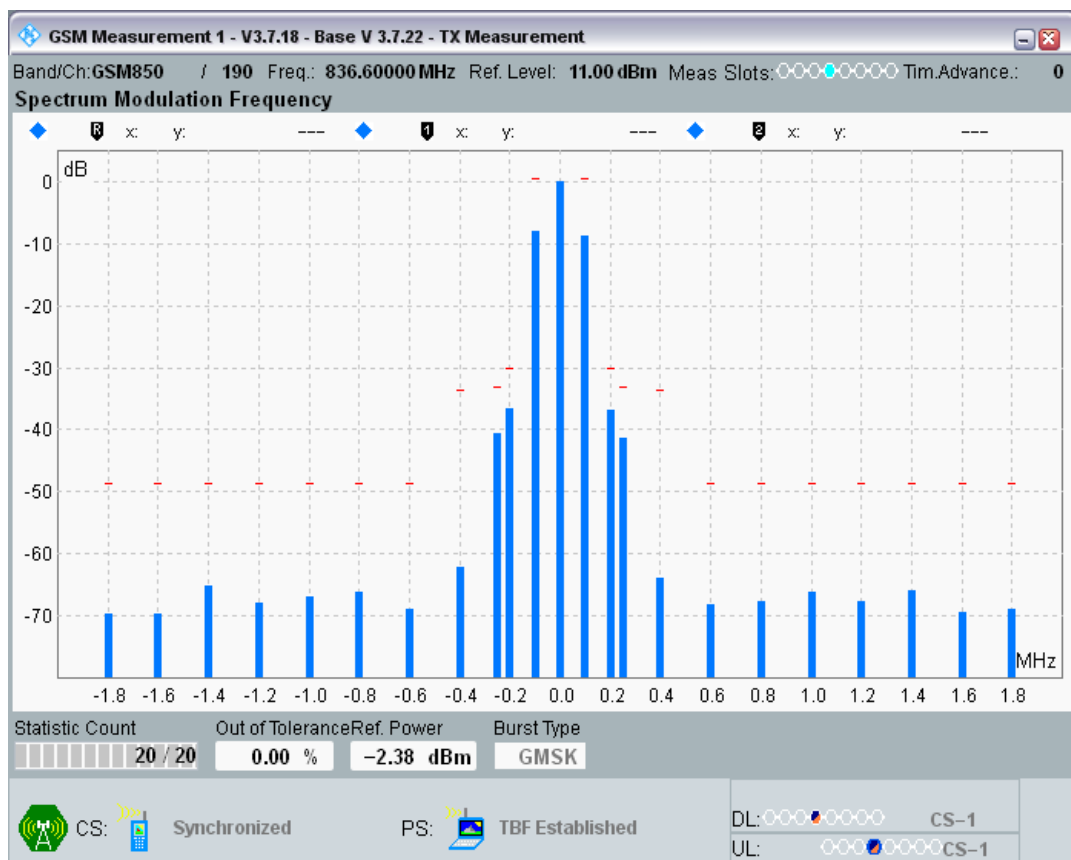


GPRS850 Channel=251 Gamma=3;3;3;3

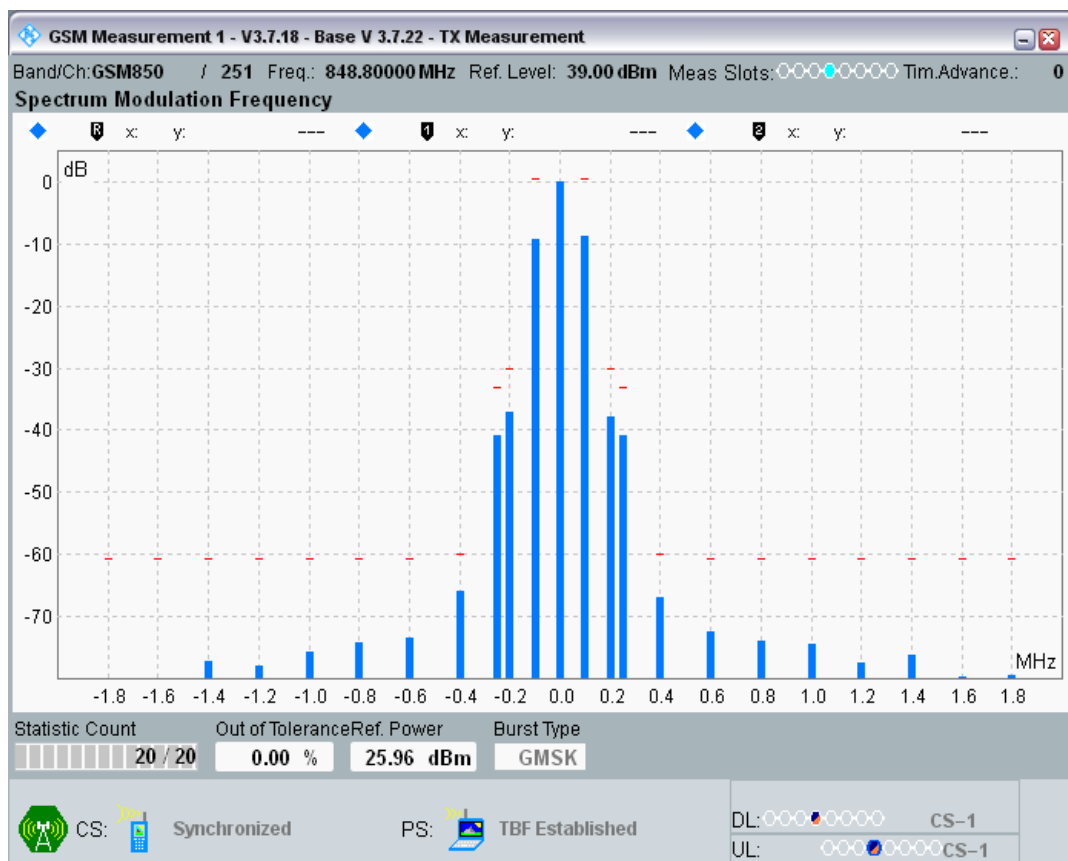


GPRS850 Channel=251 Gamma=17;17;17;17

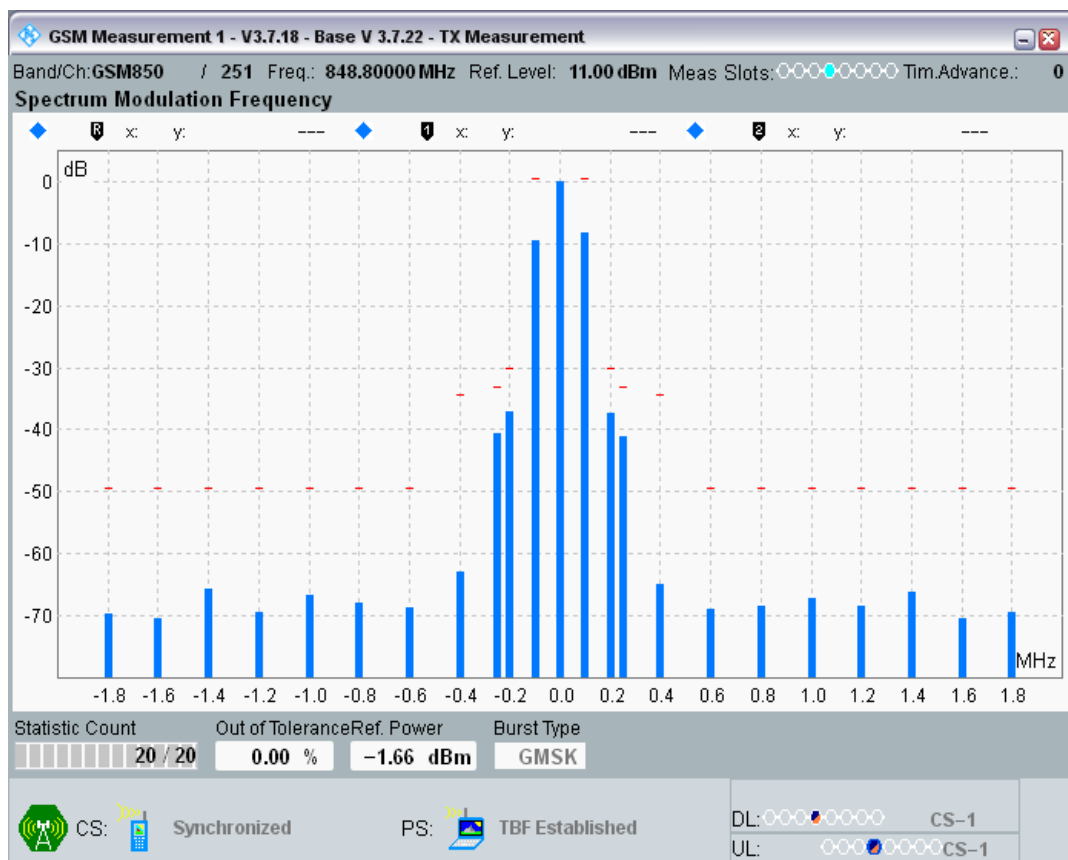


GPRS900 Channel=975 Gamma=3;3;3;3

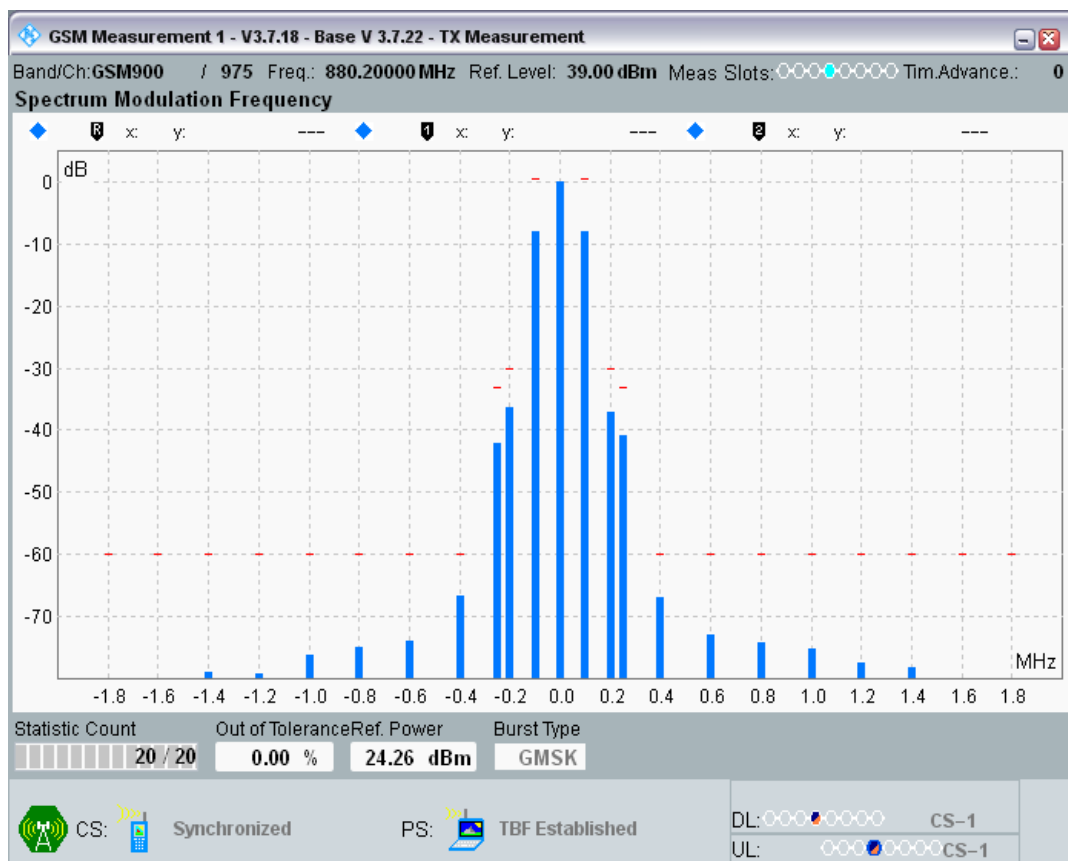


GPRS900 Channel=975 Gamma=17;17;17;17

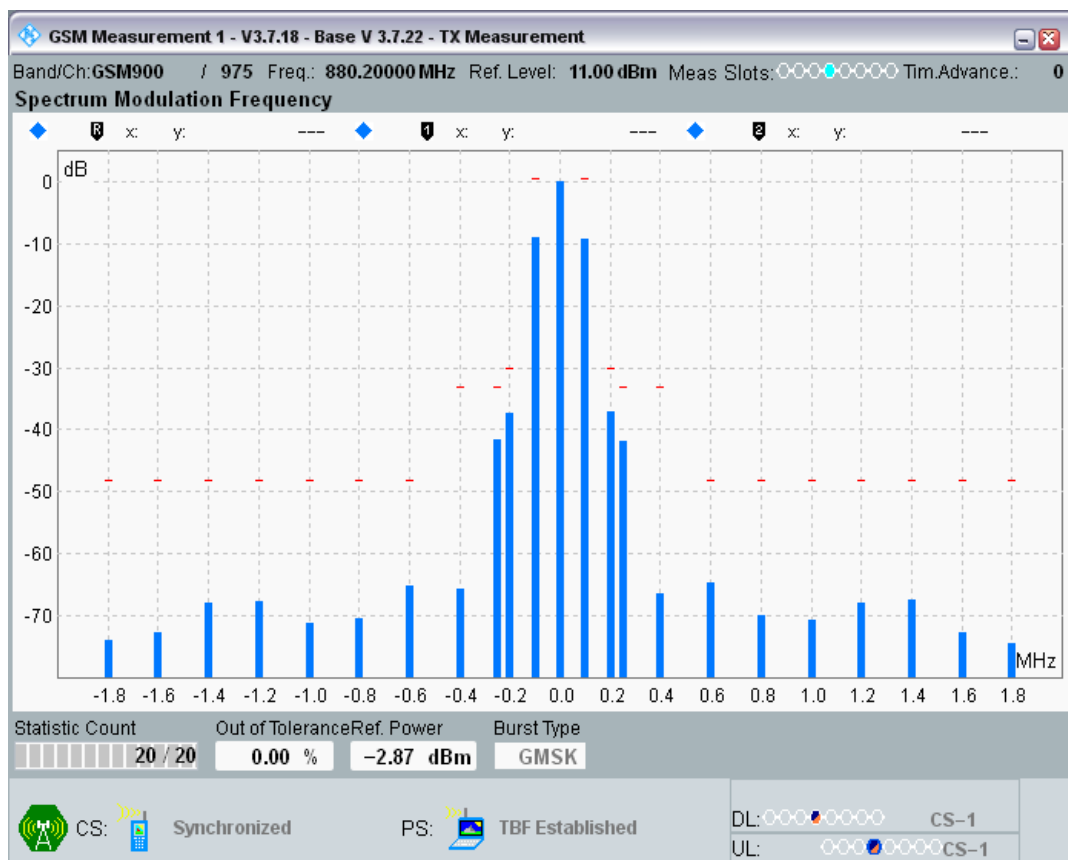


GPRS900 Channel=38 Gamma=3;3;3;3

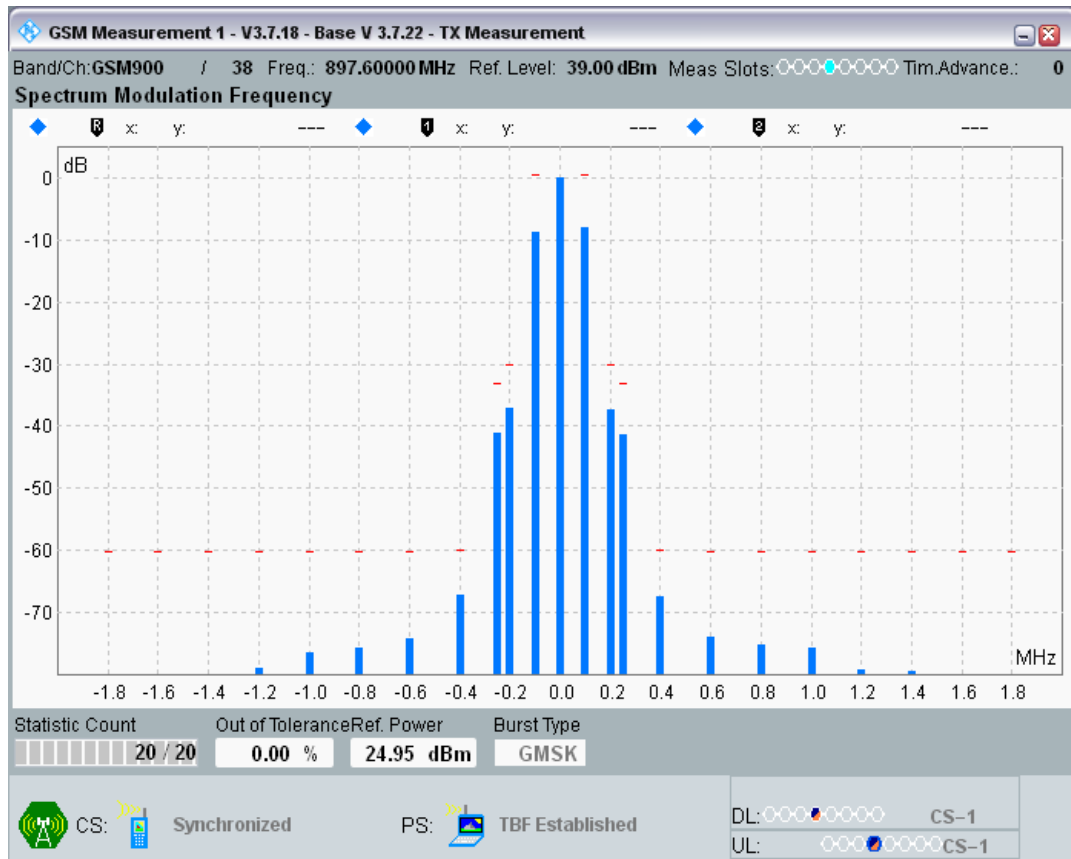


GPRS900 Channel=38 Gamma=17;17;17;17

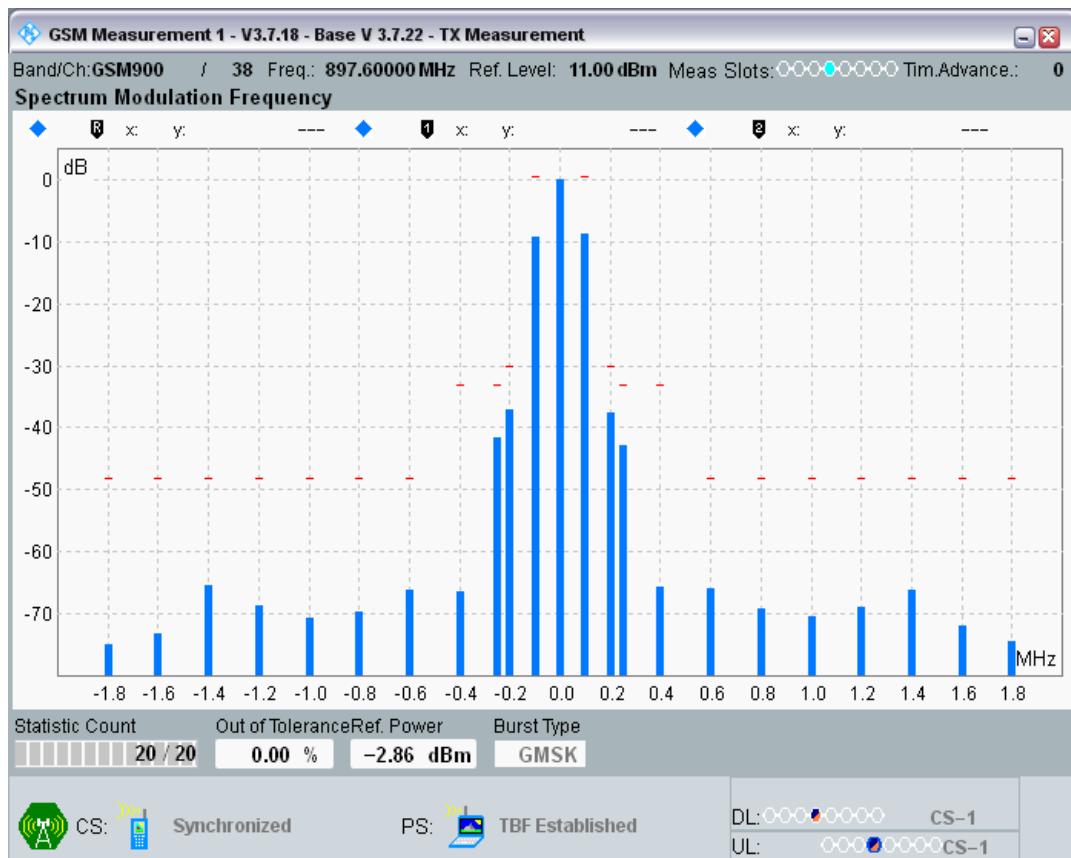

GPRS900 Channel=124 Gamma=3;3;3;3

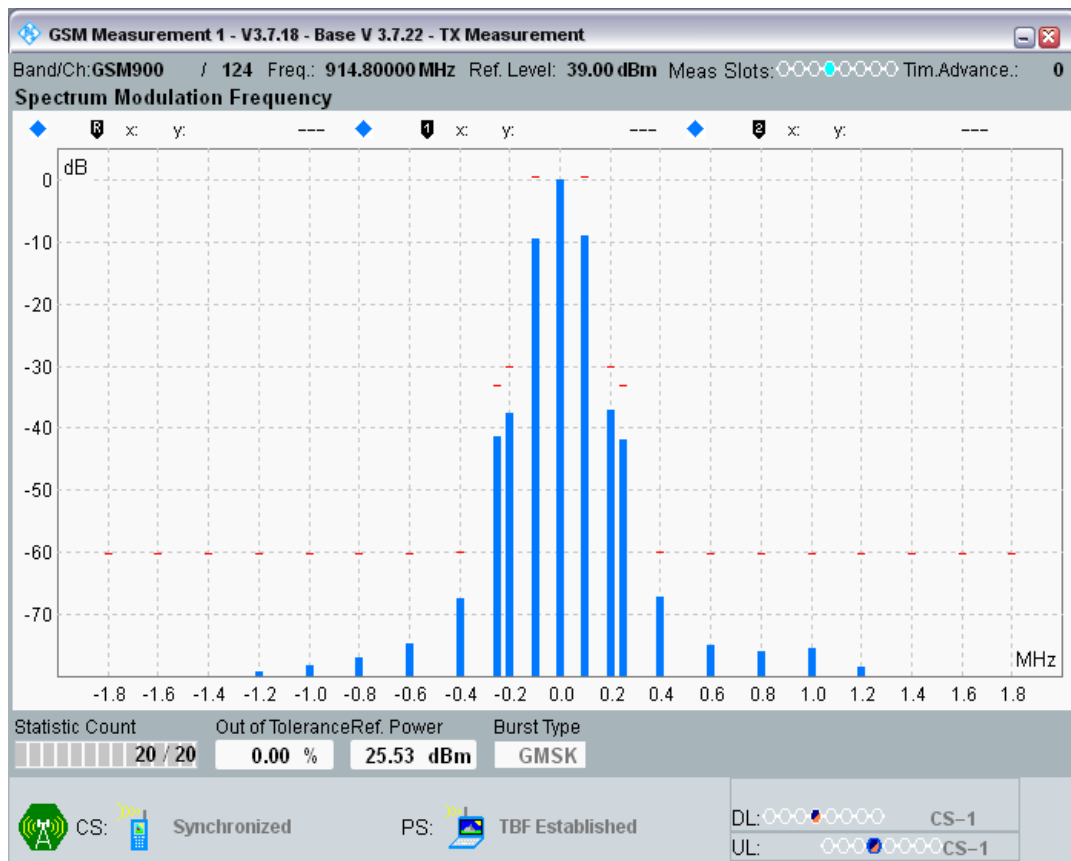

GPRS900 Channel=124 Gamma=17;17;17;17

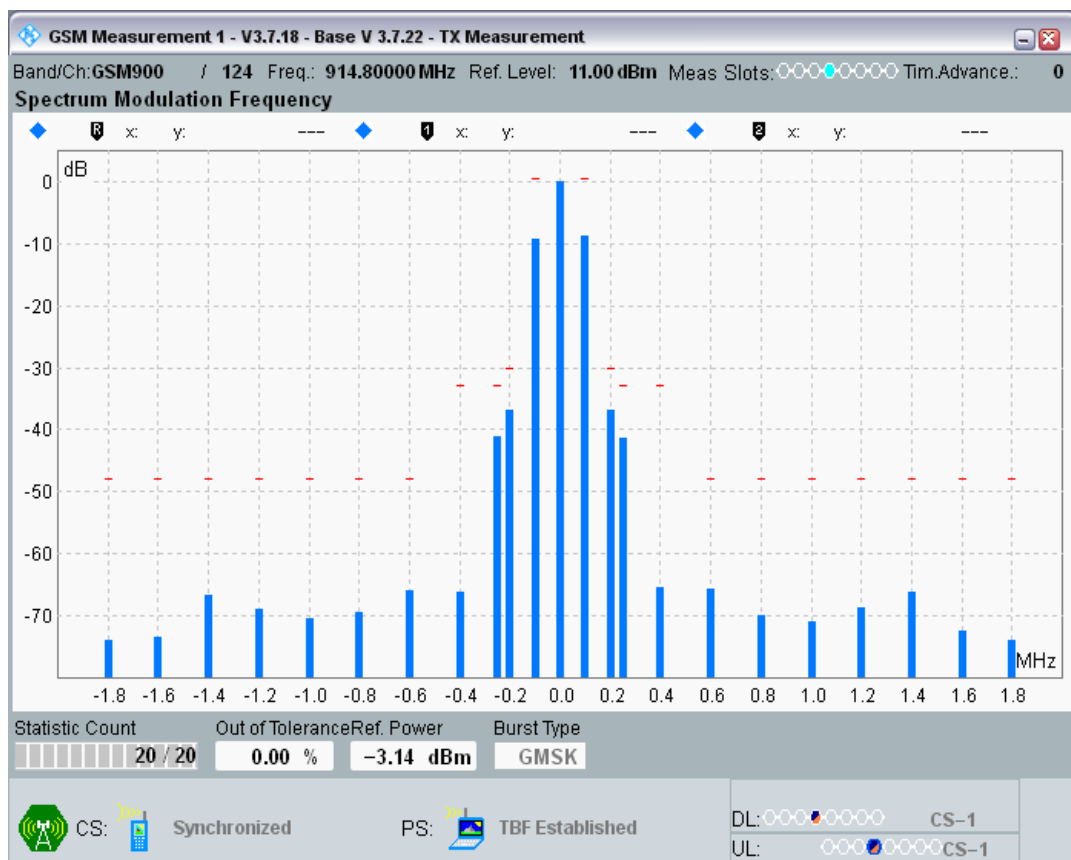

Clause 4.2.11 Switching Spectrum in GPRS multi slot configuration

Band	Channel	Frequency (MHz)	Gamma	Offset (kHz)	Result (dBm)	Limit (dBm)	Verdict
GPRS1800	512	1710.2	3;3;3;3	Ref Power	30.92		PASS
GPRS1800	512	1710.2	3;3;3;3	-1800	-42.85	-26.08	PASS
GPRS1800	512	1710.2	3;3;3;3	-1200	-40.14	-23.08	PASS
GPRS1800	512	1710.2	3;3;3;3	-600	-37.33	-23.08	PASS
GPRS1800	512	1710.2	3;3;3;3	-400	-26.66	-21.08	PASS
GPRS1800	512	1710.2	3;3;3;3	400	-28.01	-21.08	PASS
GPRS1800	512	1710.2	3;3;3;3	600	-36.62	-23.08	PASS
GPRS1800	512	1710.2	3;3;3;3	1200	-38.80	-23.08	PASS
GPRS1800	512	1710.2	3;3;3;3	1800	-44.45	-26.08	PASS
GPRS1800	512	1710.2	18;18;18;18	Ref Power	2.46		PASS
GPRS1800	512	1710.2	18;18;18;18	-1800	-60.65	-36	PASS
GPRS1800	512	1710.2	18;18;18;18	-1200	-58.04	-32	PASS
GPRS1800	512	1710.2	18;18;18;18	-600	-51.73	-26	PASS
GPRS1800	512	1710.2	18;18;18;18	-400	-48.31	-23	PASS
GPRS1800	512	1710.2	18;18;18;18	400	-46.34	-23	PASS
GPRS1800	512	1710.2	18;18;18;18	600	-50.75	-26	PASS
GPRS1800	512	1710.2	18;18;18;18	1200	-57.51	-32	PASS
GPRS1800	512	1710.2	18;18;18;18	1800	-61.76	-36	PASS
GPRS1800	698	1747.4	3;3;3;3	Ref Power	31.34		PASS
GPRS1800	698	1747.4	3;3;3;3	-1800	-43.23	-25.66	PASS
GPRS1800	698	1747.4	3;3;3;3	-1200	-37.36	-22.66	PASS
GPRS1800	698	1747.4	3;3;3;3	-600	-37.70	-22.66	PASS
GPRS1800	698	1747.4	3;3;3;3	-400	-29.17	-20.66	PASS
GPRS1800	698	1747.4	3;3;3;3	400	-28.37	-20.66	PASS
GPRS1800	698	1747.4	3;3;3;3	600	-37.75	-22.66	PASS
GPRS1800	698	1747.4	3;3;3;3	1200	-37.48	-22.66	PASS
GPRS1800	698	1747.4	3;3;3;3	1800	-43.23	-25.66	PASS
GPRS1800	698	1747.4	18;18;18;18	Ref Power	2.26		PASS
GPRS1800	698	1747.4	18;18;18;18	-1800	-61.73	-36	PASS
GPRS1800	698	1747.4	18;18;18;18	-1200	-58.06	-32	PASS
GPRS1800	698	1747.4	18;18;18;18	-600	-52.51	-26	PASS
GPRS1800	698	1747.4	18;18;18;18	-400	-48.01	-23	PASS
GPRS1800	698	1747.4	18;18;18;18	400	-46.54	-23	PASS
GPRS1800	698	1747.4	18;18;18;18	600	-51.43	-26	PASS
GPRS1800	698	1747.4	18;18;18;18	1200	-57.80	-32	PASS
GPRS1800	698	1747.4	18;18;18;18	1800	-61.37	-36	PASS
GPRS1800	885	1784.8	3;3;3;3	Ref Power	31.66		PASS
GPRS1800	885	1784.8	3;3;3;3	-1800	-43.39	-25.34	PASS
GPRS1800	885	1784.8	3;3;3;3	-1200	-37.42	-22.34	PASS
GPRS1800	885	1784.8	3;3;3;3	-600	-35.68	-22.34	PASS
GPRS1800	885	1784.8	3;3;3;3	-400	-28.51	-20.34	PASS
GPRS1800	885	1784.8	3;3;3;3	400	-27.23	-20.34	PASS
GPRS1800	885	1784.8	3;3;3;3	600	-35.86	-22.34	PASS


GPRS1800	885	1784.8	3;3;3;3	1200	-37.57	-22.34	PASS
GPRS1800	885	1784.8	3;3;3;3	1800	-44.01	-25.34	PASS
GPRS1800	885	1784.8	18;18;18;18	Ref Power	2.41		PASS
GPRS1800	885	1784.8	18;18;18;18	-1800	-60.83	-36	PASS
GPRS1800	885	1784.8	18;18;18;18	-1200	-57.77	-32	PASS
GPRS1800	885	1784.8	18;18;18;18	-600	-52.41	-26	PASS
GPRS1800	885	1784.8	18;18;18;18	-400	-48.73	-23	PASS
GPRS1800	885	1784.8	18;18;18;18	400	-46.47	-23	PASS
GPRS1800	885	1784.8	18;18;18;18	600	-51.17	-26	PASS
GPRS1800	885	1784.8	18;18;18;18	1200	-57.76	-32	PASS
GPRS1800	885	1784.8	18;18;18;18	1800	-62.06	-36	PASS
GPRS1900	512	1850.2	3;3;3;3	Ref Power	30.44		PASS
GPRS1900	512	1850.2	3;3;3;3	-1800	-45.72	-26.56	PASS
GPRS1900	512	1850.2	3;3;3;3	-1200	-40.12	-23.56	PASS
GPRS1900	512	1850.2	3;3;3;3	-600	-38.32	-23.56	PASS
GPRS1900	512	1850.2	3;3;3;3	-400	-29.87	-21.56	PASS
GPRS1900	512	1850.2	3;3;3;3	400	-27.71	-21.56	PASS
GPRS1900	512	1850.2	3;3;3;3	600	-36.23	-23.56	PASS
GPRS1900	512	1850.2	3;3;3;3	1200	-40.46	-23.56	PASS
GPRS1900	512	1850.2	3;3;3;3	1800	-46.35	-26.56	PASS
GPRS1900	512	1850.2	18;18;18;18	Ref Power	0.40		PASS
GPRS1900	512	1850.2	18;18;18;18	-1800	-59.85	-36	PASS
GPRS1900	512	1850.2	18;18;18;18	-1200	-56.75	-32	PASS
GPRS1900	512	1850.2	18;18;18;18	-600	-52.14	-26	PASS
GPRS1900	512	1850.2	18;18;18;18	-400	-48.91	-23	PASS
GPRS1900	512	1850.2	18;18;18;18	400	-47.39	-23	PASS
GPRS1900	512	1850.2	18;18;18;18	600	-50.34	-26	PASS
GPRS1900	512	1850.2	18;18;18;18	1200	-55.40	-32	PASS
GPRS1900	512	1850.2	18;18;18;18	1800	-57.91	-36	PASS
GPRS1900	661	1880	3;3;3;3	Ref Power	30.41		PASS
GPRS1900	661	1880	3;3;3;3	-1800	-45.17	-26.59	PASS
GPRS1900	661	1880	3;3;3;3	-1200	-41.29	-23.59	PASS
GPRS1900	661	1880	3;3;3;3	-600	-38.13	-23.59	PASS
GPRS1900	661	1880	3;3;3;3	-400	-29.52	-21.59	PASS
GPRS1900	661	1880	3;3;3;3	400	-28.42	-21.59	PASS
GPRS1900	661	1880	3;3;3;3	600	-37.99	-23.59	PASS
GPRS1900	661	1880	3;3;3;3	1200	-40.40	-23.59	PASS
GPRS1900	661	1880	3;3;3;3	1800	-45.36	-26.59	PASS
GPRS1900	661	1880	18;18;18;18	Ref Power	0.58		PASS
GPRS1900	661	1880	18;18;18;18	-1800	-58.54	-36	PASS
GPRS1900	661	1880	18;18;18;18	-1200	-56.93	-32	PASS
GPRS1900	661	1880	18;18;18;18	-600	-51.94	-26	PASS
GPRS1900	661	1880	18;18;18;18	-400	-49.64	-23	PASS
GPRS1900	661	1880	18;18;18;18	400	-47.33	-23	PASS

GPRS1900	661	1880	18;18;18;18	600	-50.49	-26	PASS
GPRS1900	661	1880	18;18;18;18	1200	-56.12	-32	PASS
GPRS1900	661	1880	18;18;18;18	1800	-59.80	-36	PASS
GPRS1900	810	1909.8	3;3;3;3	Ref Power	30.48		PASS
GPRS1900	810	1909.8	3;3;3;3	-1800	-45.08	-26.52	PASS
GPRS1900	810	1909.8	3;3;3;3	-1200	-40.04	-23.52	PASS
GPRS1900	810	1909.8	3;3;3;3	-600	-37.52	-23.52	PASS
GPRS1900	810	1909.8	3;3;3;3	-400	-29.45	-21.52	PASS
GPRS1900	810	1909.8	3;3;3;3	400	-28.37	-21.52	PASS
GPRS1900	810	1909.8	3;3;3;3	600	-37.33	-23.52	PASS
GPRS1900	810	1909.8	3;3;3;3	1200	-39.90	-23.52	PASS
GPRS1900	810	1909.8	3;3;3;3	1800	-44.22	-26.52	PASS
GPRS1900	810	1909.8	18;18;18;18	Ref Power	0.61		PASS
GPRS1900	810	1909.8	18;18;18;18	-1800	-59.29	-36	PASS
GPRS1900	810	1909.8	18;18;18;18	-1200	-55.95	-32	PASS
GPRS1900	810	1909.8	18;18;18;18	-600	-51.84	-26	PASS
GPRS1900	810	1909.8	18;18;18;18	-400	-49.29	-23	PASS
GPRS1900	810	1909.8	18;18;18;18	400	-47.08	-23	PASS
GPRS1900	810	1909.8	18;18;18;18	600	-50.80	-26	PASS
GPRS1900	810	1909.8	18;18;18;18	1200	-55.38	-32	PASS
GPRS1900	810	1909.8	18;18;18;18	1800	-58.53	-36	PASS
GPRS850	128	824.2	3;3;3;3	Ref Power	34.24		PASS
GPRS850	128	824.2	3;3;3;3	-1800	-42.93	-24	PASS
GPRS850	128	824.2	3;3;3;3	-1200	-37.97	-21	PASS
GPRS850	128	824.2	3;3;3;3	-600	-33.99	-21	PASS
GPRS850	128	824.2	3;3;3;3	-400	-28.06	-17.76	PASS
GPRS850	128	824.2	3;3;3;3	400	-28.25	-17.76	PASS
GPRS850	128	824.2	3;3;3;3	600	-33.56	-21	PASS
GPRS850	128	824.2	3;3;3;3	1200	-38.56	-21	PASS
GPRS850	128	824.2	3;3;3;3	1800	-42.21	-24	PASS
GPRS850	128	824.2	17;17;17;17	Ref Power	6.30		PASS
GPRS850	128	824.2	17;17;17;17	-1800	-46.31	-36	PASS
GPRS850	128	824.2	17;17;17;17	-1200	-44.01	-32	PASS
GPRS850	128	824.2	17;17;17;17	-600	-39.53	-26	PASS
GPRS850	128	824.2	17;17;17;17	-400	-36.80	-23	PASS
GPRS850	128	824.2	17;17;17;17	400	-33.77	-23	PASS
GPRS850	128	824.2	17;17;17;17	600	-37.50	-26	PASS
GPRS850	128	824.2	17;17;17;17	1200	-43.16	-32	PASS
GPRS850	128	824.2	17;17;17;17	1800	-45.65	-36	PASS
GPRS850	190	836.6	3;3;3;3	Ref Power	33.78		PASS
GPRS850	190	836.6	3;3;3;3	-1800	-43.16	-24	PASS
GPRS850	190	836.6	3;3;3;3	-1200	-41.30	-21	PASS
GPRS850	190	836.6	3;3;3;3	-600	-36.34	-21	PASS
GPRS850	190	836.6	3;3;3;3	-400	-30.04	-18.22	PASS


GPRS850	190	836.6	3;3;3;3	400	-30.30	-18.22	PASS
GPRS850	190	836.6	3;3;3;3	600	-36.17	-21	PASS
GPRS850	190	836.6	3;3;3;3	1200	-40.70	-21	PASS
GPRS850	190	836.6	3;3;3;3	1800	-42.85	-24	PASS
GPRS850	190	836.6	17;17;17;17	Ref Power	6.07		PASS
GPRS850	190	836.6	17;17;17;17	-1800	-46.84	-36	PASS
GPRS850	190	836.6	17;17;17;17	-1200	-44.27	-32	PASS
GPRS850	190	836.6	17;17;17;17	-600	-39.59	-26	PASS
GPRS850	190	836.6	17;17;17;17	-400	-37.16	-23	PASS
GPRS850	190	836.6	17;17;17;17	400	-34.14	-23	PASS
GPRS850	190	836.6	17;17;17;17	600	-37.76	-26	PASS
GPRS850	190	836.6	17;17;17;17	1200	-42.90	-32	PASS
GPRS850	190	836.6	17;17;17;17	1800	-45.83	-36	PASS
GPRS850	251	848.8	3;3;3;3	Ref Power	33.76		PASS
GPRS850	251	848.8	3;3;3;3	-1800	-43.33	-24	PASS
GPRS850	251	848.8	3;3;3;3	-1200	-40.41	-21	PASS
GPRS850	251	848.8	3;3;3;3	-600	-36.25	-21	PASS
GPRS850	251	848.8	3;3;3;3	-400	-30.92	-18.24	PASS
GPRS850	251	848.8	3;3;3;3	400	-29.49	-18.24	PASS
GPRS850	251	848.8	3;3;3;3	600	-35.79	-21	PASS
GPRS850	251	848.8	3;3;3;3	1200	-40.28	-21	PASS
GPRS850	251	848.8	3;3;3;3	1800	-43.69	-24	PASS
GPRS850	251	848.8	17;17;17;17	Ref Power	6.20		PASS
GPRS850	251	848.8	17;17;17;17	-1800	-46.99	-36	PASS
GPRS850	251	848.8	17;17;17;17	-1200	-44.36	-32	PASS
GPRS850	251	848.8	17;17;17;17	-600	-39.59	-26	PASS
GPRS850	251	848.8	17;17;17;17	-400	-37.00	-23	PASS
GPRS850	251	848.8	17;17;17;17	400	-33.95	-23	PASS
GPRS850	251	848.8	17;17;17;17	600	-37.52	-26	PASS
GPRS850	251	848.8	17;17;17;17	1200	-43.04	-32	PASS
GPRS850	251	848.8	17;17;17;17	1800	-45.41	-36	PASS
GPRS900	975	880.2	3;3;3;3	Ref Power	33.01		PASS
GPRS900	975	880.2	3;3;3;3	-1800	-44.06	-24	PASS
GPRS900	975	880.2	3;3;3;3	-1200	-42.87	-21	PASS
GPRS900	975	880.2	3;3;3;3	-600	-38.28	-21	PASS
GPRS900	975	880.2	3;3;3;3	-400	-32.38	-18.99	PASS
GPRS900	975	880.2	3;3;3;3	400	-30.47	-18.99	PASS
GPRS900	975	880.2	3;3;3;3	600	-36.72	-21	PASS
GPRS900	975	880.2	3;3;3;3	1200	-40.39	-21	PASS
GPRS900	975	880.2	3;3;3;3	1800	-42.95	-24	PASS
GPRS900	975	880.2	17;17;17;17	Ref Power	4.85		PASS
GPRS900	975	880.2	17;17;17;17	-1800	-50.42	-36	PASS
GPRS900	975	880.2	17;17;17;17	-1200	-47.83	-32	PASS
GPRS900	975	880.2	17;17;17;17	-600	-43.24	-26	PASS

GPRS900	975	880.2	17;17;17;17	-400	-40.67	-23	PASS
GPRS900	975	880.2	17;17;17;17	400	-37.76	-23	PASS
GPRS900	975	880.2	17;17;17;17	600	-41.24	-26	PASS
GPRS900	975	880.2	17;17;17;17	1200	-46.52	-32	PASS
GPRS900	975	880.2	17;17;17;17	1800	-49.37	-36	PASS
GPRS900	38	897.6	3;3;3;3	Ref Power	33.18		PASS
GPRS900	38	897.6	3;3;3;3	-1800	-45.05	-24	PASS
GPRS900	38	897.6	3;3;3;3	-1200	-41.86	-21	PASS
GPRS900	38	897.6	3;3;3;3	-600	-37.61	-21	PASS
GPRS900	38	897.6	3;3;3;3	-400	-33.32	-18.82	PASS
GPRS900	38	897.6	3;3;3;3	400	-30.33	-18.82	PASS
GPRS900	38	897.6	3;3;3;3	600	-36.72	-21	PASS
GPRS900	38	897.6	3;3;3;3	1200	-39.50	-21	PASS
GPRS900	38	897.6	3;3;3;3	1800	-42.70	-24	PASS
GPRS900	38	897.6	17;17;17;17	Ref Power	5.12		PASS
GPRS900	38	897.6	17;17;17;17	-1800	-50.43	-36	PASS
GPRS900	38	897.6	17;17;17;17	-1200	-47.98	-32	PASS
GPRS900	38	897.6	17;17;17;17	-600	-43.12	-26	PASS
GPRS900	38	897.6	17;17;17;17	-400	-40.42	-23	PASS
GPRS900	38	897.6	17;17;17;17	400	-37.77	-23	PASS
GPRS900	38	897.6	17;17;17;17	600	-41.21	-26	PASS
GPRS900	38	897.6	17;17;17;17	1200	-46.79	-32	PASS
GPRS900	38	897.6	17;17;17;17	1800	-48.98	-36	PASS
GPRS900	124	914.8	3;3;3;3	Ref Power	33.31		PASS
GPRS900	124	914.8	3;3;3;3	-1800	-43.38	-24	PASS
GPRS900	124	914.8	3;3;3;3	-1200	-42.62	-21	PASS
GPRS900	124	914.8	3;3;3;3	-600	-38.09	-21	PASS
GPRS900	124	914.8	3;3;3;3	-400	-30.18	-18.69	PASS
GPRS900	124	914.8	3;3;3;3	400	-30.18	-18.69	PASS
GPRS900	124	914.8	3;3;3;3	600	-35.75	-21	PASS
GPRS900	124	914.8	3;3;3;3	1200	-39.57	-21	PASS
GPRS900	124	914.8	3;3;3;3	1800	-42.61	-24	PASS
GPRS900	124	914.8	17;17;17;17	Ref Power	4.79		PASS
GPRS900	124	914.8	17;17;17;17	-1800	-50.62	-36	PASS
GPRS900	124	914.8	17;17;17;17	-1200	-47.98	-32	PASS
GPRS900	124	914.8	17;17;17;17	-600	-43.73	-26	PASS
GPRS900	124	914.8	17;17;17;17	-400	-40.75	-23	PASS
GPRS900	124	914.8	17;17;17;17	400	-37.72	-23	PASS
GPRS900	124	914.8	17;17;17;17	600	-41.17	-26	PASS
GPRS900	124	914.8	17;17;17;17	1200	-46.54	-32	PASS
GPRS900	124	914.8	17;17;17;17	1800	-49.40	-36	PASS

GPRS1800 Channel=512 Gamma=3;3;3;3

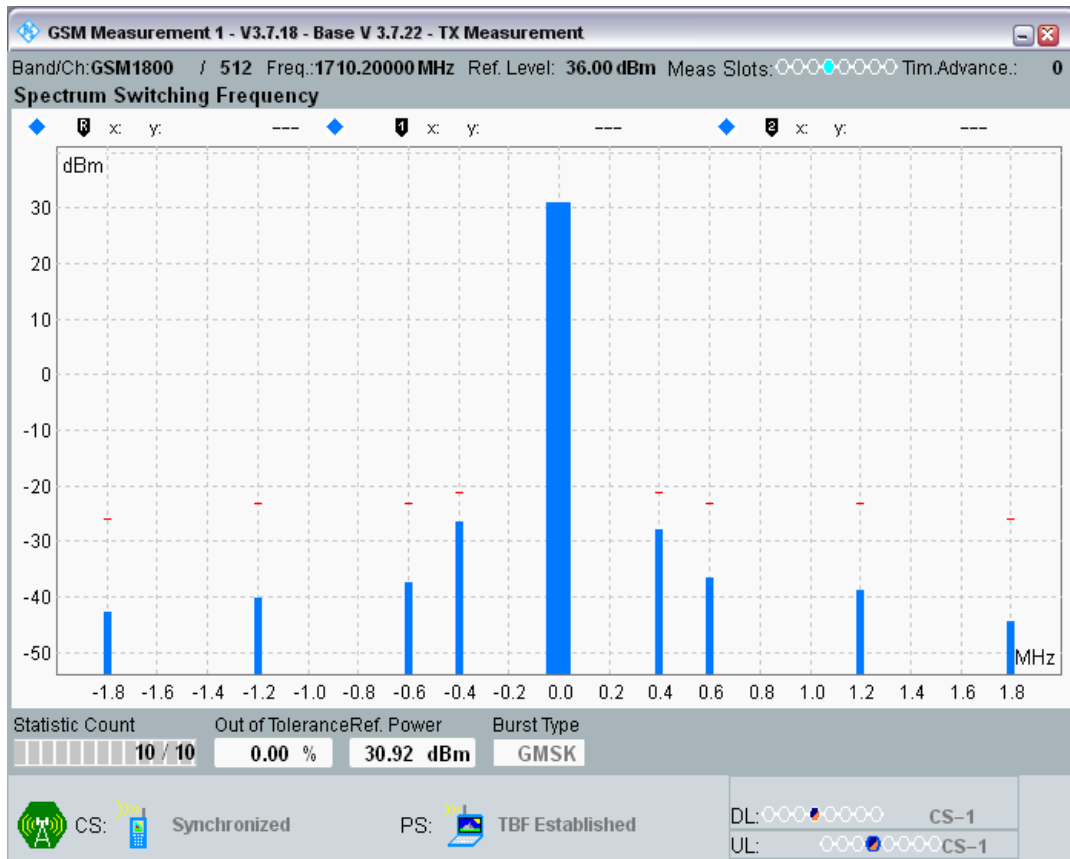


GPRS1800 Channel=512 Gamma=18;18;18;18

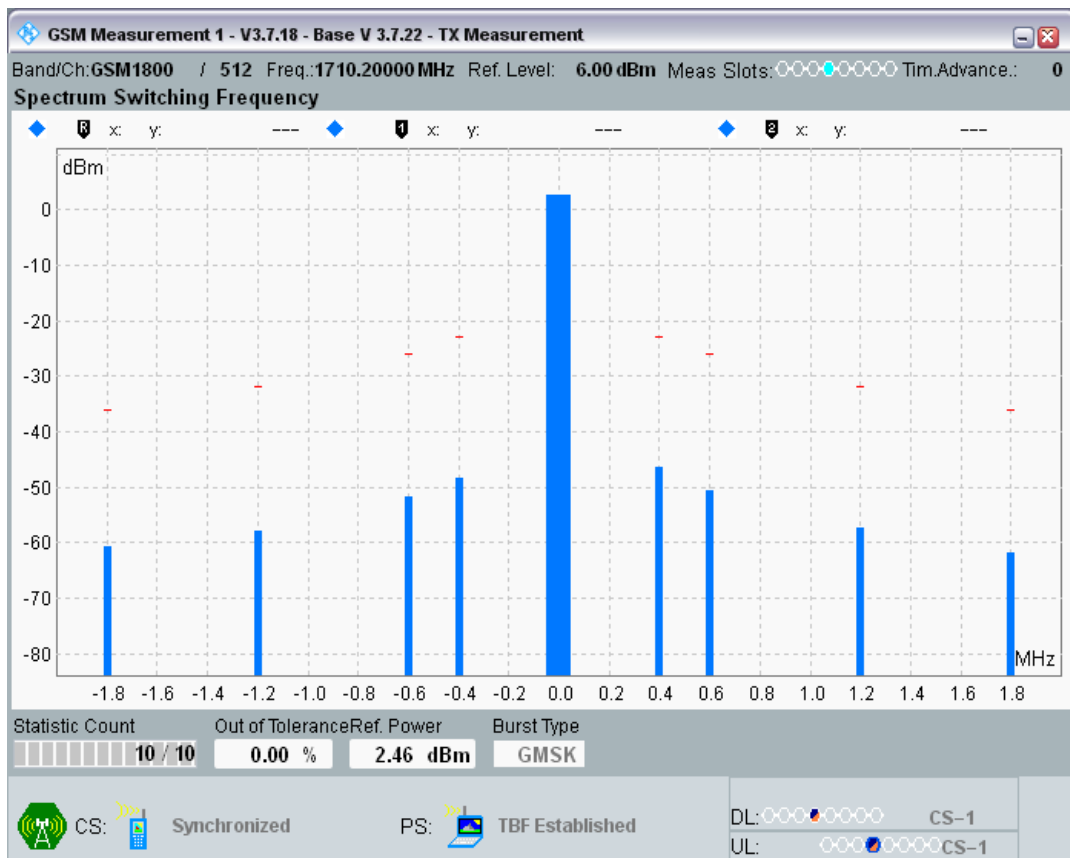


GPRS1800 Channel=698 Gamma=3;3;3;3




GPRS1800 Channel=698 Gamma=18;18;18;18

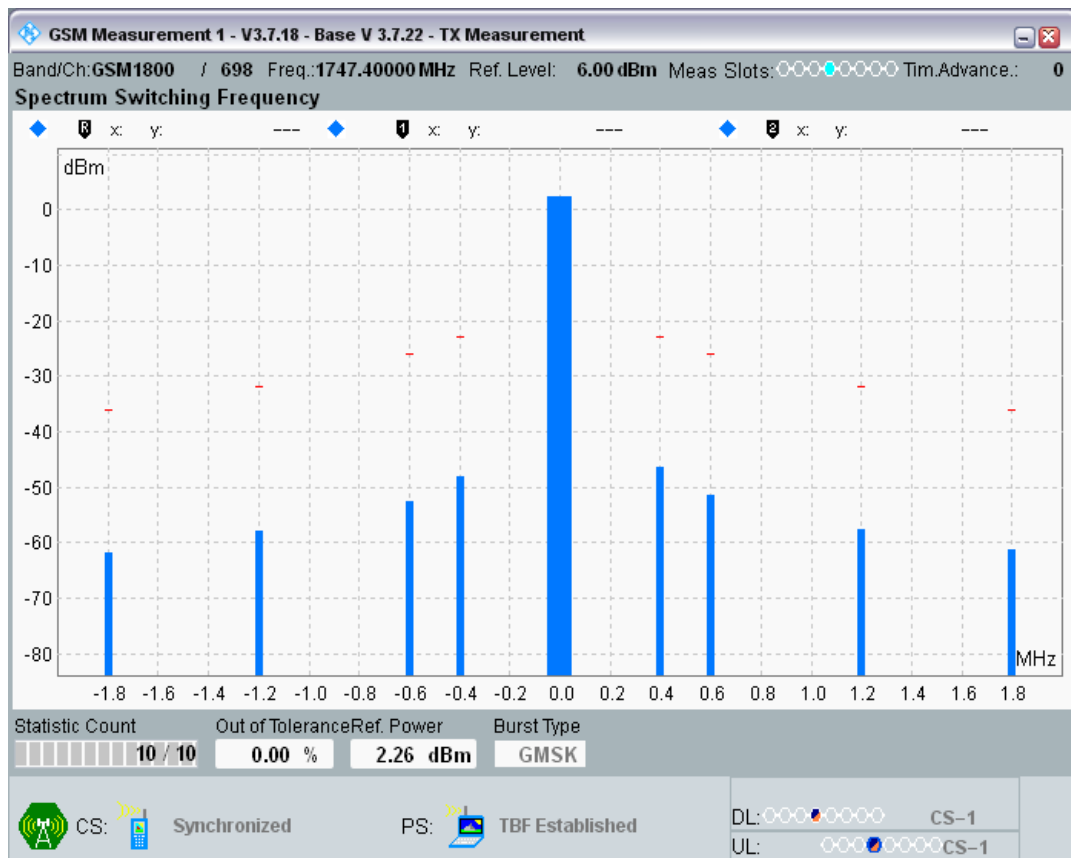


GPRS1800 Channel=885 Gamma=3;3;3;3

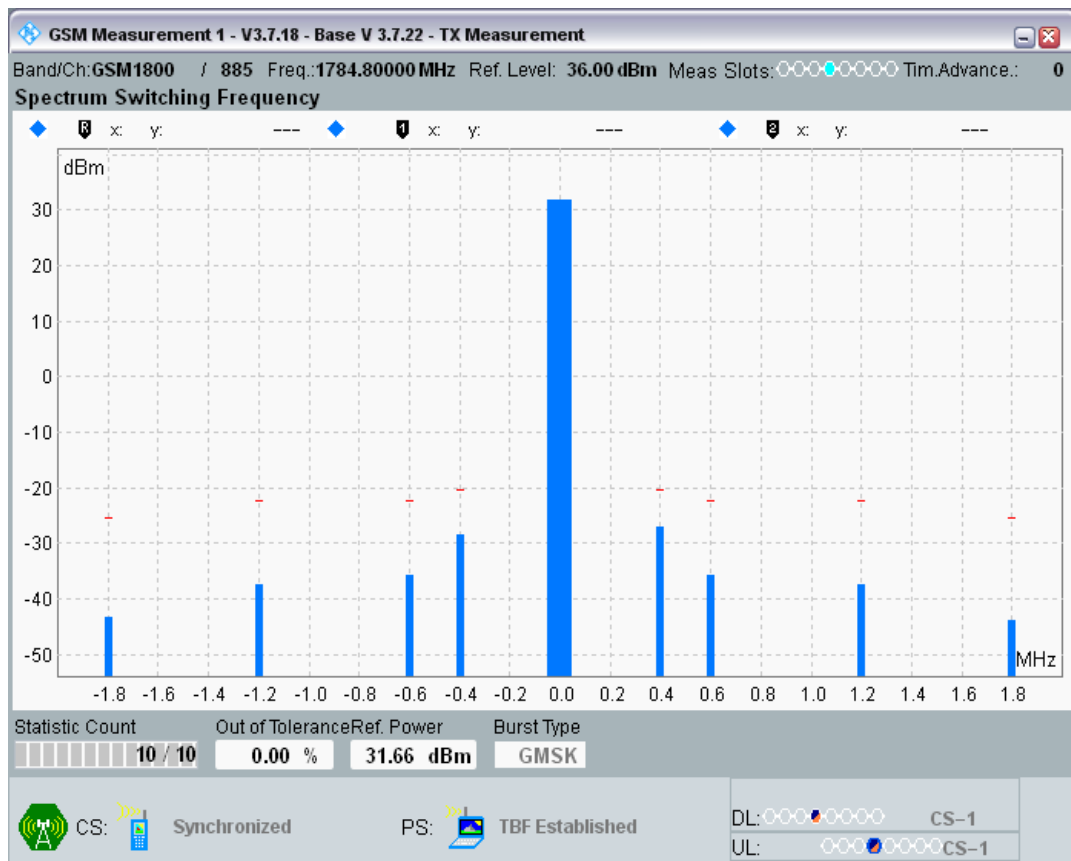


GPRS1800 Channel=885 Gamma=18;18;18;18

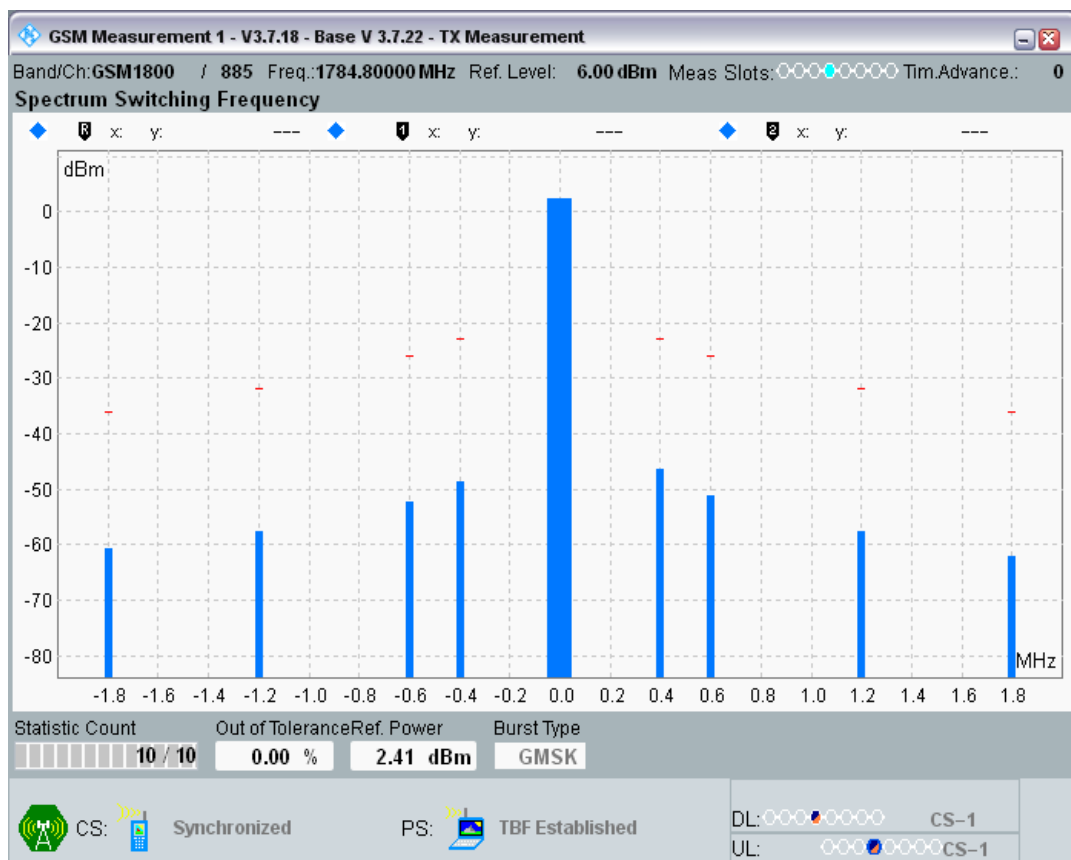


GPRS1900 Channel=512 Gamma=3;3;3;3

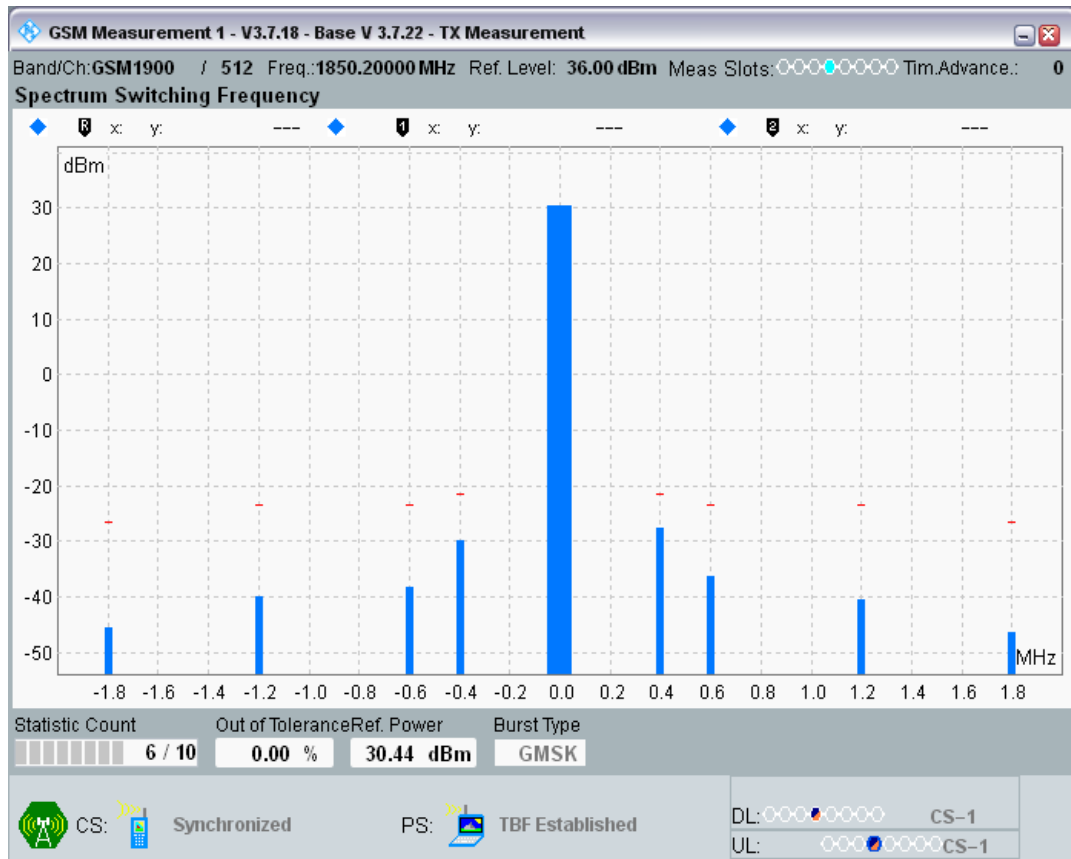


GPRS1900 Channel=512 Gamma=18;18;18;18

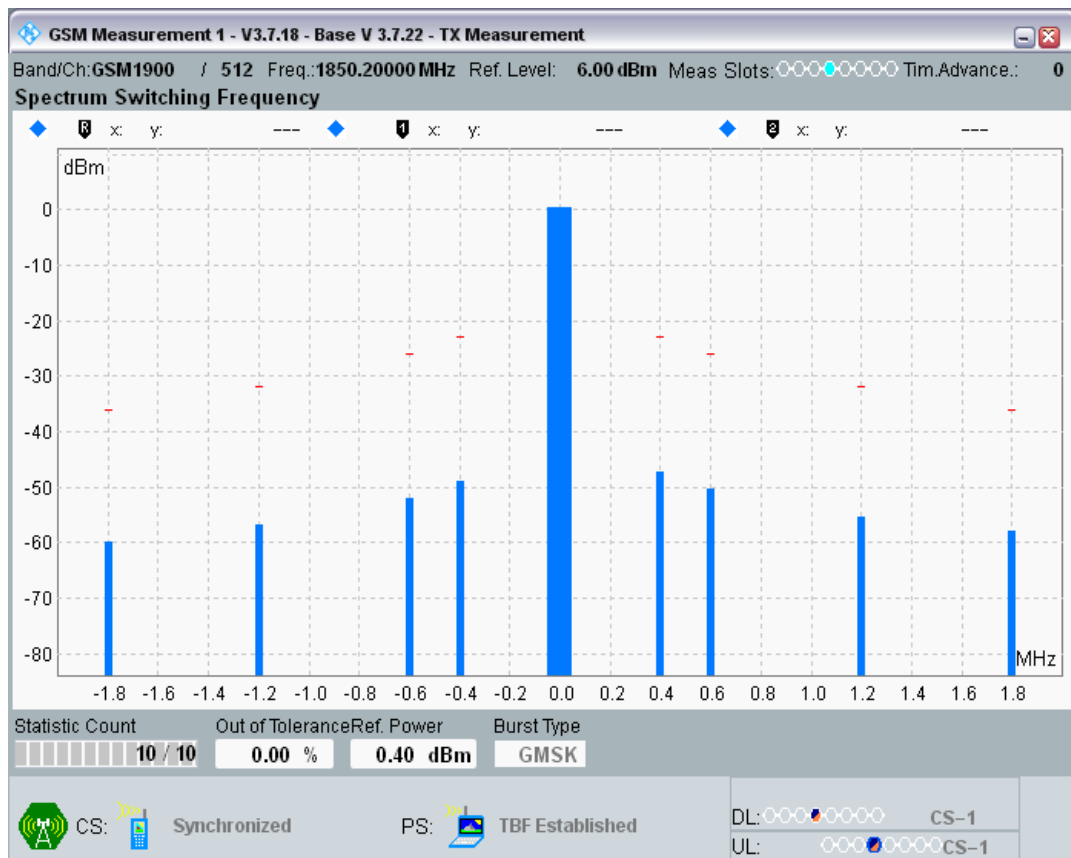


GPRS1900 Channel=661 Gamma=3;3;3;3

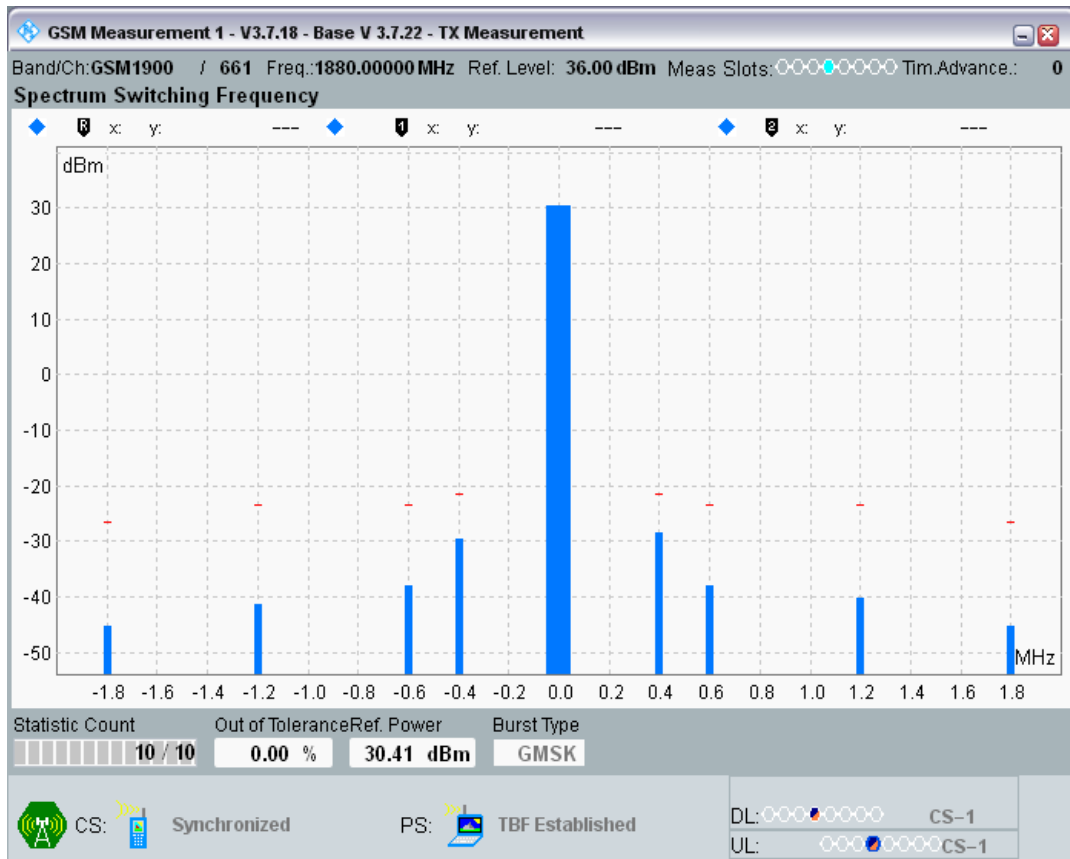


GPRS1900 Channel=661 Gamma=18;18;18;18

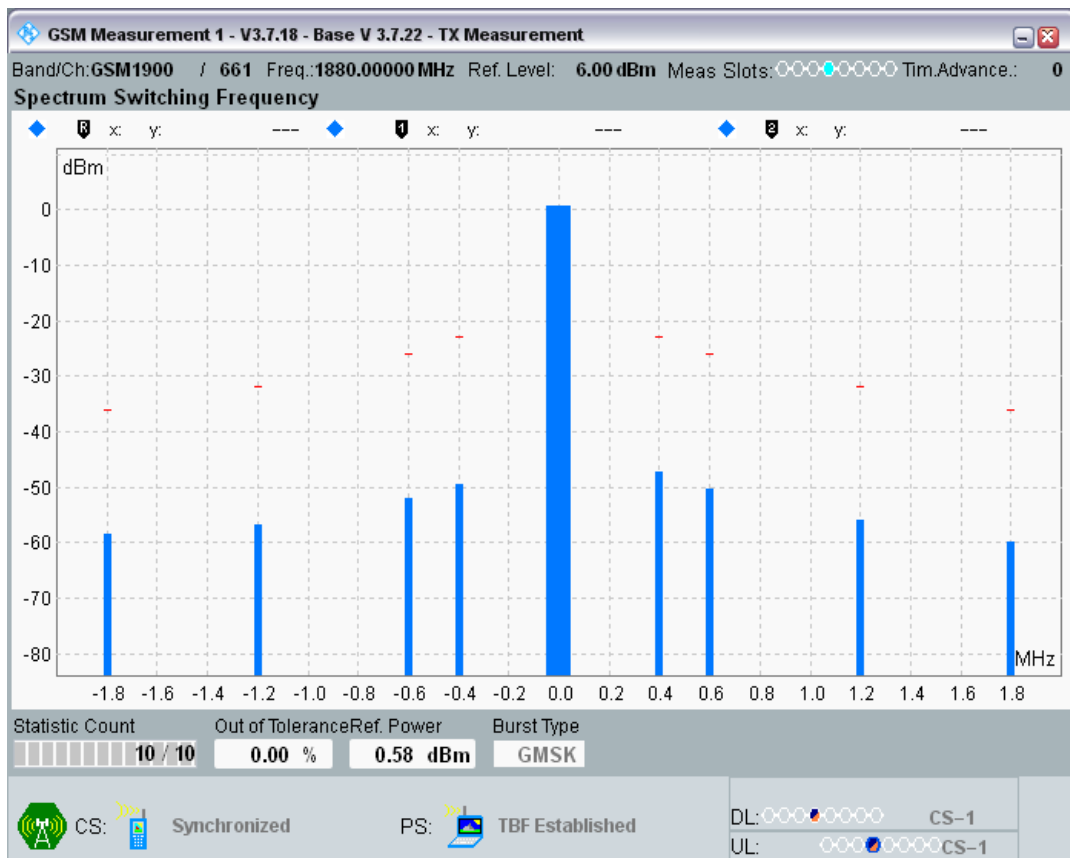


GPRS1900 Channel=810 Gamma=3;3;3;3

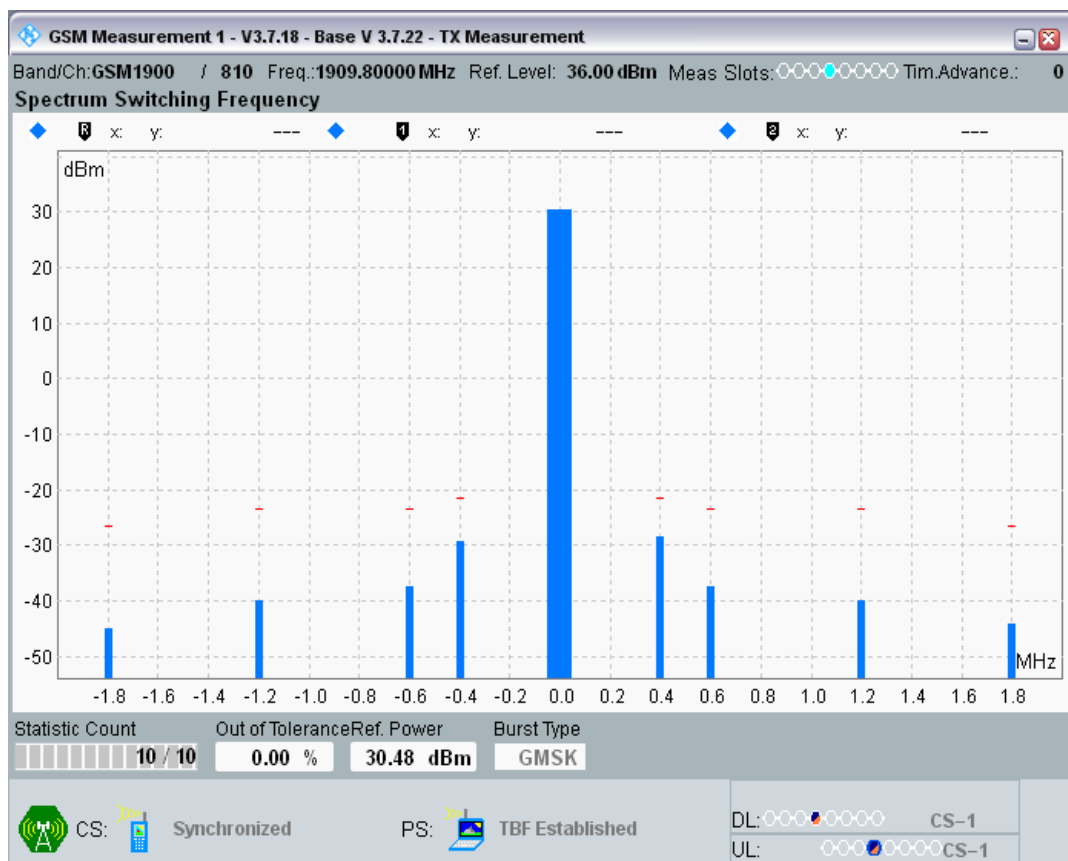


GPRS1900 Channel=810 Gamma=18;18;18;18

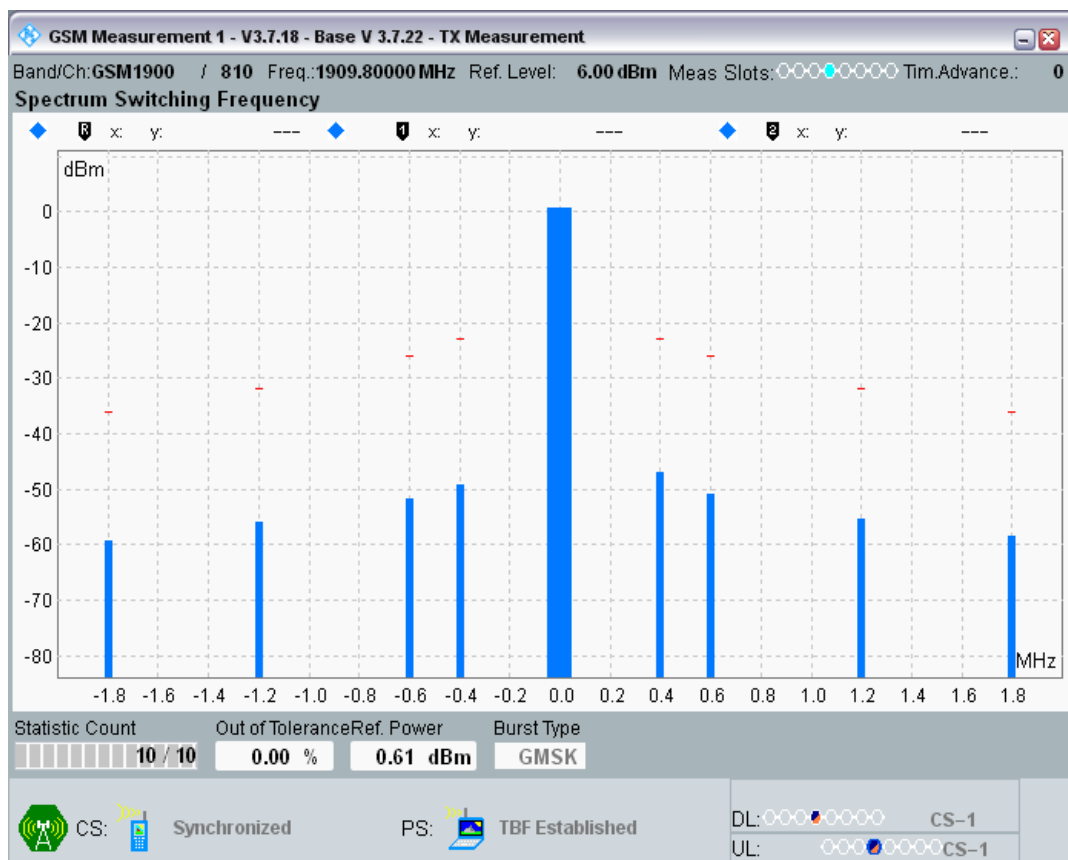


GPRS850 Channel=128 Gamma=3;3;3;3

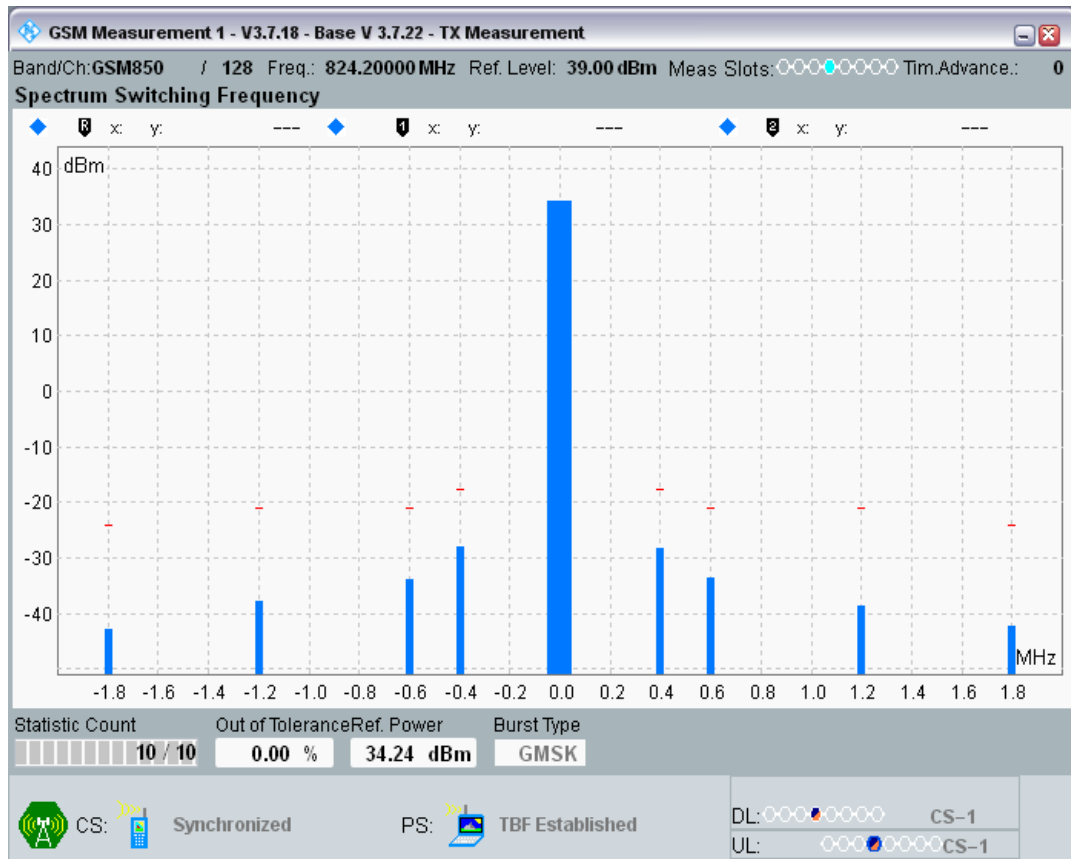


GPRS850 Channel=128 Gamma=17;17;17;17

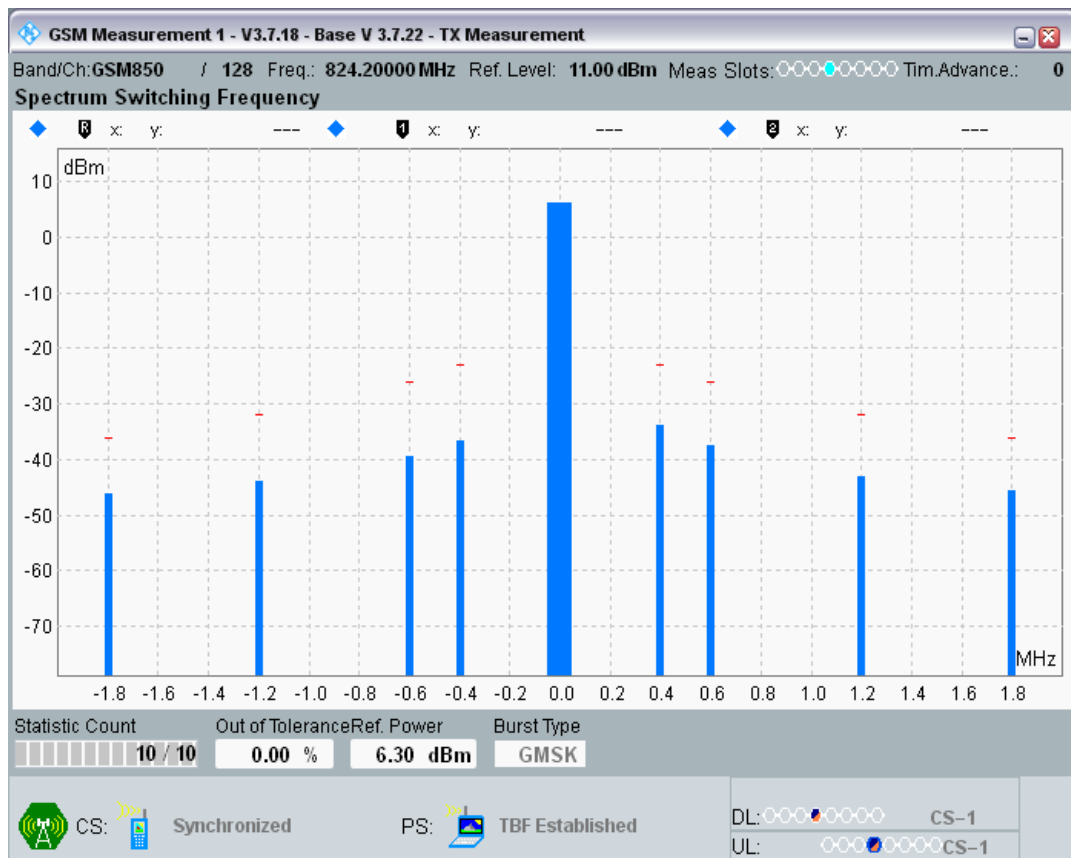


GPRS850 Channel=190 Gamma=3;3;3;3

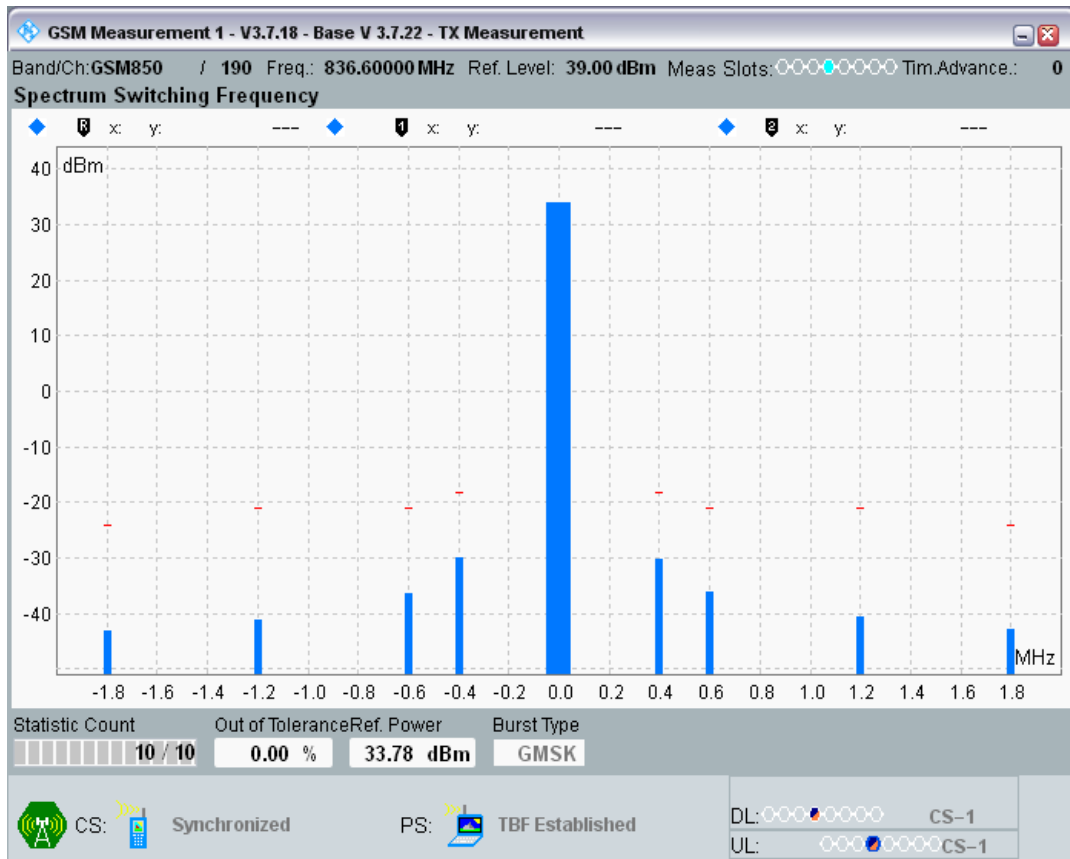


GPRS850 Channel=190 Gamma=17;17;17;17

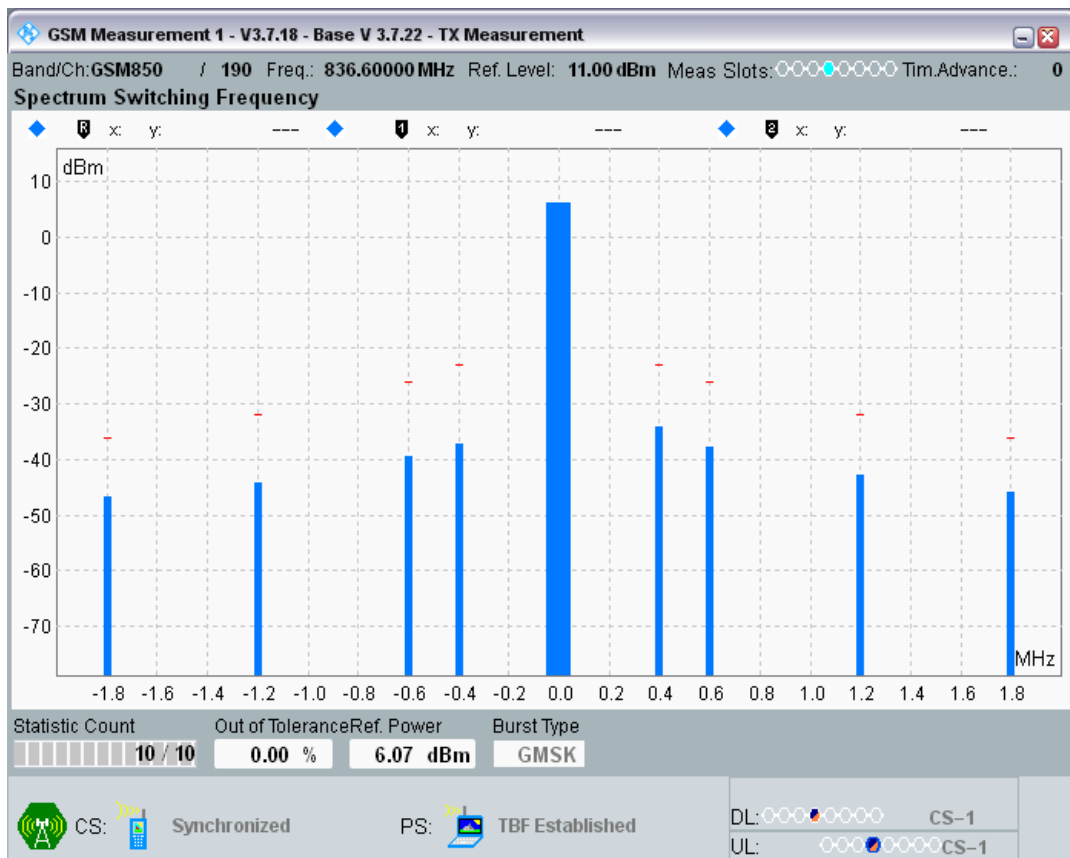


GPRS850 Channel=251 Gamma=3;3;3;3

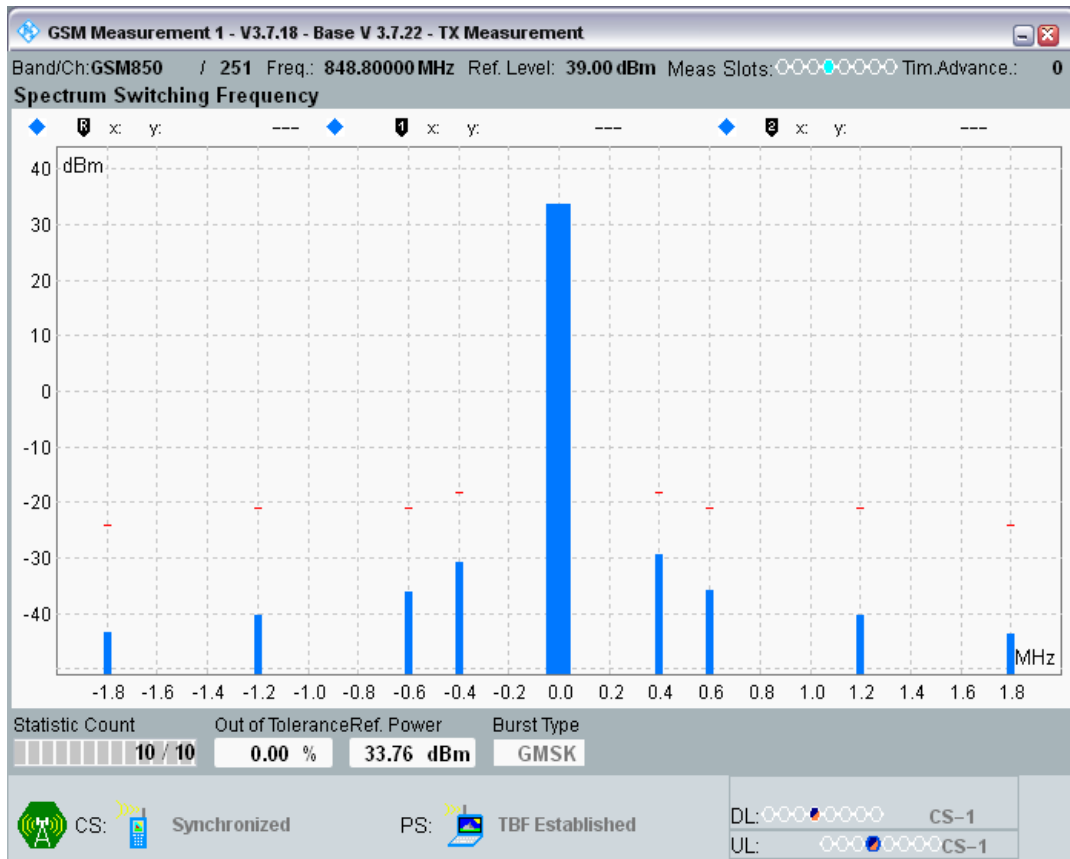


GPRS850 Channel=251 Gamma=17;17;17;17

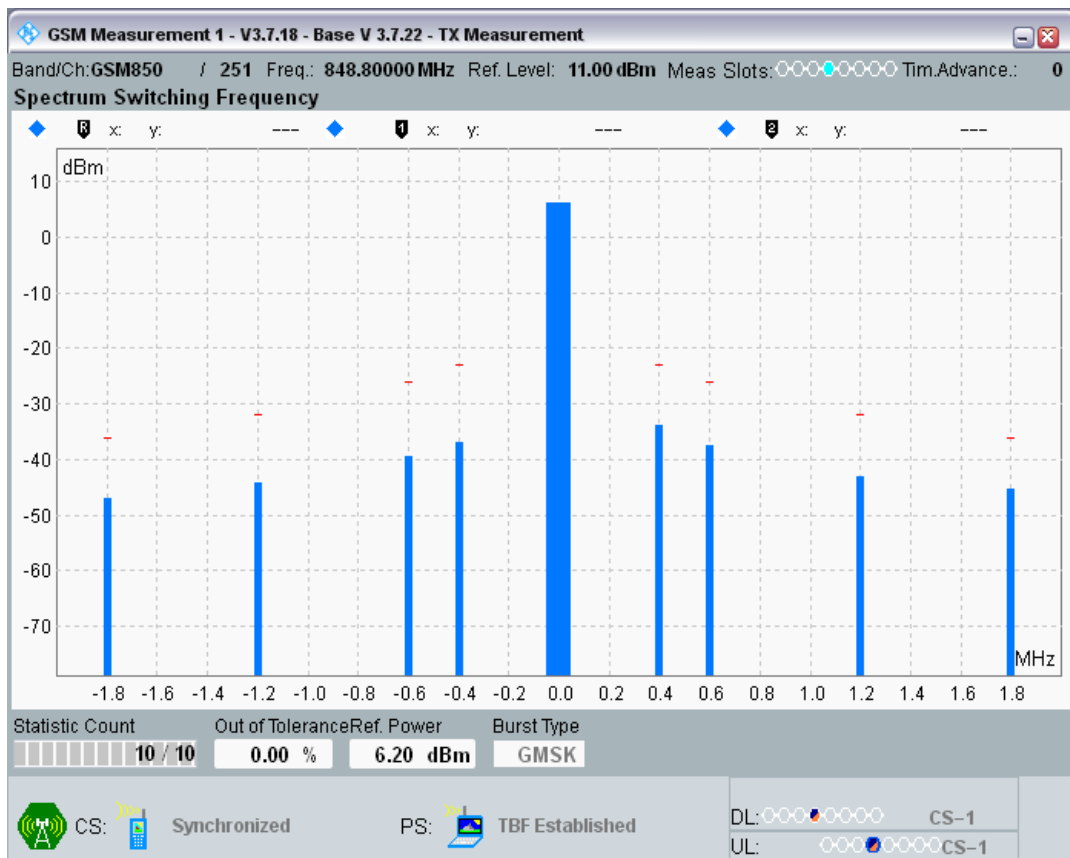


GPRS900 Channel=975 Gamma=3;3;3;3

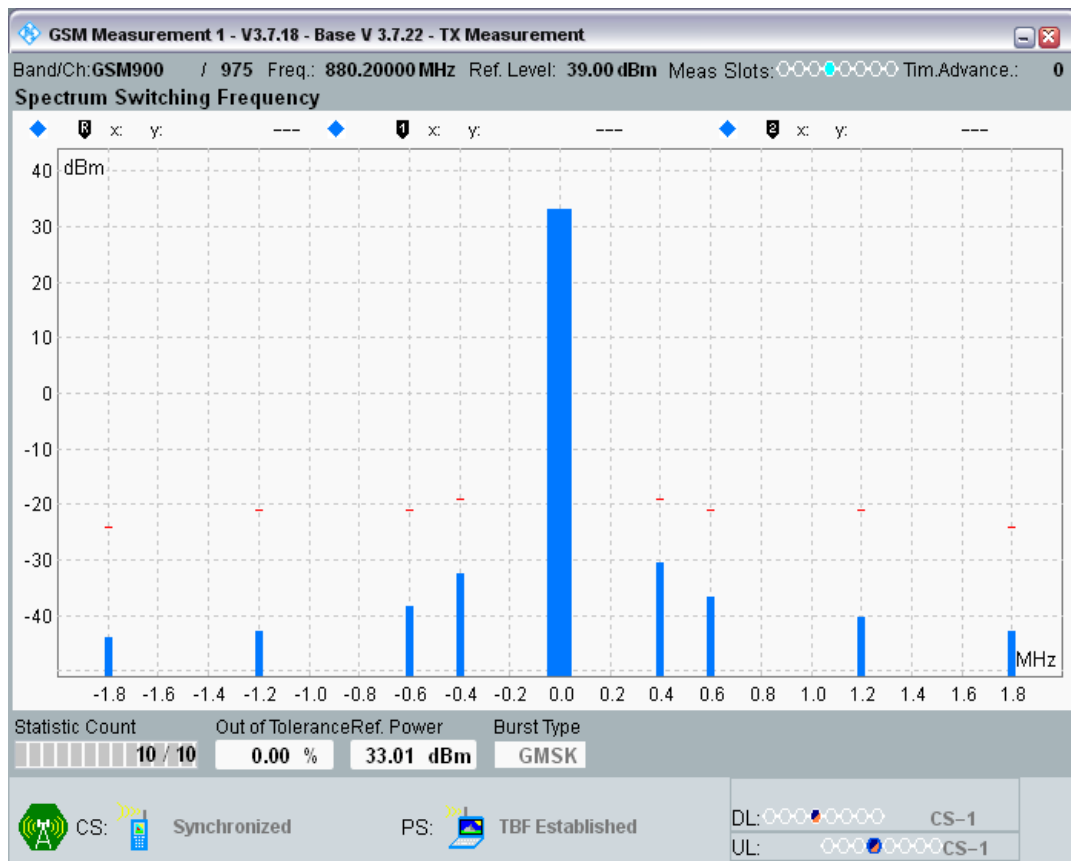


GPRS900 Channel=975 Gamma=17;17;17;17

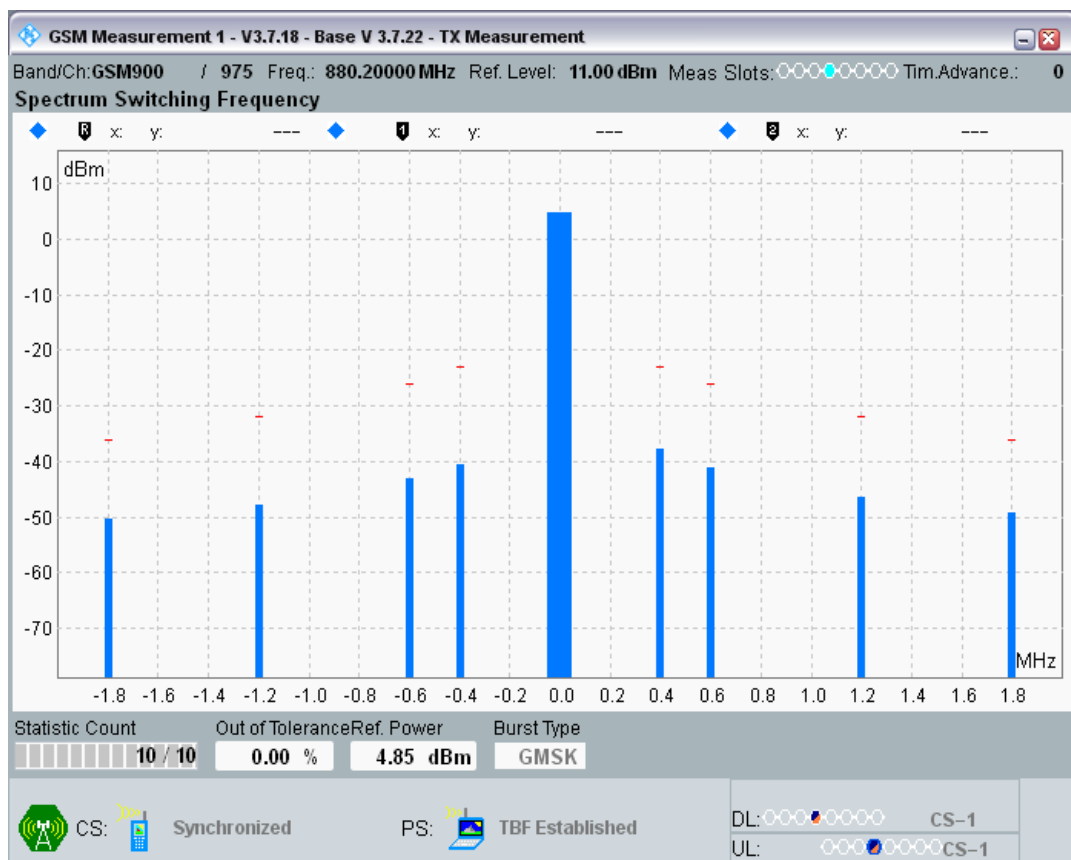

GPRS900 Channel=38 Gamma=3;3;3;3

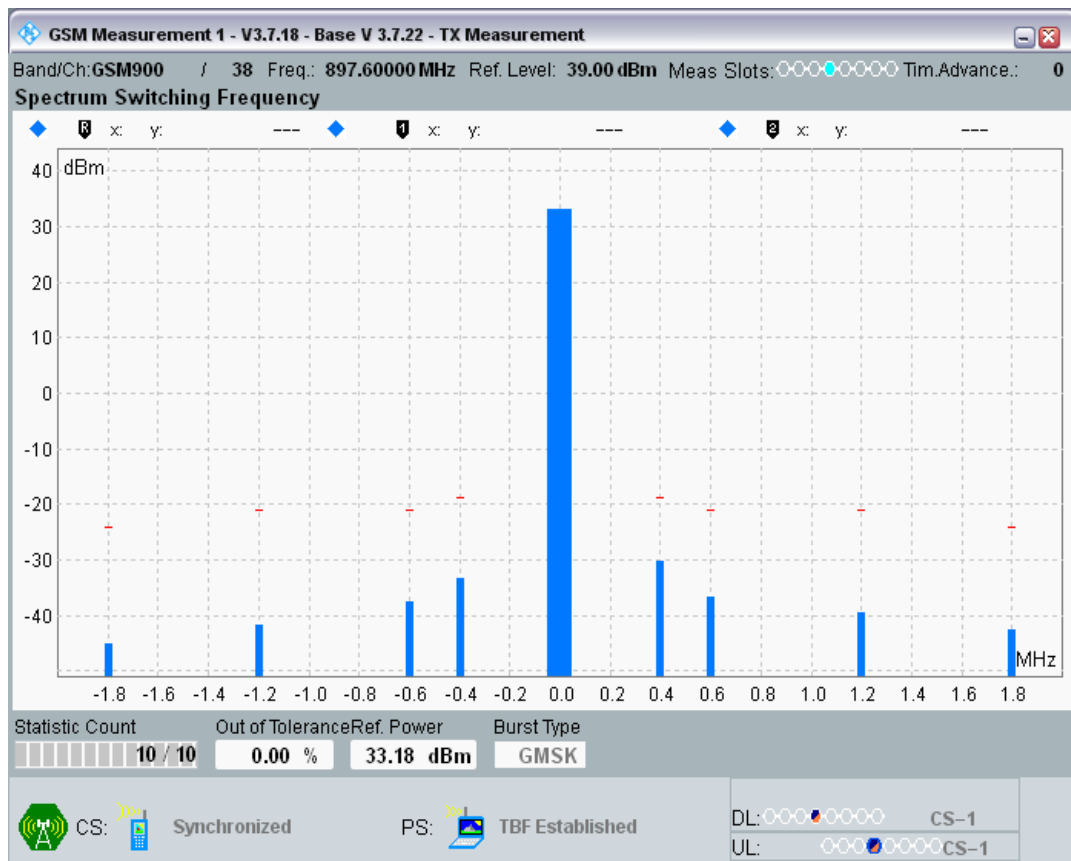


GPRS900 Channel=38 Gamma=17;17;17;17

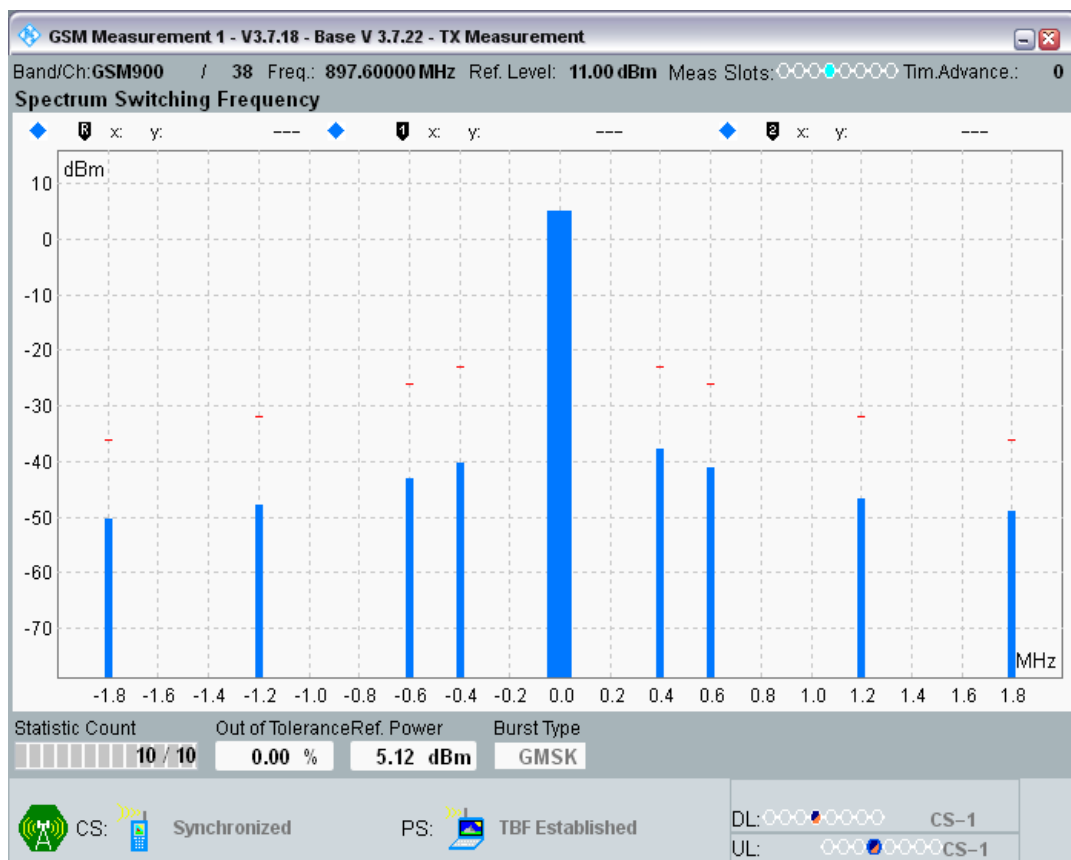

GPRS900 Channel=124 Gamma=3;3;3;3



GPRS900 Channel=124 Gamma=17;17;17;17

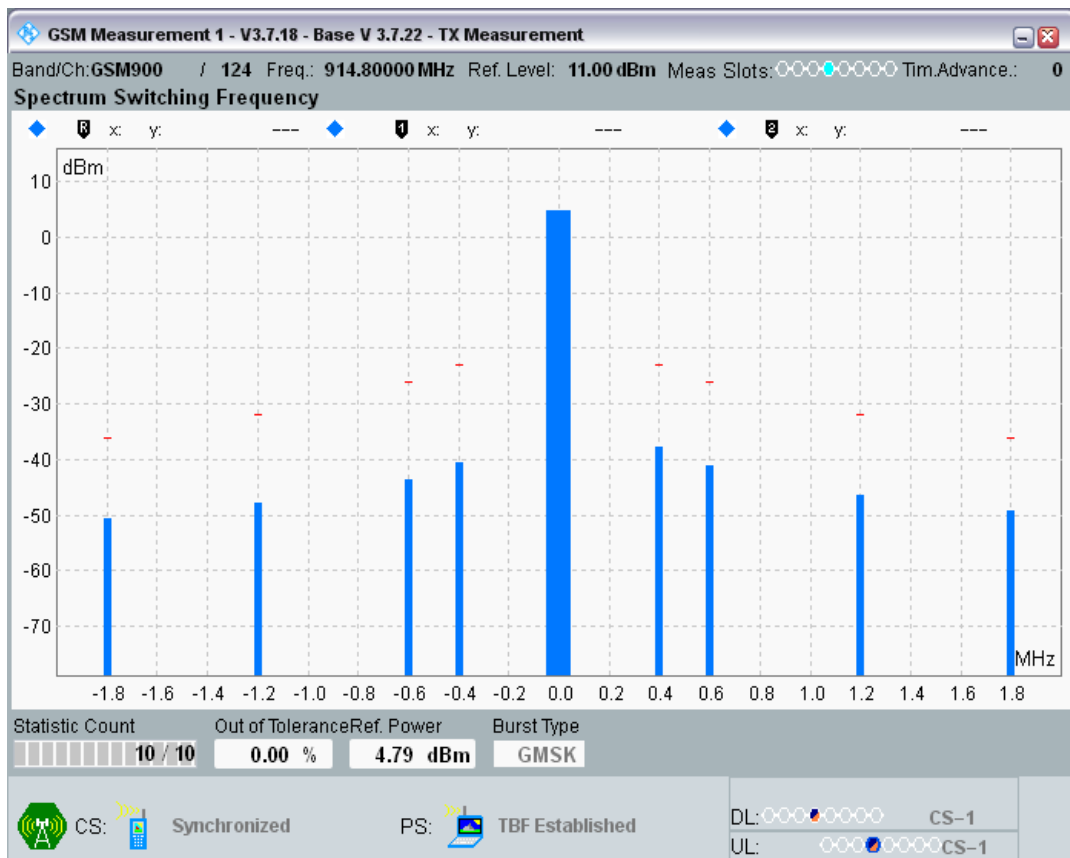

Clause 4.2.44 Minimum Input level for Reference Performance - GPRS PDTCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Type	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GPRS1800	Hopping	-	-	PDTCH CS3 Static FH	-101	0.00	10	PASS
GPRS1800	512	1710.2	1805.2	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS1800	Hopping	-	-	PDTCH CS3 TU50 FH	-95	0.00	10	PASS
GPRS1800	512	1710.2	1805.2	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS1800	512	1710.2	1805.2	PDTCH CS3 HT100	-91	0.00	10	PASS
GPRS1800	Hopping	-	-	PDTCH CS4 Static FH	-98	0.00	10	PASS
GPRS1800	512	1710.2	1805.2	PDTCH CS4 TU50	-85	0.00	10	PASS
GPRS1800	Hopping	-	-	PDTCH CS4 TU50 FH	-85	0.00	10	PASS
GPRS1800	698	1747.4	1842.4	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS1800	698	1747.4	1842.4	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS1800	698	1747.4	1842.4	PDTCH CS3 HT100	-91	0.00	10	PASS
GPRS1800	698	1747.4	1842.4	PDTCH CS4 TU50	-85	0.00	10	PASS
GPRS1800	885	1784.8	1879.8	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS1800	885	1784.8	1879.8	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS1800	885	1784.8	1879.8	PDTCH CS3 HT100	-91	0.00	10	PASS
GPRS1800	885	1784.8	1879.8	PDTCH CS4 TU50	-85	0.00	10	PASS
GPRS1900	Hopping	-	-	PDTCH CS3 Static FH	-101	0.00	10	PASS
GPRS1900	512	1850.2	1930.2	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS1900	Hopping	-	-	PDTCH CS3 TU50 FH	-95	0.00	10	PASS
GPRS1900	512	1850.2	1930.2	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS1900	512	1850.2	1930.2	PDTCH CS3 HT100	-91	0.00	10	PASS

GPRS1900	Hopping	-	-	PDTCH CS4 Static FH	-98	0.00	10	PASS
GPRS1900	512	1850.2	1930.2	PDTCH CS4 TU50	-85	0.00	10	PASS
GPRS1900	Hopping	-	-	PDTCH CS4 TU50 FH	-85	0.00	10	PASS
GPRS1900	661	1880	1960	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS1900	661	1880	1960	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS1900	661	1880	1960	PDTCH CS3 HT100	-91	0.00	10	PASS
GPRS1900	661	1880	1960	PDTCH CS4 TU50	-85	0.00	10	PASS
GPRS1900	810	1909.8	1989.8	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS1900	810	1909.8	1989.8	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS1900	810	1909.8	1989.8	PDTCH CS3 HT100	-91	0.00	10	PASS
GPRS1900	810	1909.8	1989.8	PDTCH CS4 TU50	-85	0.00	10	PASS
GPRS850	Hopping	-	-	PDTCH CS3 Static FH	-101	0.00	10	PASS
GPRS850	128	824.2	869.2	PDTCH CS3 TU50	-95	0.10	10	PASS
GPRS850	Hopping	-	-	PDTCH CS3 TU50 FH	-96	0.00	10	PASS
GPRS850	128	824.2	869.2	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS850	128	824.2	869.2	PDTCH CS3 HT100	-93	0.00	10	PASS
GPRS850	Hopping	-	-	PDTCH CS4 Static FH	-98	0.00	10	PASS
GPRS850	128	824.2	869.2	PDTCH CS4 TU50	-87	0.00	10	PASS
GPRS850	Hopping	-	-	PDTCH CS4 TU50 FH	-87	0.00	10	PASS
GPRS850	190	836.6	881.6	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS850	190	836.6	881.6	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS850	190	836.6	881.6	PDTCH CS3 HT100	-93	0.00	10	PASS

GPRS850	190	836.6	881.6	PDTCH CS4 TU50	-87	0.00	10	PASS
GPRS850	251	848.8	893.8	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS850	251	848.8	893.8	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS850	251	848.8	893.8	PDTCH CS3 HT100	-93	0.00	10	PASS
GPRS850	251	848.8	893.8	PDTCH CS4 TU50	-87	0.00	10	PASS
GPRS900	Hopping	-	-	PDTCH CS3 Static FH	-101	0.00	10	PASS
GPRS900	975	880.2	915.2	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS900	Hopping	-	-	PDTCH CS3 TU50 FH	-96	0.00	10	PASS
GPRS900	975	880.2	915.2	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS900	975	880.2	915.2	PDTCH CS3 HT100	-93	0.00	10	PASS
GPRS900	Hopping	-	-	PDTCH CS4 Static FH	-98	0.00	10	PASS
GPRS900	975	880.2	915.2	PDTCH CS4 TU50	-87	0.00	10	PASS
GPRS900	Hopping	-	-	PDTCH CS4 TU50 FH	-87	0.00	10	PASS
GPRS900	38	897.6	942.6	PDTCH CS3 TU50	-95	0.20	10	PASS
GPRS900	38	897.6	942.6	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS900	38	897.6	942.6	PDTCH CS3 HT100	-93	0.00	10	PASS
GPRS900	38	897.6	942.6	PDTCH CS4 TU50	-87	0.00	10	PASS
GPRS900	124	914.8	959.8	PDTCH CS3 TU50	-95	0.00	10	PASS
GPRS900	124	914.8	959.8	PDTCH CS3 RA250	-95	0.00	10	PASS
GPRS900	124	914.8	959.8	PDTCH CS3 HT100	-93	0.00	10	PASS
GPRS900	124	914.8	959.8	PDTCH CS4 TU50	-87	0.00	10	PASS

Clause 4.2.44 Minimum Input level for Reference Performance - GPRS USF

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Type	Ref Sensitivity Level (dBm)	BLER (%)	Limit (%)	Verdict
GPRS1800	512	1710.2	1805.2	USF CS1 HT100	-98	0.00	1	PASS
GPRS1800	512	1710.2	1805.2	USF CS2 HT100	-100	0.00	1	PASS
GPRS1800	512	1710.2	1805.2	USF CS3 HT100	-100	0.00	1	PASS
GPRS1800	512	1710.2	1805.2	USF CS4 HT100	-100	0.00	1	PASS
GPRS1800	512	1710.2	1805.2	USF CS1 Static	-105	0.00	1	PASS
GPRS1800	698	1747.4	1842.4	USF CS1 HT100	-98	0.00	1	PASS
GPRS1800	698	1747.4	1842.4	USF CS2 HT100	-100	0.00	1	PASS
GPRS1800	698	1747.4	1842.4	USF CS3 HT100	-100	0.00	1	PASS
GPRS1800	698	1747.4	1842.4	USF CS4 HT100	-100	0.00	1	PASS
GPRS1800	698	1747.4	1842.4	USF CS1 Static	-105	0.00	1	PASS
GPRS1800	885	1784.8	1879.8	USF CS1 HT100	-98	0.00	1	PASS
GPRS1800	885	1784.8	1879.8	USF CS2 HT100	-100	0.00	1	PASS
GPRS1800	885	1784.8	1879.8	USF CS3 HT100	-100	0.00	1	PASS
GPRS1800	885	1784.8	1879.8	USF CS4 HT100	-100	0.00	1	PASS
GPRS1800	885	1784.8	1879.8	USF CS1 Static	-105	0.00	1	PASS
GPRS1900	512	1850.2	1930.2	USF CS1 HT100	-98	0.00	1	PASS
GPRS1900	512	1850.2	1930.2	USF CS2 HT100	-100	0.00	1	PASS
GPRS1900	512	1850.2	1930.2	USF CS3 HT100	-100	0.00	1	PASS
GPRS1900	512	1850.2	1930.2	USF CS4 HT100	-100	0.00	1	PASS
GPRS1900	512	1850.2	1930.2	USF CS1 Static	-105	0.00	1	PASS
GPRS1900	661	1880	1960	USF CS1 HT100	-98	0.00	1	PASS

GPRS1900	661	1880	1960	USF CS2 HT100	-100	0.00	1	PASS
GPRS1900	661	1880	1960	USF CS3 HT100	-100	0.00	1	PASS
GPRS1900	661	1880	1960	USF CS4 HT100	-100	0.00	1	PASS
GPRS1900	661	1880	1960	USF CS1 Static	-105	0.00	1	PASS
GPRS1900	810	1909.8	1989.8	USF CS1 HT100	-98	0.00	1	PASS
GPRS1900	810	1909.8	1989.8	USF CS2 HT100	-100	0.00	1	PASS
GPRS1900	810	1909.8	1989.8	USF CS3 HT100	-100	0.00	1	PASS
GPRS1900	810	1909.8	1989.8	USF CS4 HT100	-100	0.00	1	PASS
GPRS1900	810	1909.8	1989.8	USF CS1 Static	-105	0.00	1	PASS
GPRS850	128	824.2	869.2	USF CS1 HT100	-98	0.00	1	PASS
GPRS850	128	824.2	869.2	USF CS2 HT100	-101	0.00	1	PASS
GPRS850	128	824.2	869.2	USF CS3 HT100	-101	0.00	1	PASS
GPRS850	128	824.2	869.2	USF CS4 HT100	-101	0.00	1	PASS
GPRS850	128	824.2	869.2	USF CS1 Static	-105	0.00	1	PASS
GPRS850	190	836.6	881.6	USF CS1 HT100	-98	0.00	1	PASS
GPRS850	190	836.6	881.6	USF CS2 HT100	-101	0.00	1	PASS
GPRS850	190	836.6	881.6	USF CS3 HT100	-101	0.00	1	PASS
GPRS850	190	836.6	881.6	USF CS4 HT100	-101	0.00	1	PASS
GPRS850	190	836.6	881.6	USF CS1 Static	-105	0.00	1	PASS
GPRS850	251	848.8	893.8	USF CS1 HT100	-98	0.00	1	PASS
GPRS850	251	848.8	893.8	USF CS2 HT100	-101	0.00	1	PASS
GPRS850	251	848.8	893.8	USF CS3 HT100	-101	0.00	1	PASS


GPRS850	251	848.8	893.8	USF CS4 HT100	-101	0.00	1	PASS
GPRS850	251	848.8	893.8	USF CS1 Static	-105	0.00	1	PASS
GPRS900	975	880.2	915.2	USF CS1 HT100	-98	0.00	1	PASS
GPRS900	975	880.2	915.2	USF CS2 HT100	-101	0.00	1	PASS
GPRS900	975	880.2	915.2	USF CS3 HT100	-101	0.00	1	PASS
GPRS900	975	880.2	915.2	USF CS4 HT100	-101	0.00	1	PASS
GPRS900	975	880.2	915.2	USF CS1 Static	-105	0.00	1	PASS
GPRS900	38	897.6	942.6	USF CS1 HT100	-98	0.00	1	PASS
GPRS900	38	897.6	942.6	USF CS2 HT100	-101	0.00	1	PASS
GPRS900	38	897.6	942.6	USF CS3 HT100	-101	0.00	1	PASS
GPRS900	38	897.6	942.6	USF CS4 HT100	-101	0.00	1	PASS
GPRS900	38	897.6	942.6	USF CS1 Static	-105	0.00	1	PASS
GPRS900	124	914.8	959.8	USF CS1 HT100	-98	0.00	1	PASS
GPRS900	124	914.8	959.8	USF CS2 HT100	-101	0.00	1	PASS
GPRS900	124	914.8	959.8	USF CS3 HT100	-101	0.00	1	PASS
GPRS900	124	914.8	959.8	USF CS4 HT100	-101	0.00	1	PASS
GPRS900	124	914.8	959.8	USF CS1 Static	-105	0.00	1	PASS

Clause 4.2.1 Transmitter-Frequency error and phase error


Band	Channel	Frequency (MHz)	PCL	Type	Result	Low Limit	high Limit	Verdict
GSM1800	698	1747.4	0	Frequency Error (Hz)	-4.62	-174.74	174.74	PASS
GSM1800	698	1747.4	0	RMS Phase Error (Degree)	1.39	0	5	PASS
GSM1800	698	1747.4	0	Peak Phase Error (Degree)	7.29	0	20	PASS
GSM1800	698	1747.4	15	Frequency Error (Hz)	23.89	-174.74	174.74	PASS
GSM1800	698	1747.4	15	RMS Phase Error (Degree)	1.26	0	5	PASS
GSM1800	698	1747.4	15	Peak Phase Error (Degree)	3.95	0	20	PASS
GSM1900	661	1880	0	Frequency Error (Hz)	-10.07	-188	188	PASS

GSM1900	661	1880	0	RMS Phase Error (Degree)	1.28	0	5	PASS
GSM1900	661	1880	0	Peak Phase Error (Degree)	5.43	0	20	PASS
GSM1900	661	1880	15	Frequency Error (Hz)	19.98	-188	188	PASS
GSM1900	661	1880	15	RMS Phase Error (Degree)	1.27	0	5	PASS
GSM1900	661	1880	15	Peak Phase Error (Degree)	4.00	0	20	PASS
GSM850	190	836.6	5	Frequency Error (Hz)	6.81	-83.66	83.66	PASS
GSM850	190	836.6	5	RMS Phase Error (Degree)	0.96	0	5	PASS
GSM850	190	836.6	5	Peak Phase Error (Degree)	2.87	0	20	PASS
GSM850	190	836.6	19	Frequency Error (Hz)	-2.07	-83.66	83.66	PASS
GSM850	190	836.6	19	RMS Phase Error (Degree)	1.02	0	5	PASS
GSM850	190	836.6	19	Peak Phase Error (Degree)	2.67	0	20	PASS
GSM900	38	897.6	5	Frequency Error (Hz)	9.94	-89.76	89.76	PASS
GSM900	38	897.6	5	RMS Phase Error (Degree)	0.77	0	5	PASS
GSM900	38	897.6	5	Peak Phase Error (Degree)	3.89	0	20	PASS
GSM900	38	897.6	19	Frequency Error (Hz)	9.30	-89.76	89.76	PASS
GSM900	38	897.6	19	RMS Phase Error (Degree)	0.77	0	5	PASS
GSM900	38	897.6	19	Peak Phase Error (Degree)	2.37	0	20	PASS


GSM1800 Channel=698 PCL=0

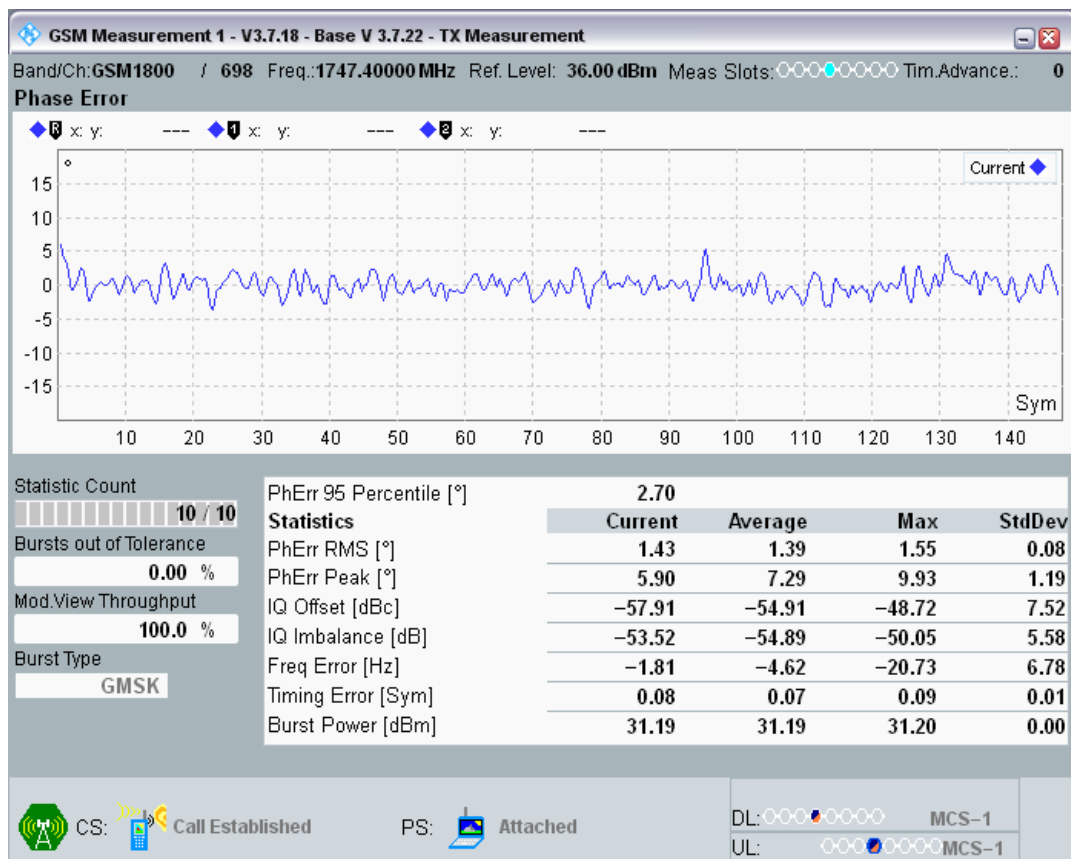


GSM1800 Channel=698 PCL=15

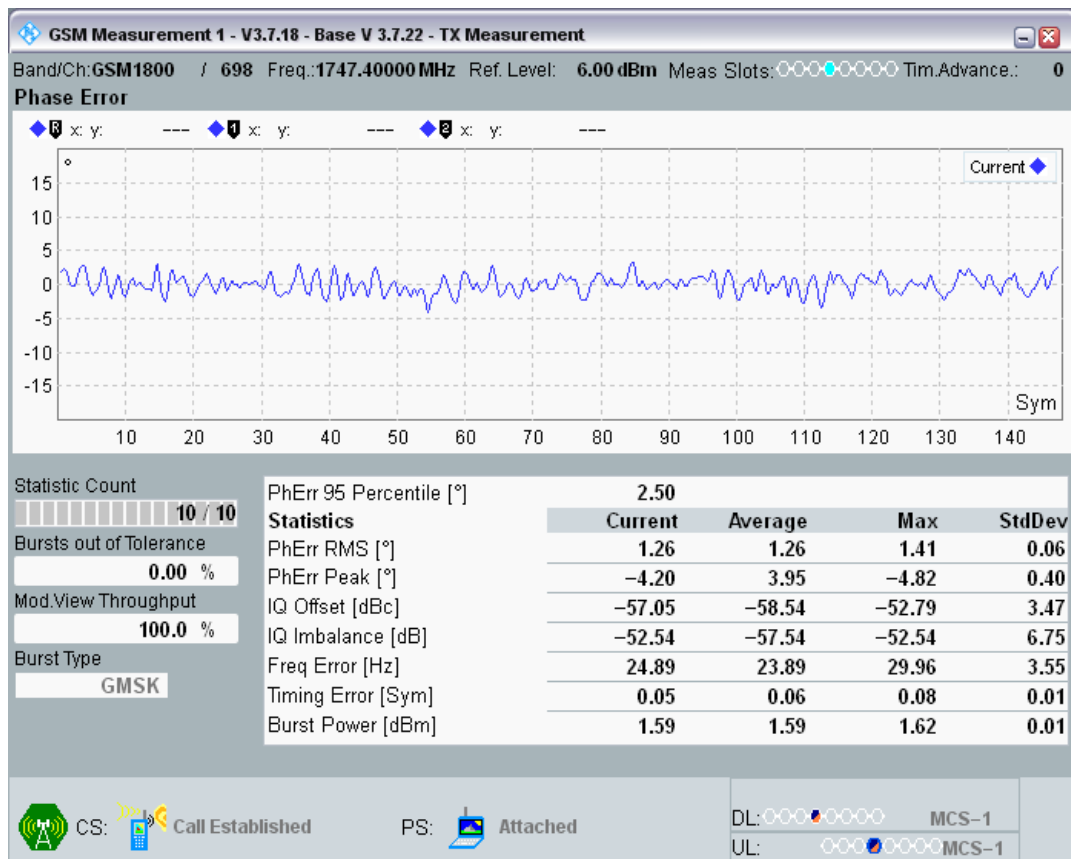


GSM1900 Channel=661 PCL=0

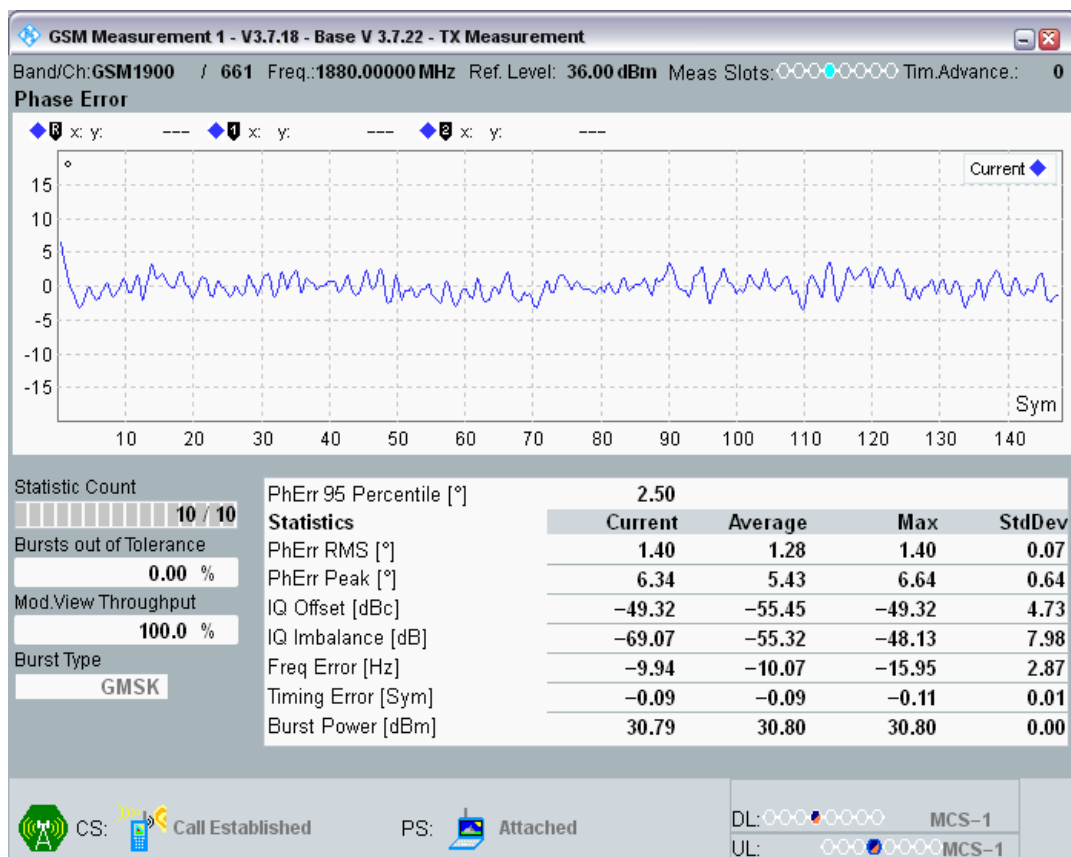


GSM1900 Channel=661 PCL=15

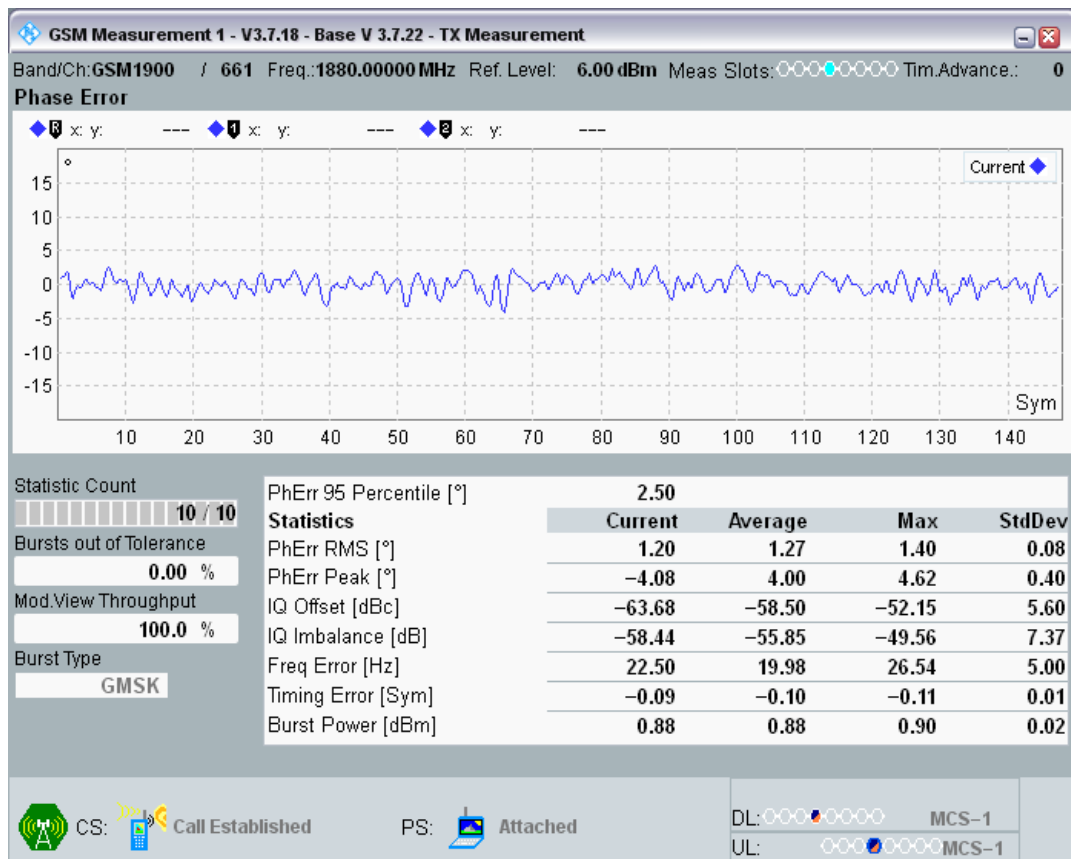


GSM850 Channel=190 PCL=5

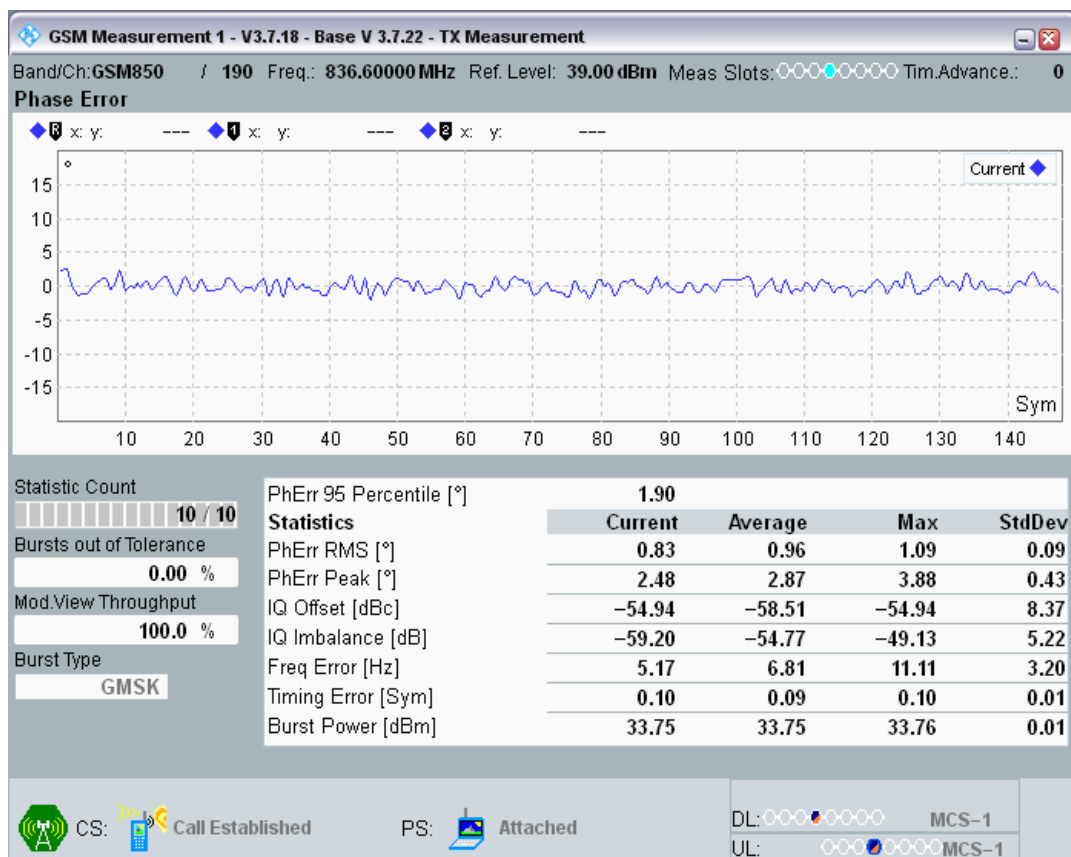


GSM850 Channel=190 PCL=19

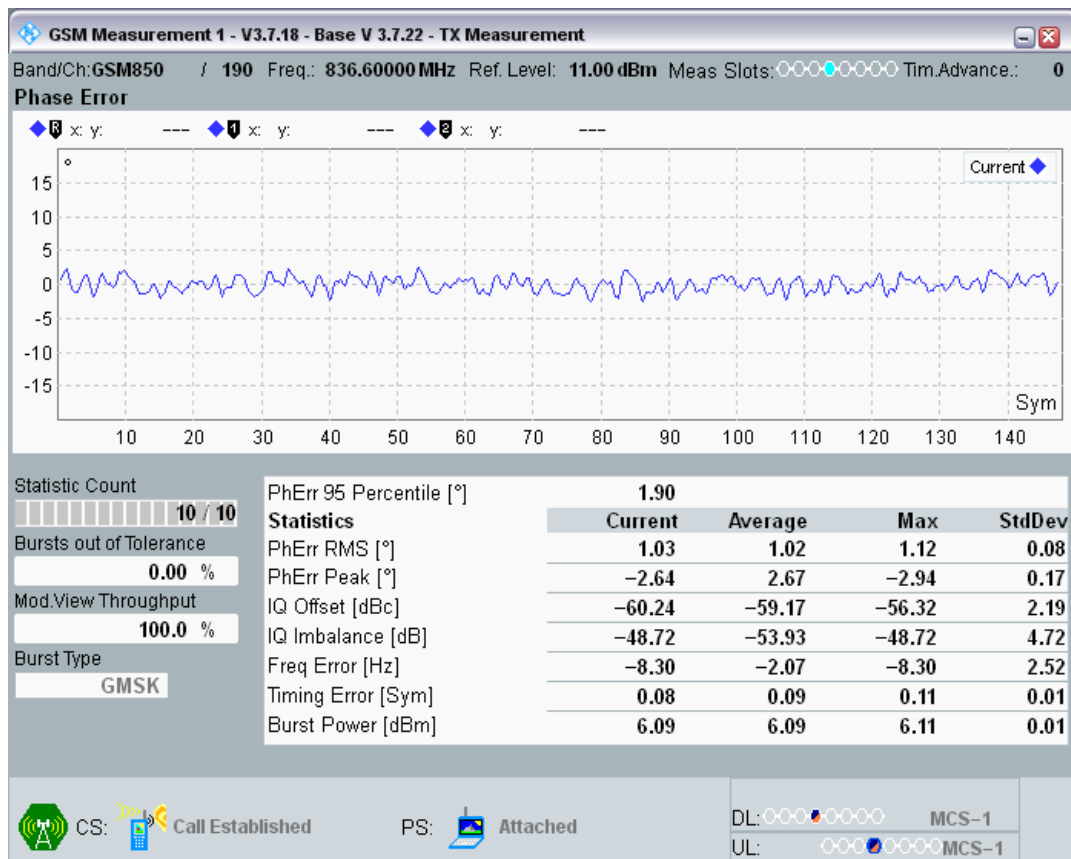

GSM900 Channel=38 PCL=5

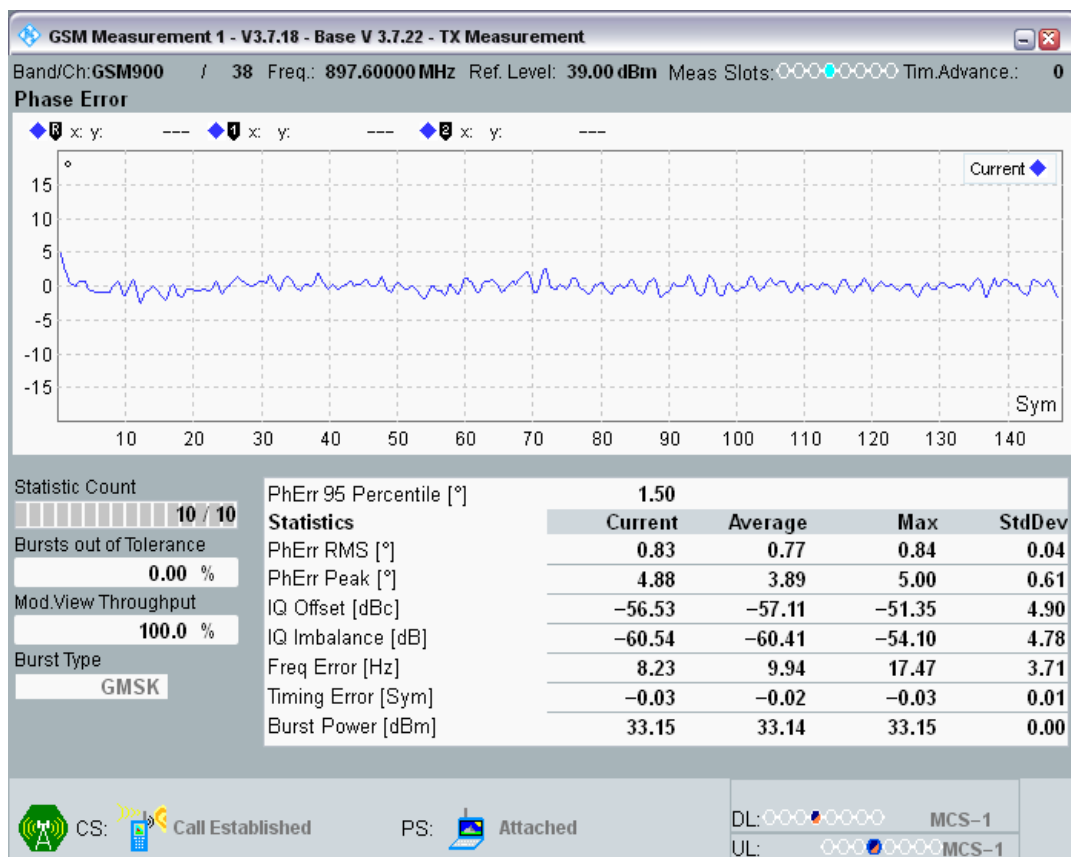

GSM900 Channel=38 PCL=19

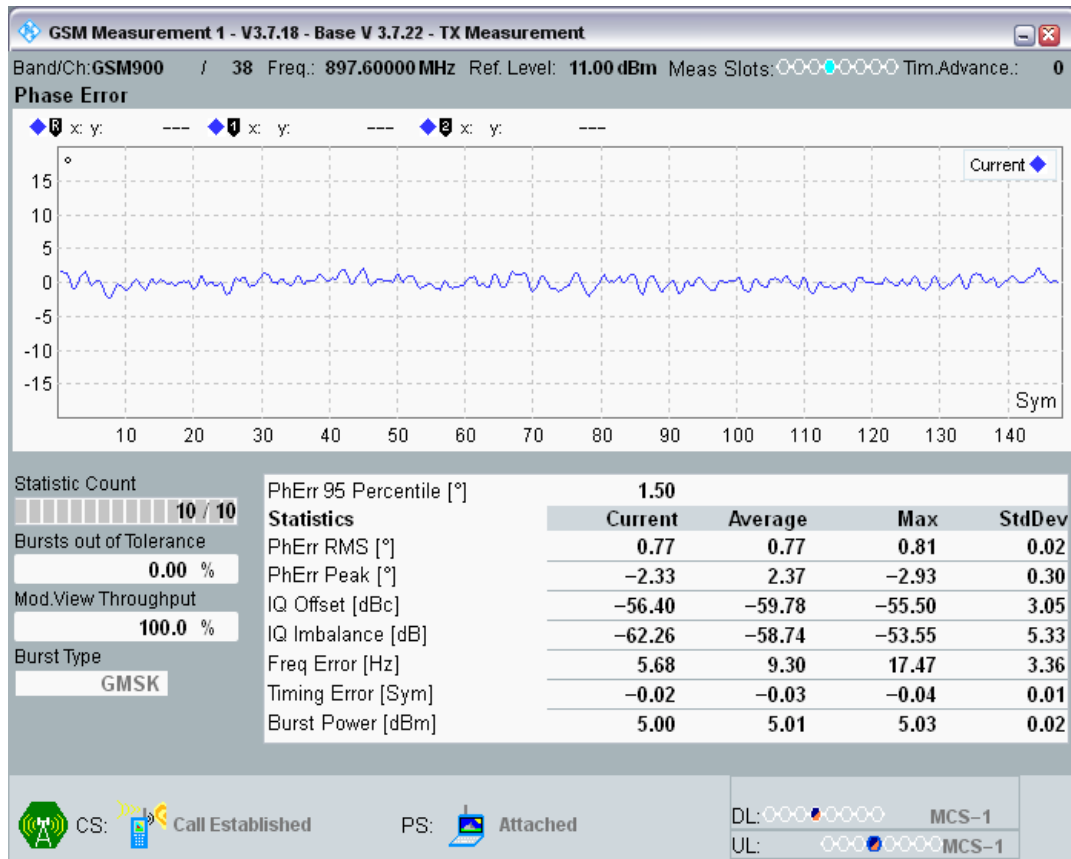

Clause 4.2.2 Transmitter-Frequency error under multi path

Band	Type	Channel	Frequency (MHz)	PCL	Result (Hz)	Low Limit (Hz)	high Limit (Hz)	Verdict
GSM1800	RA130 @RACH	698	1747.4	0	14.24	-574.74	574.74	PASS
GSM1800	RA130 @Sens1	698	1747.4	0	-3.49	-574.74	574.74	PASS
GSM1800	RA130 @Sens2	698	1747.4	0	-2.94	-574.74	574.74	PASS
GSM1800	RA130 @Sens3	698	1747.4	0	-11.46	-574.74	574.74	PASS
GSM1800	RA130 @Sens4	698	1747.4	0	-0.97	-574.74	574.74	PASS
GSM1800	RA130 @Sens5	698	1747.4	0	4.29	-574.74	574.74	PASS
GSM1800	HT100 @RACH	698	1747.4	0	-7.33	-524.74	524.74	PASS
GSM1800	HT100 @Sens1	698	1747.4	0	-12.88	-524.74	524.74	PASS
GSM1800	HT100 @Sens2	698	1747.4	0	4.75	-524.74	524.74	PASS
GSM1800	HT100 @Sens3	698	1747.4	0	-13.98	-524.74	524.74	PASS
GSM1800	HT100 @Sens4	698	1747.4	0	-2.42	-524.74	524.74	PASS
GSM1800	HT100 @Sens5	698	1747.4	0	3.33	-524.74	524.74	PASS
GSM1800	TU50 @RACH	698	1747.4	0	-4.07	-434.74	434.74	PASS
GSM1800	TU50 @Sens1	698	1747.4	0	-17.01	-434.74	434.74	PASS
GSM1800	TU50 @Sens2	698	1747.4	0	-8.23	-434.74	434.74	PASS
GSM1800	TU50 @Sens3	698	1747.4	0	-23.60	-434.74	434.74	PASS
GSM1800	TU50 @Sens4	698	1747.4	0	-2.65	-434.74	434.74	PASS
GSM1800	TU50 @Sens5	698	1747.4	0	-7.23	-434.74	434.74	PASS
GSM1800	TU1_5 @RACH	698	1747.4	0	-17.63	-494.74	494.74	PASS
GSM1800	TU1_5 @1	698	1747.4	0	-6.68	-494.74	494.74	PASS
GSM1800	TU1_5 @2	698	1747.4	0	-3.45	-494.74	494.74	PASS


GSM1800	TU1_5 @3	698	1747.4	0	-4.46	-494.74	494.74	PASS
GSM1800	TU1_5 @4	698	1747.4	0	1.19	-494.74	494.74	PASS
GSM1800	TU1_5 @5	698	1747.4	0	-15.24	-494.74	494.74	PASS
GSM1800	TU1_5 @6	698	1747.4	0	-4.23	-494.74	494.74	PASS
GSM1800	TU1_5 @7	698	1747.4	0	-6.04	-494.74	494.74	PASS
GSM1800	TU1_5 @8	698	1747.4	0	-7.30	-494.74	494.74	PASS
GSM1800	TU1_5 @9	698	1747.4	0	-1.55	-494.74	494.74	PASS
GSM1800	TU1_5 @10	698	1747.4	0	-12.14	-494.74	494.74	PASS
GSM1800	TU1_5 @11	698	1747.4	0	-3.03	-494.74	494.74	PASS
GSM1800	TU1_5 @12	698	1747.4	0	0.55	-494.74	494.74	PASS
GSM1800	TU1_5 @13	698	1747.4	0	-8.56	-494.74	494.74	PASS
GSM1800	TU1_5 @14	698	1747.4	0	-1.71	-494.74	494.74	PASS
GSM1800	TU1_5 @15	698	1747.4	0	5.07	-494.74	494.74	PASS
GSM1800	TU1_5 @16	698	1747.4	0	-2.81	-494.74	494.74	PASS
GSM1800	TU1_5 @17	698	1747.4	0	-10.17	-494.74	494.74	PASS
GSM1800	TU1_5 @18	698	1747.4	0	-10.85	-494.74	494.74	PASS
GSM1800	TU1_5 @19	698	1747.4	0	-10.33	-494.74	494.74	PASS
GSM1800	TU1_5 @20	698	1747.4	0	0.10	-494.74	494.74	PASS
GSM1900	RA130 @RACH	661	1880	0	-11.95	-608	608	PASS
GSM1900	RA130 @Sens1	661	1880	0	0.26	-608	608	PASS
GSM1900	RA130 @Sens2	661	1880	0	15.79	-608	608	PASS
GSM1900	RA130 @Sens3	661	1880	0	-13.75	-608	608	PASS
GSM1900	RA130 @Sens4	661	1880	0	-19.53	-608	608	PASS
GSM1900	RA130 @Sens5	661	1880	0	5.29	-608	608	PASS
GSM1900	HT100 @RACH	661	1880	0	2.49	-558	558	PASS
GSM1900	HT100 @Sens1	661	1880	0	18.34	-558	558	PASS
GSM1900	HT100 @Sens2	661	1880	0	-7.97	-558	558	PASS
GSM1900	HT100 @Sens3	661	1880	0	8.52	-558	558	PASS
GSM1900	HT100 @Sens4	661	1880	0	9.56	-558	558	PASS
GSM1900	HT100 @Sens5	661	1880	0	-5.71	-558	558	PASS
GSM1900	TU50 @RACH	661	1880	0	-9.81	-468	468	PASS
GSM1900	TU50 @Sens1	661	1880	0	13.53	-468	468	PASS
GSM1900	TU50 @Sens2	661	1880	0	2.94	-468	468	PASS
GSM1900	TU50 @Sens3	661	1880	0	-7.91	-468	468	PASS
GSM1900	TU50 @Sens4	661	1880	0	0.94	-468	468	PASS
GSM1900	TU50 @Sens5	661	1880	0	10.36	-468	468	PASS
GSM1900	TU1_5 @RACH	661	1880	0	10.78	-518	518	PASS
GSM1900	TU1_5 @1	661	1880	0	1.42	-518	518	PASS
GSM1900	TU1_5 @2	661	1880	0	3.84	-518	518	PASS
GSM1900	TU1_5 @3	661	1880	0	5.36	-518	518	PASS
GSM1900	TU1_5 @4	661	1880	0	-9.72	-518	518	PASS
GSM1900	TU1_5 @5	661	1880	0	13.33	-518	518	PASS
GSM1900	TU1_5 @6	661	1880	0	-8.30	-518	518	PASS
GSM1900	TU1_5 @7	661	1880	0	10.59	-518	518	PASS

GSM1900	TU1_5 @8	661	1880	0	6.07	-518	518	PASS
GSM1900	TU1_5 @9	661	1880	0	-13.33	-518	518	PASS
GSM1900	TU1_5 @10	661	1880	0	4.88	-518	518	PASS
GSM1900	TU1_5 @11	661	1880	0	-1.58	-518	518	PASS
GSM1900	TU1_5 @12	661	1880	0	-9.52	-518	518	PASS
GSM1900	TU1_5 @13	661	1880	0	-4.10	-518	518	PASS
GSM1900	TU1_5 @14	661	1880	0	-0.39	-518	518	PASS
GSM1900	TU1_5 @15	661	1880	0	-8.43	-518	518	PASS
GSM1900	TU1_5 @16	661	1880	0	2.94	-518	518	PASS
GSM1900	TU1_5 @17	661	1880	0	-1.13	-518	518	PASS
GSM1900	TU1_5 @18	661	1880	0	-4.23	-518	518	PASS
GSM1900	TU1_5 @19	661	1880	0	-1.97	-518	518	PASS
GSM1900	TU1_5 @20	661	1880	0	-6.33	-518	518	PASS
GSM850	RA250 @RACH	190	836.6	5	4.75	-383.66	383.66	PASS
GSM850	RA250 @Sens1	190	836.6	5	-7.81	-383.66	383.66	PASS
GSM850	RA250 @Sens2	190	836.6	5	4.94	-383.66	383.66	PASS
GSM850	RA250 @Sens3	190	836.6	5	-4.58	-383.66	383.66	PASS
GSM850	RA250 @Sens4	190	836.6	5	-3.52	-383.66	383.66	PASS
GSM850	RA250 @Sens5	190	836.6	5	-5.36	-383.66	383.66	PASS
GSM850	HT100 @RACH	190	836.6	5	-2.00	-263.66	263.66	PASS
GSM850	HT100 @Sens1	190	836.6	5	3.84	-263.66	263.66	PASS
GSM850	HT100 @Sens2	190	836.6	5	1.42	-263.66	263.66	PASS
GSM850	HT100 @Sens3	190	836.6	5	-6.46	-263.66	263.66	PASS
GSM850	HT100 @Sens4	190	836.6	5	-15.37	-263.66	263.66	PASS
GSM850	HT100 @Sens5	190	836.6	5	-4.62	-263.66	263.66	PASS
GSM850	TU50 @RACH	190	836.6	5	-1.13	-243.66	243.66	PASS
GSM850	TU50 @Sens1	190	836.6	5	-5.78	-243.66	243.66	PASS
GSM850	TU50 @Sens2	190	836.6	5	-11.72	-243.66	243.66	PASS
GSM850	TU50 @Sens3	190	836.6	5	-0.36	-243.66	243.66	PASS
GSM850	TU50 @Sens4	190	836.6	5	-11.17	-243.66	243.66	PASS
GSM850	TU50 @Sens5	190	836.6	5	-4.26	-243.66	243.66	PASS
GSM850	TU3 @RACH	190	836.6	5	-0.65	-313.66	313.66	PASS
GSM850	TU3 @1	190	836.6	5	-1.71	-313.66	313.66	PASS
GSM850	TU3 @2	190	836.6	5	-7.65	-313.66	313.66	PASS
GSM850	TU3 @3	190	836.6	5	-15.11	-313.66	313.66	PASS
GSM850	TU3 @4	190	836.6	5	-6.17	-313.66	313.66	PASS
GSM850	TU3 @5	190	836.6	5	-11.88	-313.66	313.66	PASS
GSM850	TU3 @6	190	836.6	5	-5.46	-313.66	313.66	PASS
GSM850	TU3 @7	190	836.6	5	-16.89	-313.66	313.66	PASS
GSM850	TU3 @8	190	836.6	5	-8.68	-313.66	313.66	PASS
GSM850	TU3 @9	190	836.6	5	-8.30	-313.66	313.66	PASS
GSM850	TU3 @10	190	836.6	5	-14.27	-313.66	313.66	PASS
GSM850	TU3 @11	190	836.6	5	-3.65	-313.66	313.66	PASS
GSM850	TU3 @12	190	836.6	5	0.81	-313.66	313.66	PASS


GSM850	TU3 @13	190	836.6	5	1.87	-313.66	313.66	PASS
GSM850	TU3 @14	190	836.6	5	0.29	-313.66	313.66	PASS
GSM850	TU3 @15	190	836.6	5	-2.65	-313.66	313.66	PASS
GSM850	TU3 @16	190	836.6	5	-12.98	-313.66	313.66	PASS
GSM850	TU3 @17	190	836.6	5	-3.33	-313.66	313.66	PASS
GSM850	TU3 @18	190	836.6	5	-0.52	-313.66	313.66	PASS
GSM850	TU3 @19	190	836.6	5	4.65	-313.66	313.66	PASS
GSM850	TU3 @20	190	836.6	5	-4.52	-313.66	313.66	PASS
GSM900	RA250 @RACH	38	897.6	5	10.01	-389.76	389.76	PASS
GSM900	RA250 @Sens1	38	897.6	5	4.49	-389.76	389.76	PASS
GSM900	RA250 @Sens2	38	897.6	5	-4.49	-389.76	389.76	PASS
GSM900	RA250 @Sens3	38	897.6	5	3.52	-389.76	389.76	PASS
GSM900	RA250 @Sens4	38	897.6	5	-29.19	-389.76	389.76	PASS
GSM900	RA250 @Sens5	38	897.6	5	6.07	-389.76	389.76	PASS
GSM900	HT100 @RACH	38	897.6	5	4.23	-269.76	269.76	PASS
GSM900	HT100 @Sens1	38	897.6	5	-0.65	-269.76	269.76	PASS
GSM900	HT100 @Sens2	38	897.6	5	5.97	-269.76	269.76	PASS
GSM900	HT100 @Sens3	38	897.6	5	1.97	-269.76	269.76	PASS
GSM900	HT100 @Sens4	38	897.6	5	7.85	-269.76	269.76	PASS
GSM900	HT100 @Sens5	38	897.6	5	6.39	-269.76	269.76	PASS
GSM900	TU50 @RACH	38	897.6	5	0.45	-249.76	249.76	PASS
GSM900	TU50 @Sens1	38	897.6	5	14.72	-249.76	249.76	PASS
GSM900	TU50 @Sens2	38	897.6	5	-10.30	-249.76	249.76	PASS
GSM900	TU50 @Sens3	38	897.6	5	9.62	-249.76	249.76	PASS
GSM900	TU50 @Sens4	38	897.6	5	0.55	-249.76	249.76	PASS
GSM900	TU50 @Sens5	38	897.6	5	9.30	-249.76	249.76	PASS
GSM900	TU3 @RACH	38	897.6	5	4.42	-319.76	319.76	PASS
GSM900	TU3 @1	38	897.6	5	7.62	-319.76	319.76	PASS
GSM900	TU3 @2	38	897.6	5	-2.36	-319.76	319.76	PASS
GSM900	TU3 @3	38	897.6	5	-3.45	-319.76	319.76	PASS
GSM900	TU3 @4	38	897.6	5	5.68	-319.76	319.76	PASS
GSM900	TU3 @5	38	897.6	5	14.37	-319.76	319.76	PASS
GSM900	TU3 @6	38	897.6	5	2.58	-319.76	319.76	PASS
GSM900	TU3 @7	38	897.6	5	-1.03	-319.76	319.76	PASS
GSM900	TU3 @8	38	897.6	5	3.00	-319.76	319.76	PASS
GSM900	TU3 @9	38	897.6	5	-0.90	-319.76	319.76	PASS
GSM900	TU3 @10	38	897.6	5	-2.52	-319.76	319.76	PASS
GSM900	TU3 @11	38	897.6	5	-2.29	-319.76	319.76	PASS
GSM900	TU3 @12	38	897.6	5	6.10	-319.76	319.76	PASS
GSM900	TU3 @13	38	897.6	5	-1.26	-319.76	319.76	PASS
GSM900	TU3 @14	38	897.6	5	2.32	-319.76	319.76	PASS
GSM900	TU3 @15	38	897.6	5	-4.39	-319.76	319.76	PASS
GSM900	TU3 @16	38	897.6	5	2.49	-319.76	319.76	PASS
GSM900	TU3 @17	38	897.6	5	-0.26	-319.76	319.76	PASS

GSM900	TU3 @18	38	897.6	5	2.68	-319.76	319.76	PASS
GSM900	TU3 @19	38	897.6	5	-0.36	-319.76	319.76	PASS
GSM900	TU3 @20	38	897.6	5	4.10	-319.76	319.76	PASS

GSM1800 Channel=698 PCL=0 RA130 @RACH

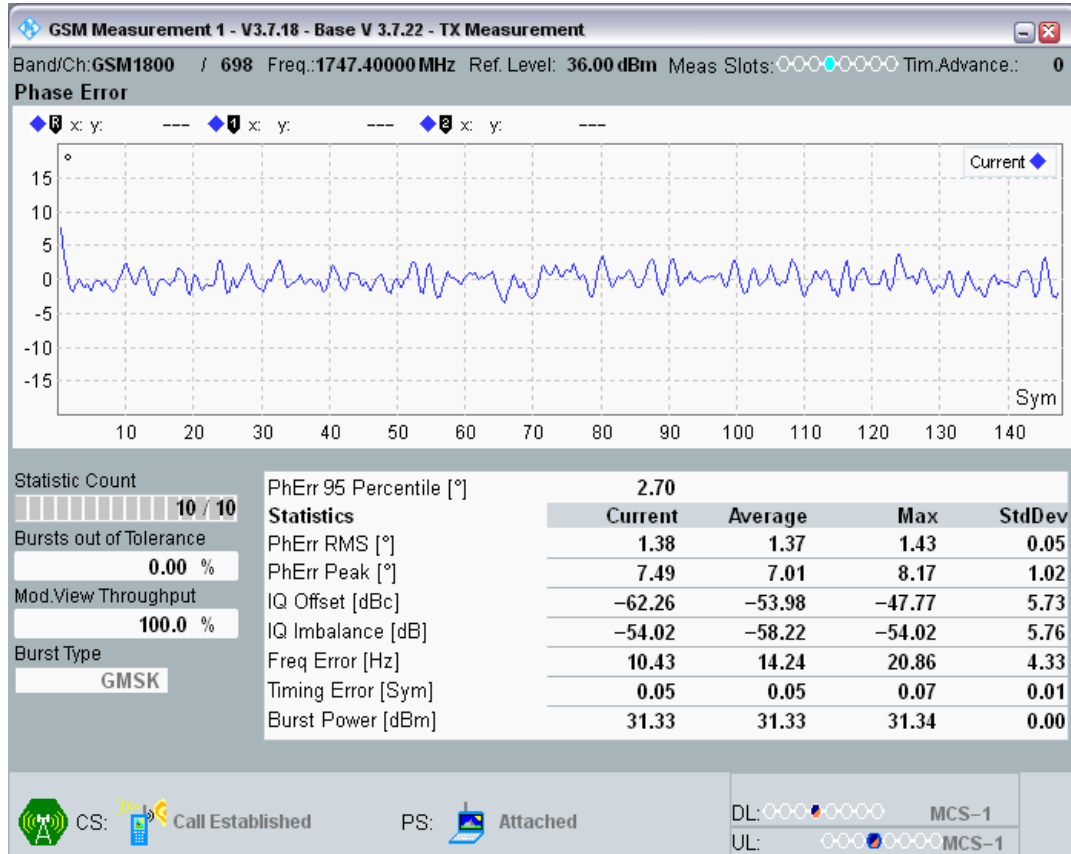


GSM1800 Channel=698 PCL=0 RA130 @Sens1

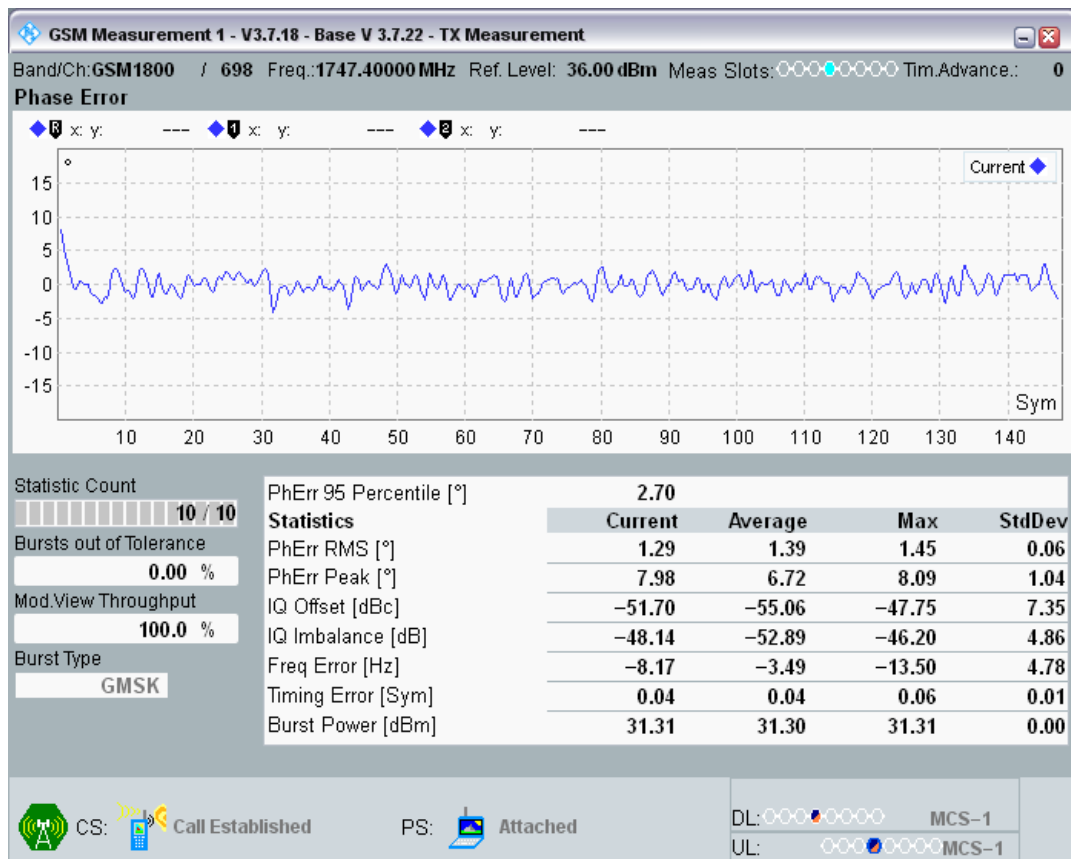

GSM1800 Channel=698 PCL=0 RA130 @Sens2




GSM1800 Channel=698 PCL=0 RA130 @Sens3

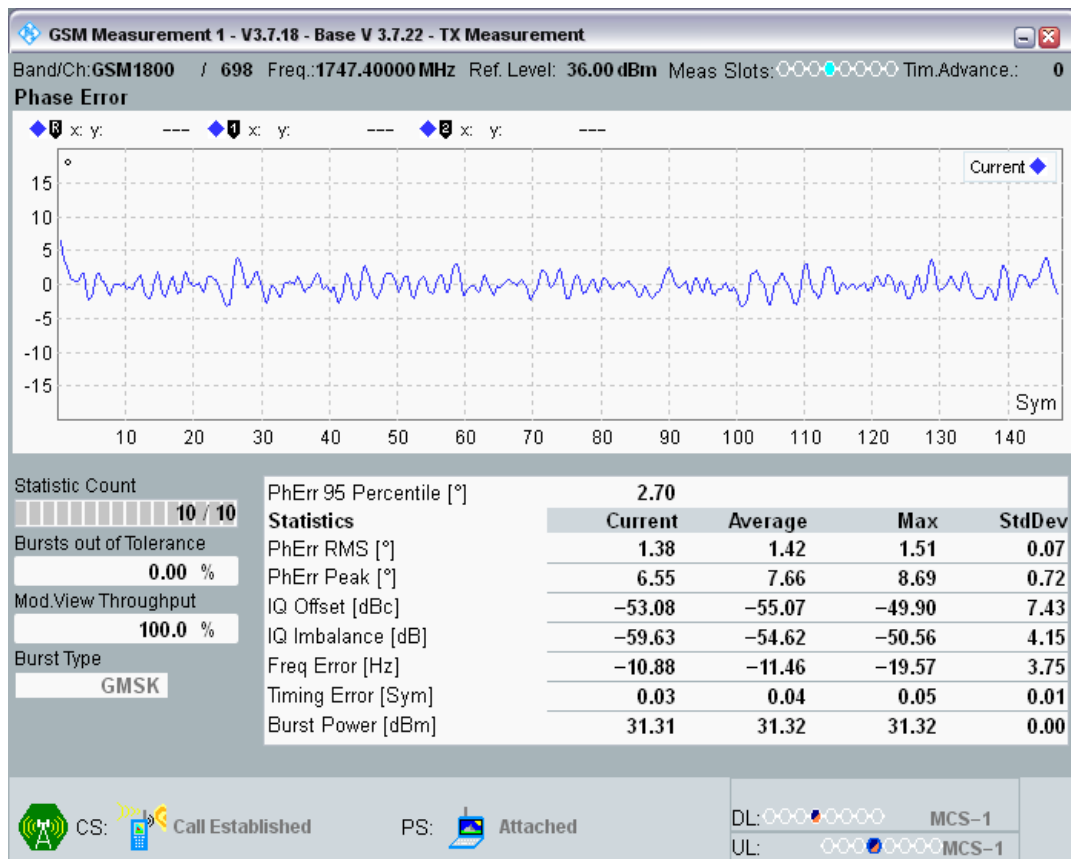

GSM1800 Channel=698 PCL=0 RA130 @Sens4




GSM1800 Channel=698 PCL=0 RA130 @Sens5

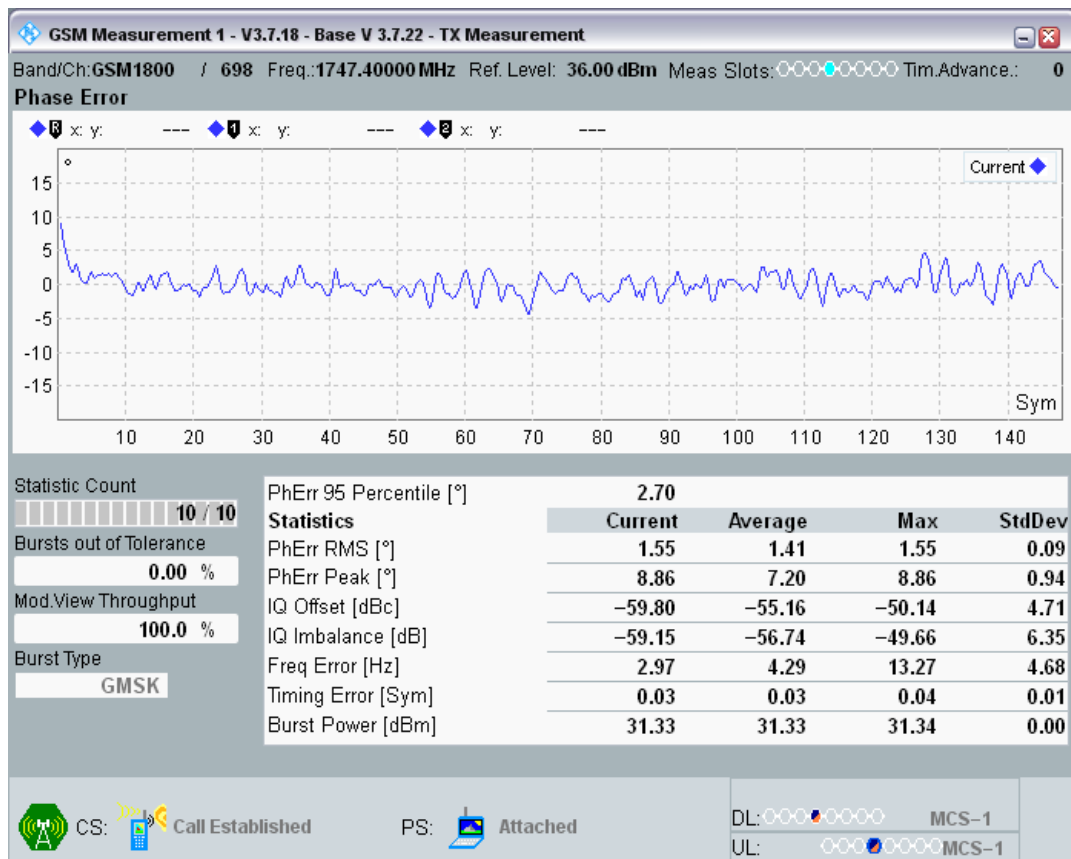


GSM1800 Channel=698 PCL=0 HT100 @RACH




GSM1800 Channel=698 PCL=0 HT100 @Sens1

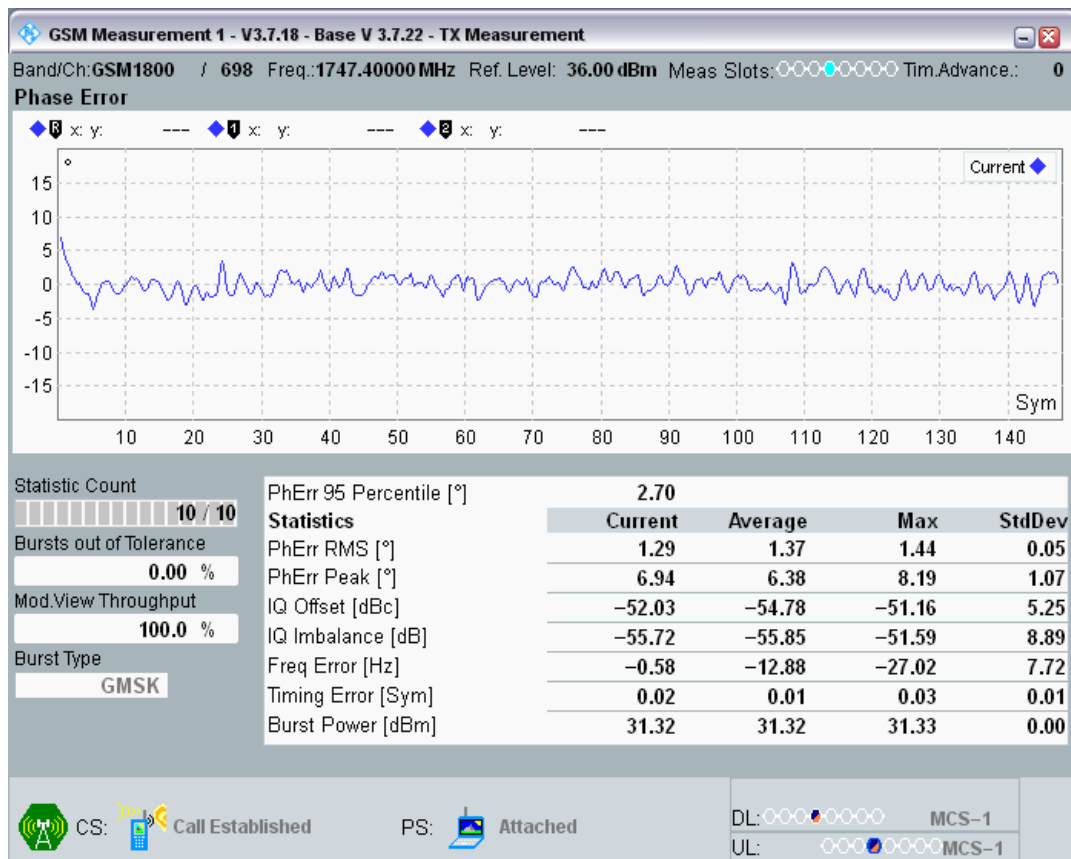


GSM1800 Channel=698 PCL=0 HT100 @Sens2

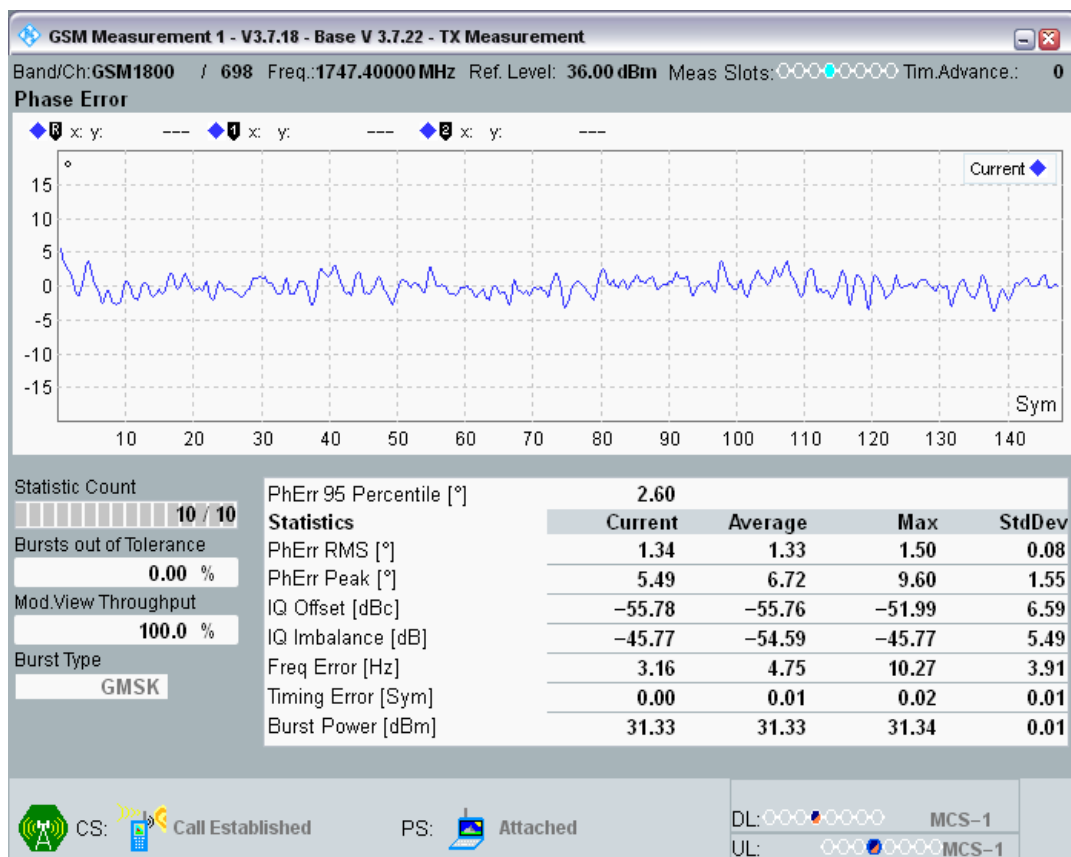


GSM1800 Channel=698 PCL=0 HT100 @Sens4

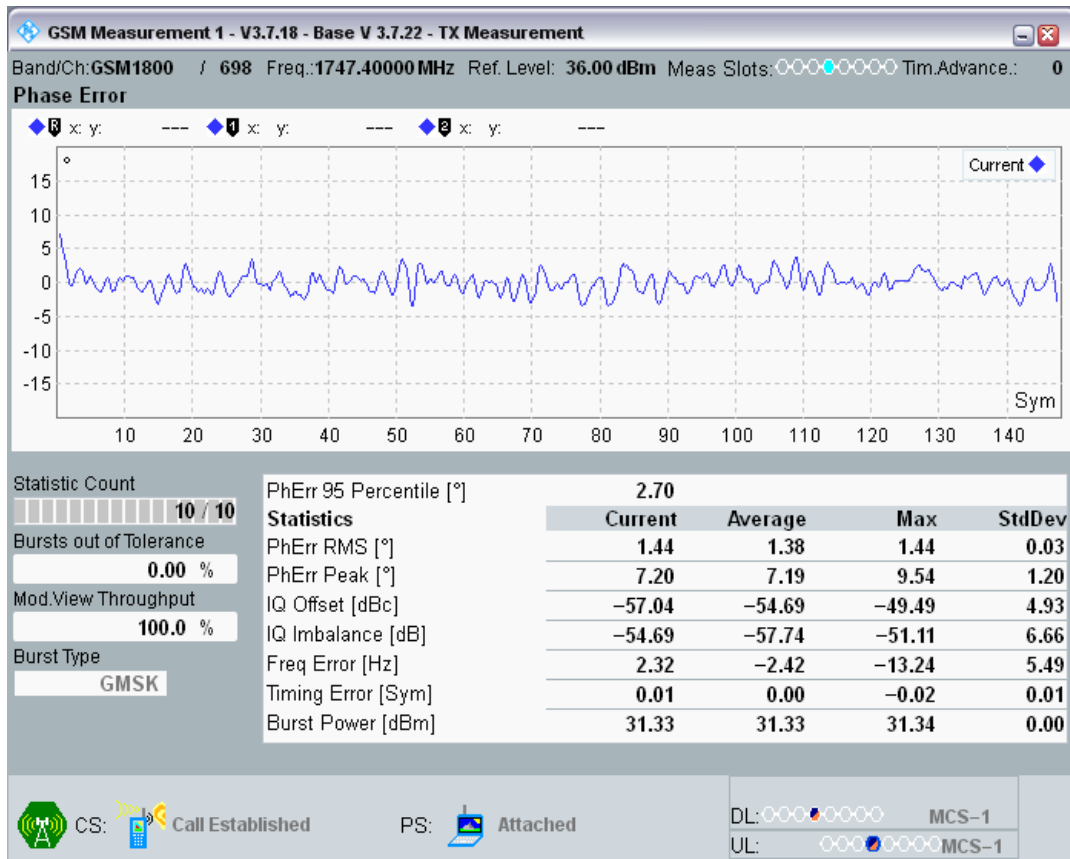


GSM1800 Channel=698 PCL=0 HT100 @Sens3

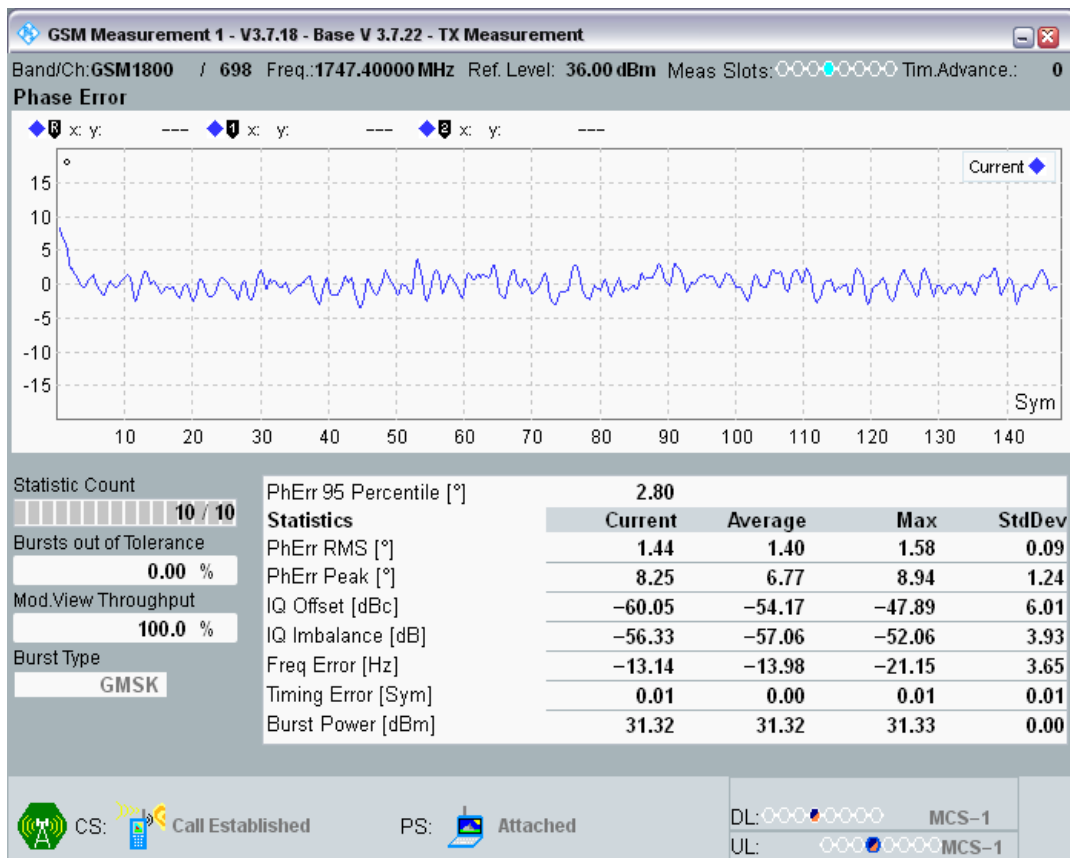


GSM1800 Channel=698 PCL=0 HT100 @Sens5

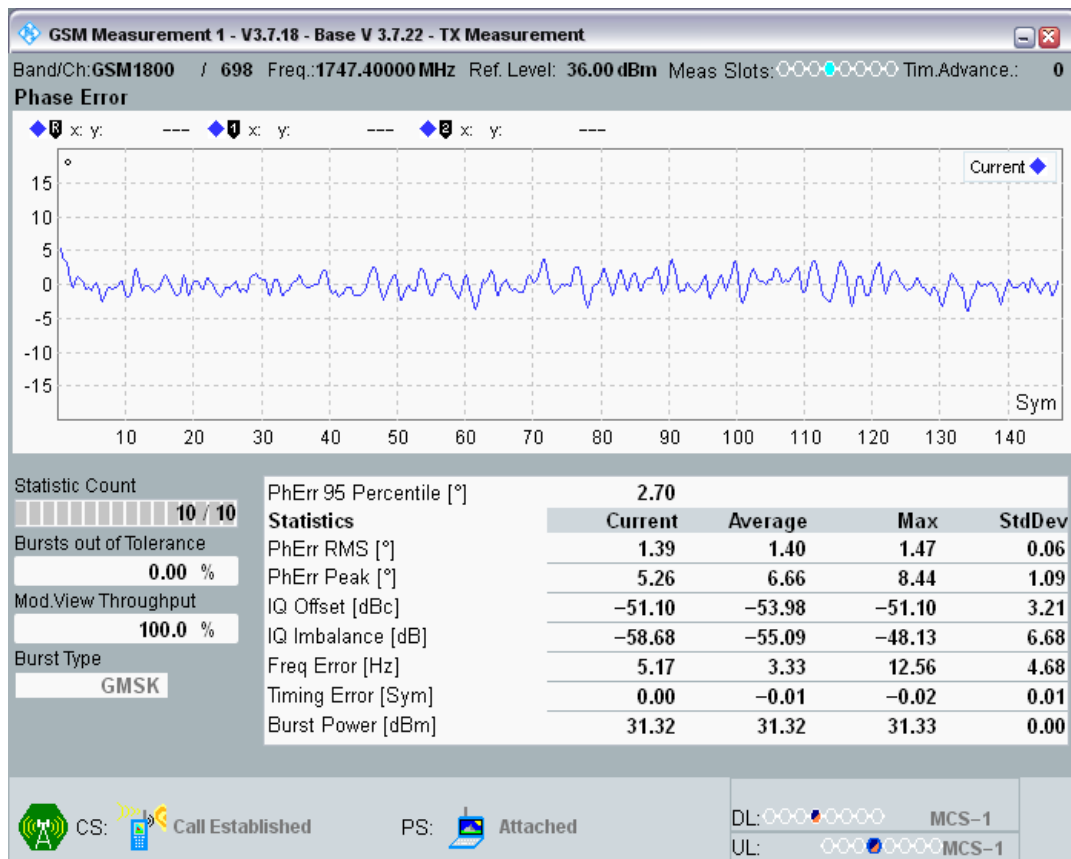


GSM1800 Channel=698 PCL=0 TU50 @Sens1

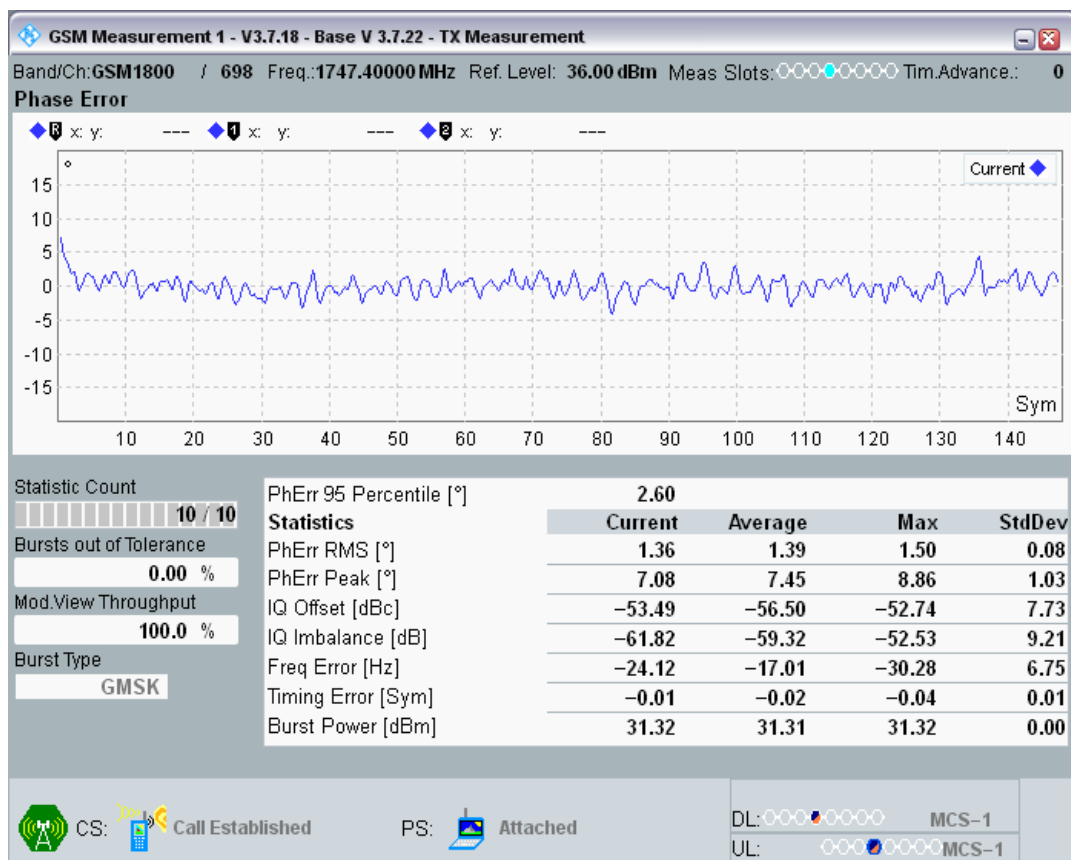


GSM1800 Channel=698 PCL=0 TU50 @RACH

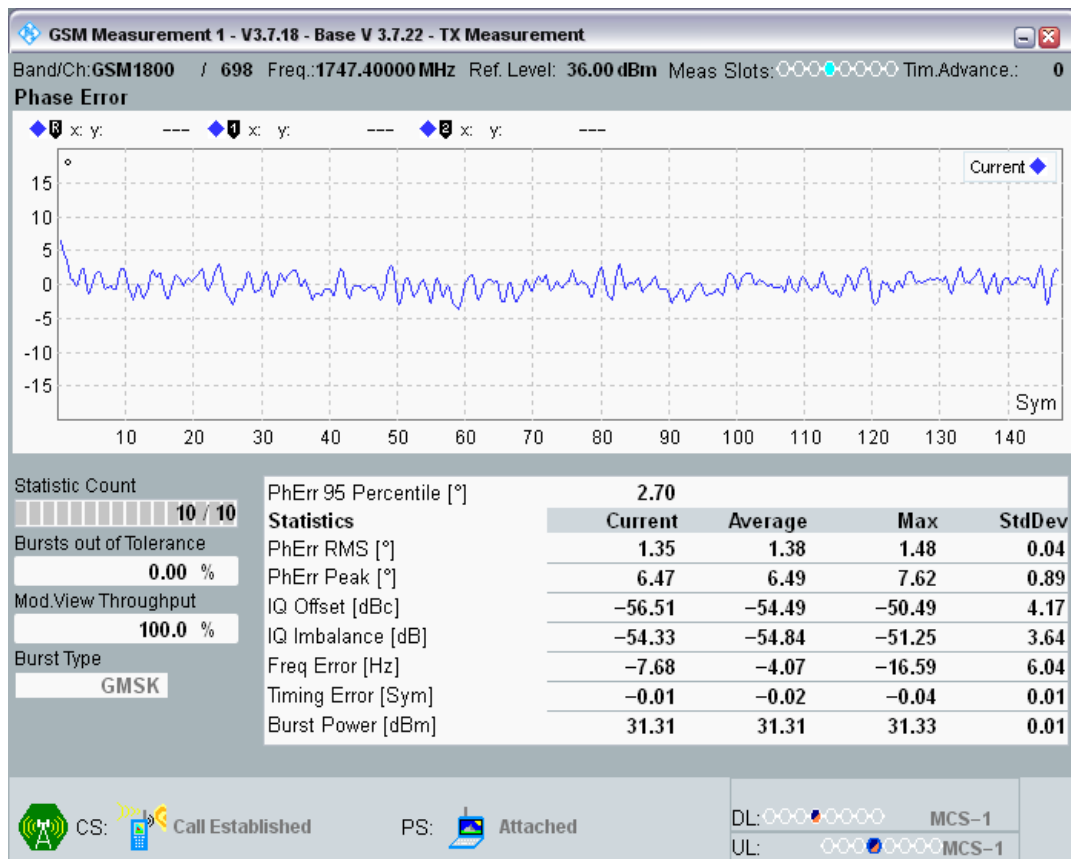


GSM1800 Channel=698 PCL=0 TU50 @Sens2

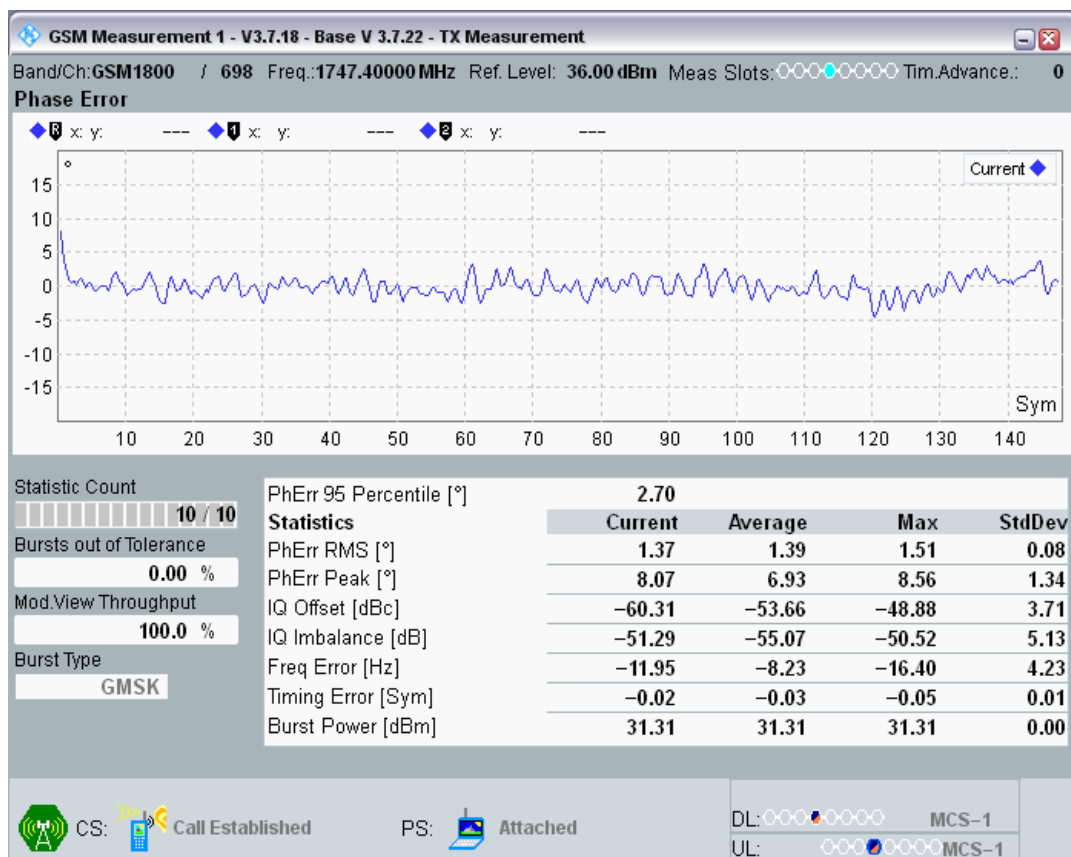


GSM1800 Channel=698 PCL=0 TU50 @Sens3

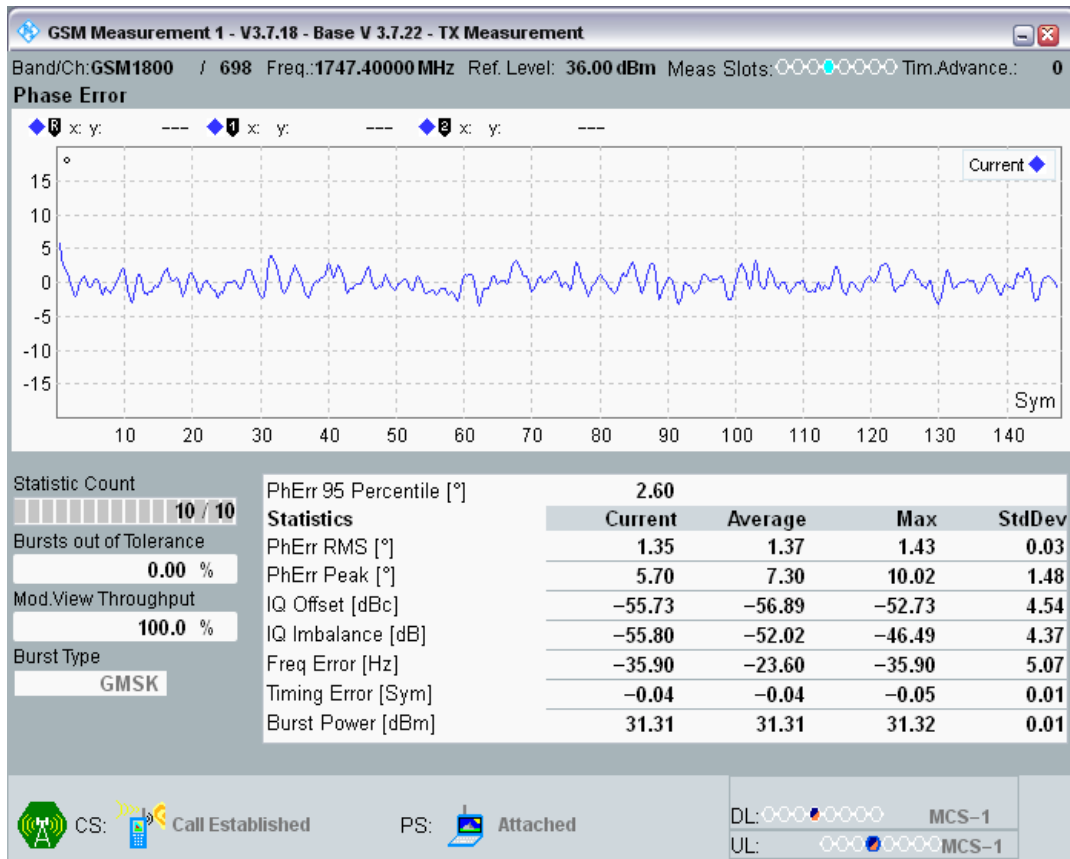


GSM1800 Channel=698 PCL=0 TU50 @Sens5

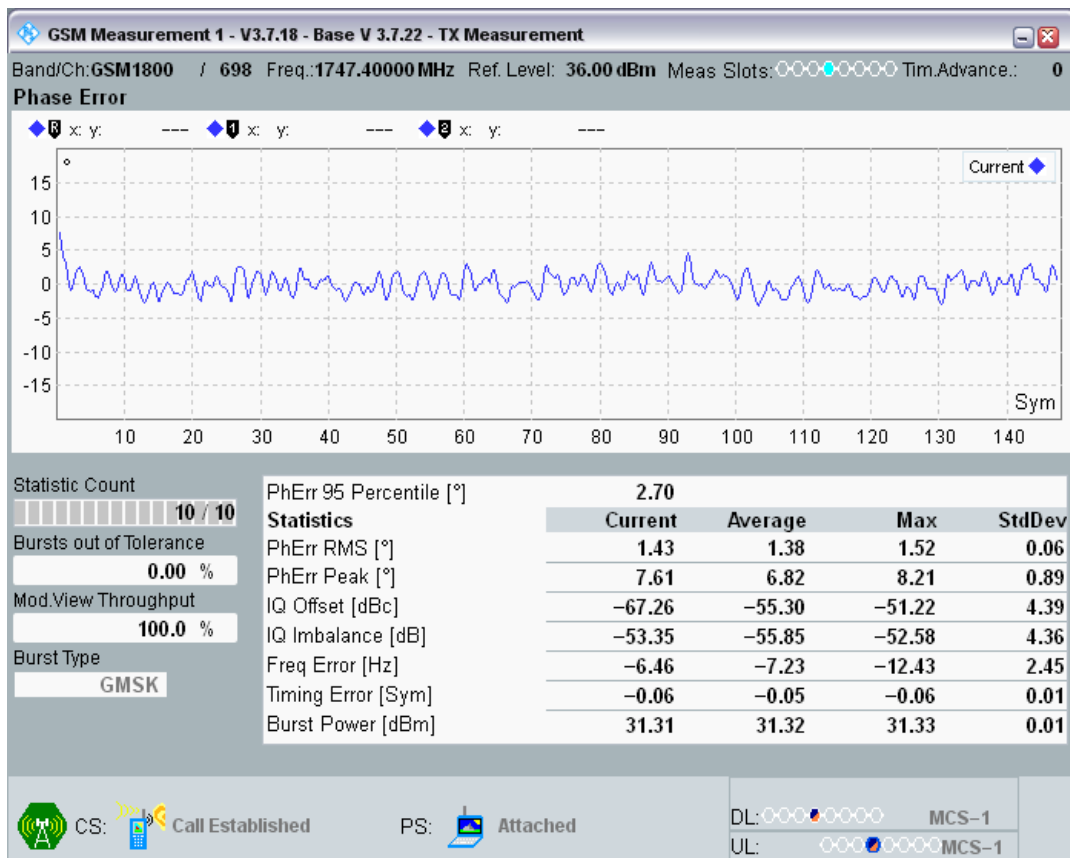


GSM1800 Channel=698 PCL=0 TU50 @Sens4

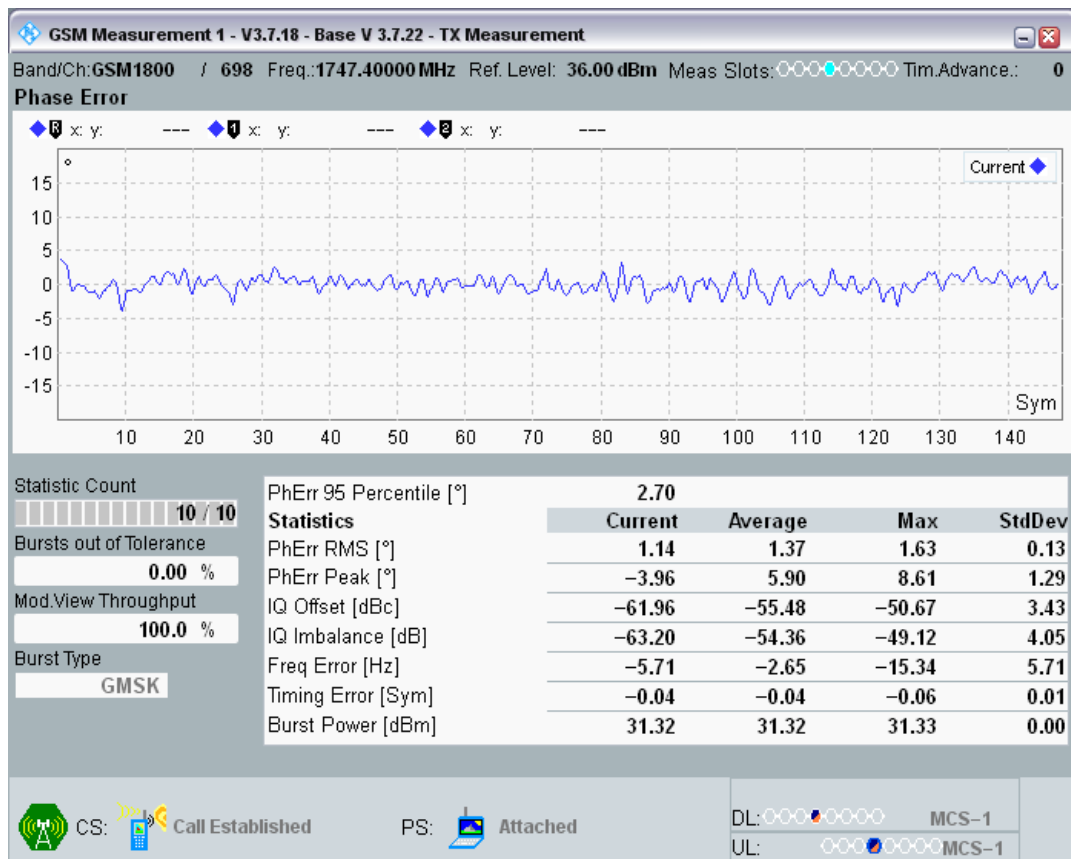


GSM1800 Channel=698 PCL=0 TU1_5 @RACH

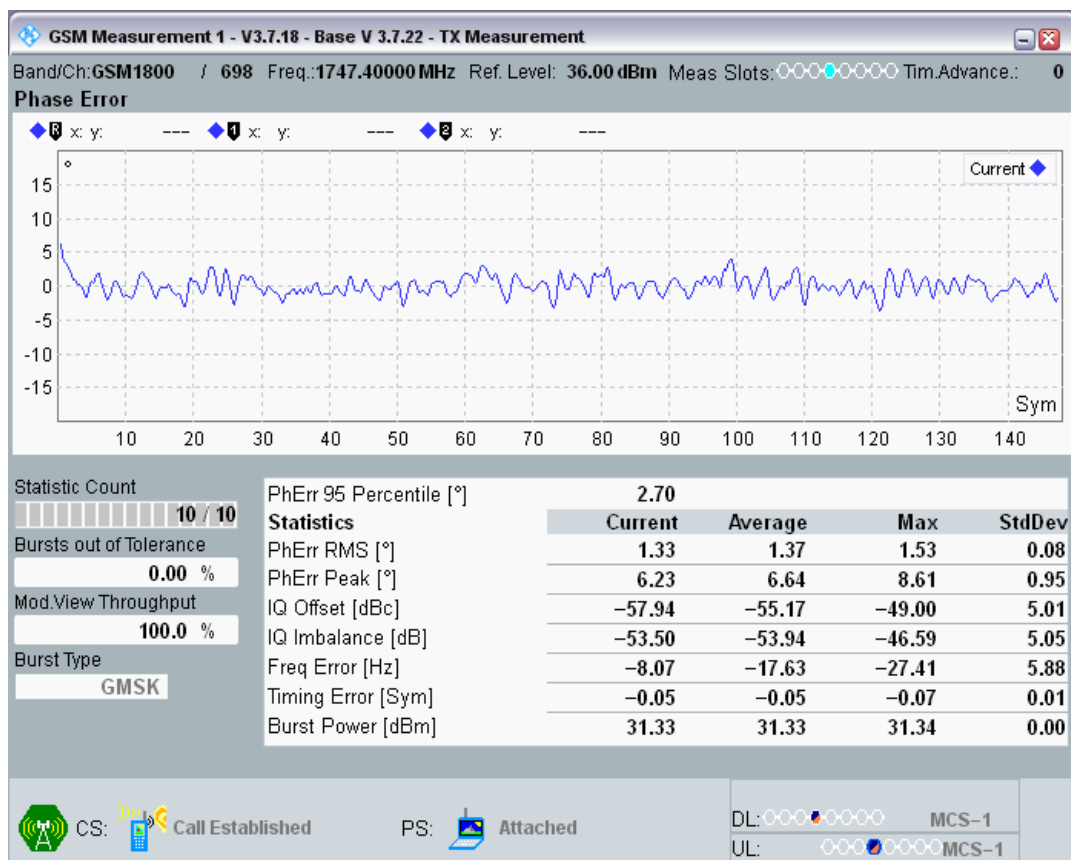


GSM1800 Channel=698 PCL=0 TU1_5 @1

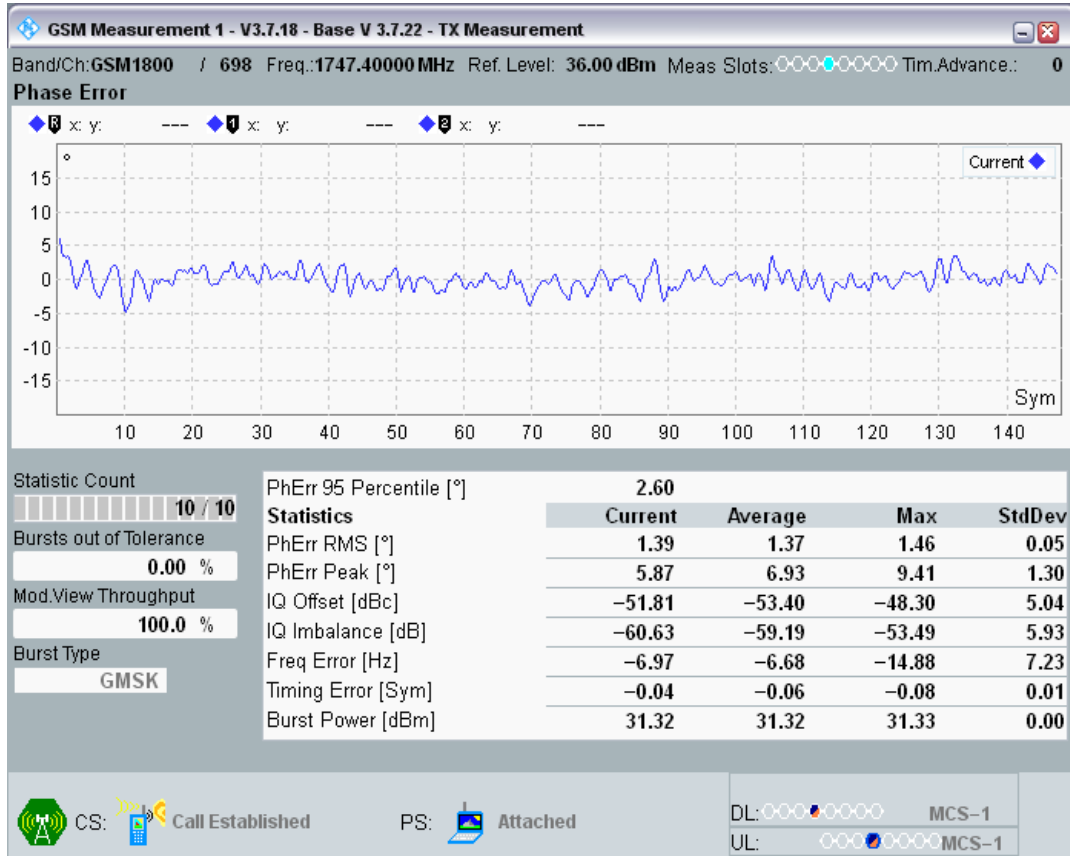


GSM1800 Channel=698 PCL=0 TU1_5 @2

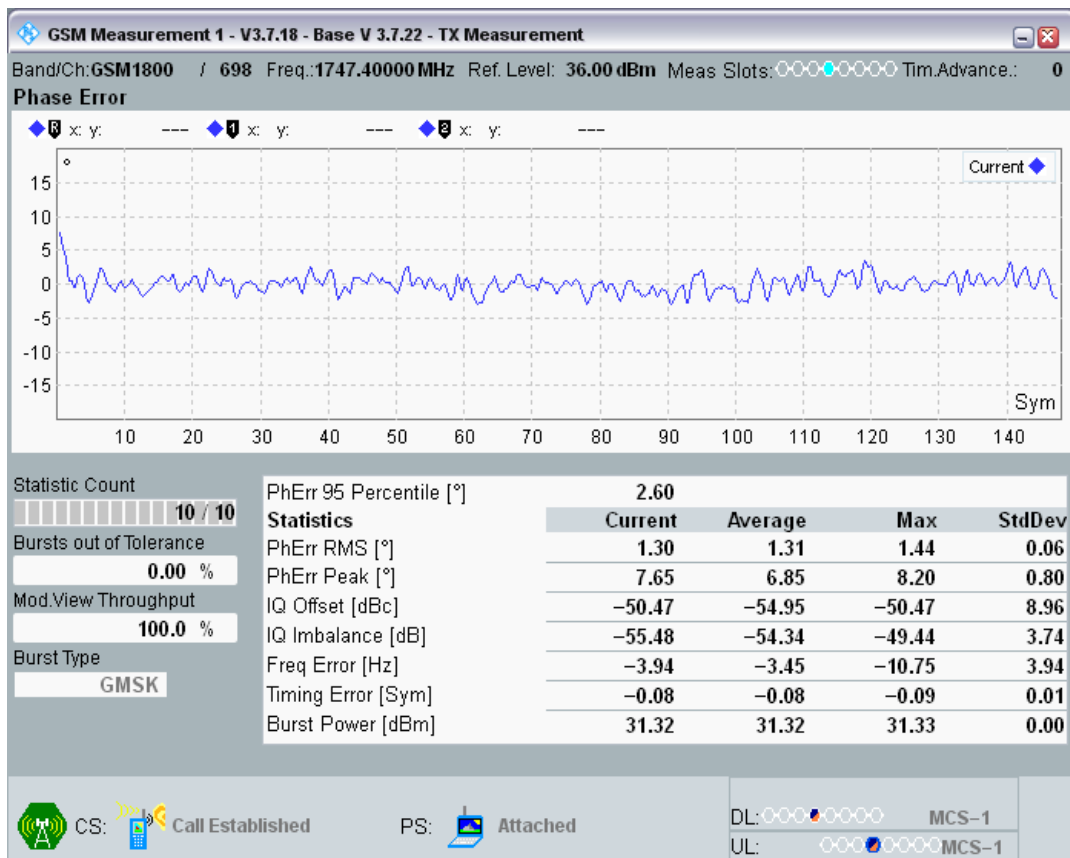


GSM1800 Channel=698 PCL=0 TU1_5 @3

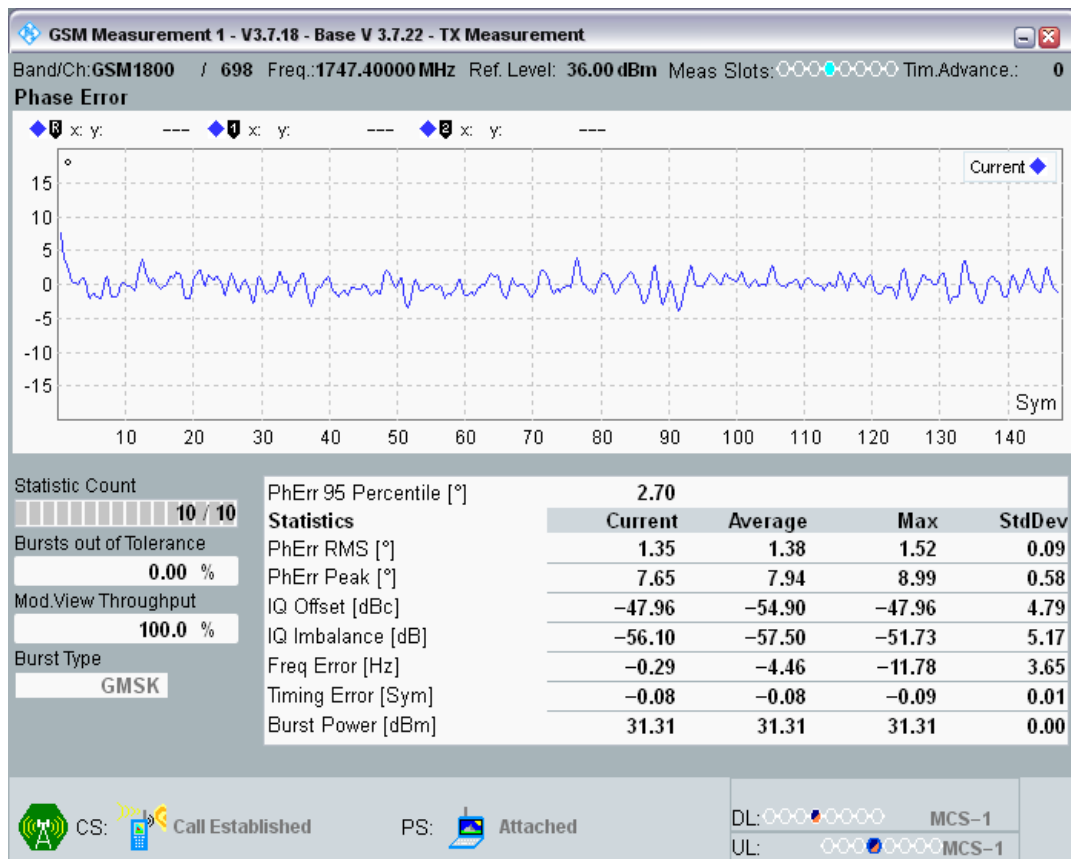


GSM1800 Channel=698 PCL=0 TU1_5 @4

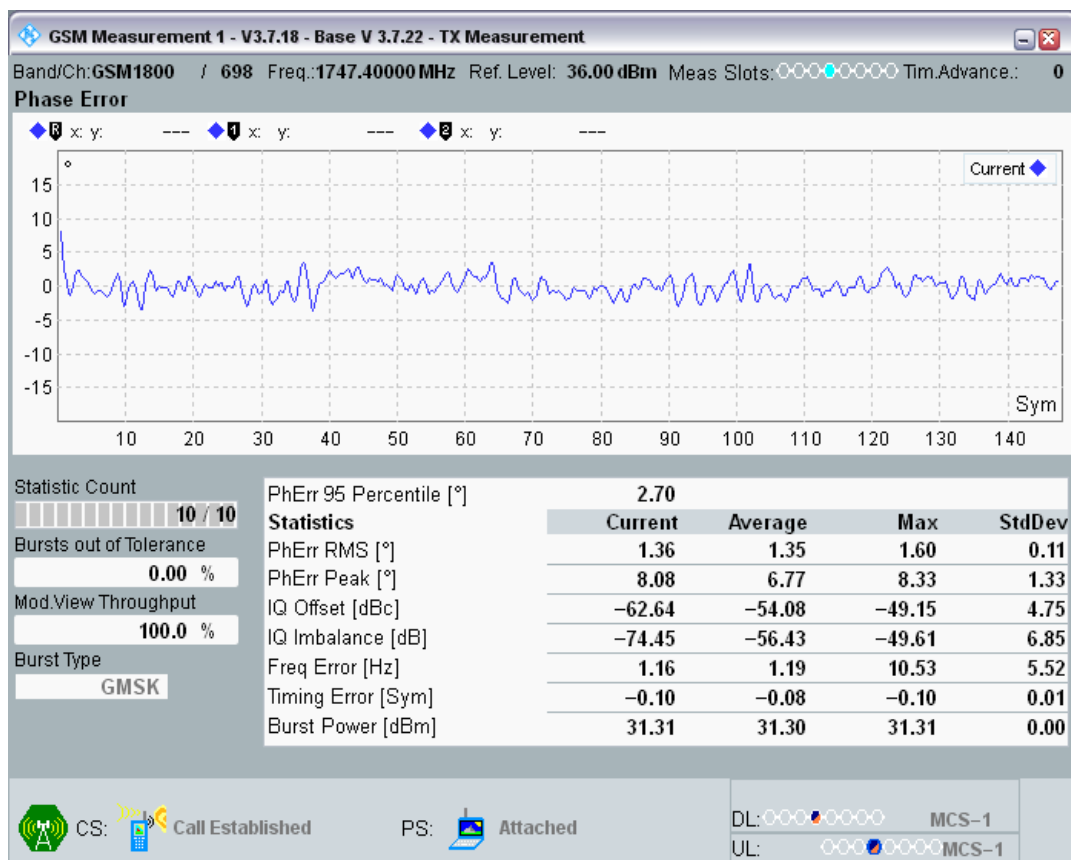


GSM1800 Channel=698 PCL=0 TU1_5 @5

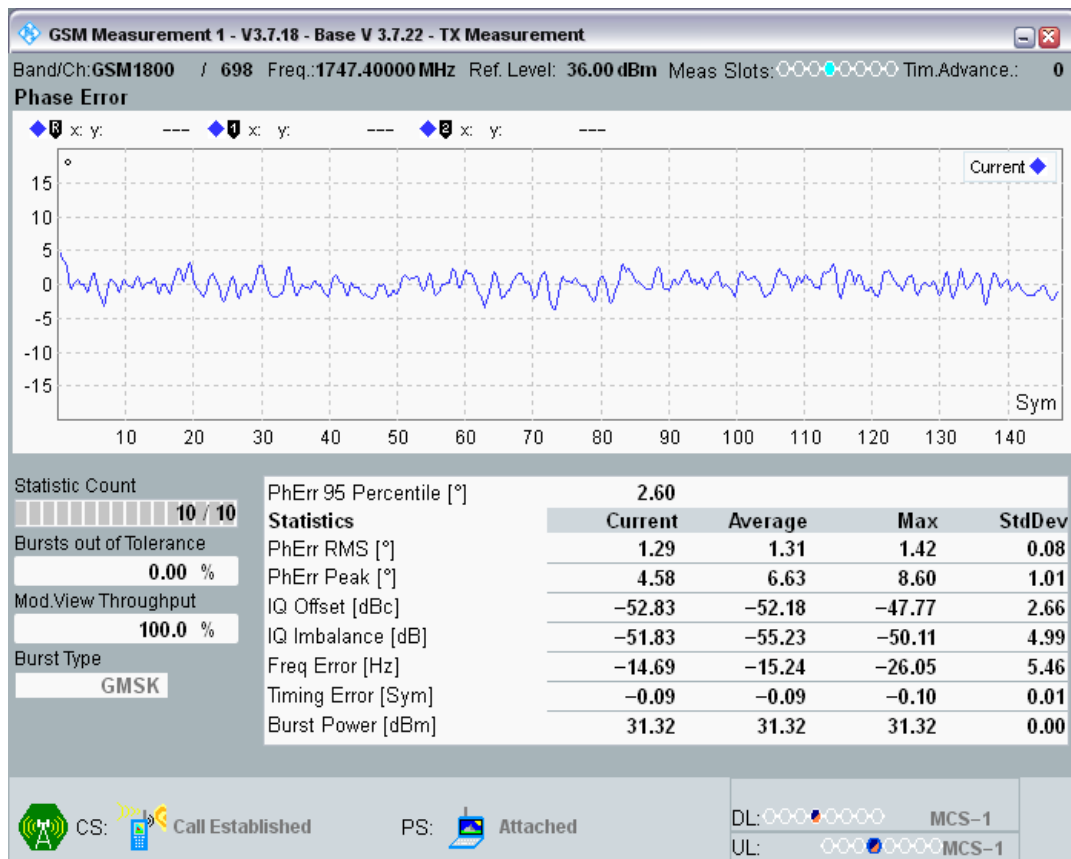


GSM1800 Channel=698 PCL=0 TU1_5 @6

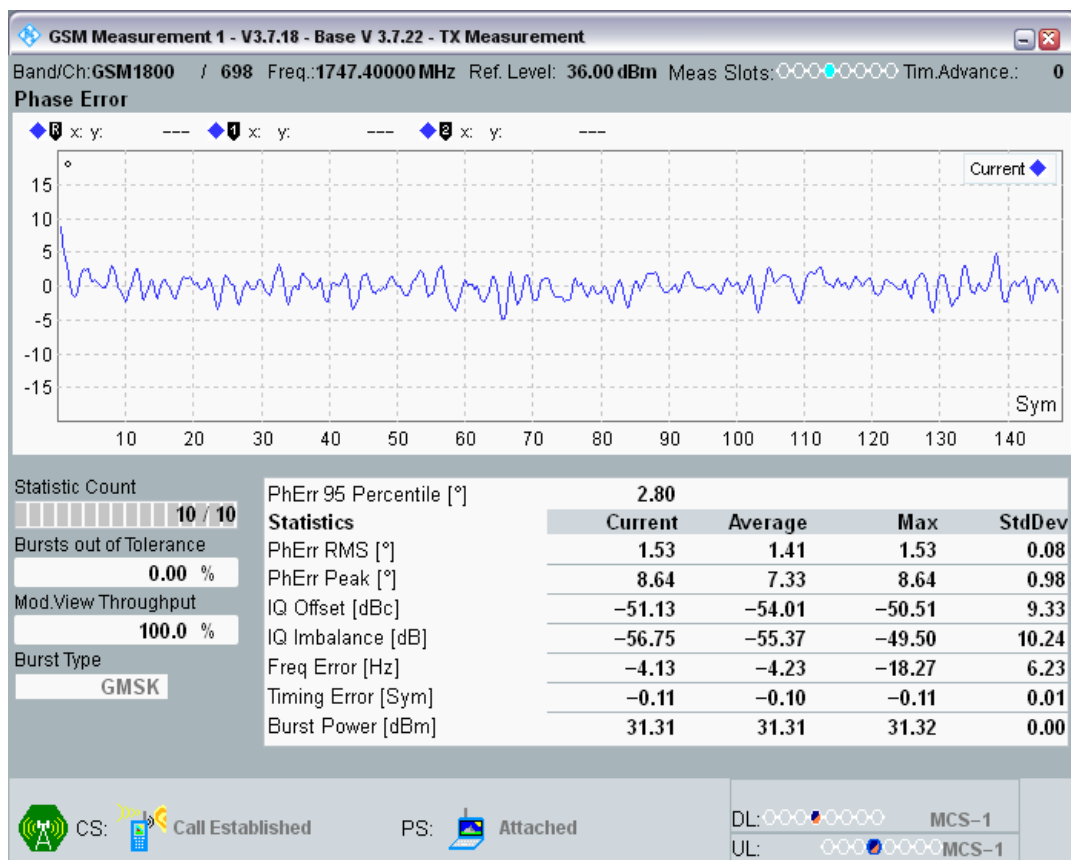


GSM1800 Channel=698 PCL=0 TU1_5 @7

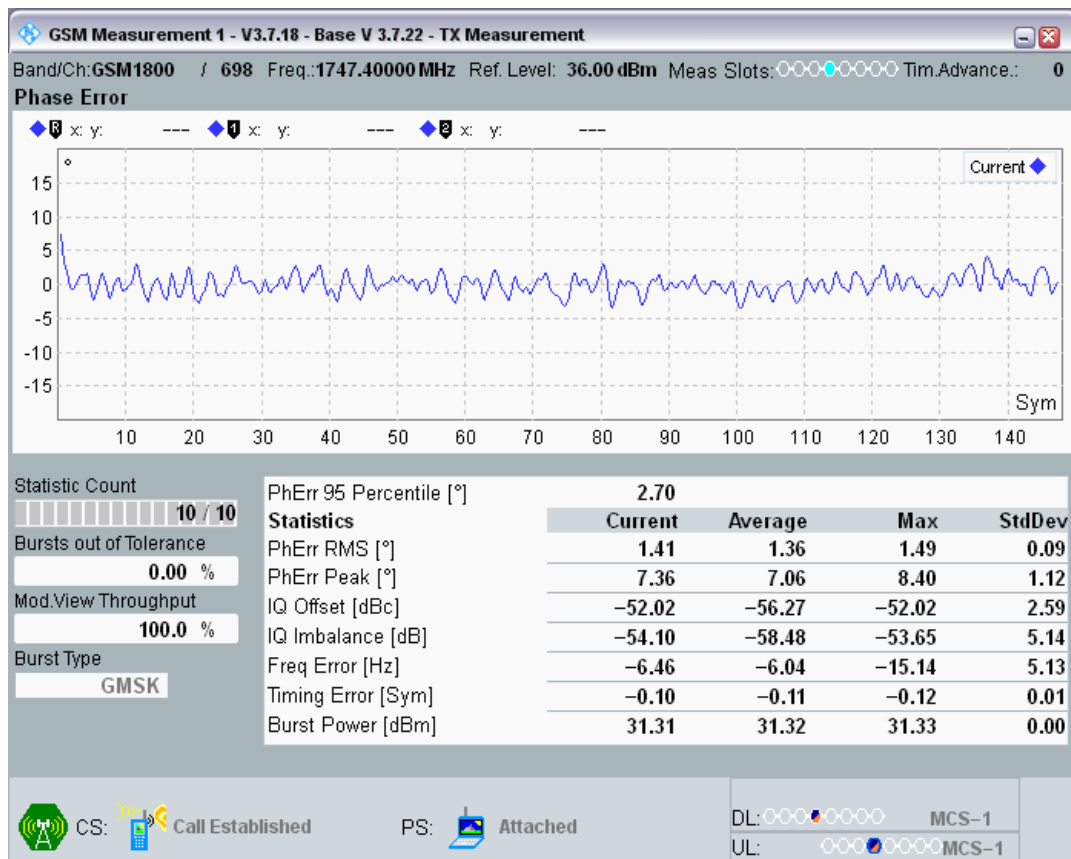


GSM1800 Channel=698 PCL=0 TU1_5 @9

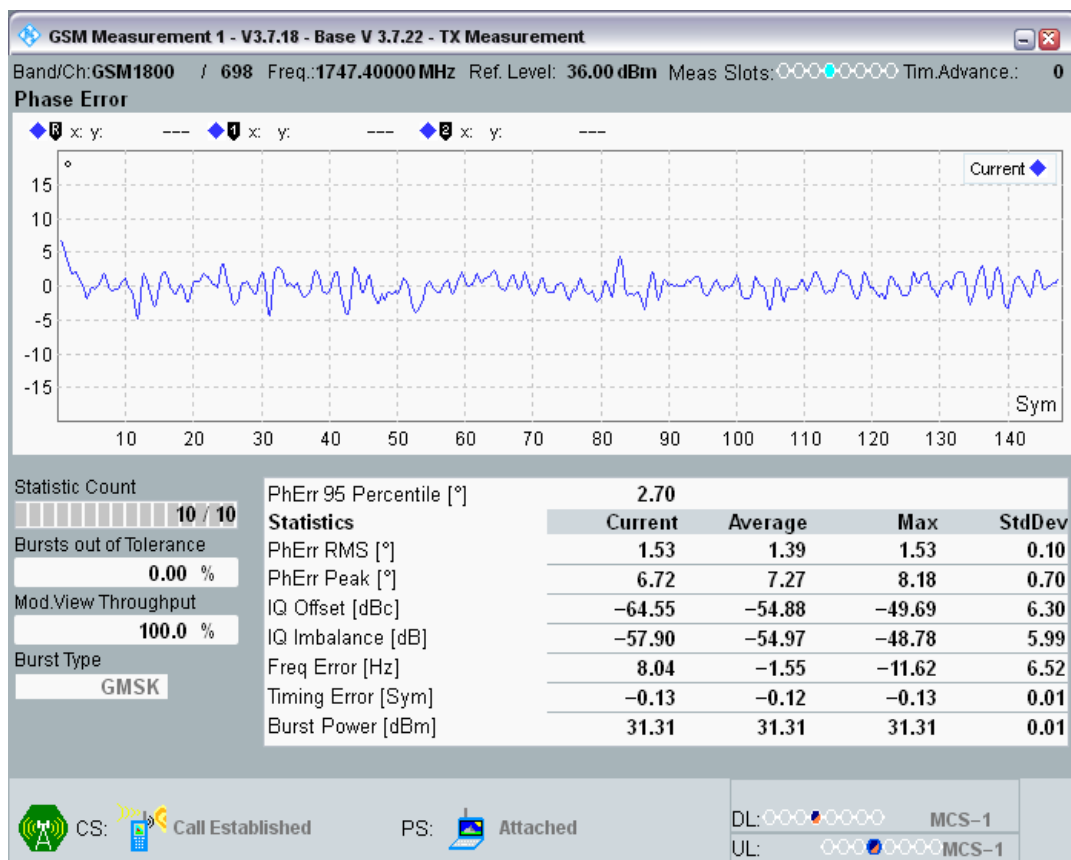


GSM1800 Channel=698 PCL=0 TU1_5 @8

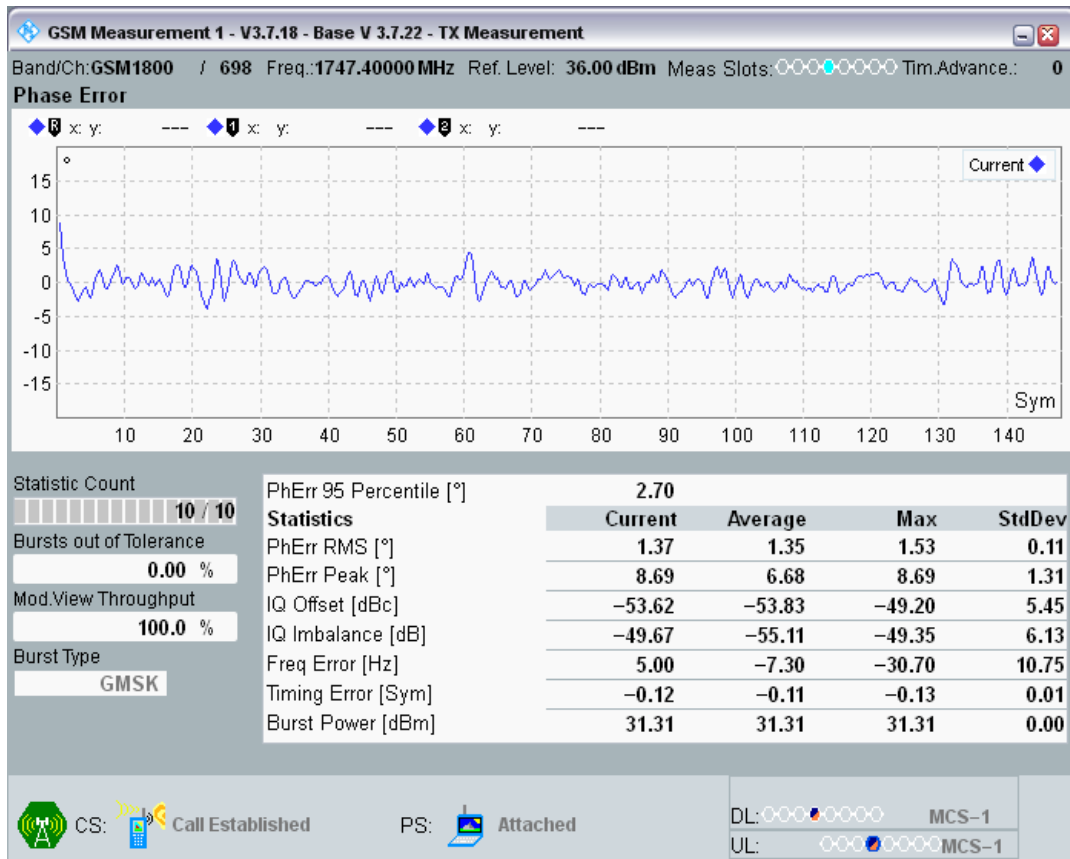


GSM1800 Channel=698 PCL=0 TU1_5 @11

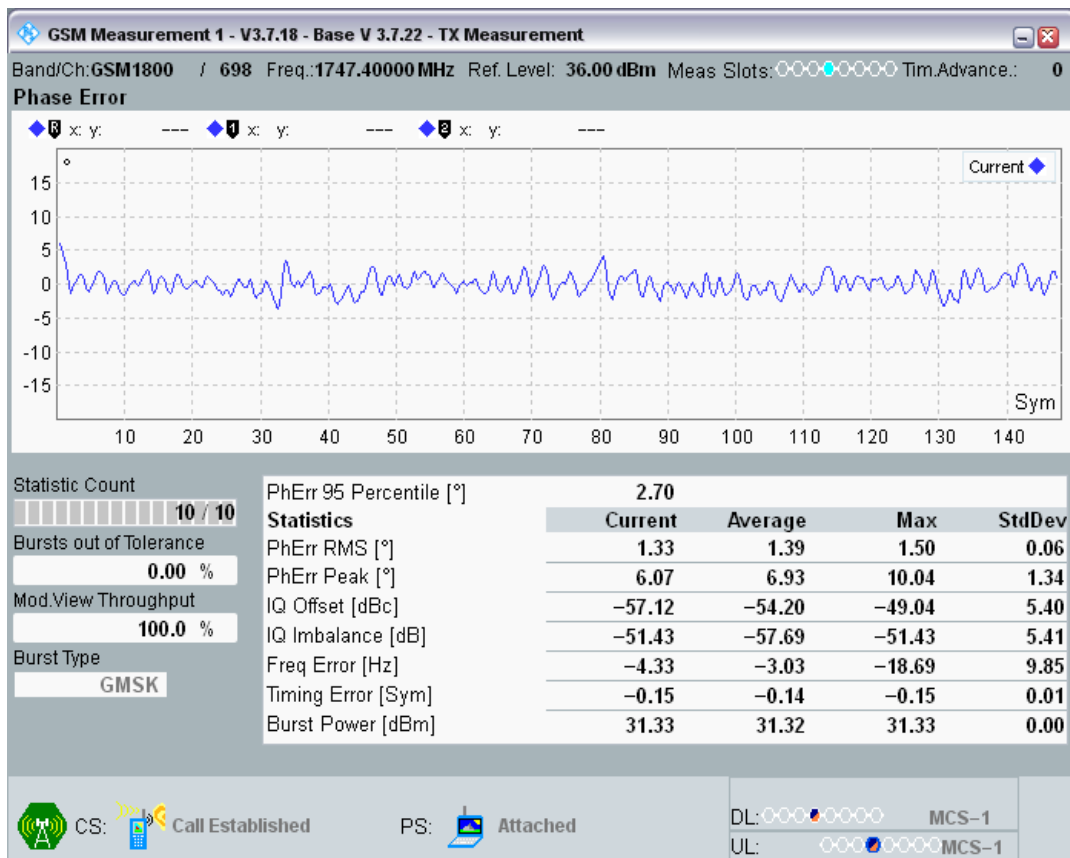


GSM1800 Channel=698 PCL=0 TU1_5 @10

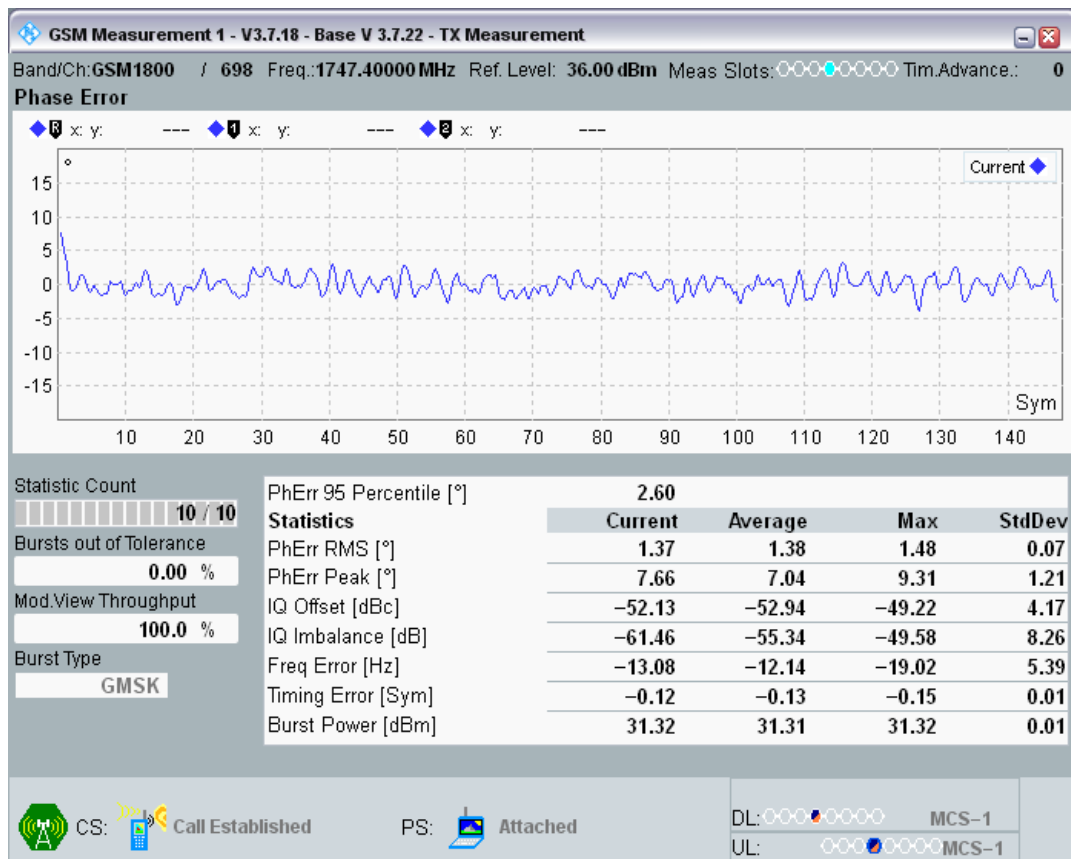


GSM1800 Channel=698 PCL=0 TU1_5 @12

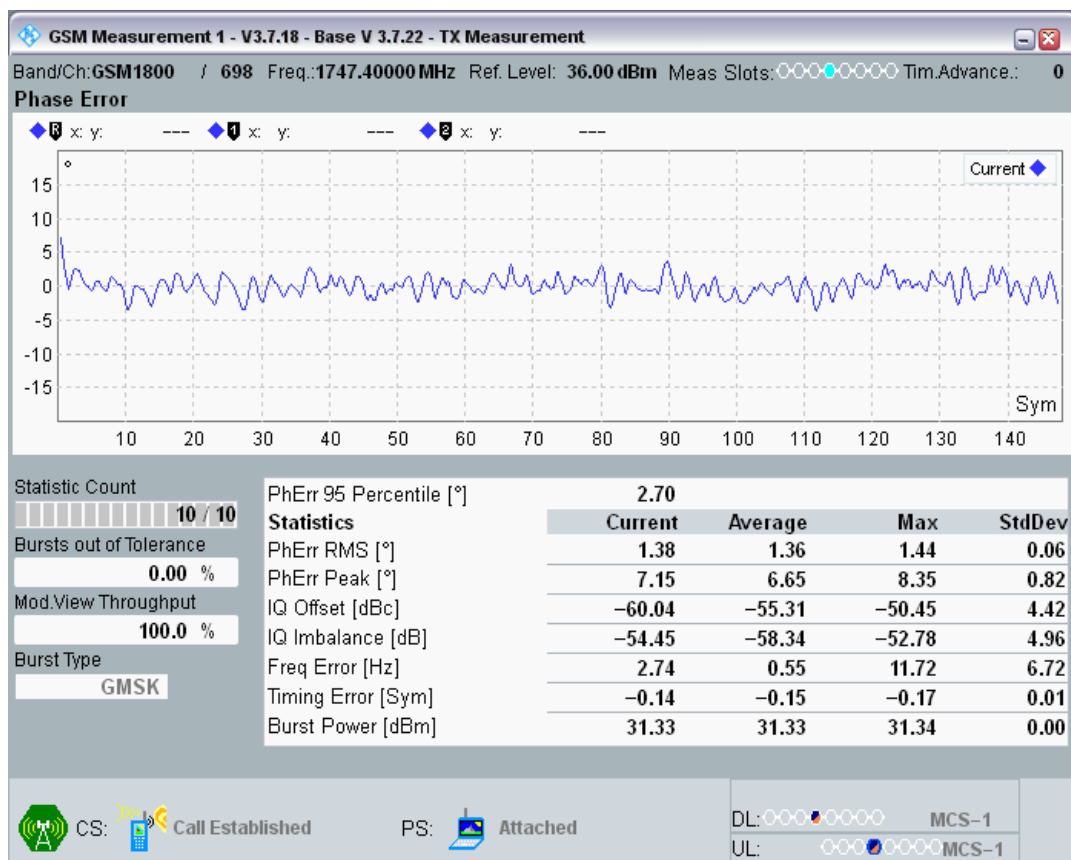


GSM1800 Channel=698 PCL=0 TU1_5 @14

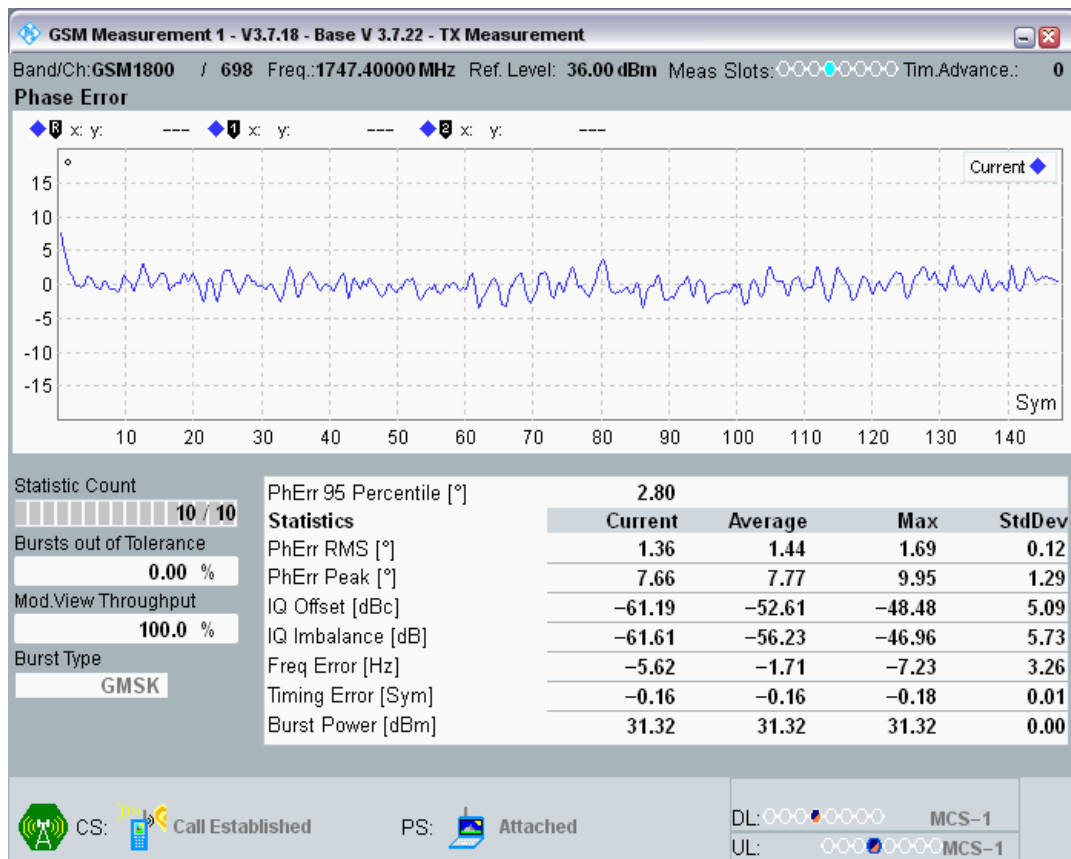


GSM1800 Channel=698 PCL=0 TU1_5 @13

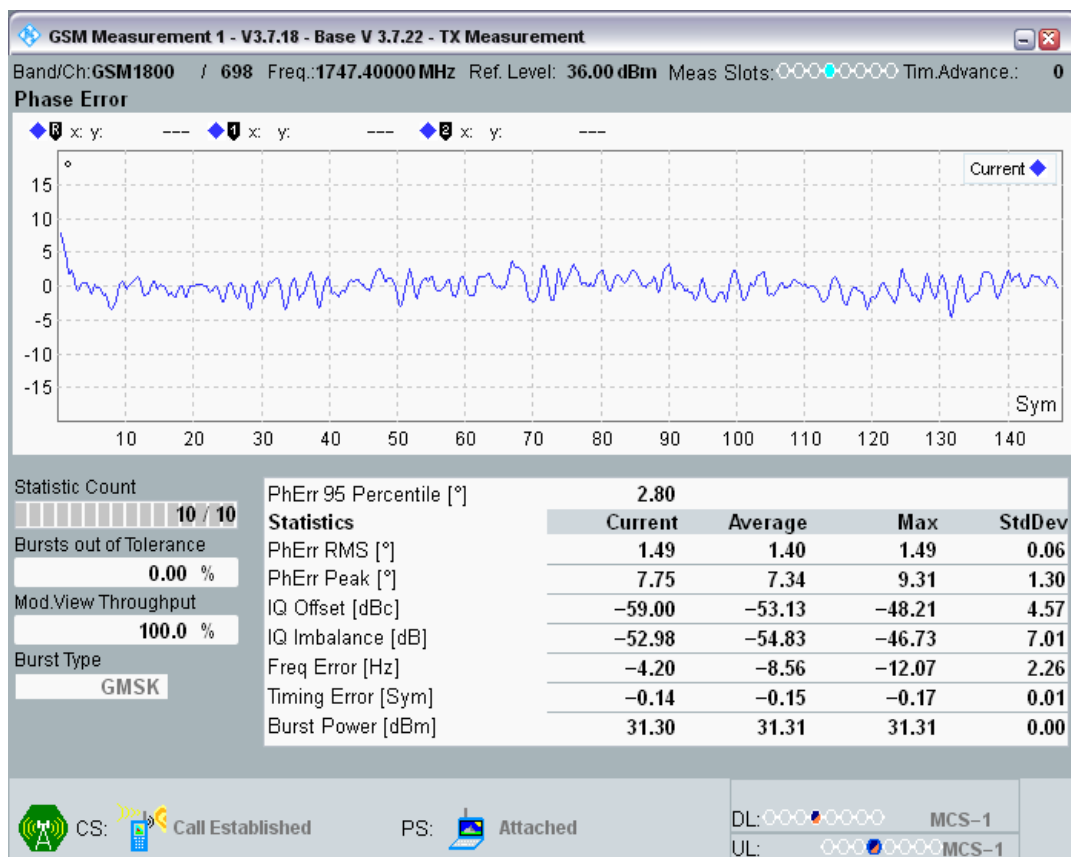


GSM1800 Channel=698 PCL=0 TU1_5 @15

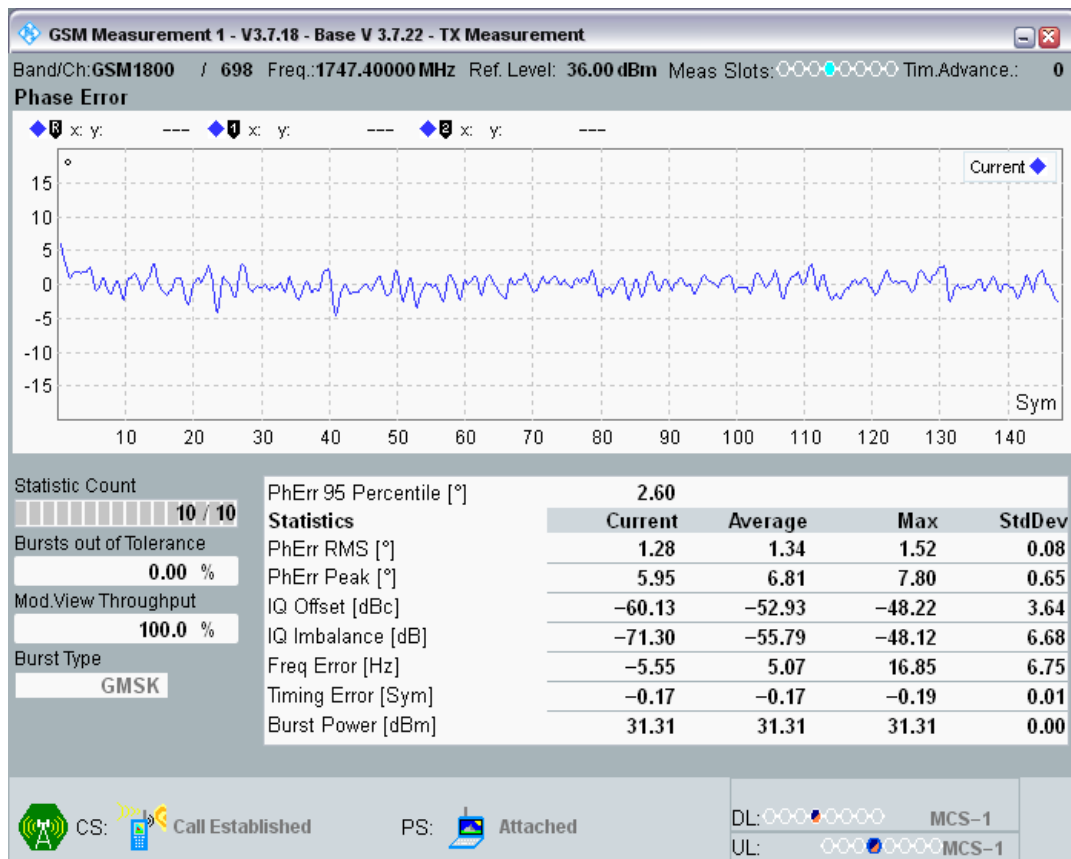


GSM1800 Channel=698 PCL=0 TU1_5 @17

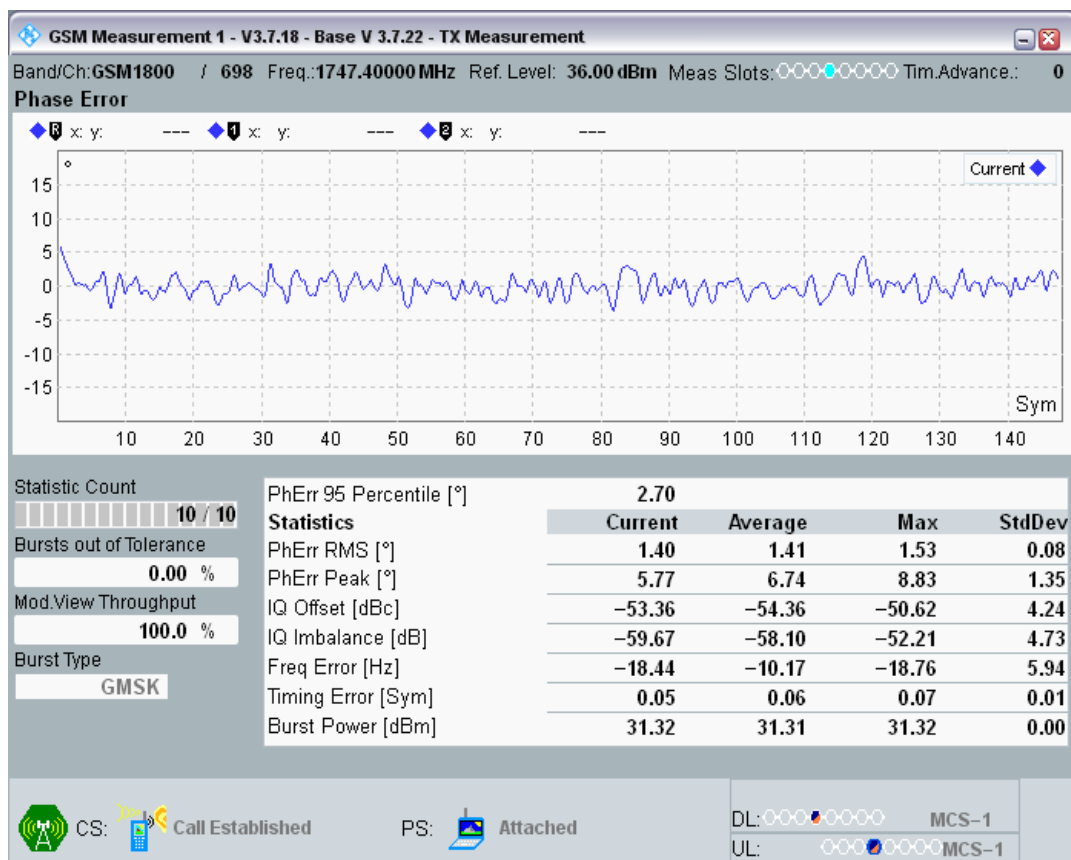


GSM1800 Channel=698 PCL=0 TU1_5 @16

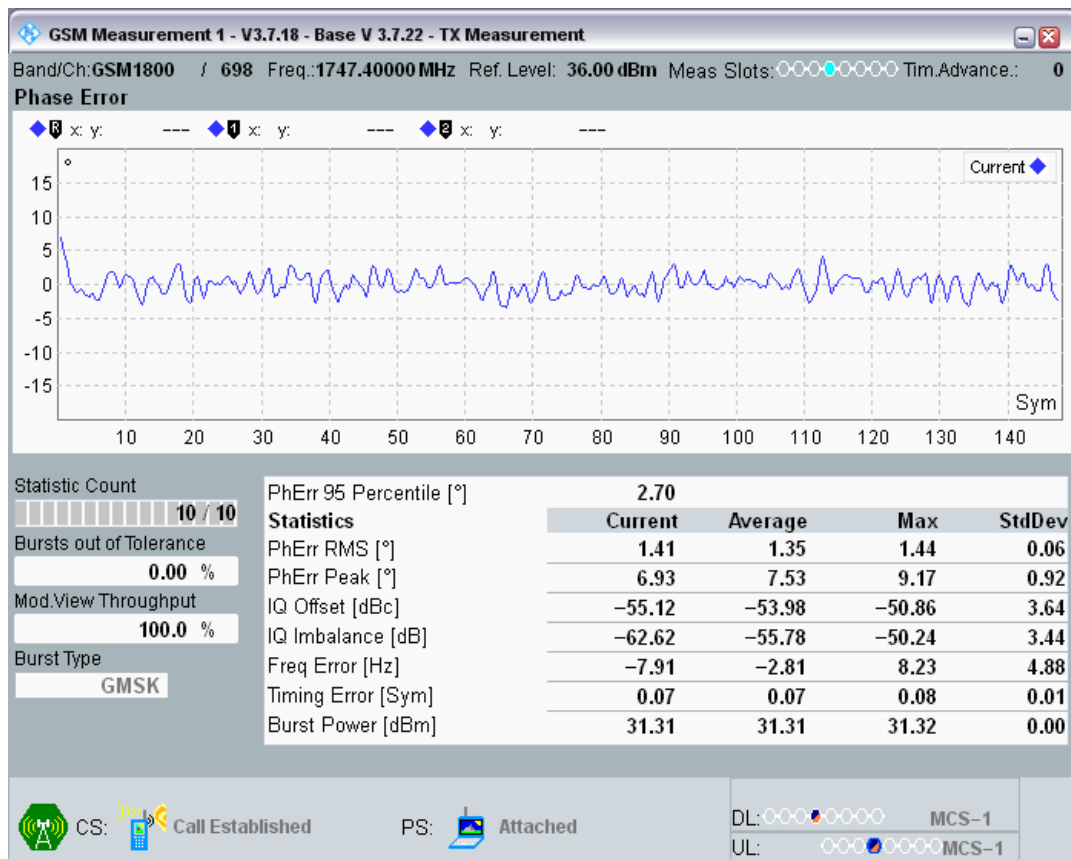


GSM1800 Channel=698 PCL=0 TU1_5 @18

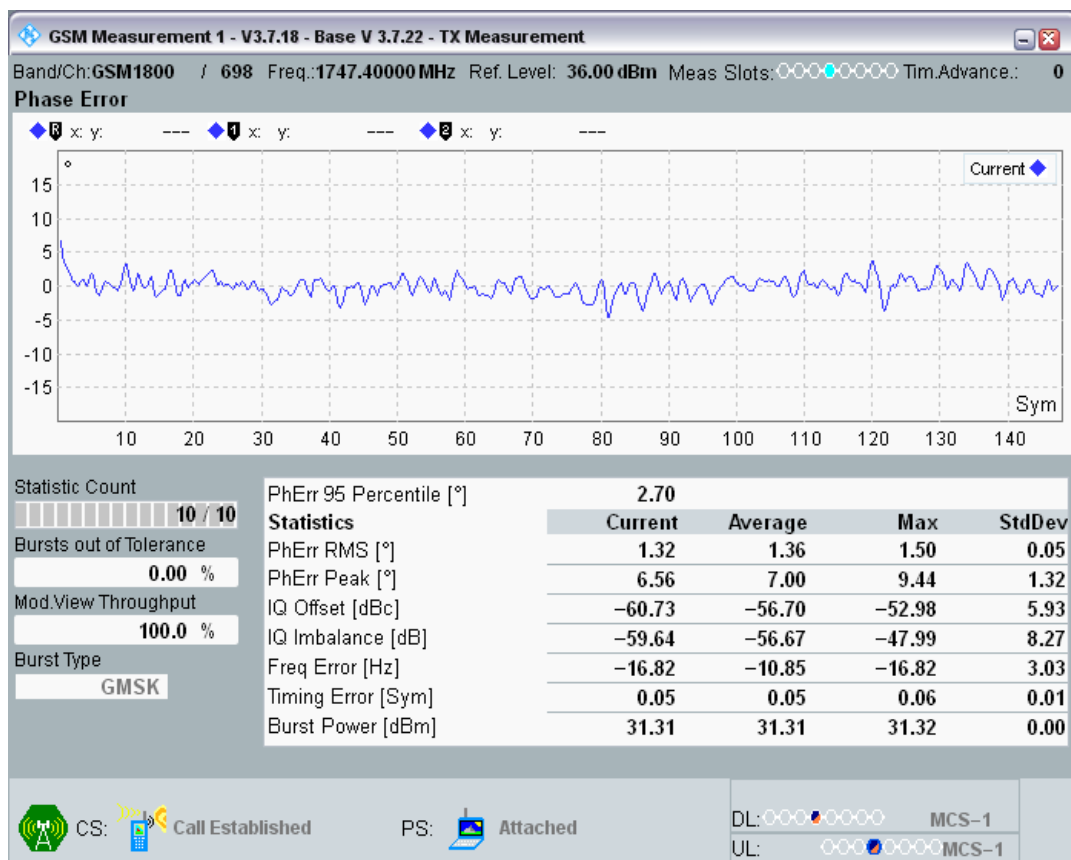


GSM1800 Channel=698 PCL=0 TU1_5 @19

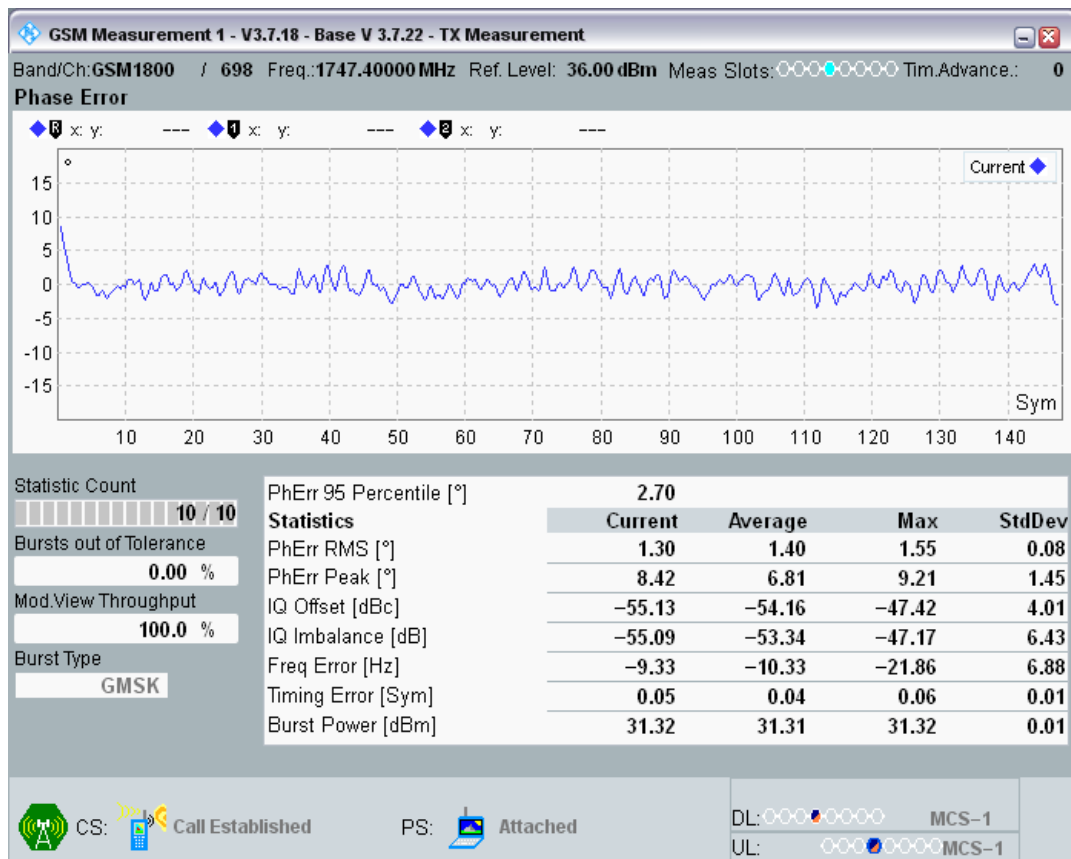


GSM1800 Channel=698 PCL=0 TU1_5 @20

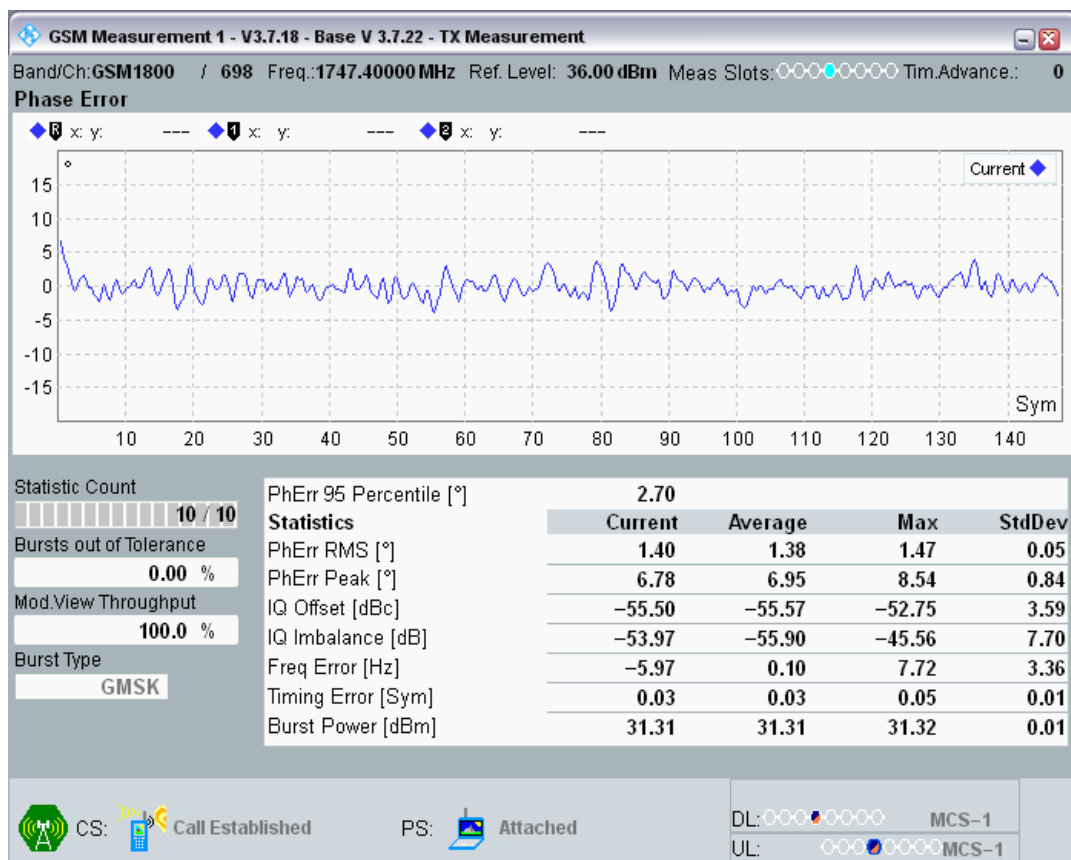


GSM1900 Channel=661 PCL=0 RA130 @RACH

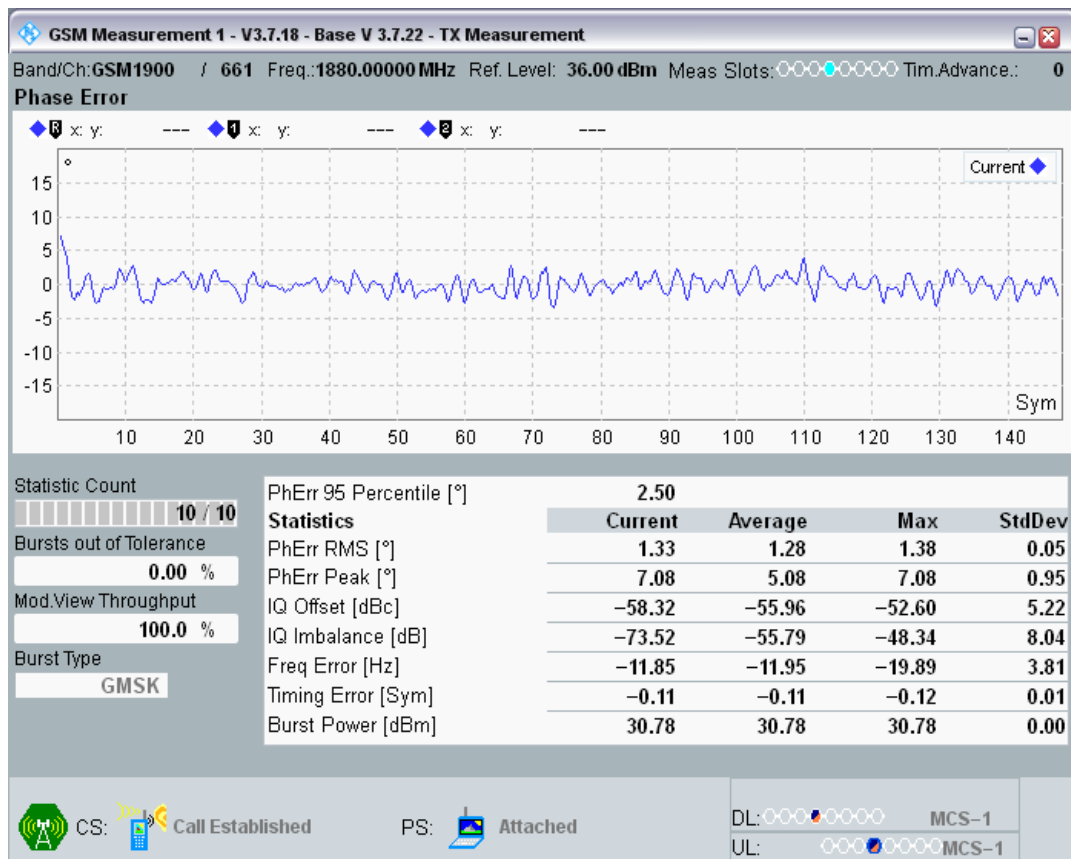


GSM1900 Channel=661 PCL=0 RA130 @Sens2

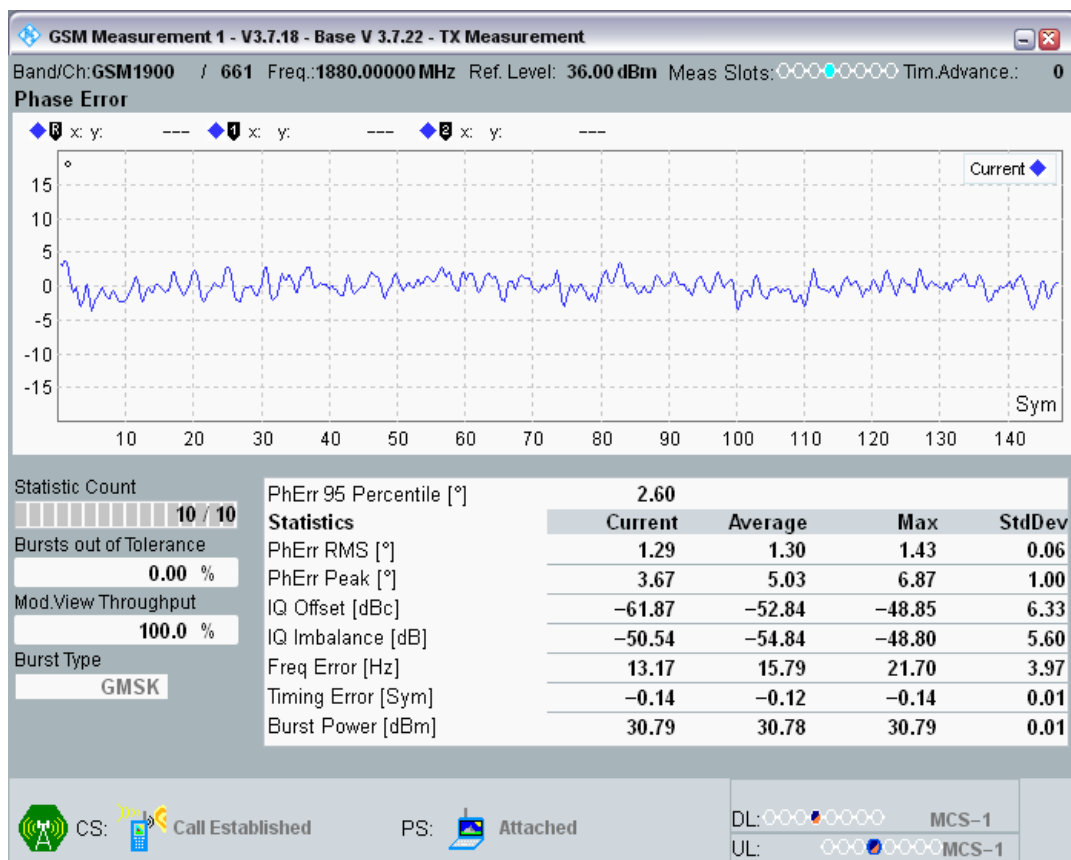


GSM1900 Channel=661 PCL=0 RA130 @Sens1

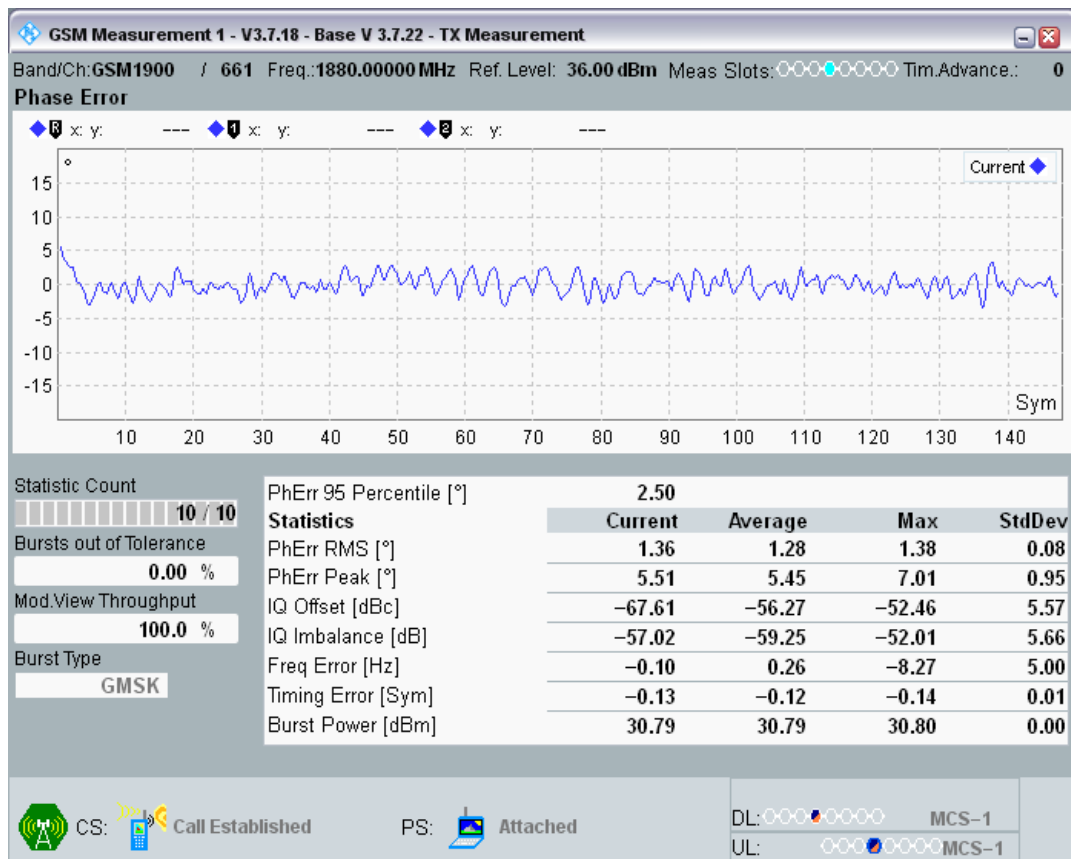


GSM1900 Channel=661 PCL=0 RA130 @Sens3

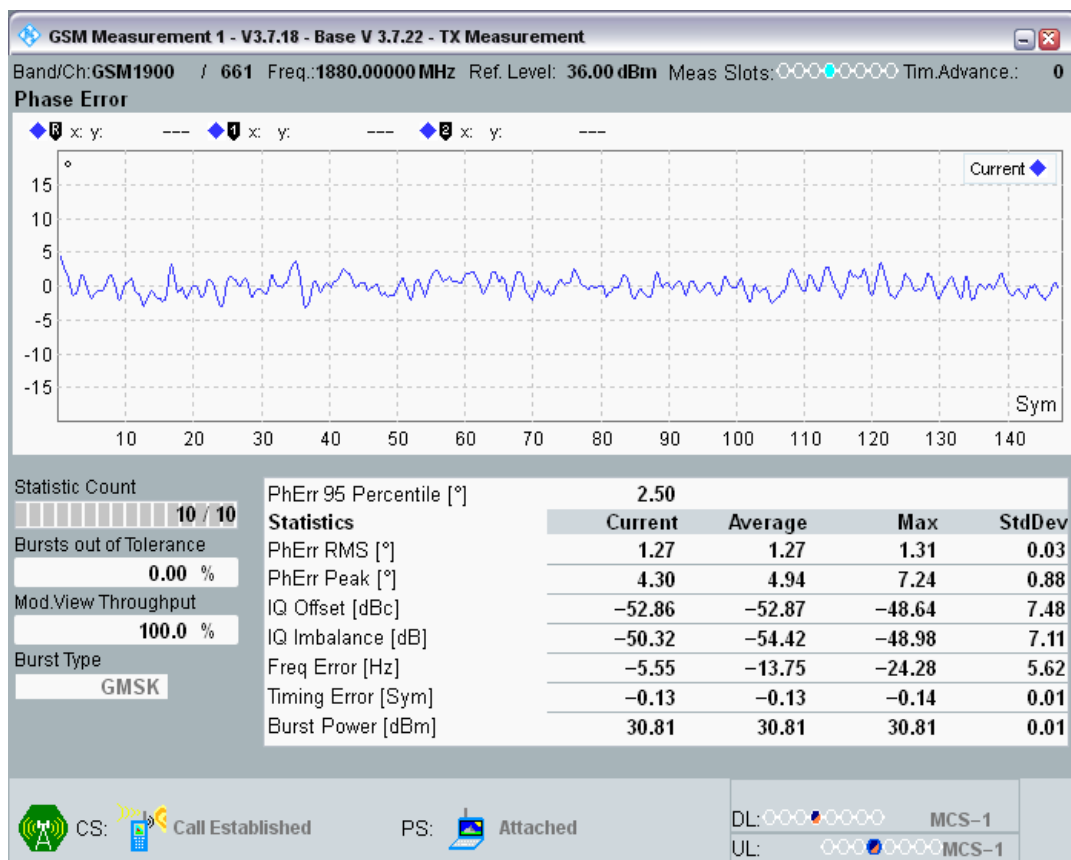


GSM1900 Channel=661 PCL=0 RA130 @Sens5

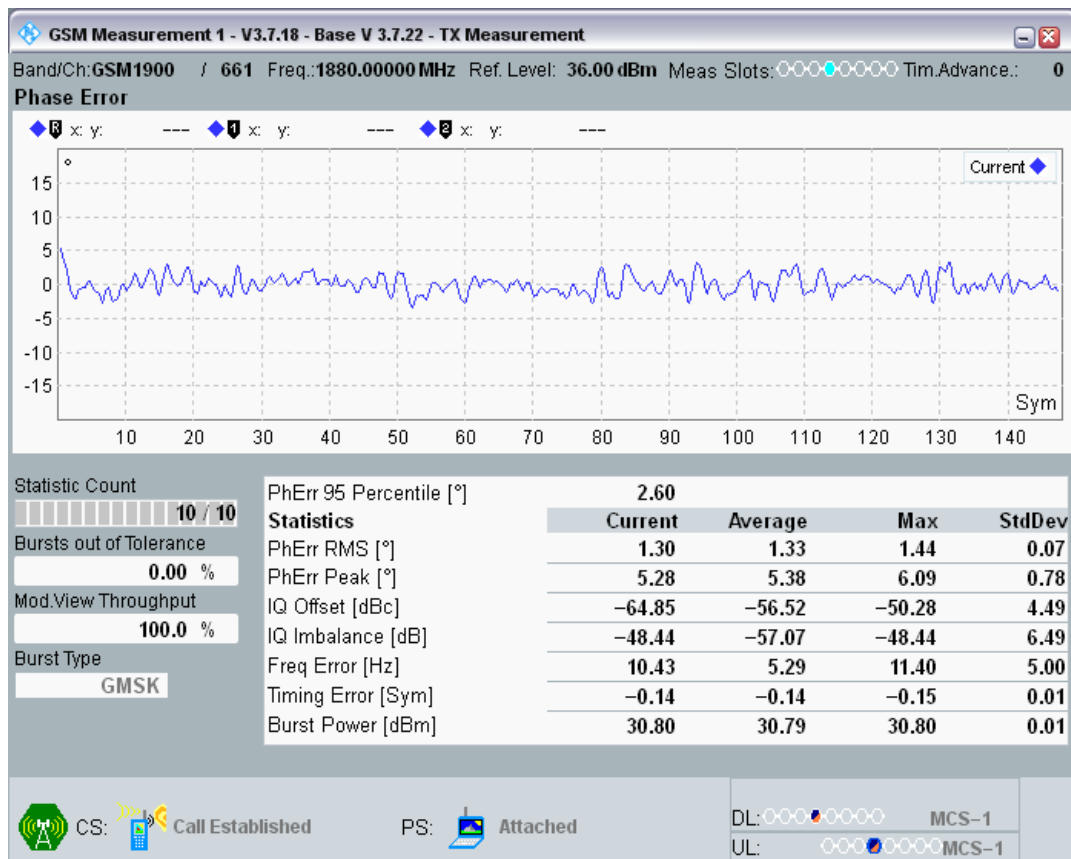


GSM1900 Channel=661 PCL=0 RA130 @Sens4

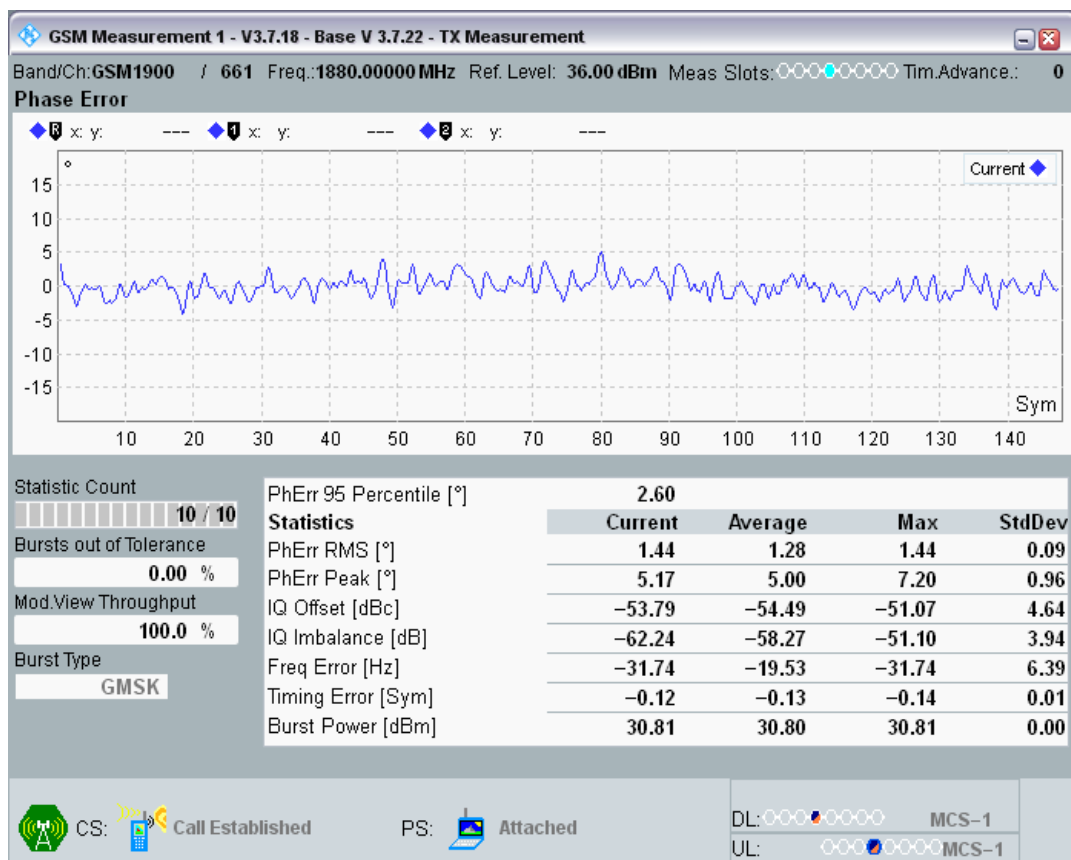


GSM1900 Channel=661 PCL=0 HT100 @RACH

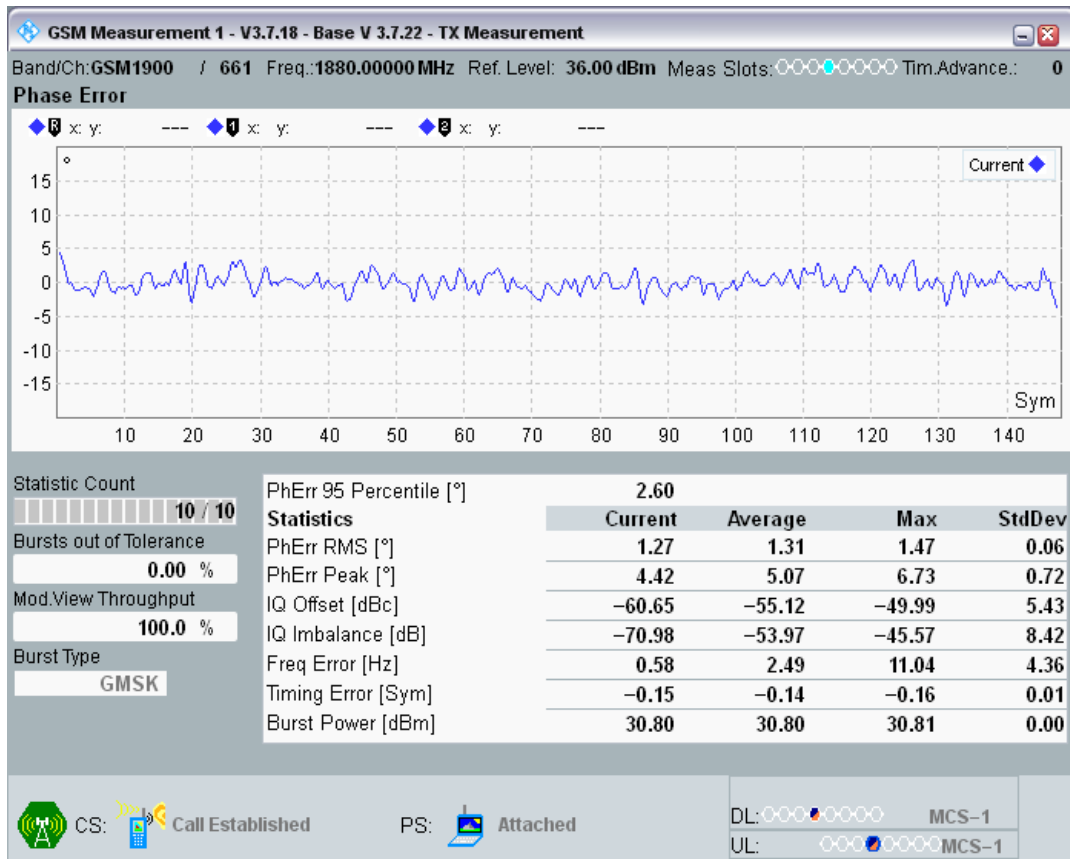


GSM1900 Channel=661 PCL=0 HT100 @Sens2

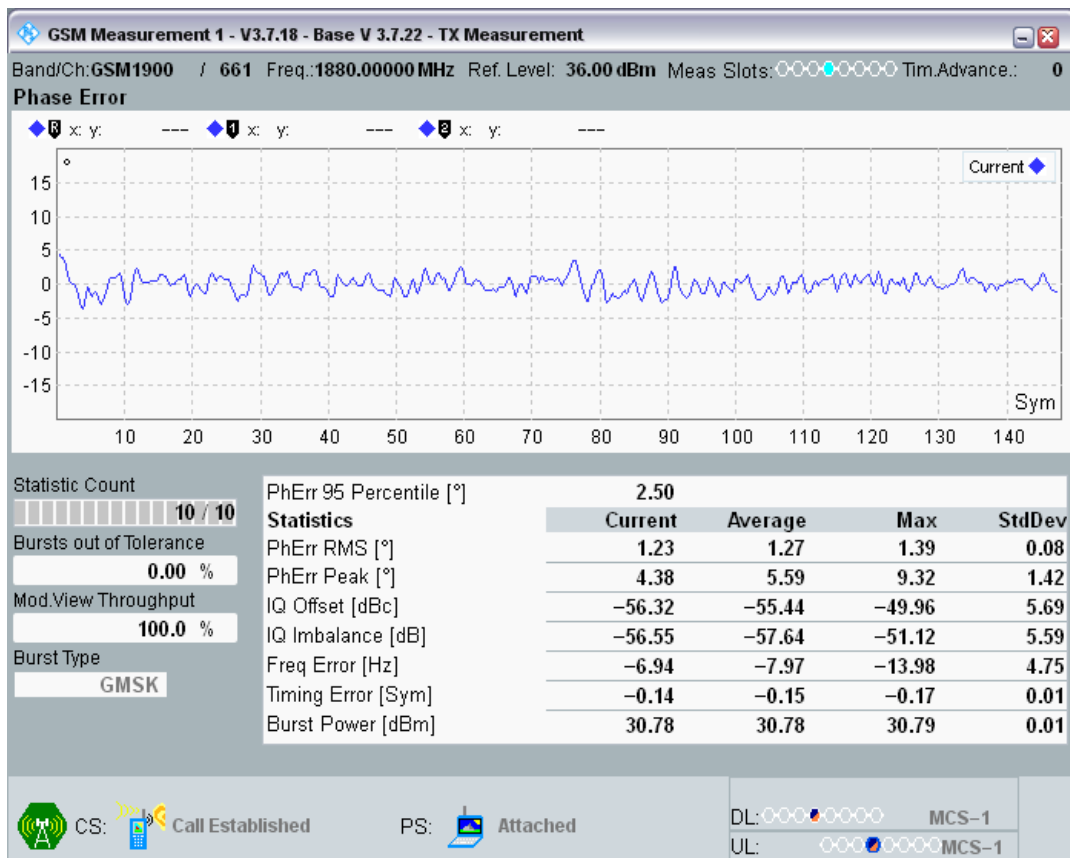


GSM1900 Channel=661 PCL=0 HT100 @Sens1

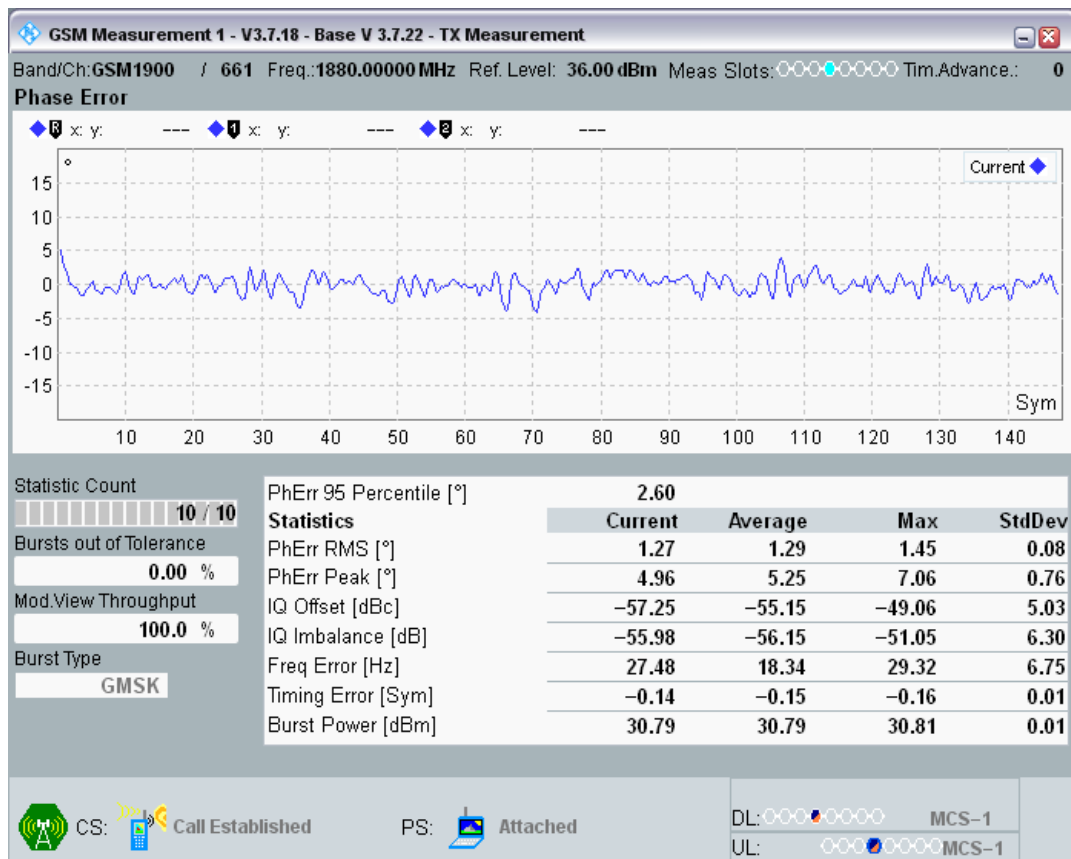


GSM1900 Channel=661 PCL=0 HT100 @Sens3

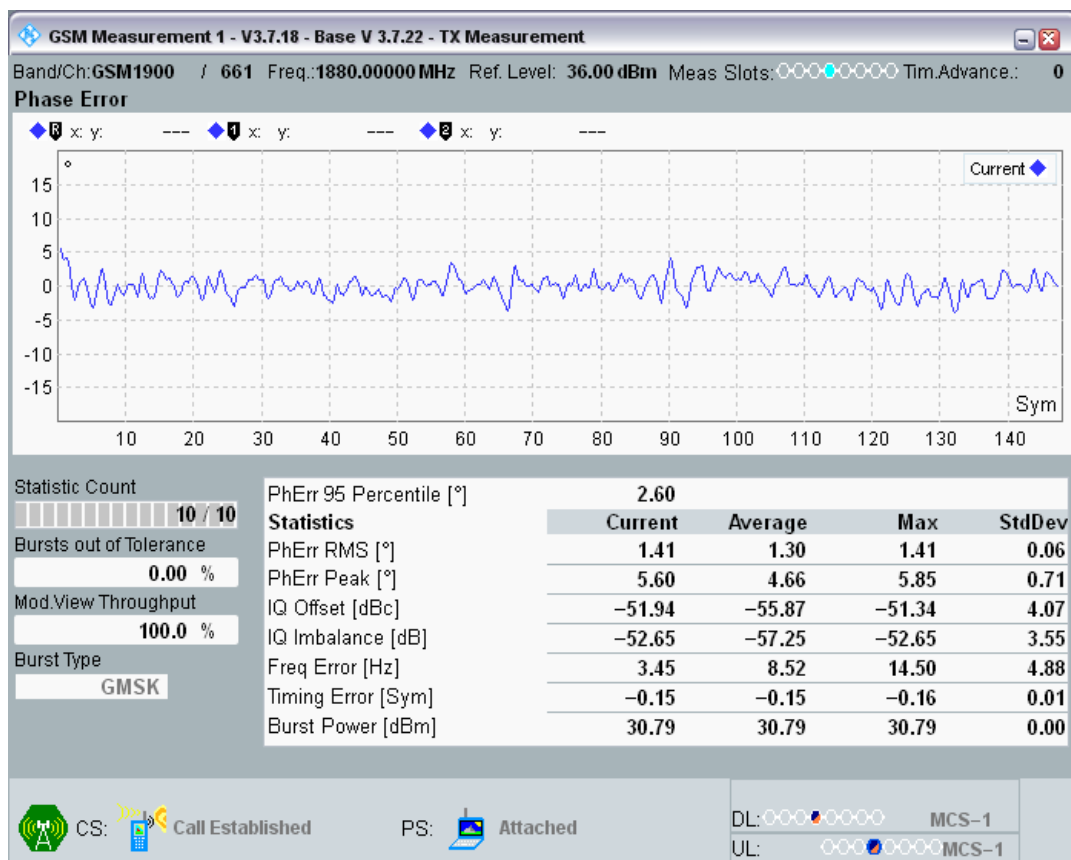


GSM1900 Channel=661 PCL=0 HT100 @Sens5

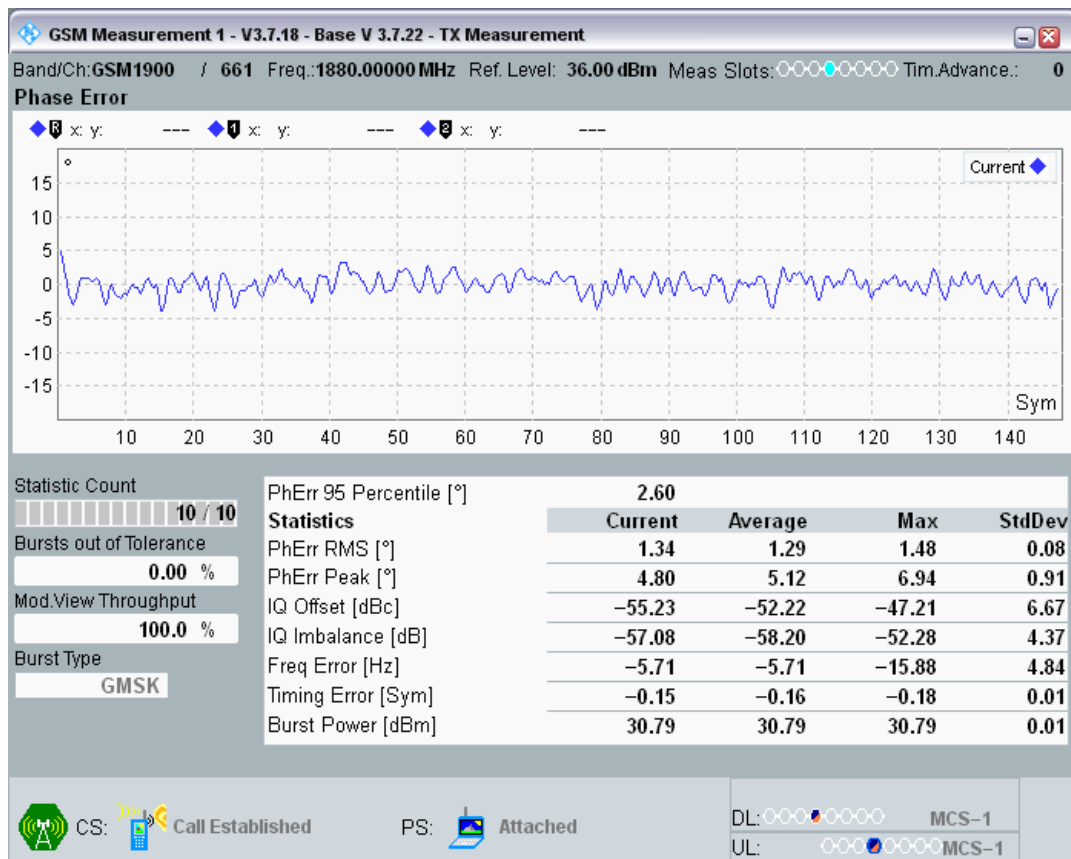


GSM1900 Channel=661 PCL=0 HT100 @Sens4

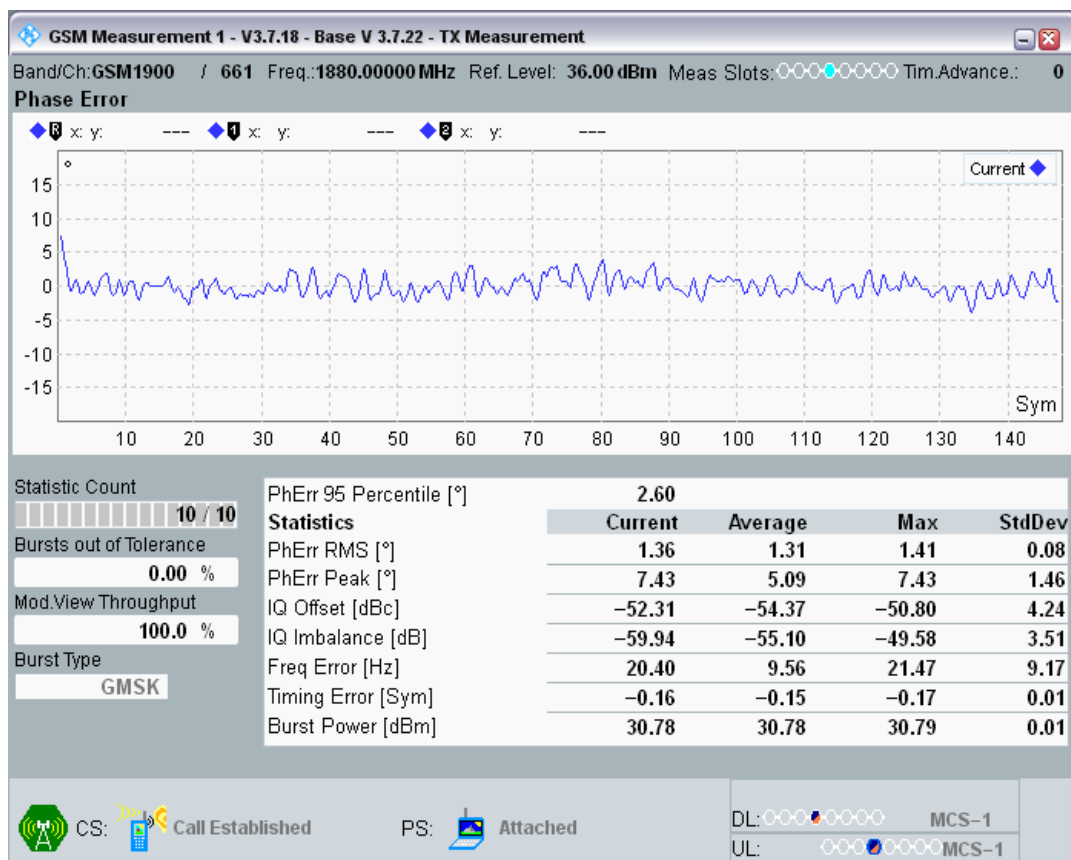


GSM1900 Channel=661 PCL=0 TU50 @RACH

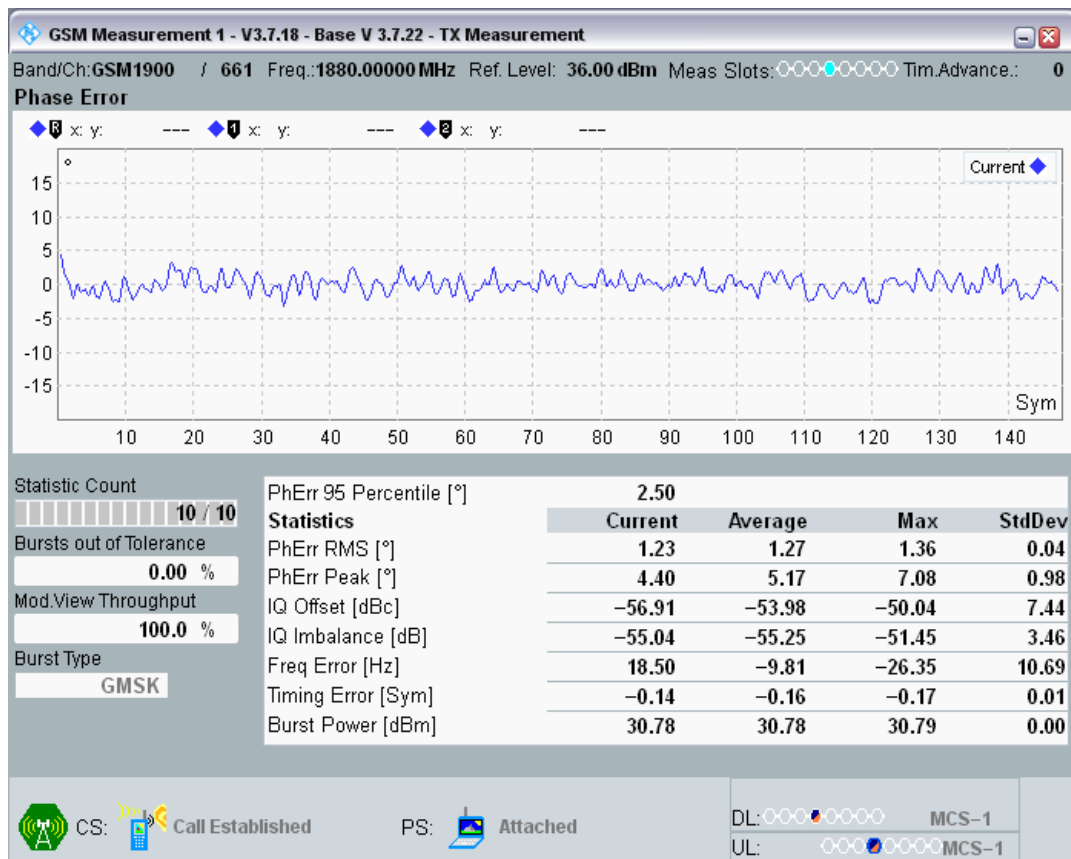


GSM1900 Channel=661 PCL=0 TU50 @Sens1

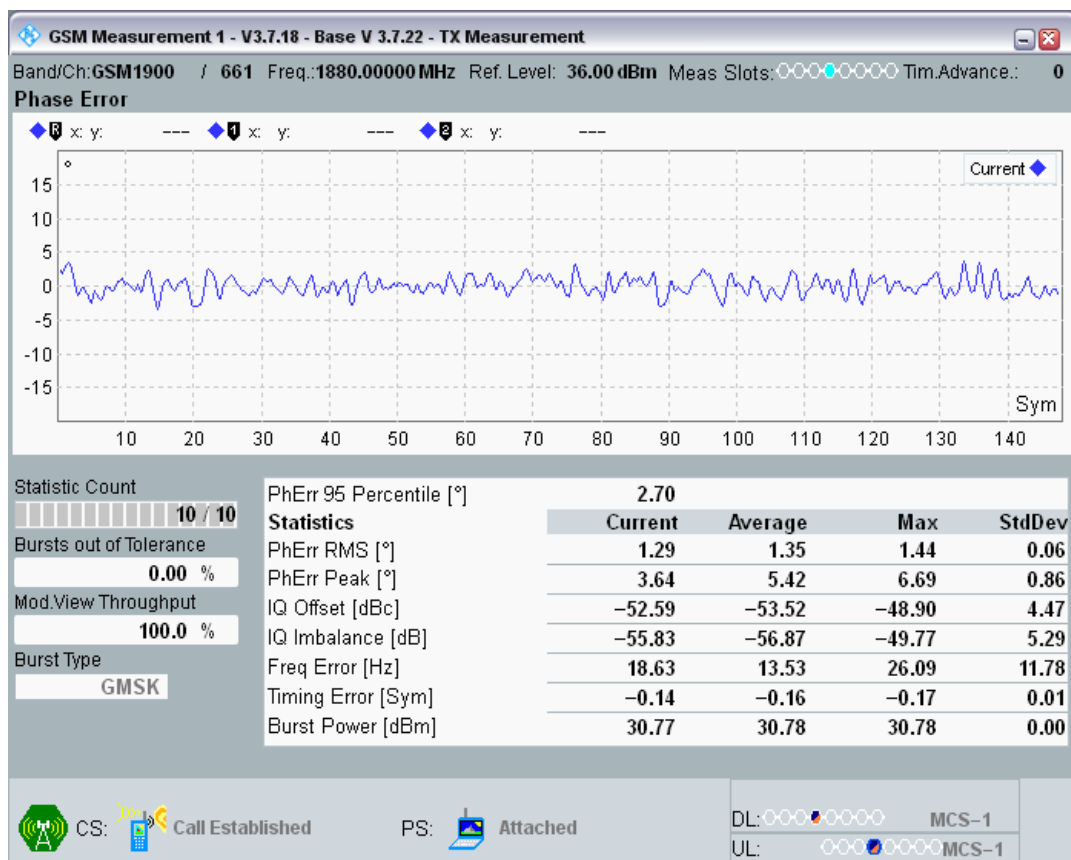


GSM1900 Channel=661 PCL=0 TU50 @Sens2

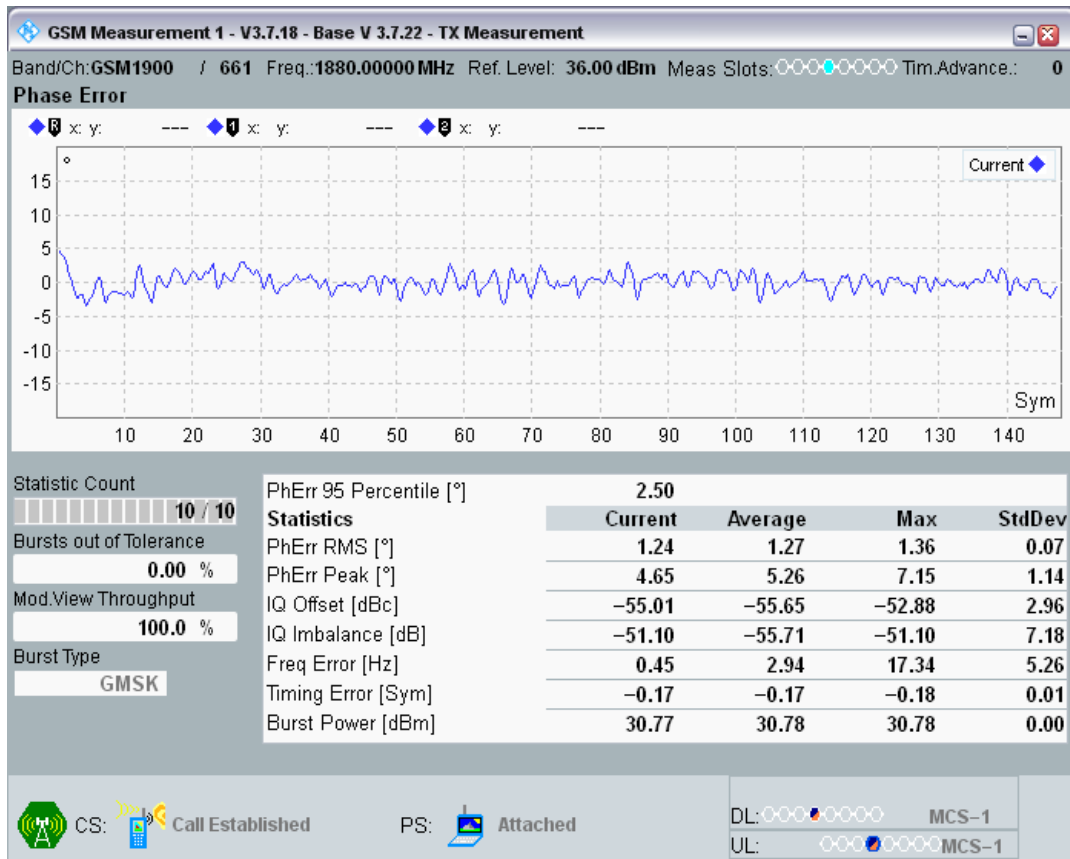


GSM1900 Channel=661 PCL=0 TU50 @Sens3

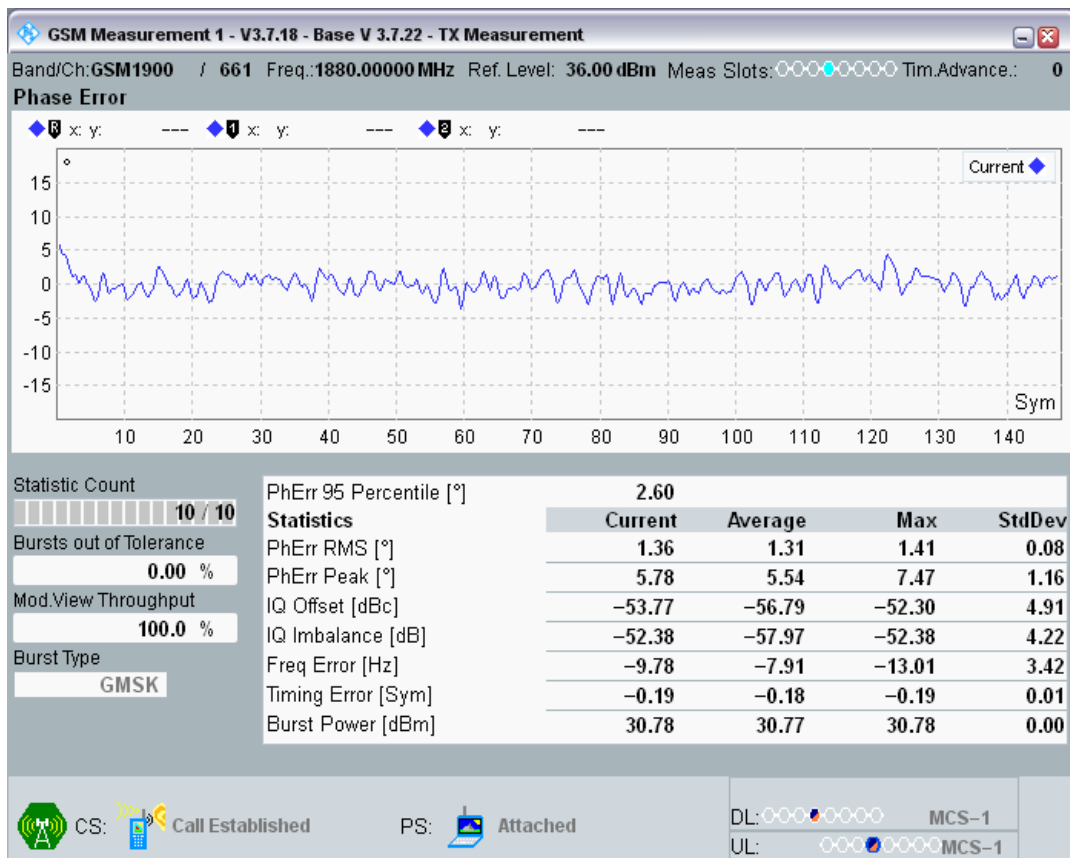


GSM1900 Channel=661 PCL=0 TU50 @Sens5

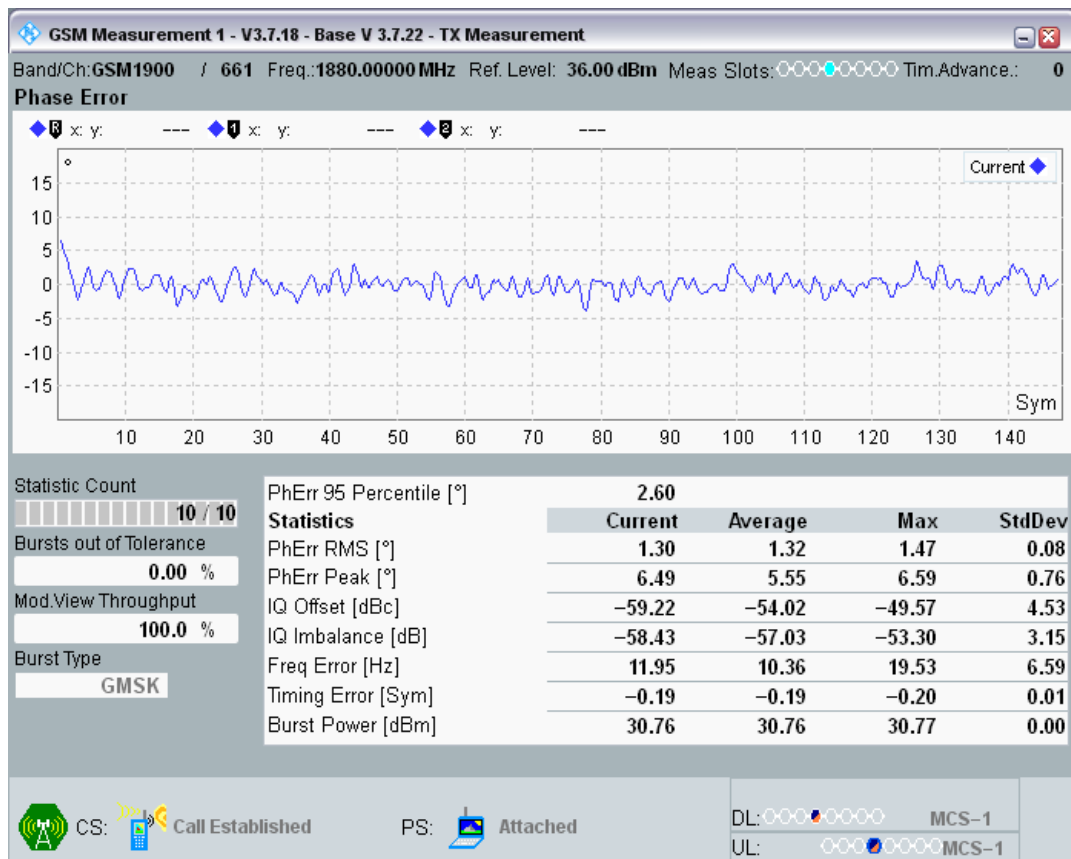


GSM1900 Channel=661 PCL=0 TU50 @Sens4

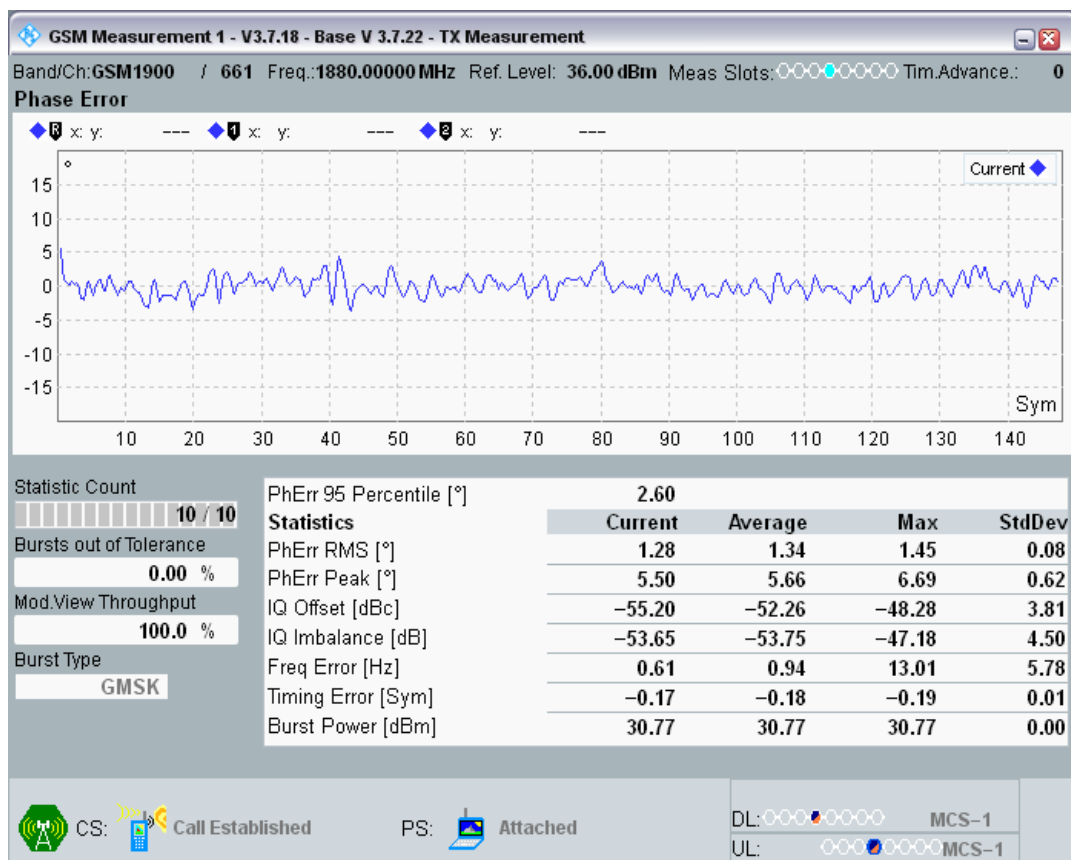


GSM1900 Channel=661 PCL=0 TU1_5 @RACH

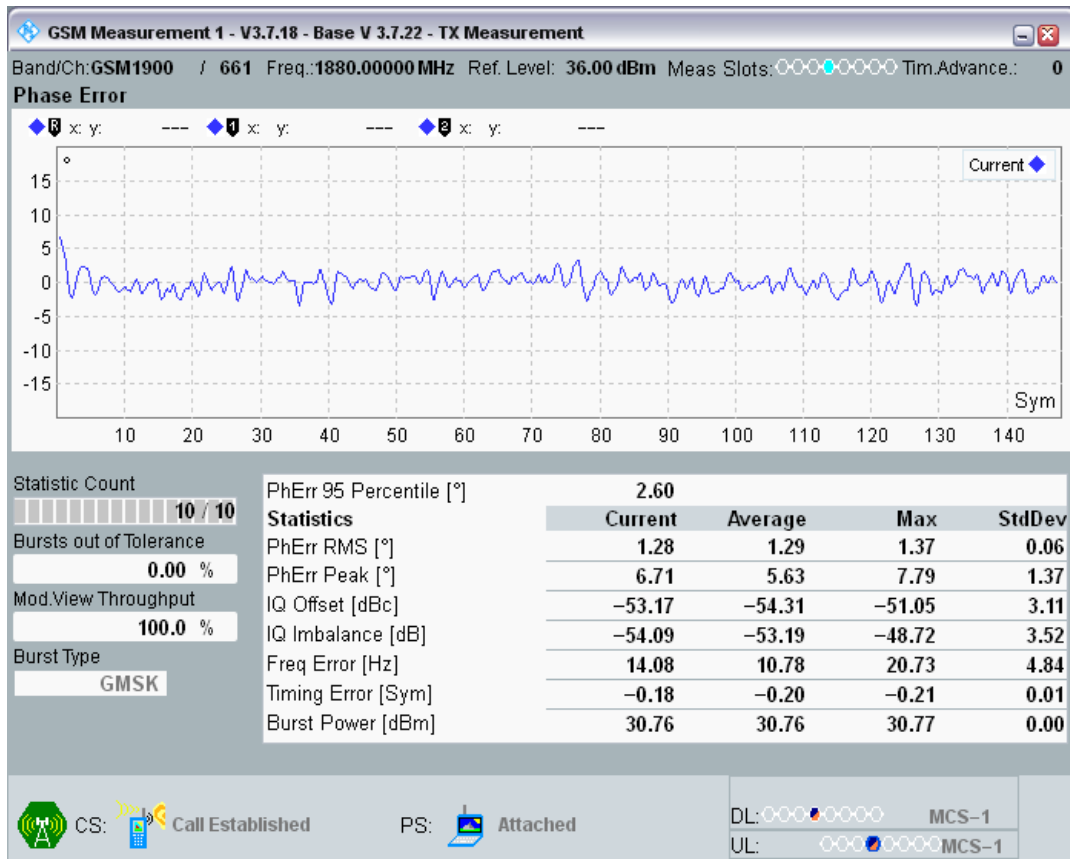


GSM1900 Channel=661 PCL=0 TU1_5 @1

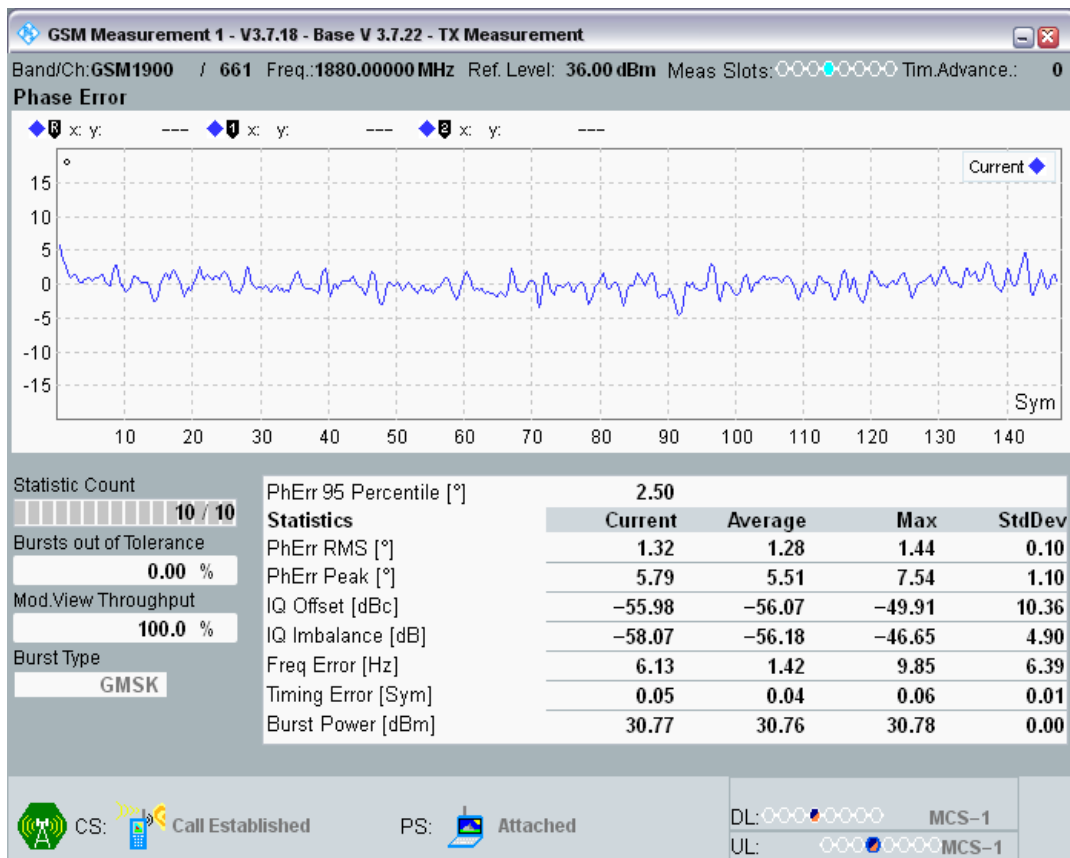


GSM1900 Channel=661 PCL=0 TU1_5 @2

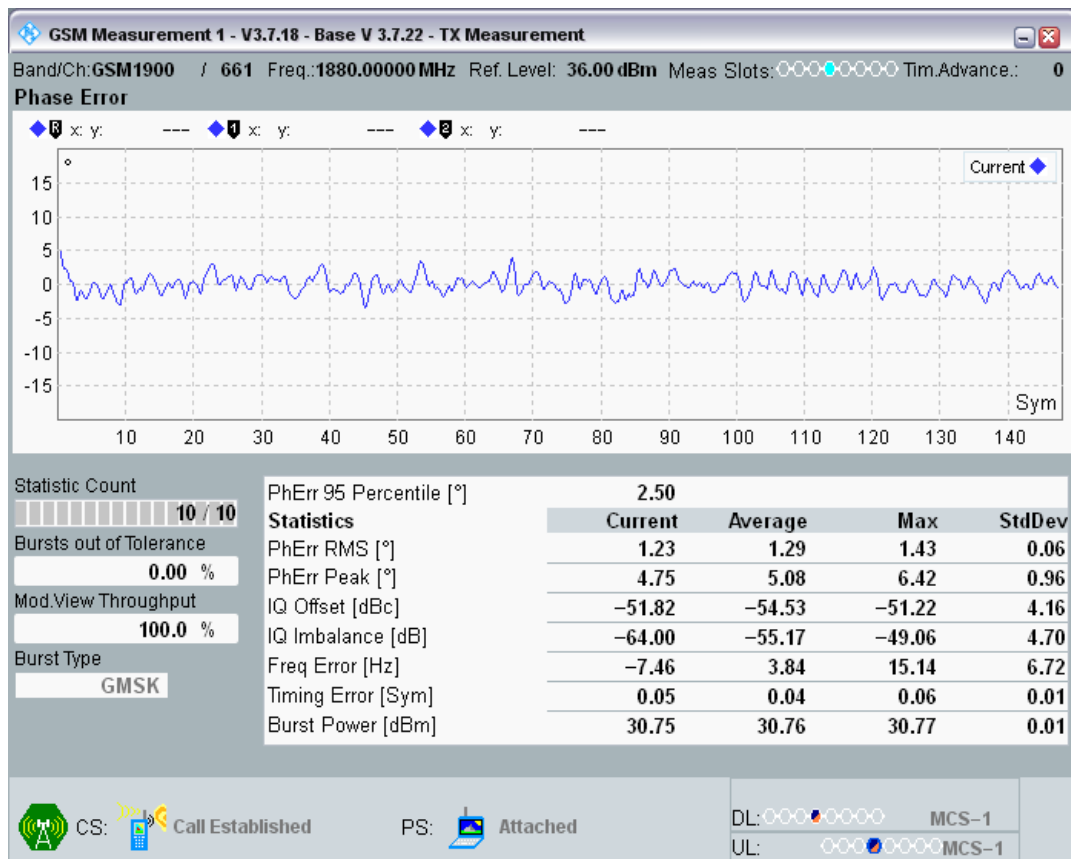


GSM1900 Channel=661 PCL=0 TU1_5 @3

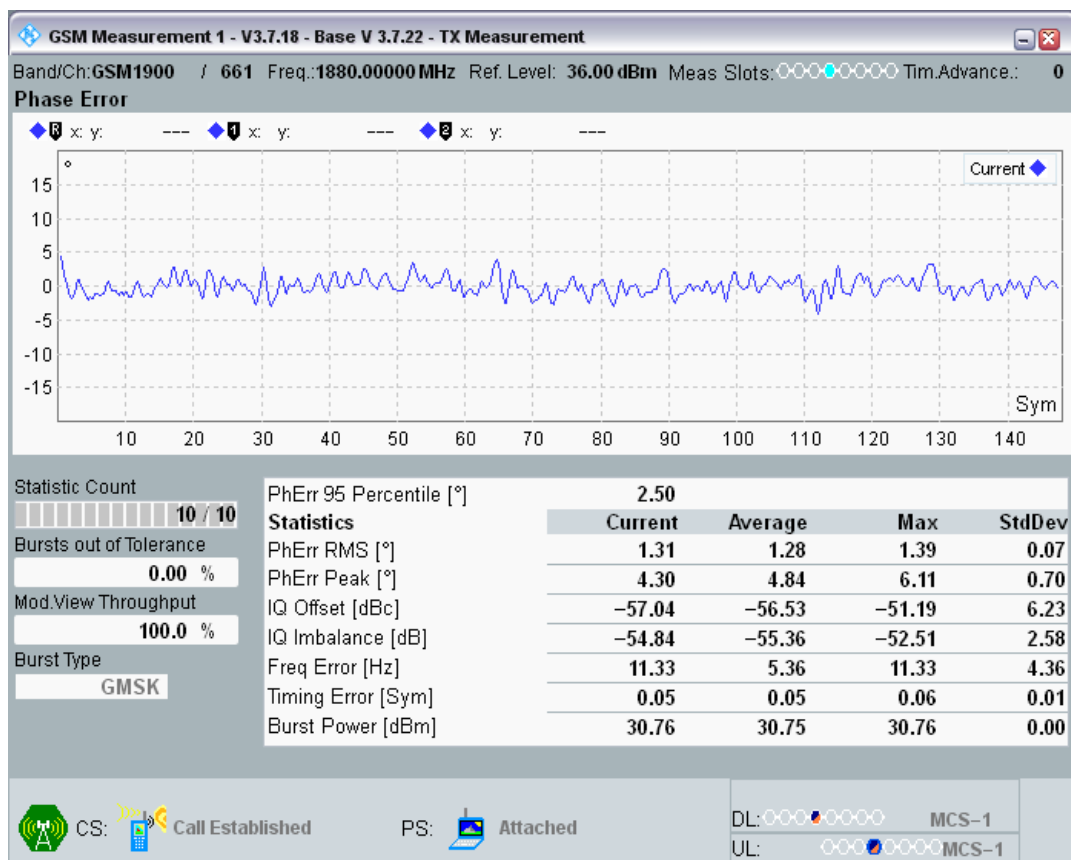


GSM1900 Channel=661 PCL=0 TU1_5 @4

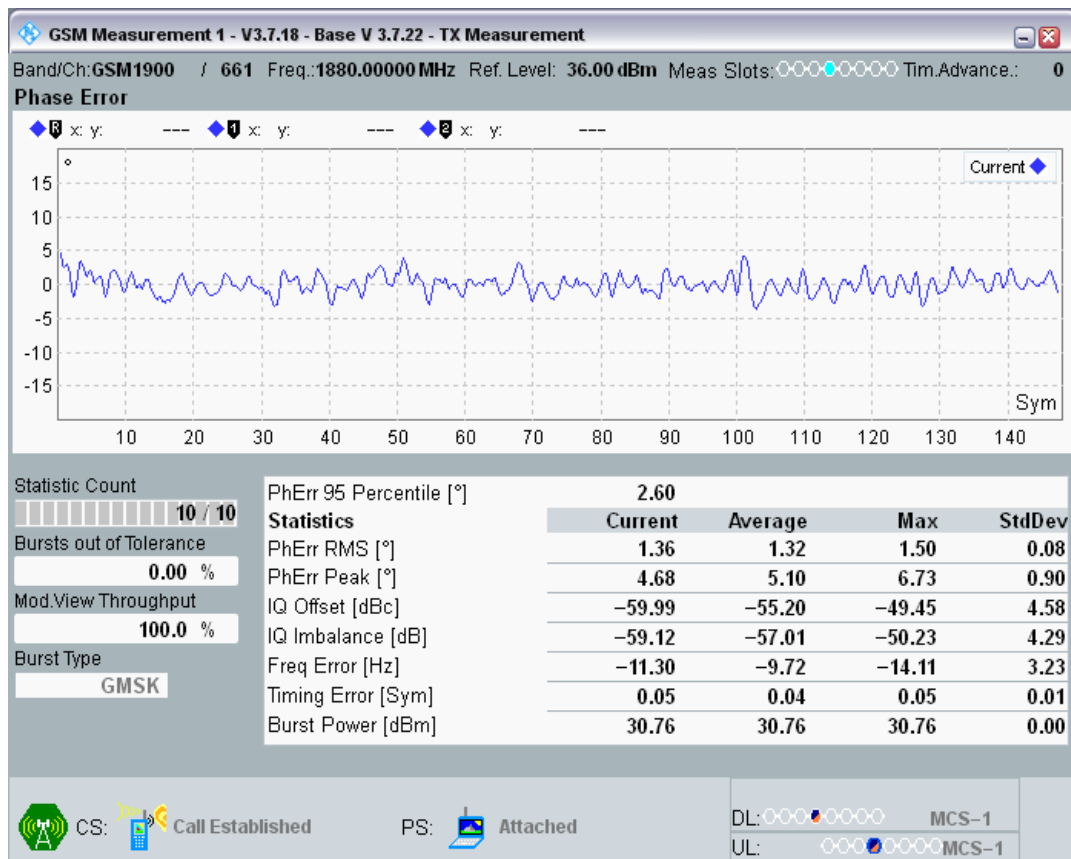


GSM1900 Channel=661 PCL=0 TU1_5 @5

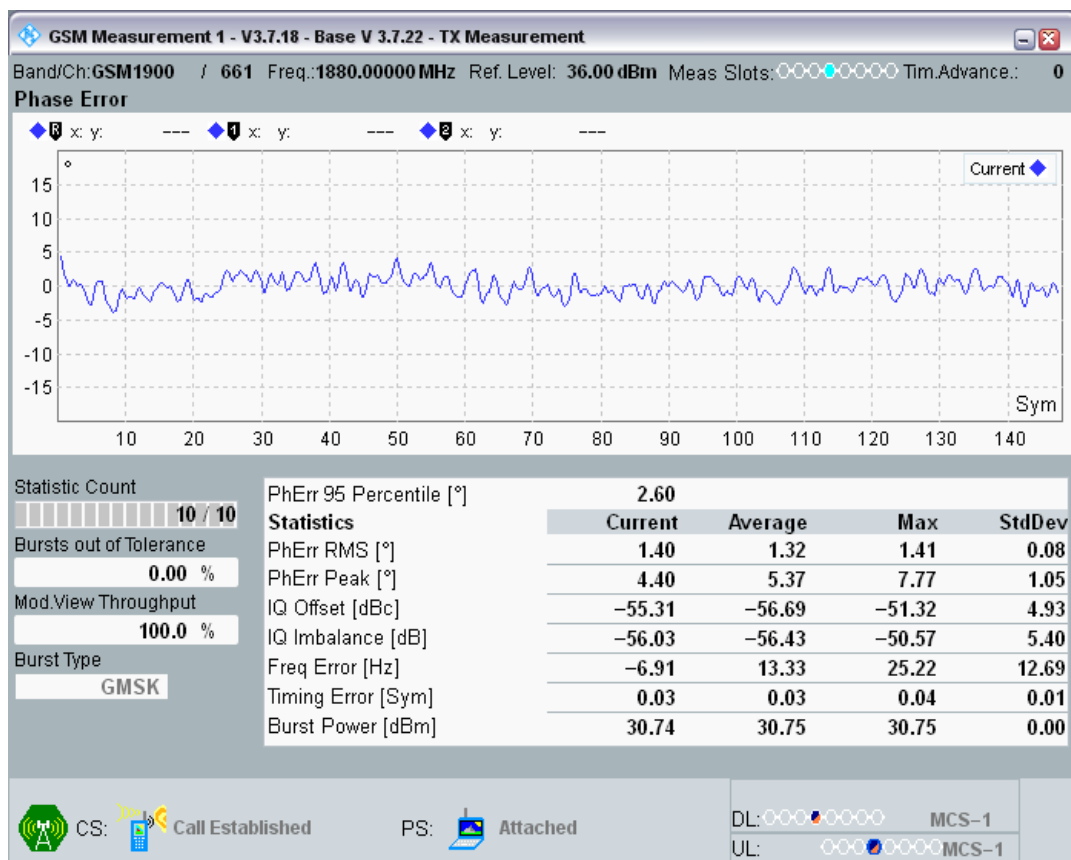


GSM1900 Channel=661 PCL=0 TU1_5 @6

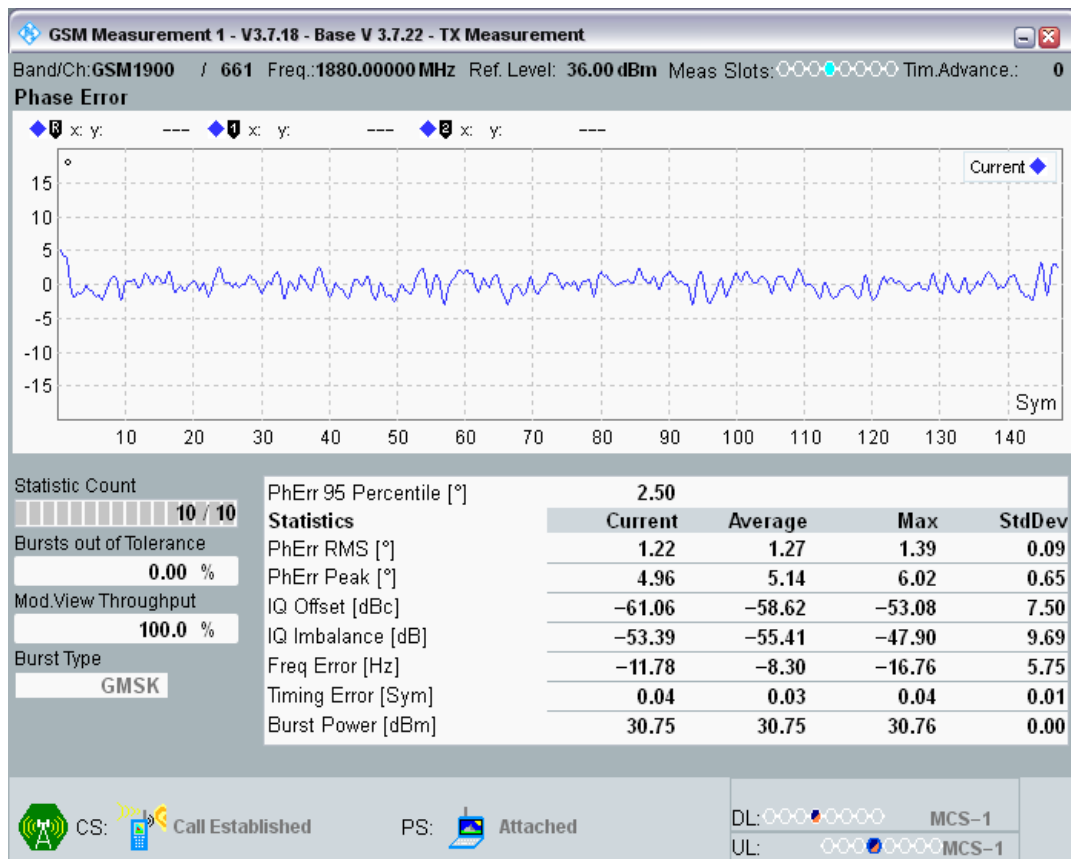


GSM1900 Channel=661 PCL=0 TU1_5 @7

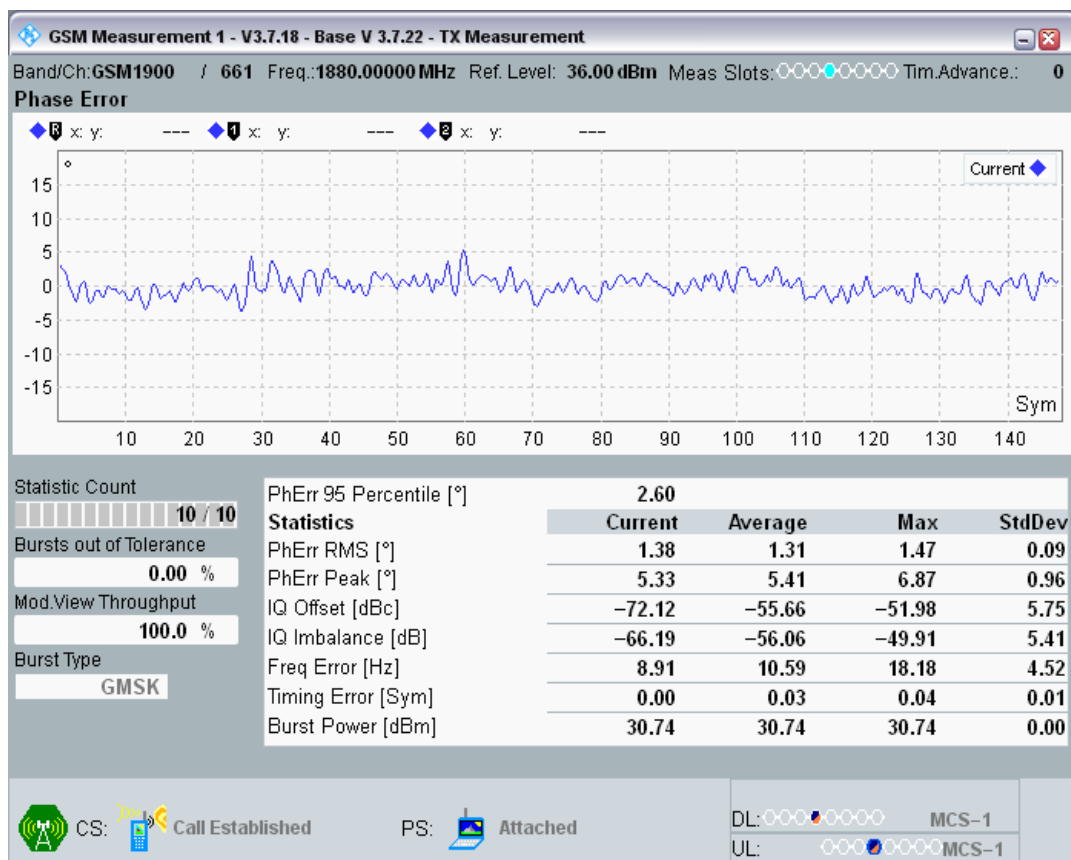


GSM1900 Channel=661 PCL=0 TU1_5 @8

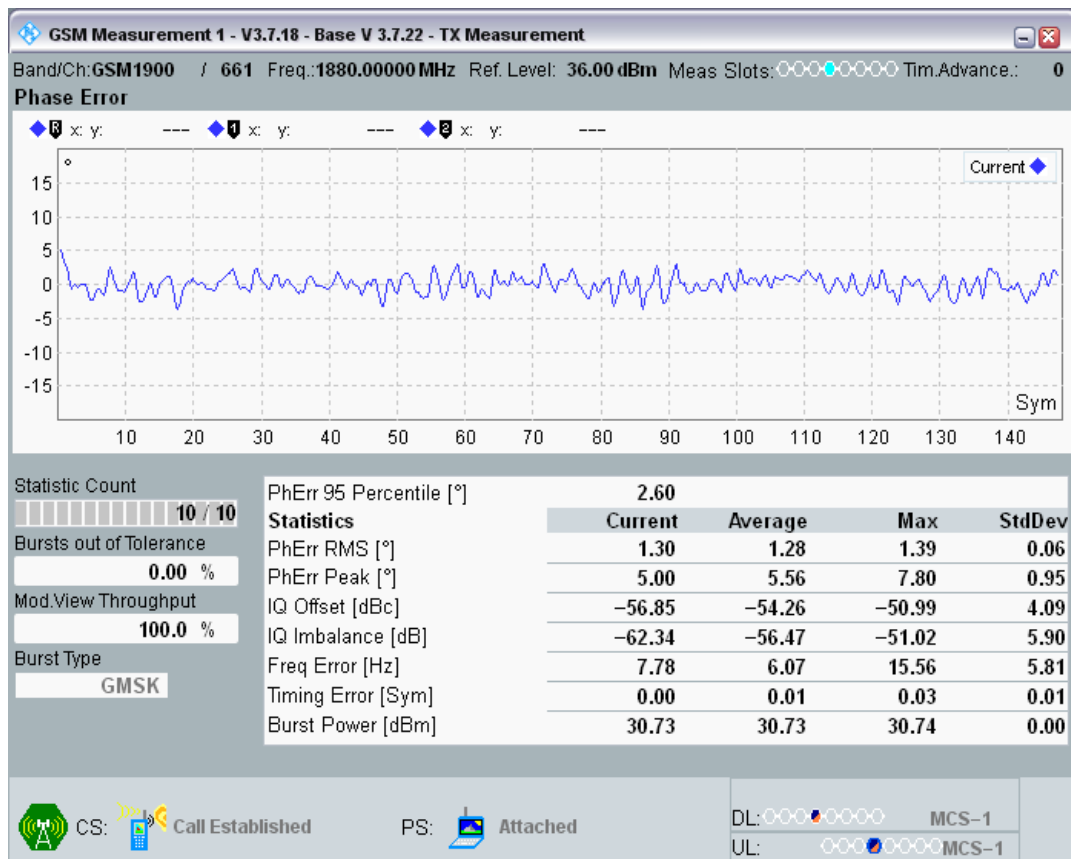


GSM1900 Channel=661 PCL=0 TU1_5 @9

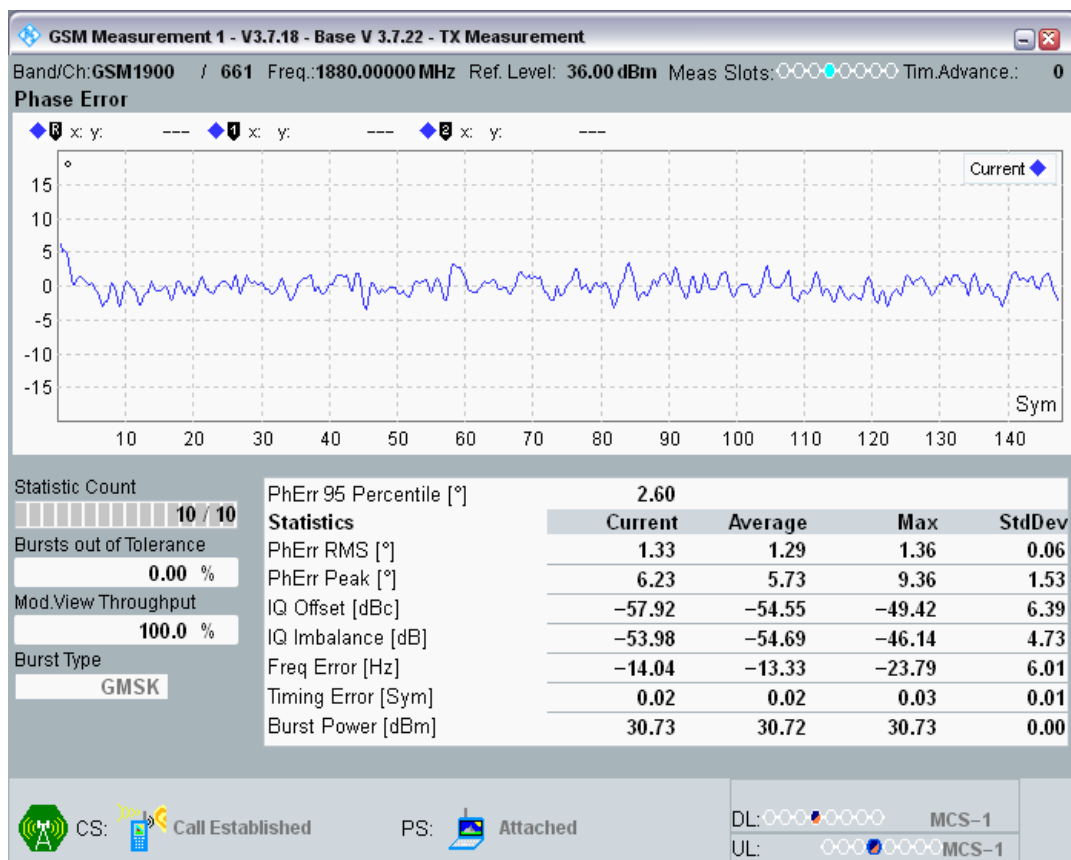


GSM1900 Channel=661 PCL=0 TU1_5 @11

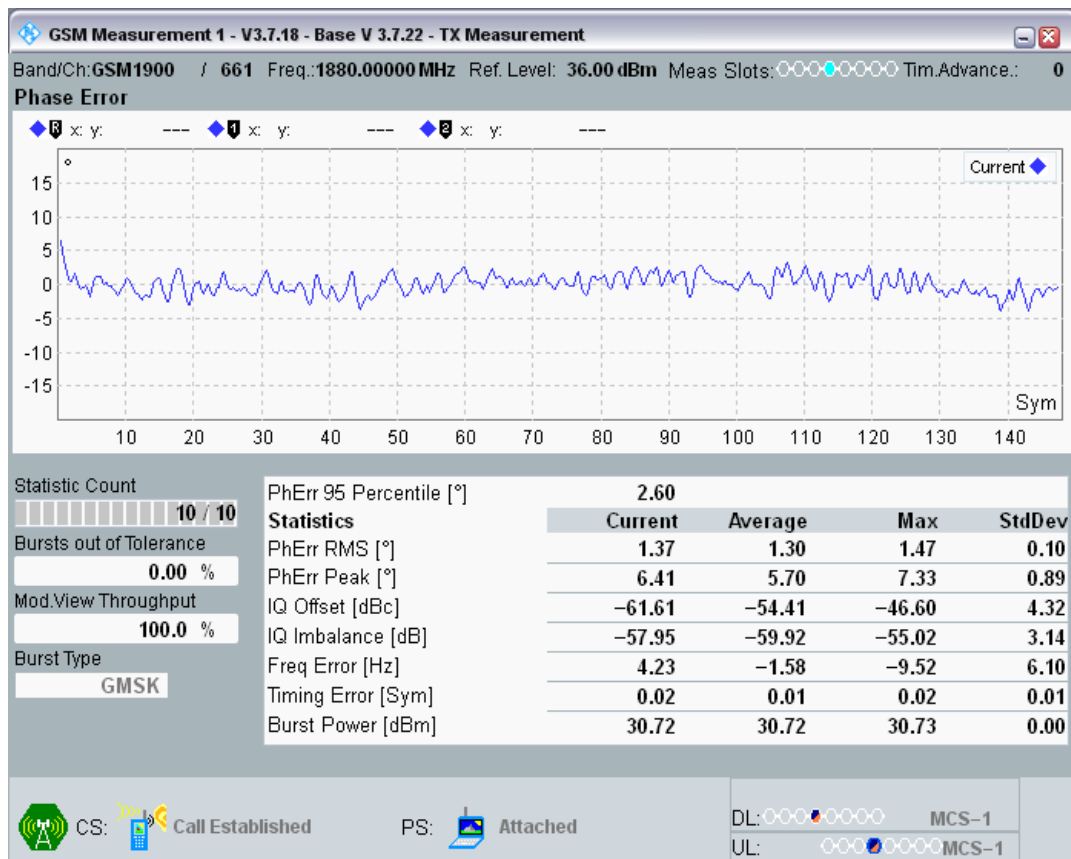


GSM1900 Channel=661 PCL=0 TU1_5 @10

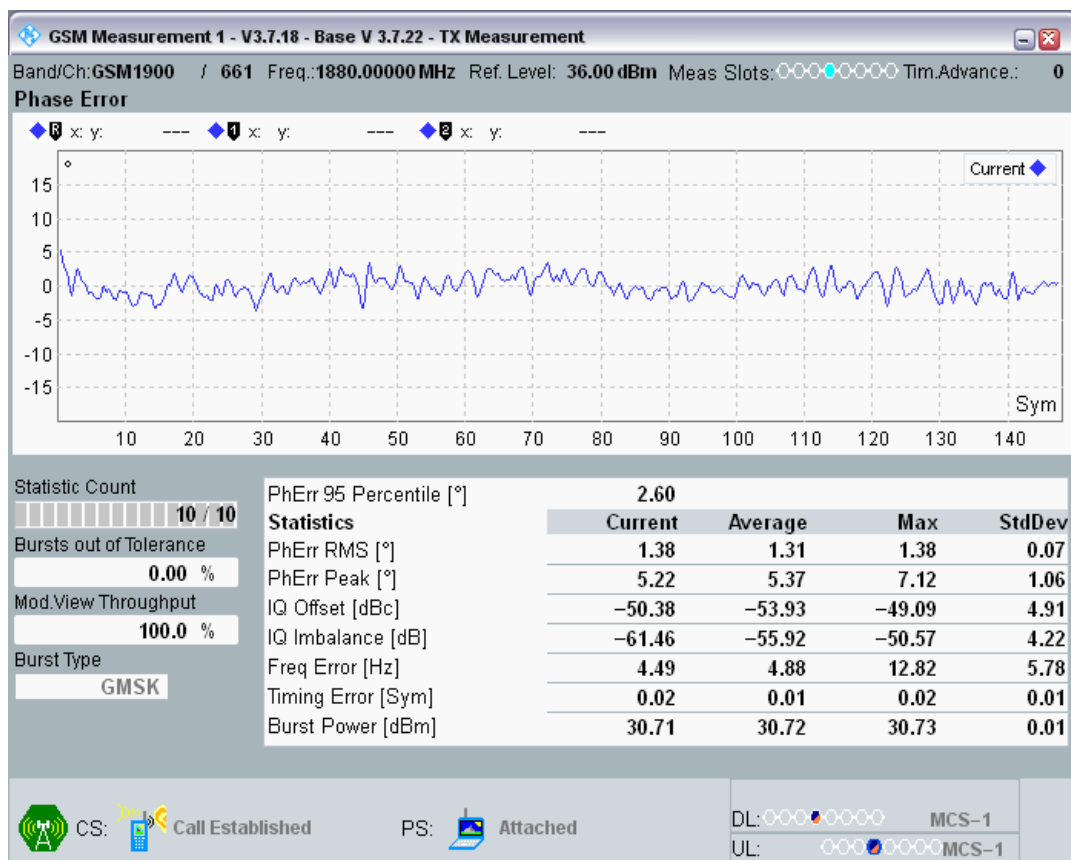


GSM1900 Channel=661 PCL=0 TU1_5 @12

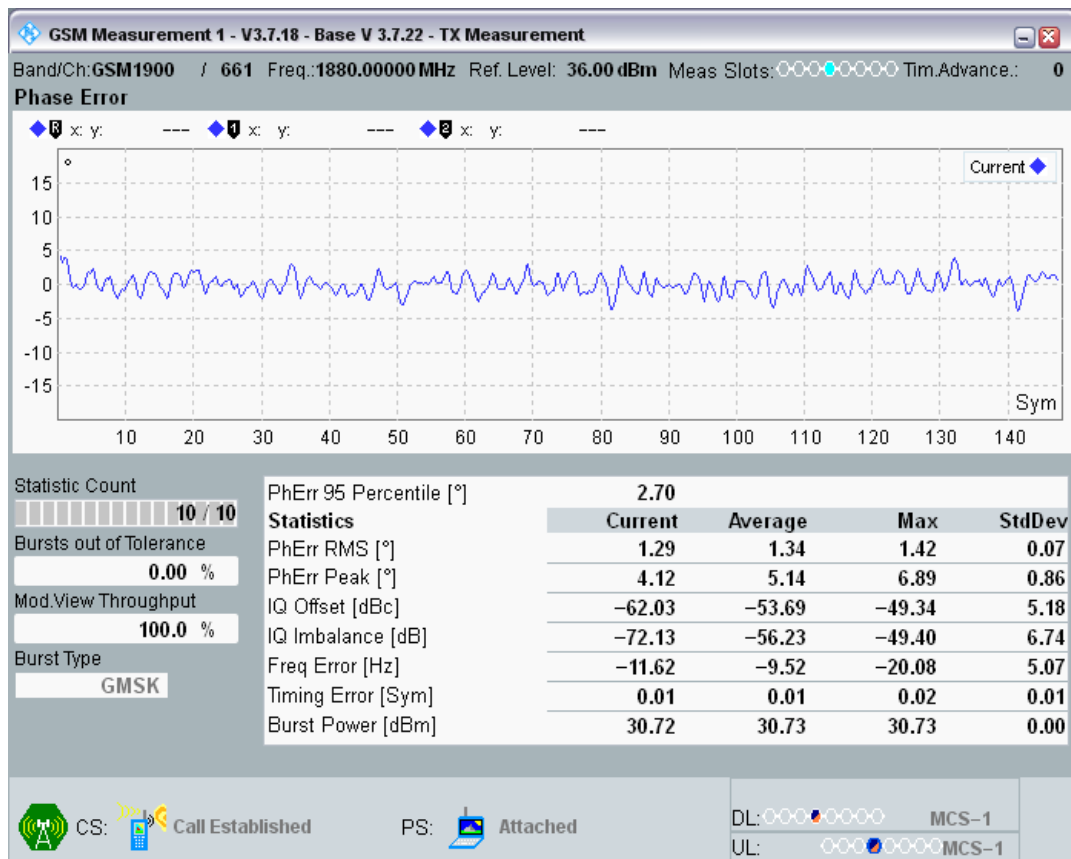


GSM1900 Channel=661 PCL=0 TU1_5 @14

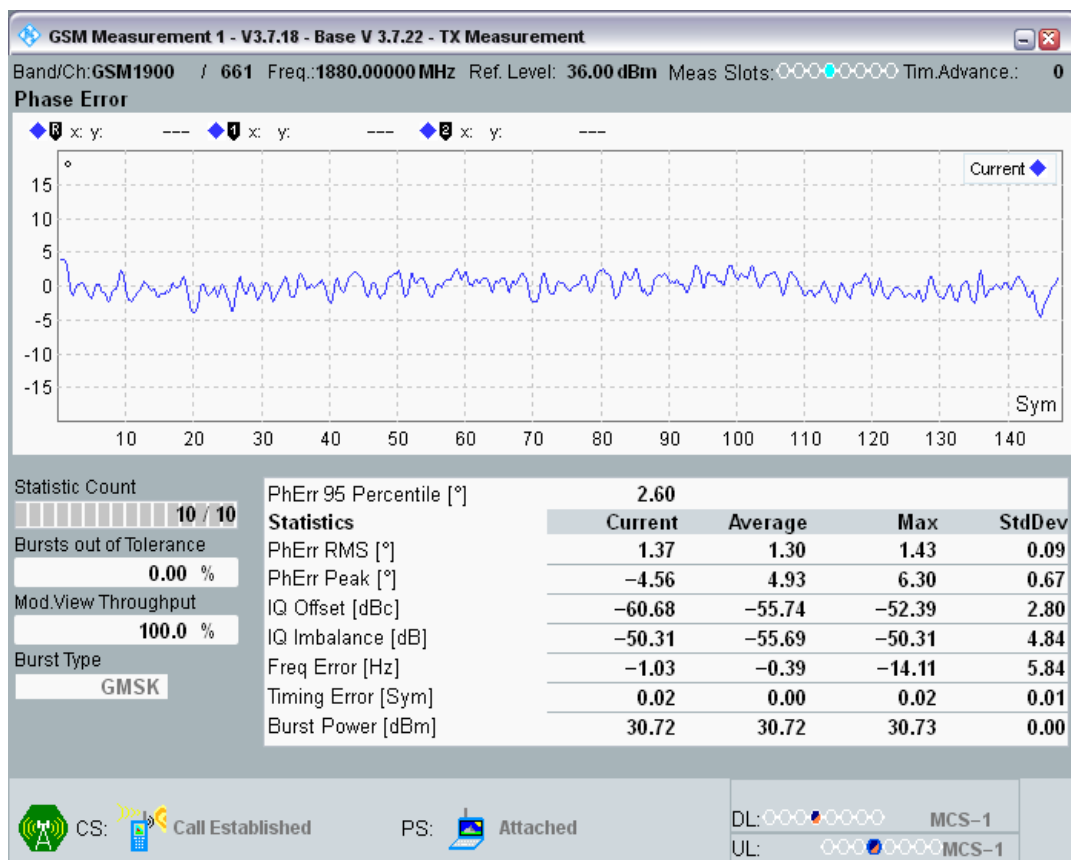


GSM1900 Channel=661 PCL=0 TU1_5 @13

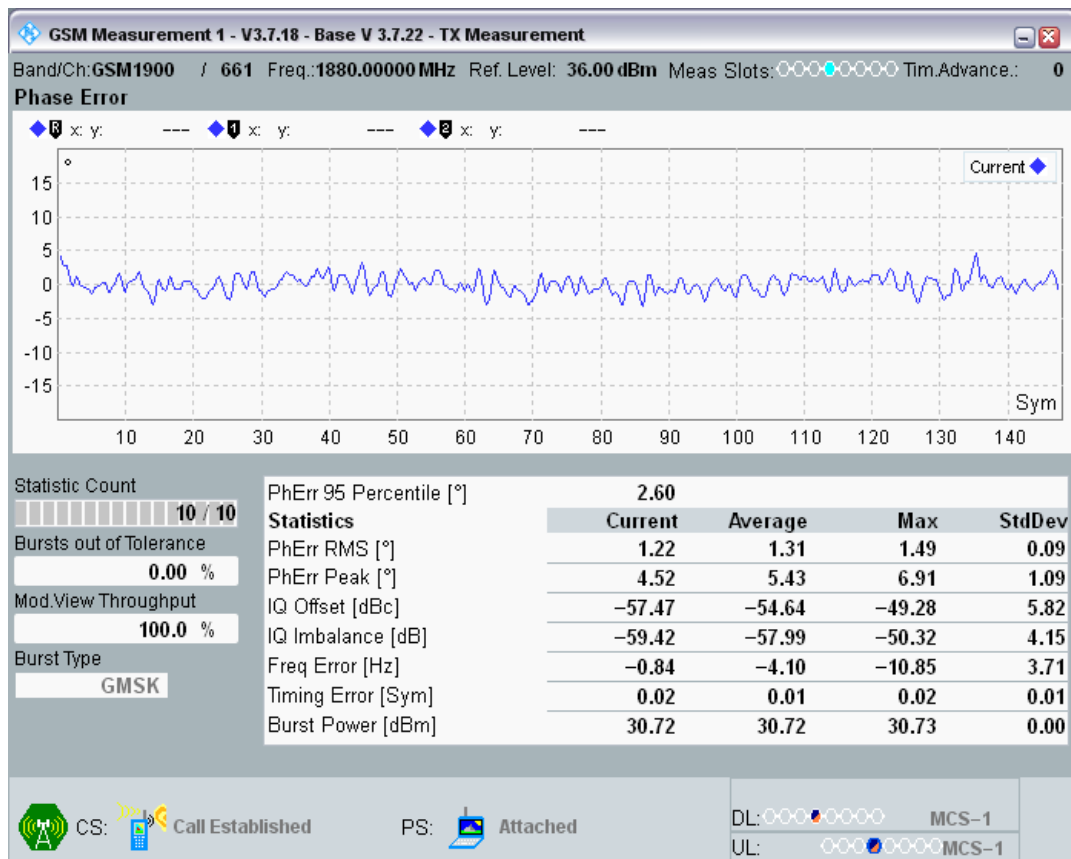


GSM1900 Channel=661 PCL=0 TU1_5 @15

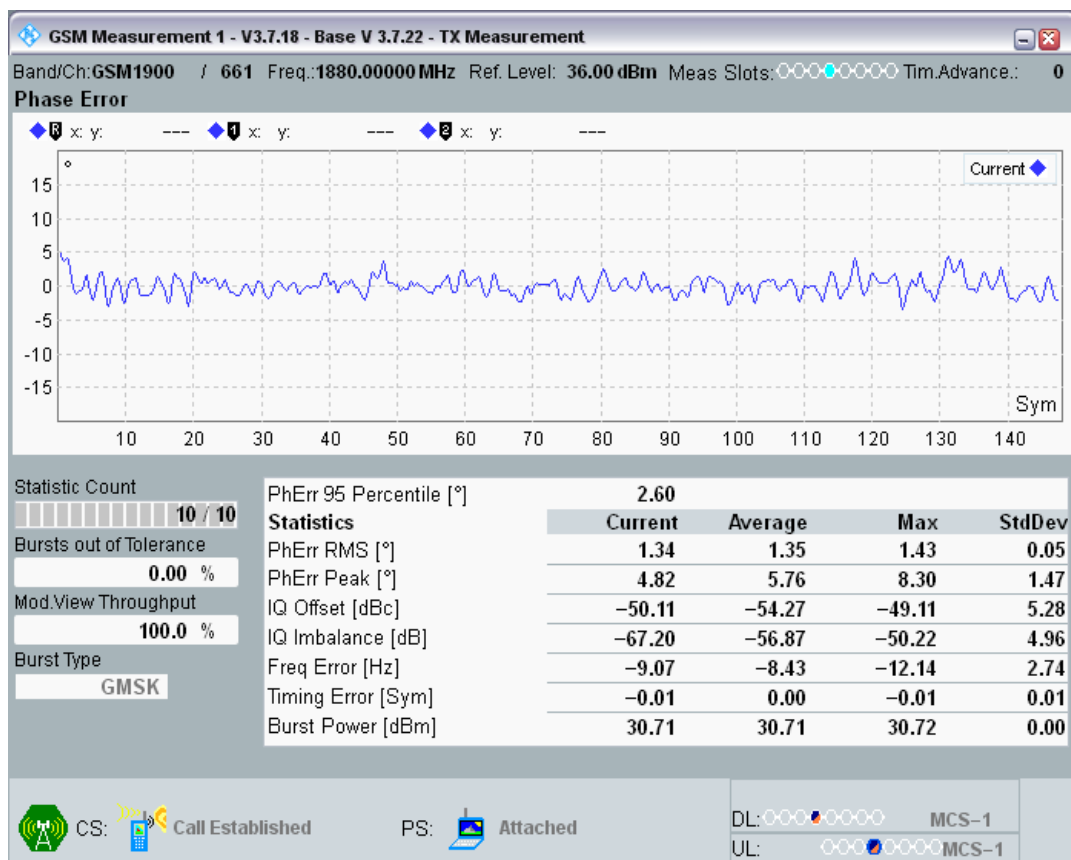


GSM1900 Channel=661 PCL=0 TU1_5 @17

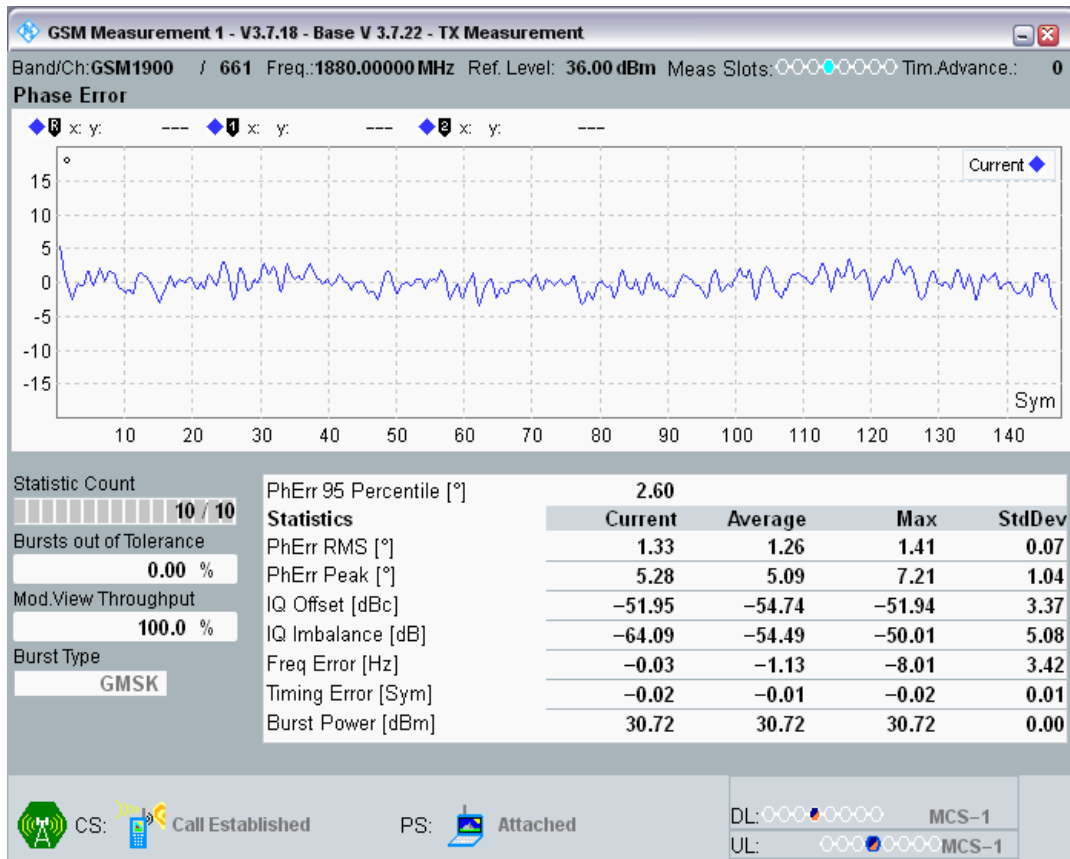


GSM1900 Channel=661 PCL=0 TU1_5 @16

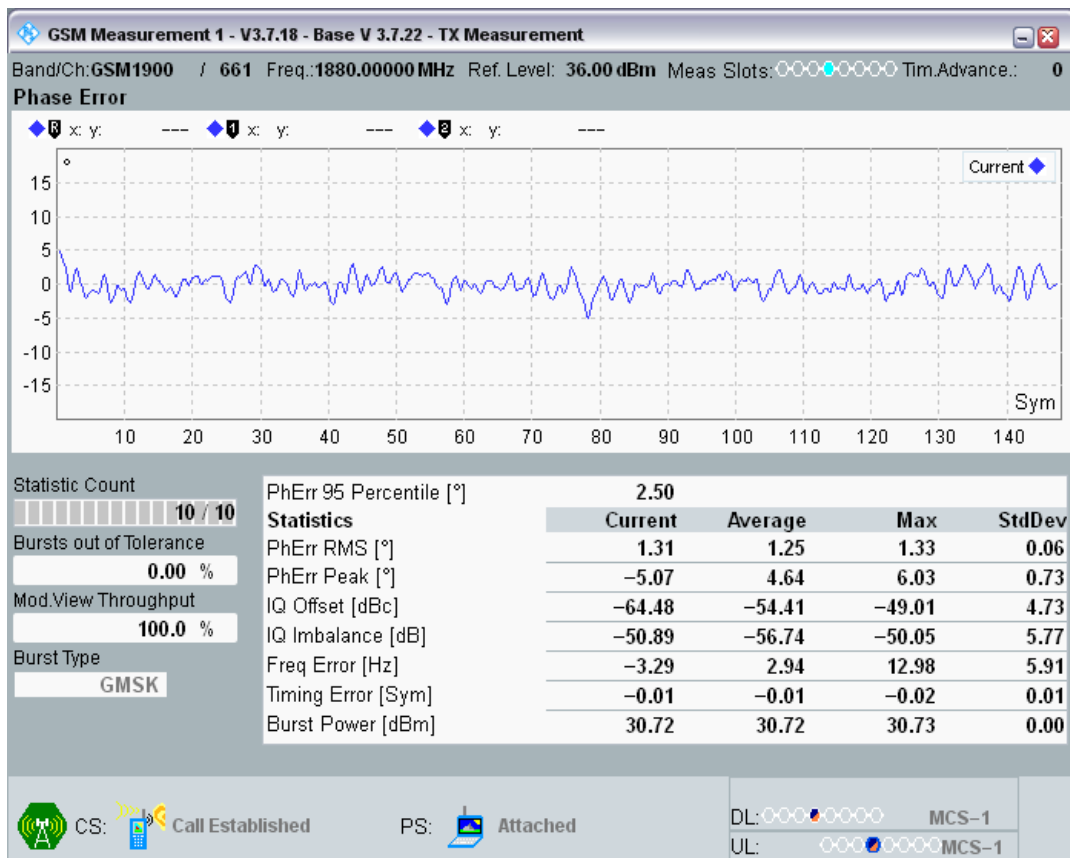


GSM1900 Channel=661 PCL=0 TU1_5 @18

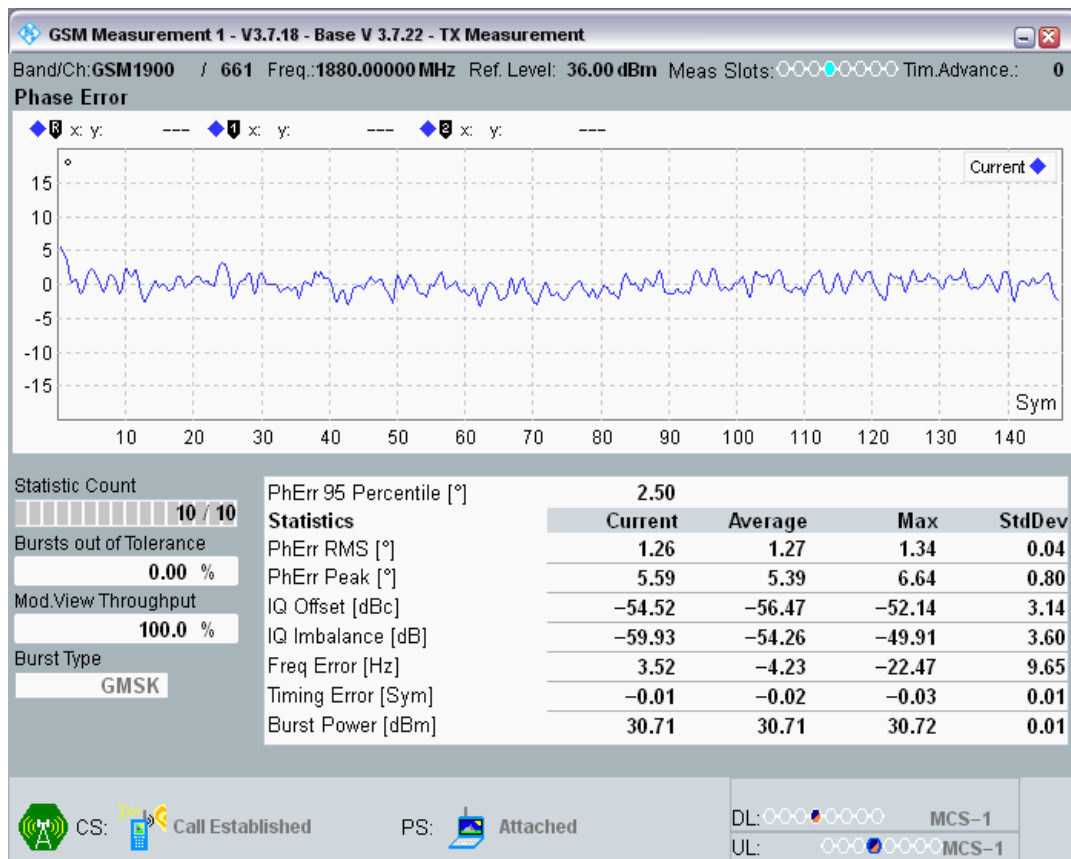


GSM1900 Channel=661 PCL=0 TU1_5 @19

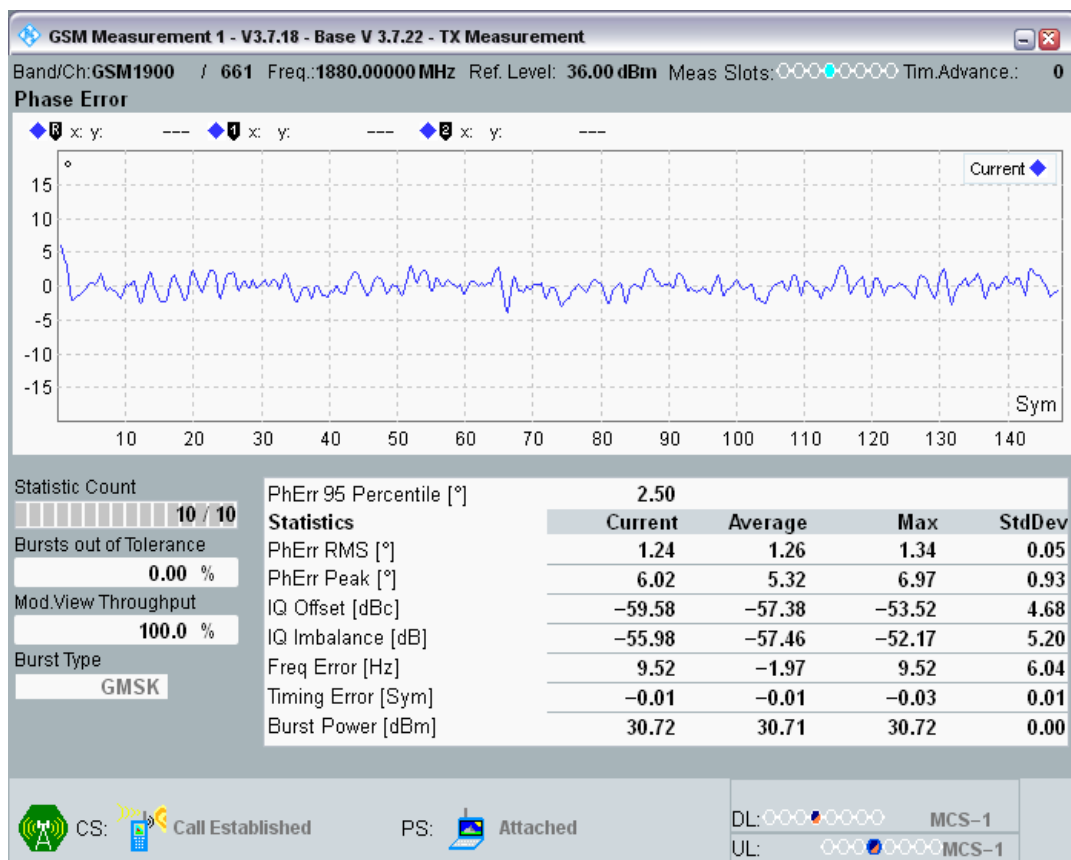


GSM1900 Channel=661 PCL=0 TU1_5 @20

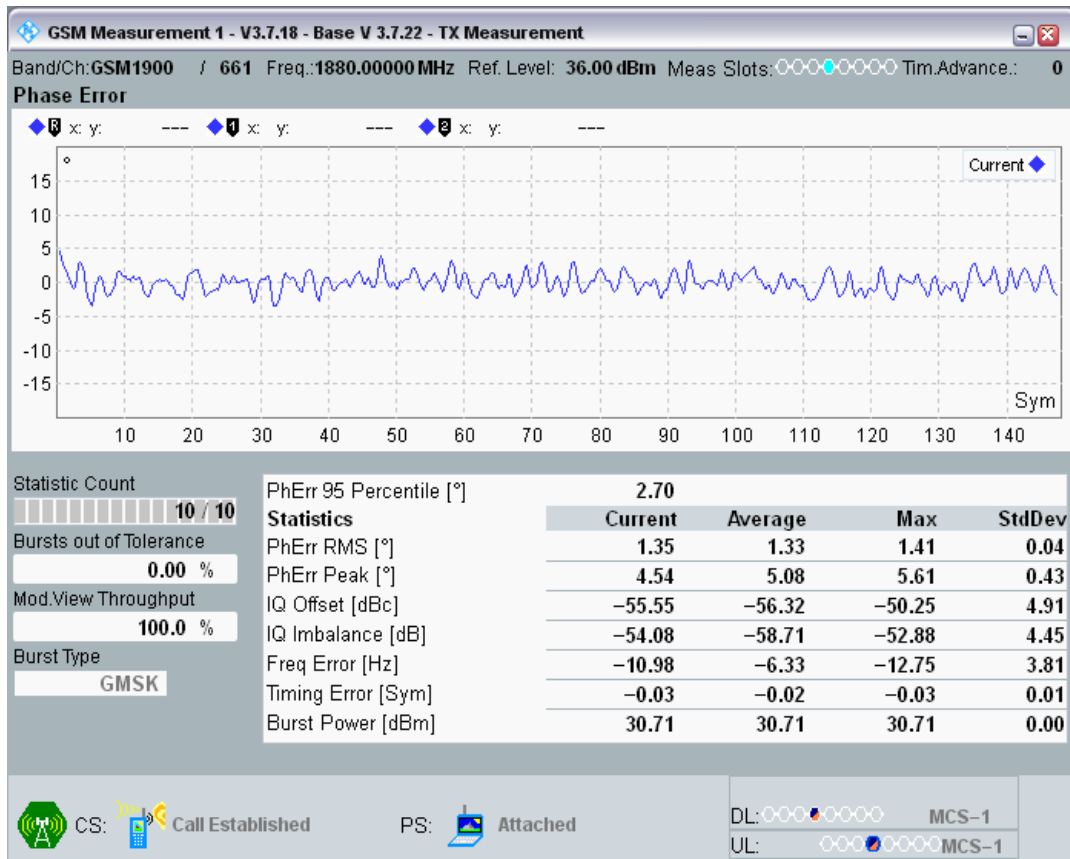


GSM850 Channel=190 PCL=5 RA250 @RACH

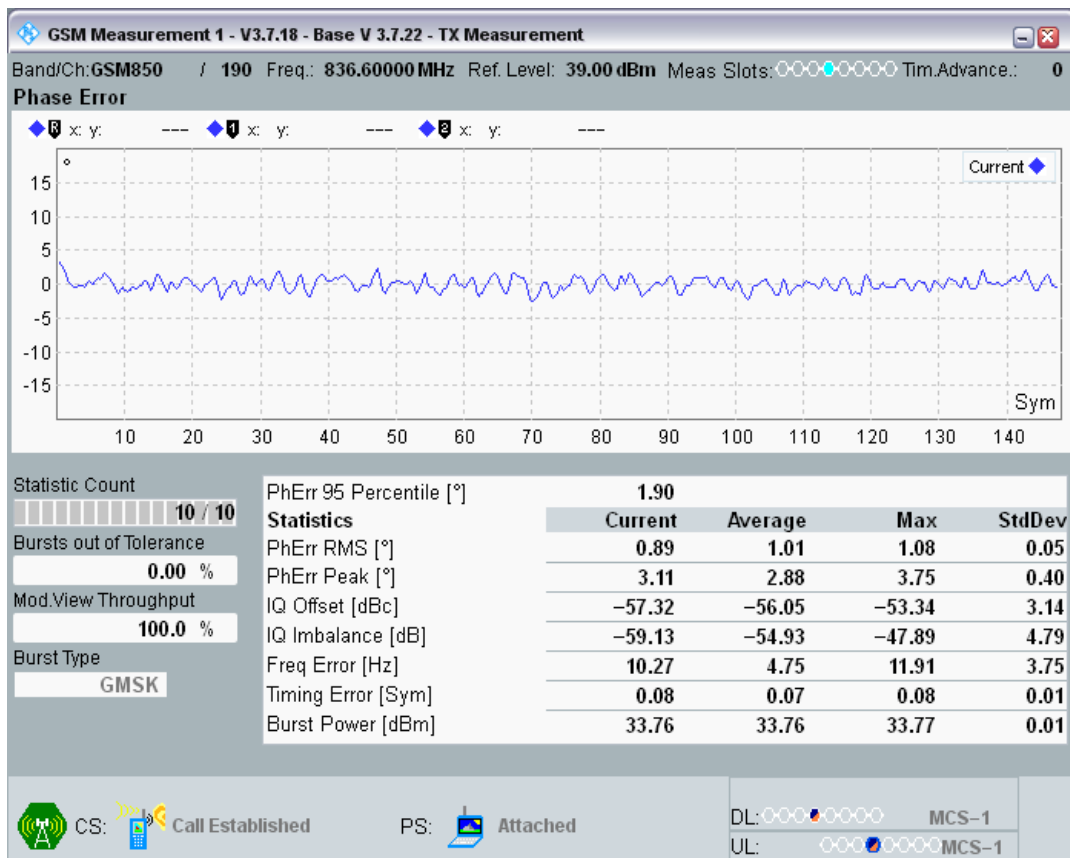


GSM850 Channel=190 PCL=5 RA250 @Sens2

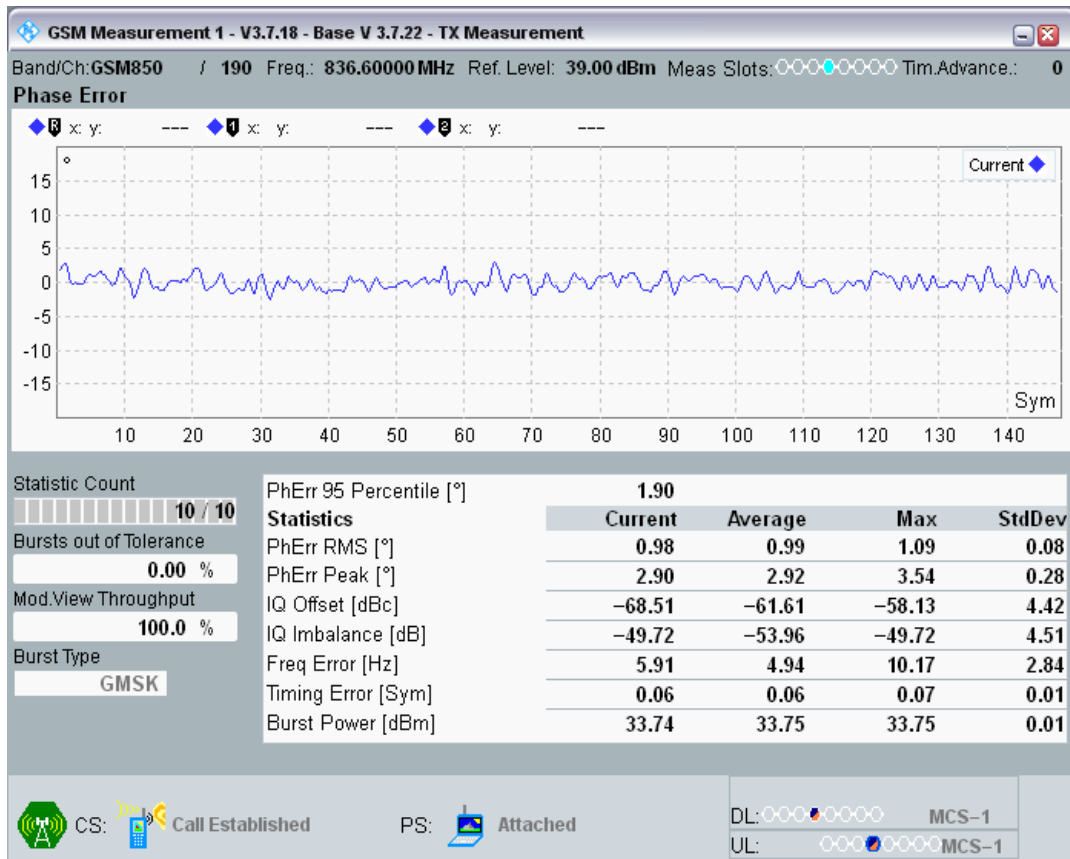


GSM850 Channel=190 PCL=5 RA250 @Sens1

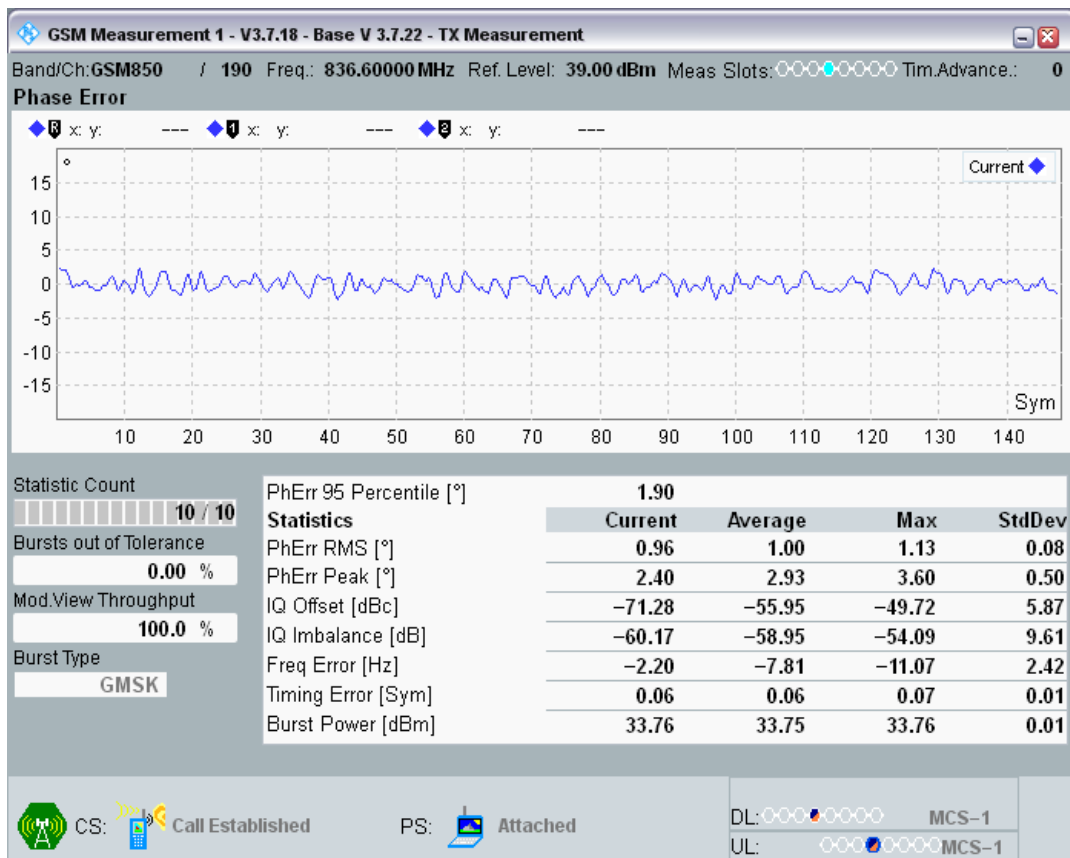


GSM850 Channel=190 PCL=5 RA250 @Sens3

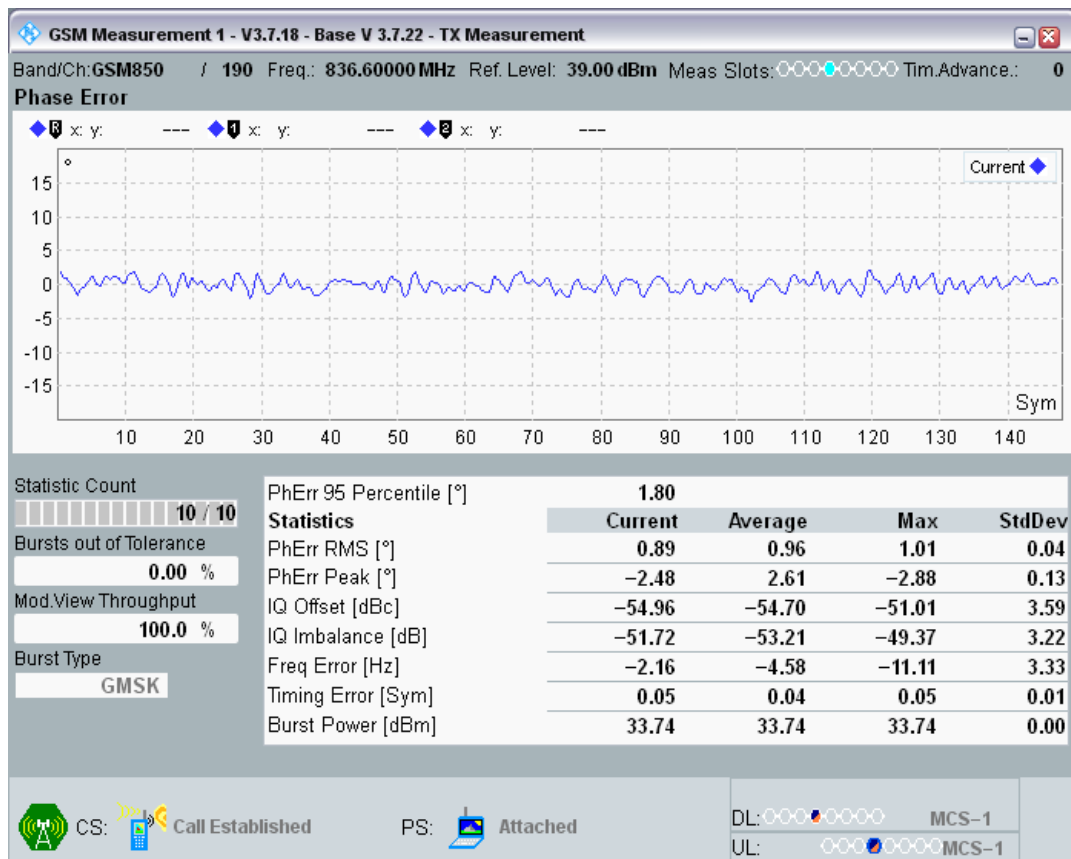


GSM850 Channel=190 PCL=5 RA250 @Sens5

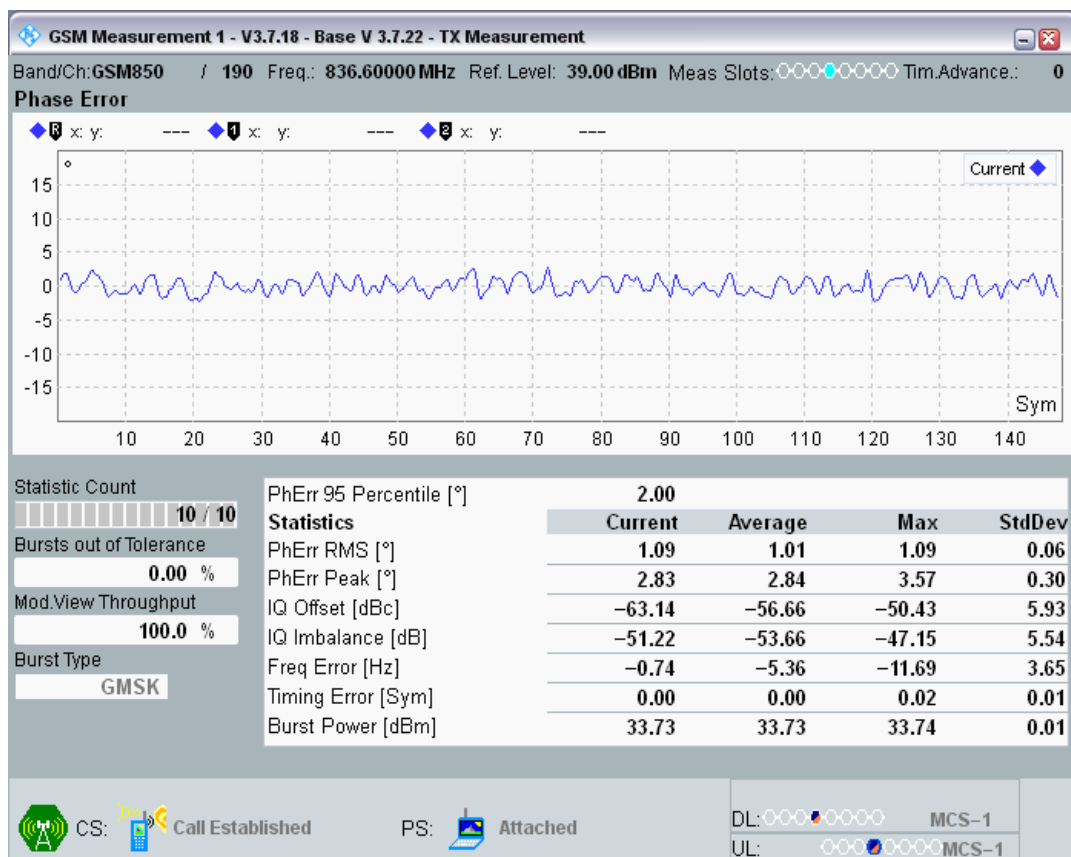


GSM850 Channel=190 PCL=5 RA250 @Sens4

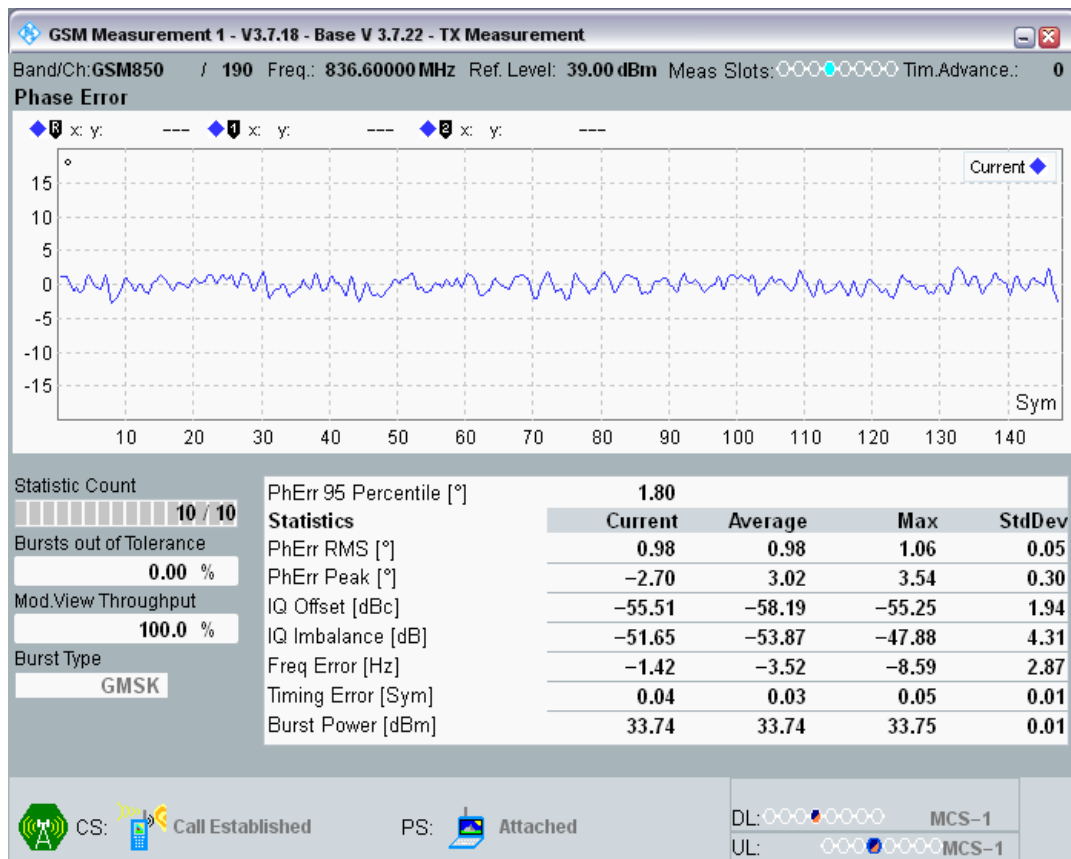


GSM850 Channel=190 PCL=5 HT100 @RACH

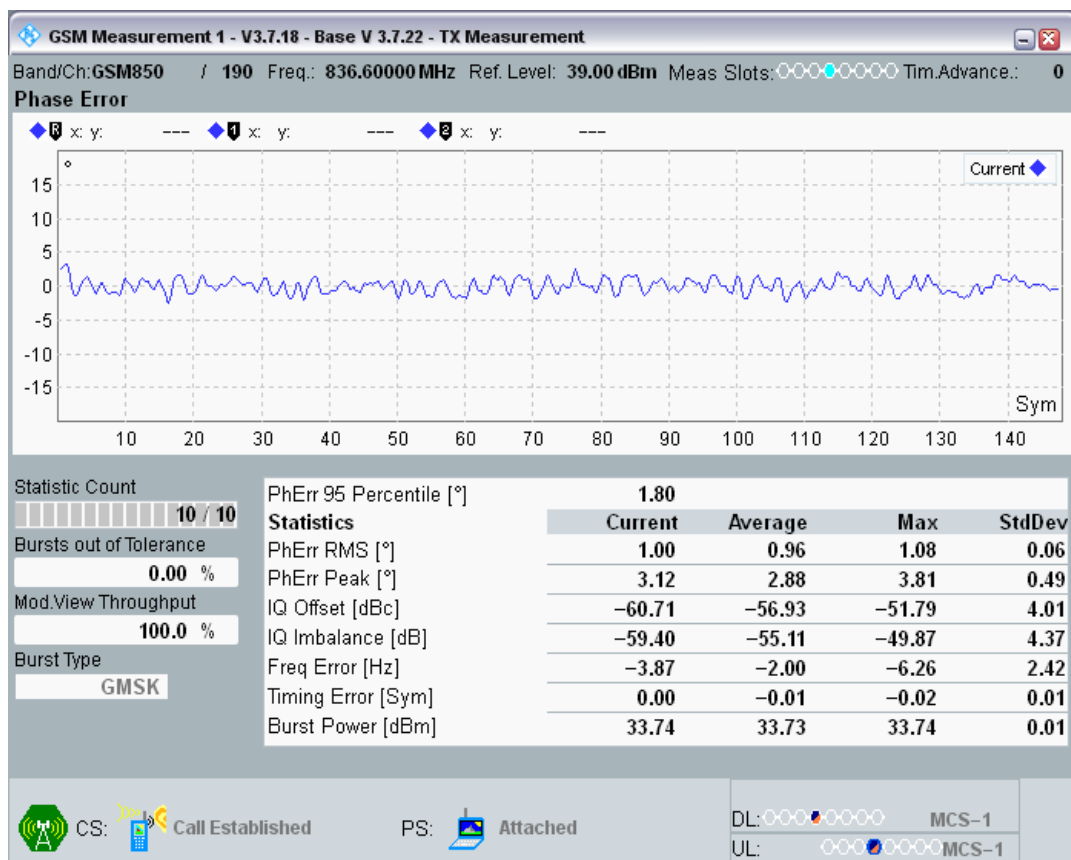


GSM850 Channel=190 PCL=5 HT100 @Sens1

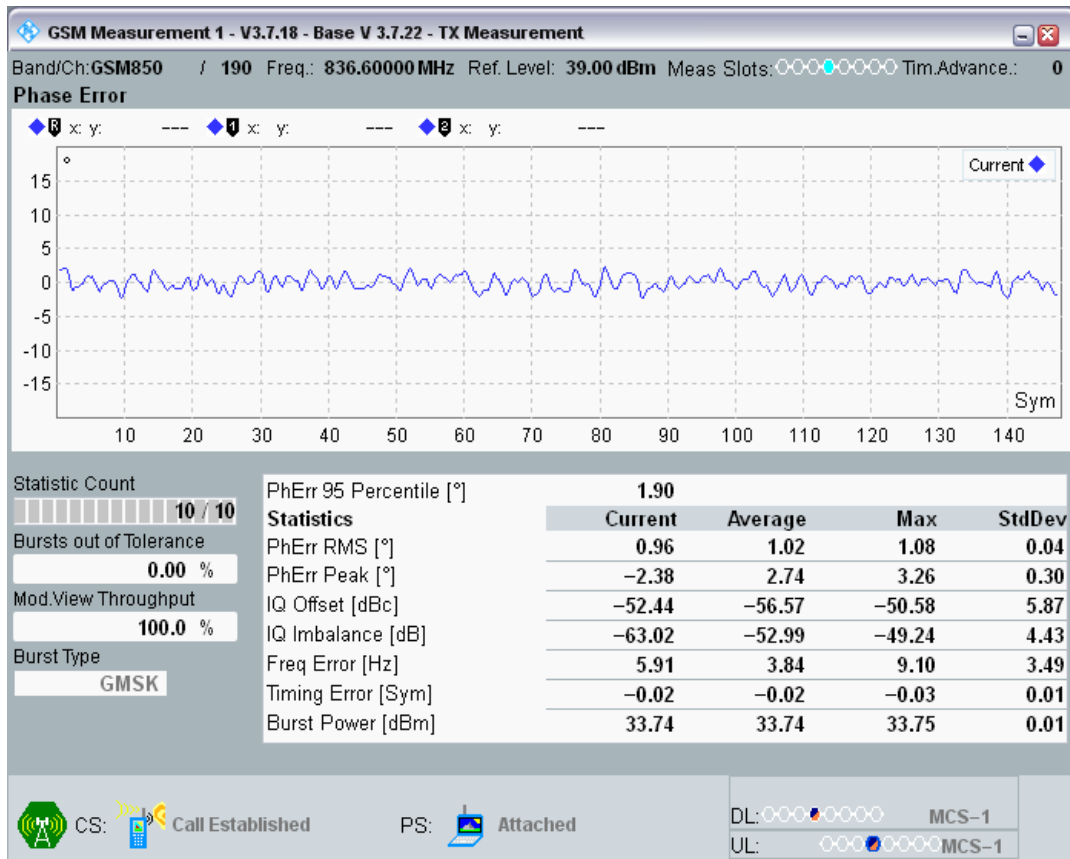


GSM850 Channel=190 PCL=5 HT100 @Sens3

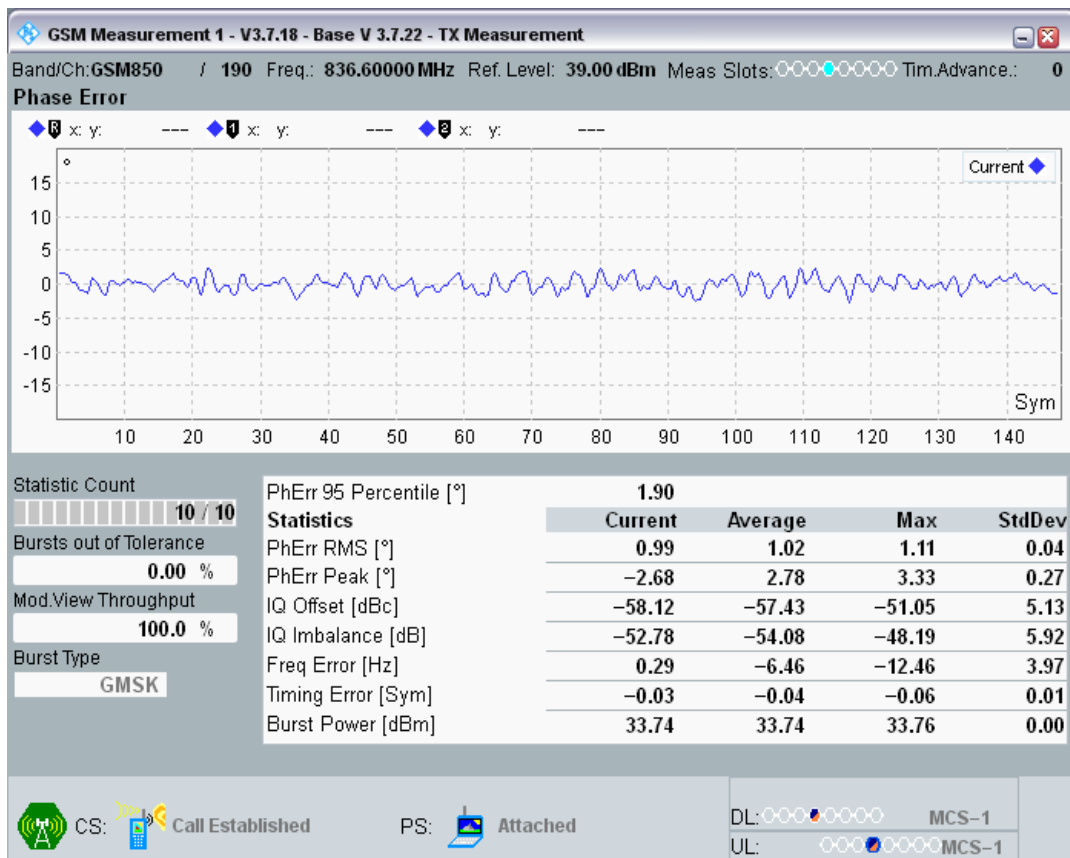


GSM850 Channel=190 PCL=5 HT100 @Sens2

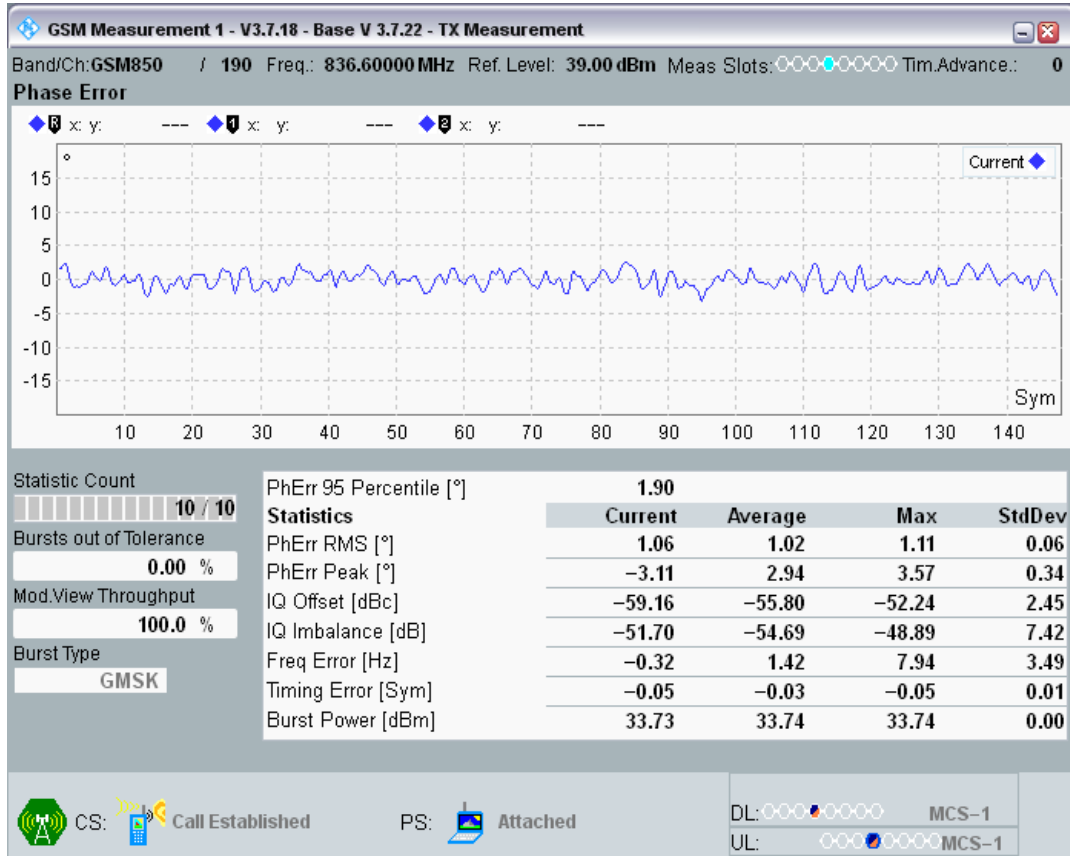


GSM850 Channel=190 PCL=5 HT100 @Sens5

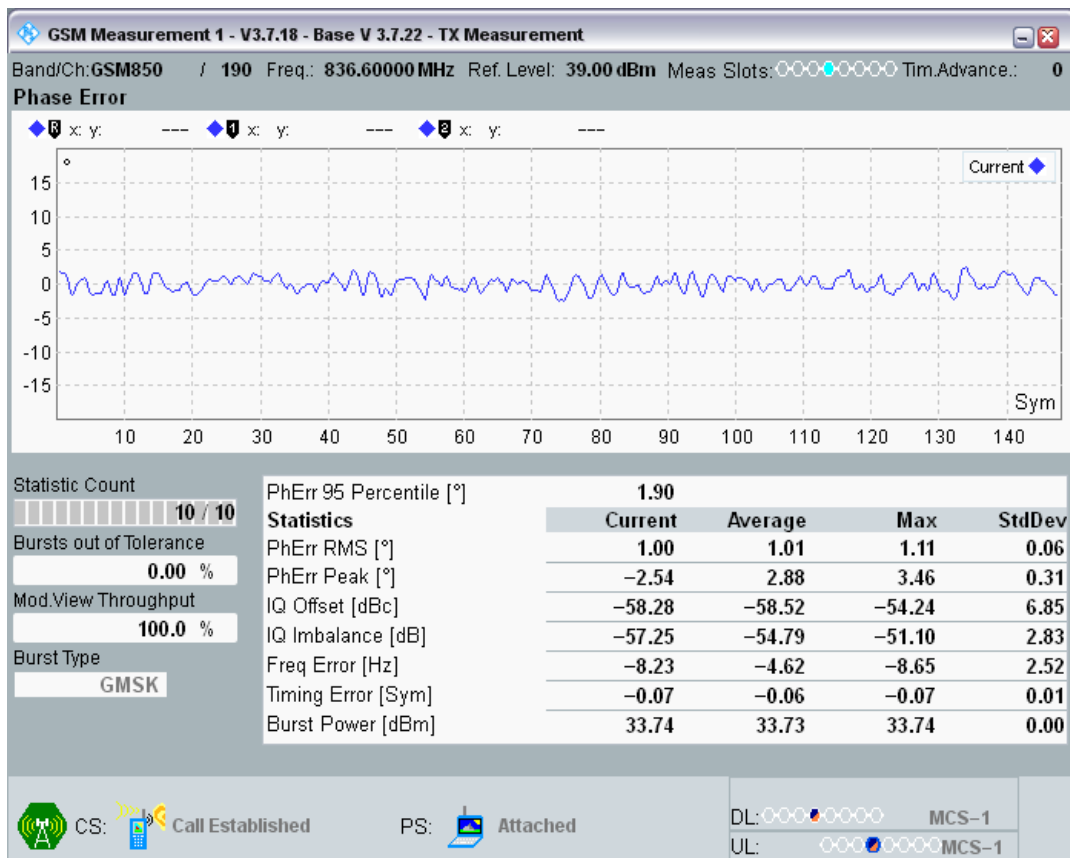


GSM850 Channel=190 PCL=5 HT100 @Sens4

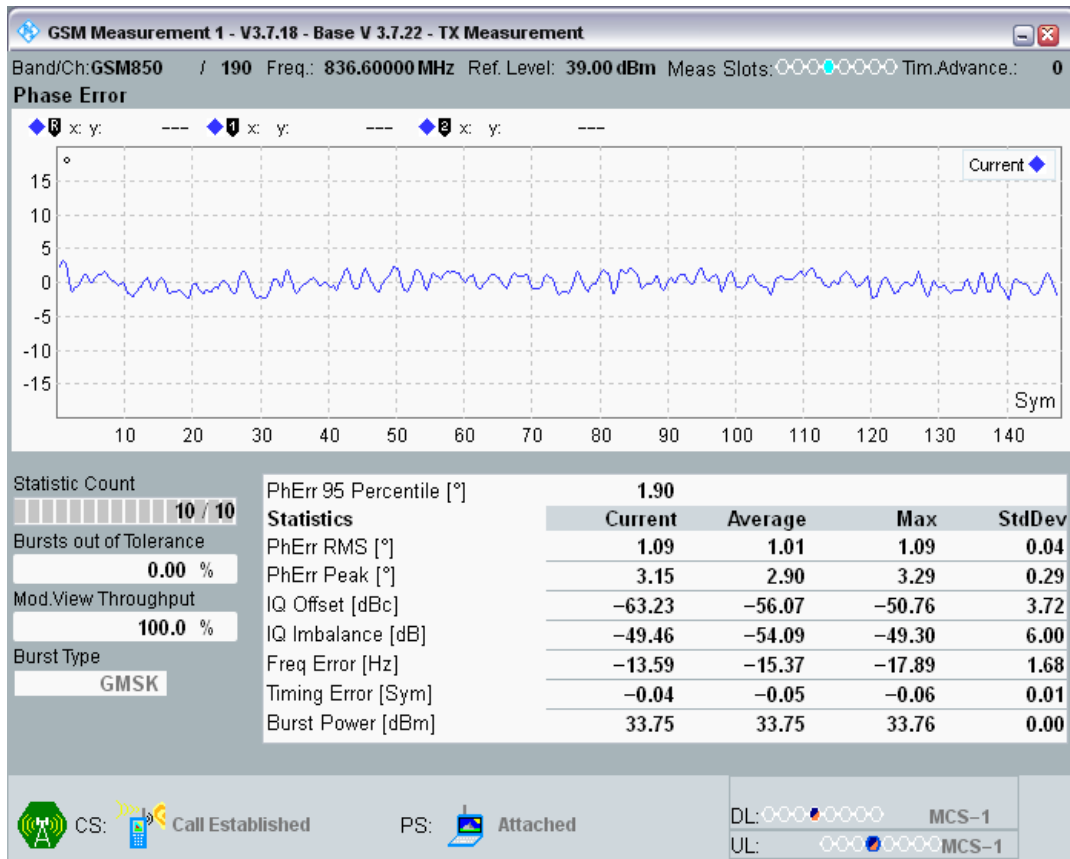


GSM850 Channel=190 PCL=5 TU50 @RACH

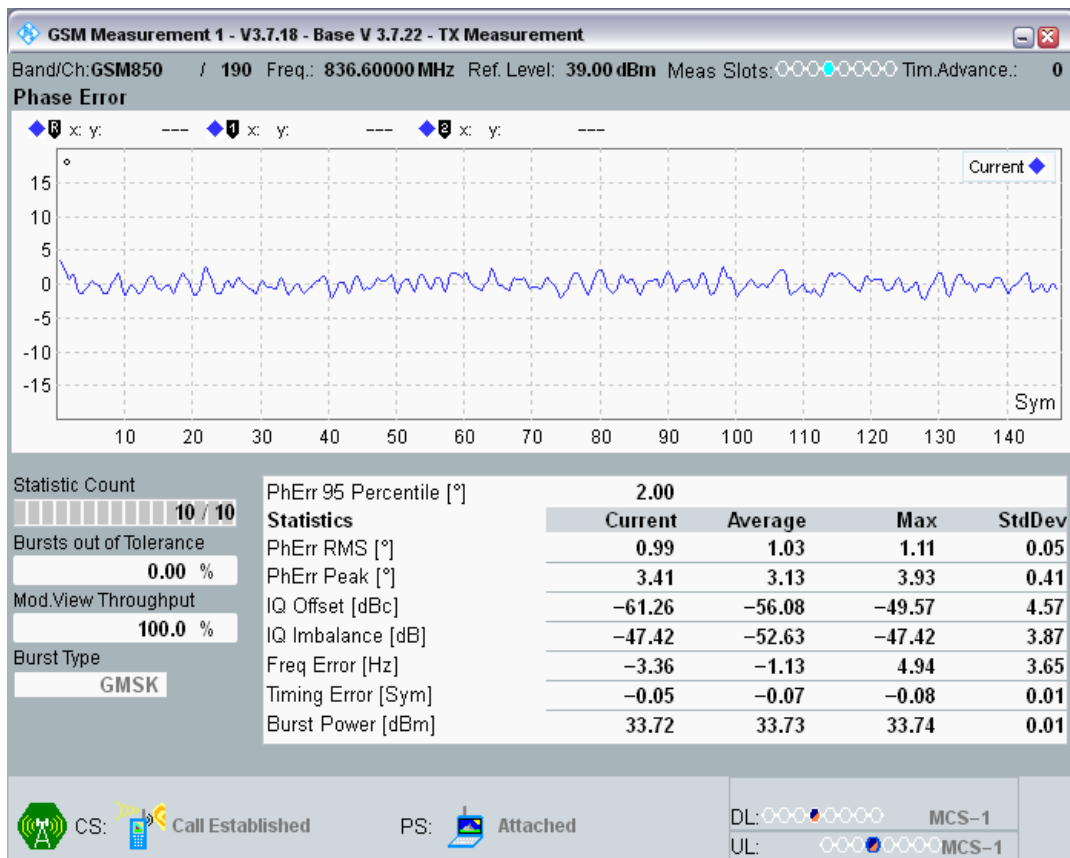


GSM850 Channel=190 PCL=5 TU50 @Sens1

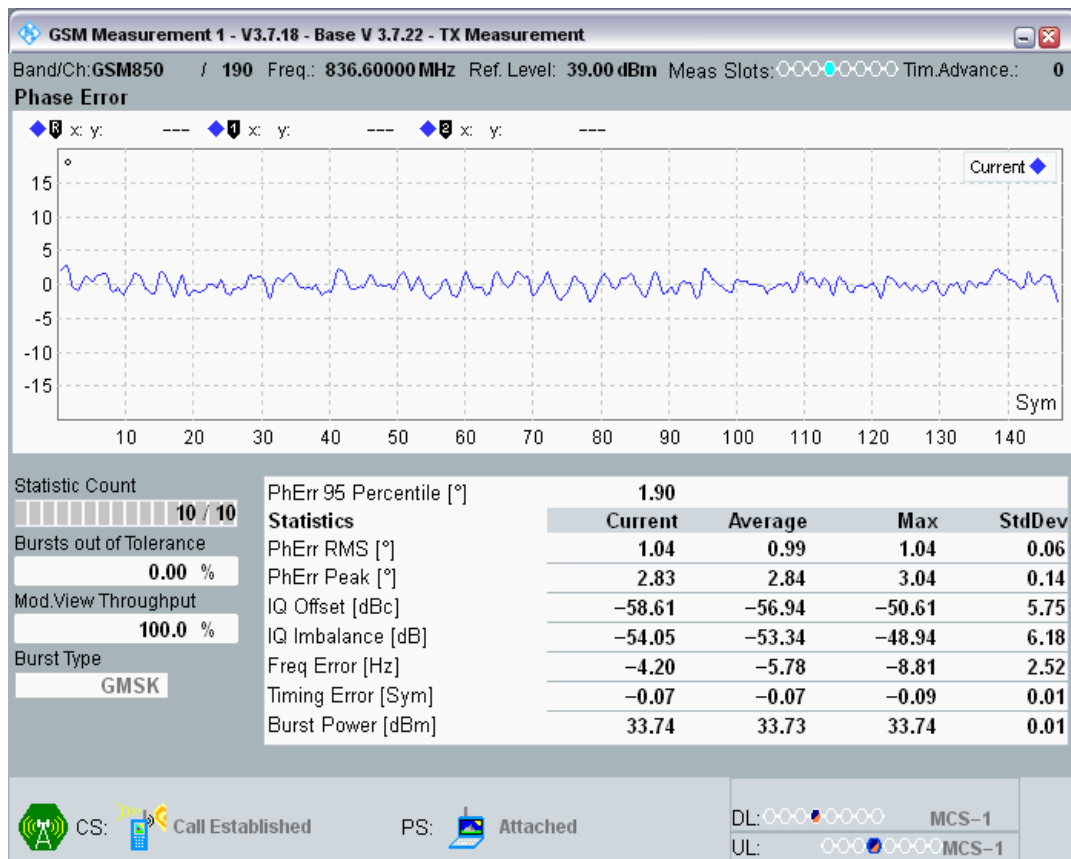


GSM850 Channel=190 PCL=5 TU50 @Sens2

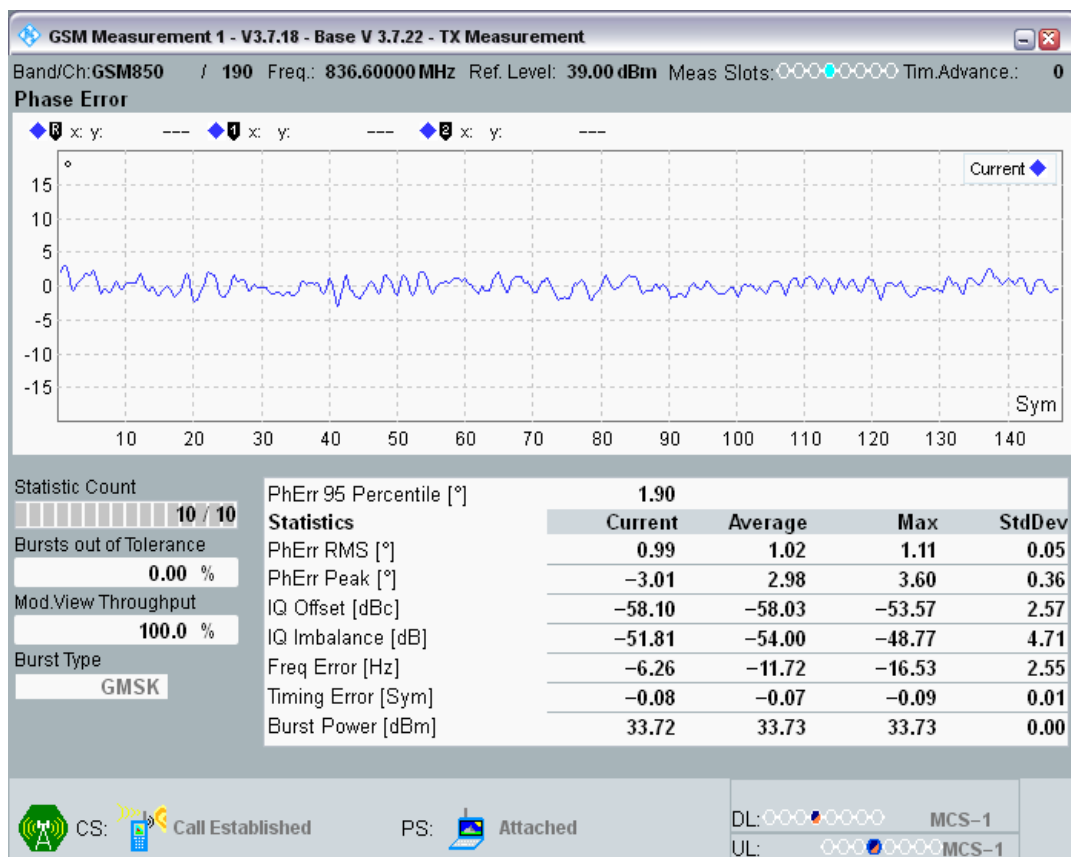


GSM850 Channel=190 PCL=5 TU50 @Sens3

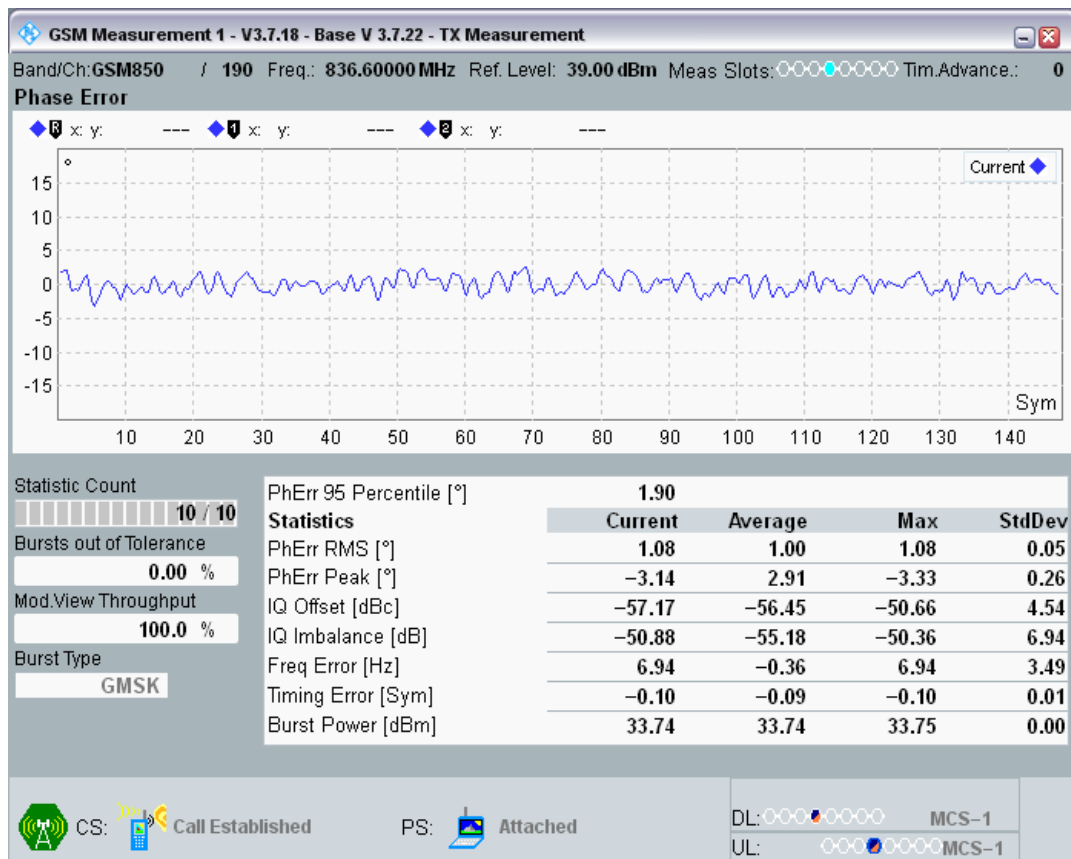


GSM850 Channel=190 PCL=5 TU50 @Sens5

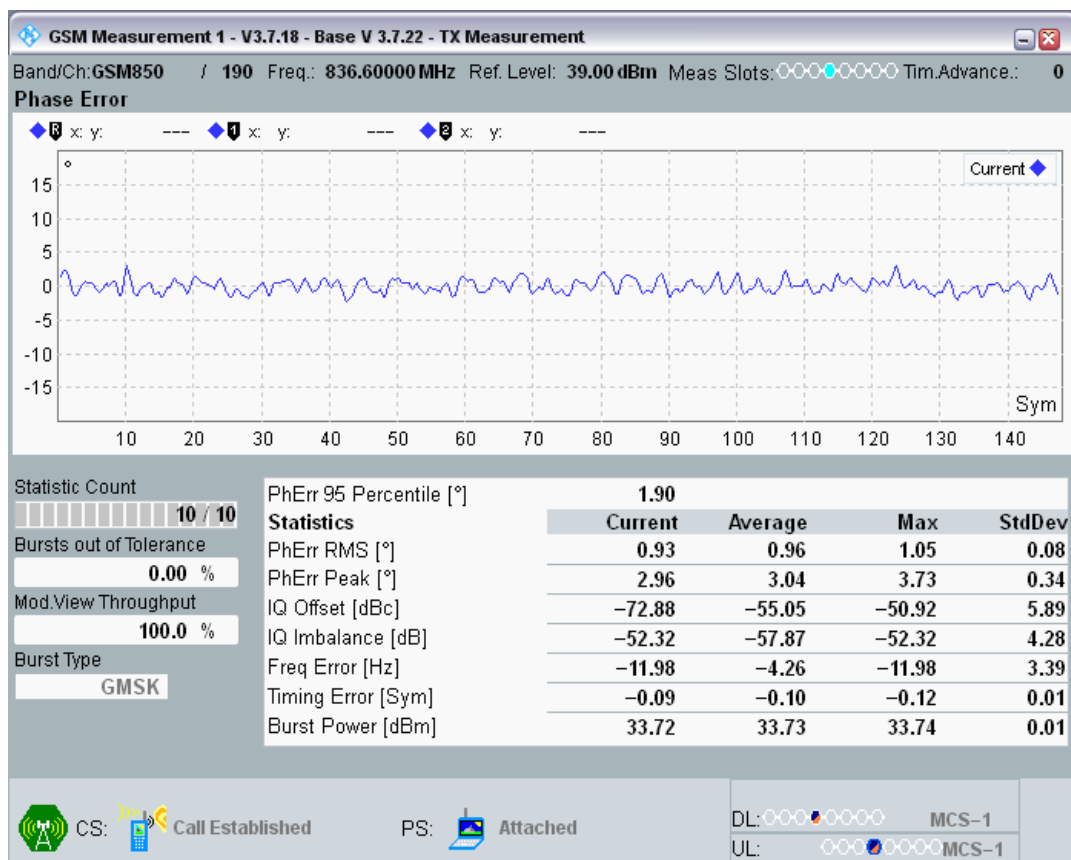


GSM850 Channel=190 PCL=5 TU50 @Sens4

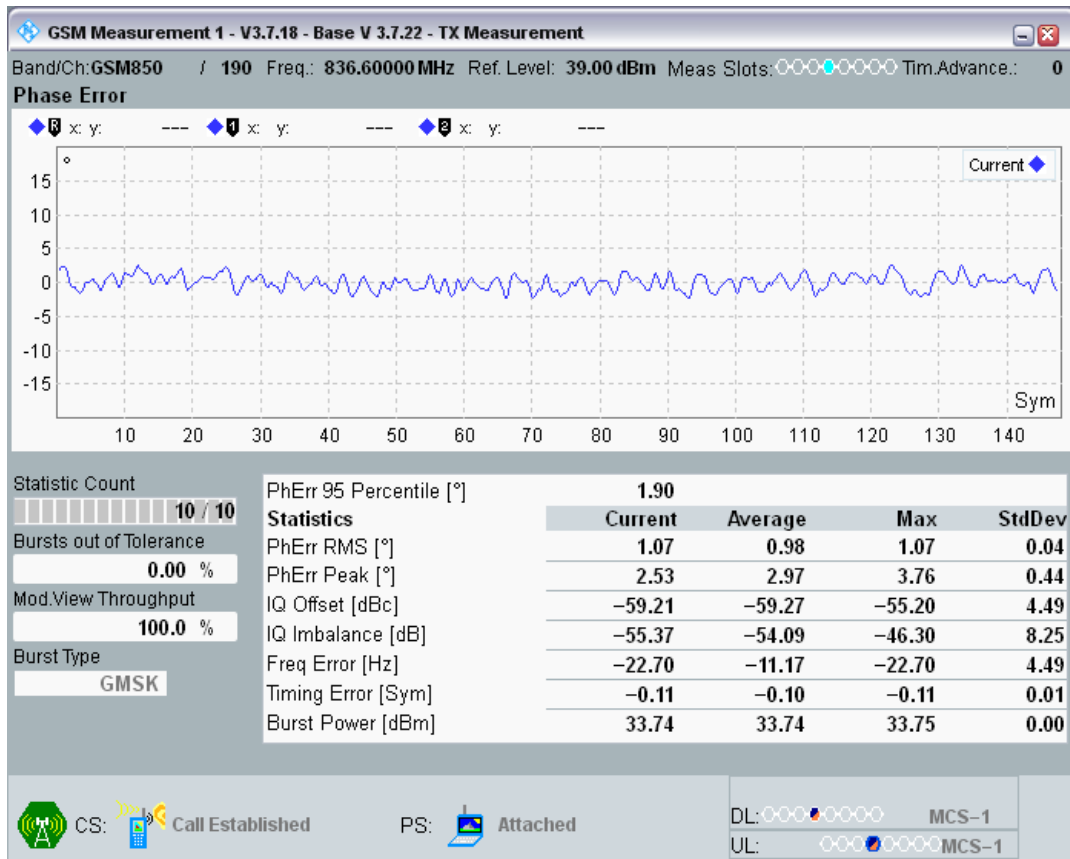


GSM850 Channel=190 PCL=5 TU3 @RACH

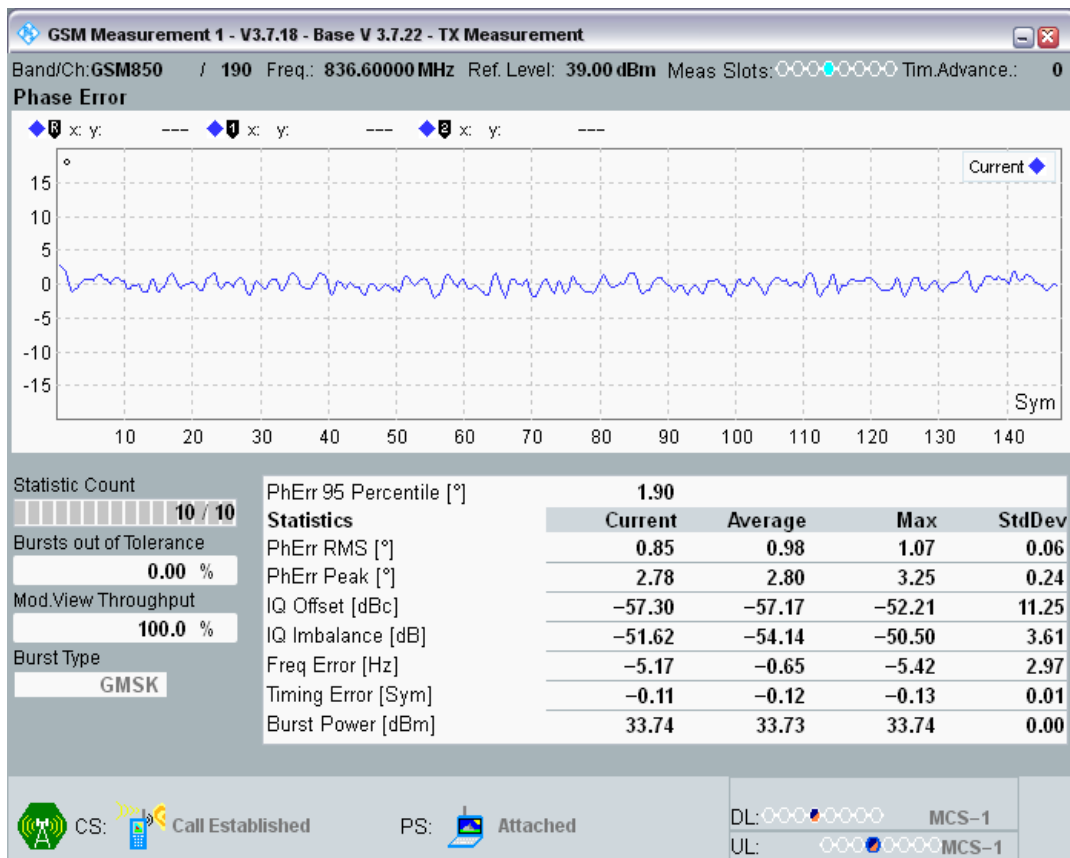


GSM850 Channel=190 PCL=5 TU3 @2

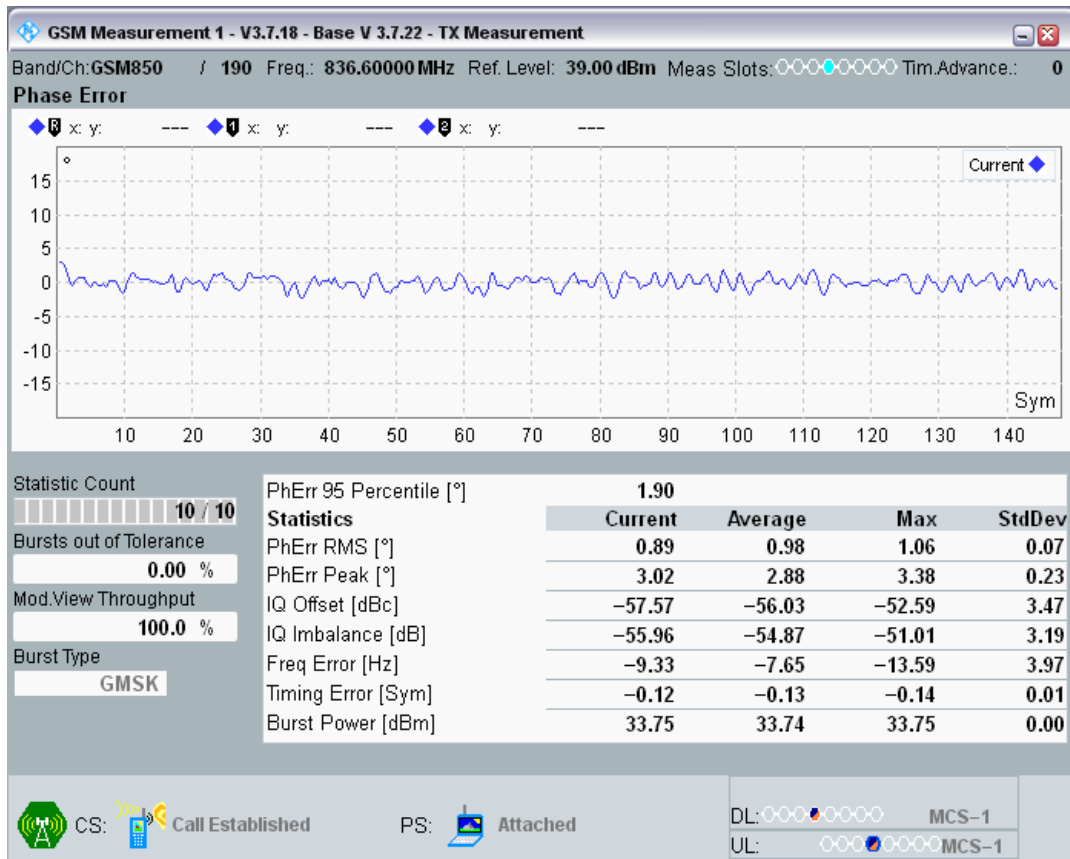


GSM850 Channel=190 PCL=5 TU3 @1

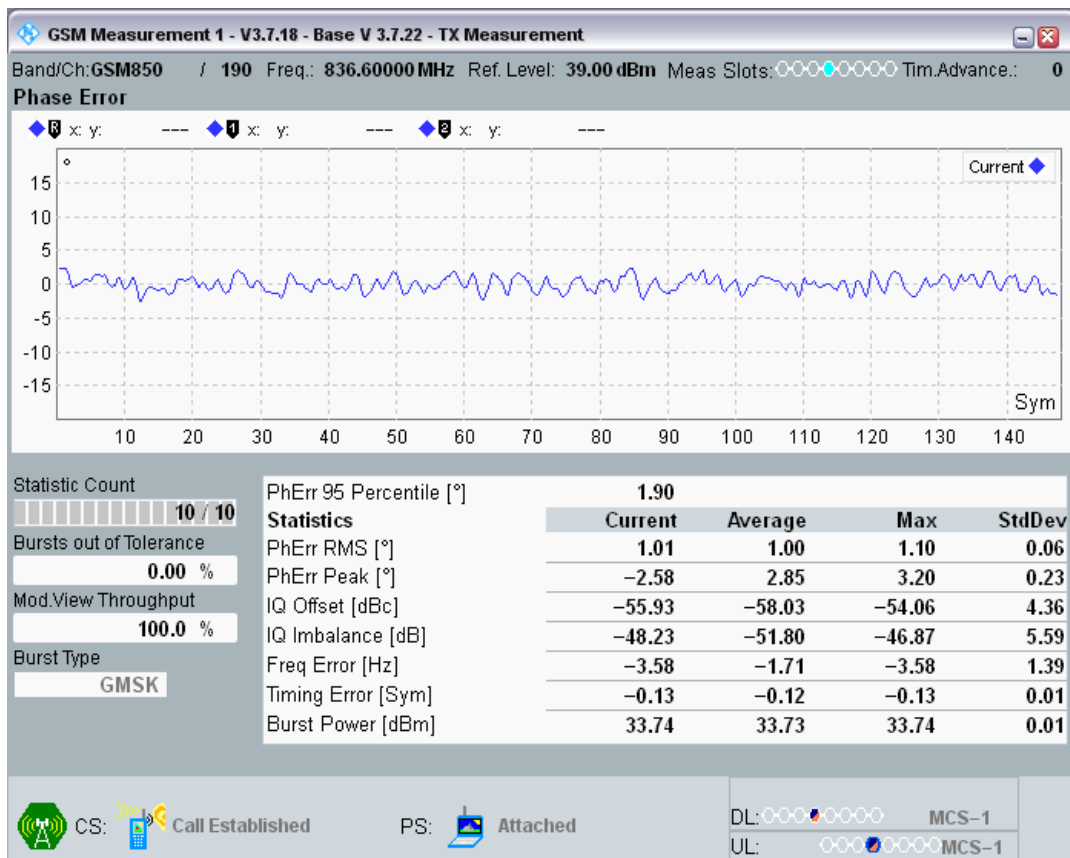


GSM850 Channel=190 PCL=5 TU3 @3

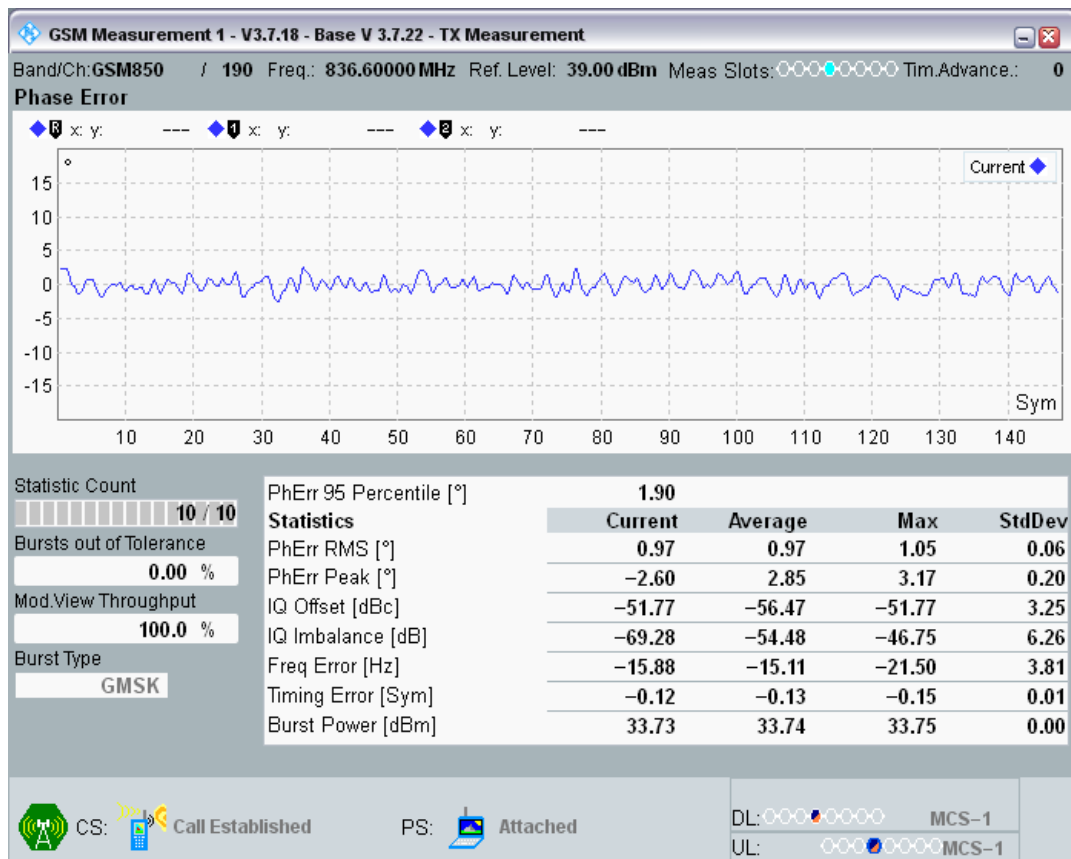


GSM850 Channel=190 PCL=5 TU3 @5

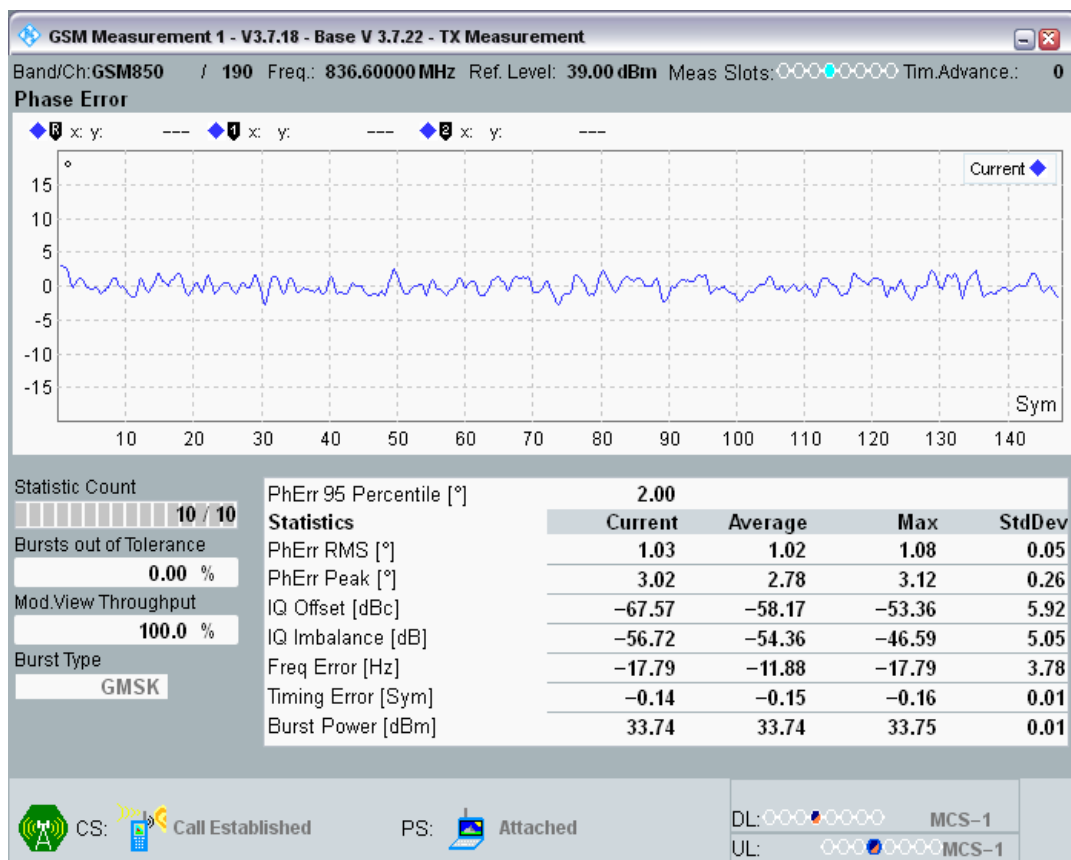


GSM850 Channel=190 PCL=5 TU3 @4

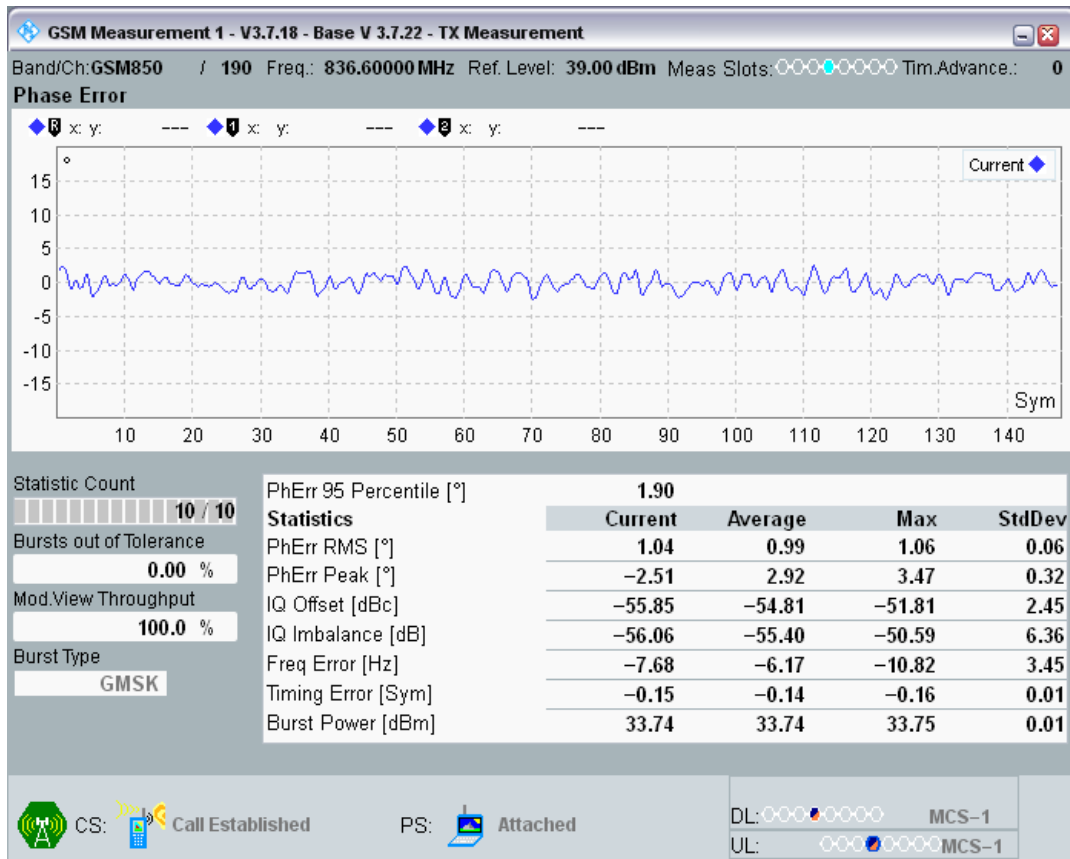


GSM850 Channel=190 PCL=5 TU3 @6

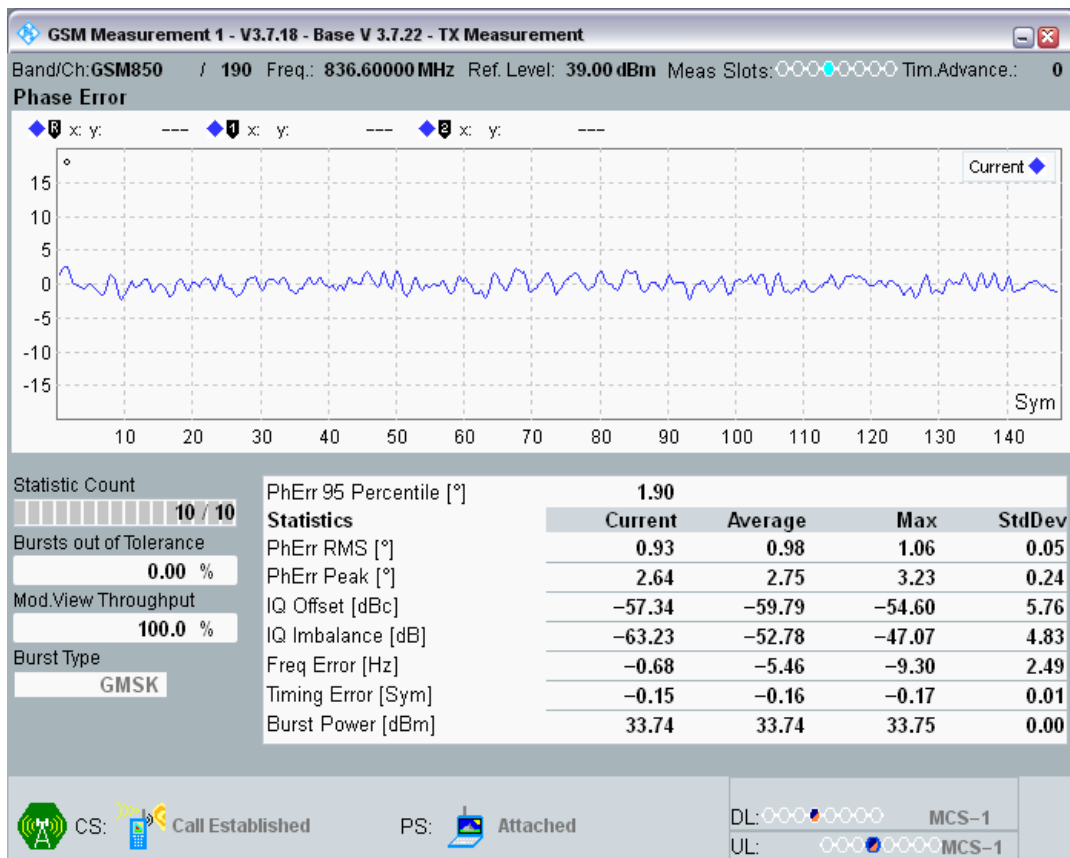


GSM850 Channel=190 PCL=5 TU3 @8

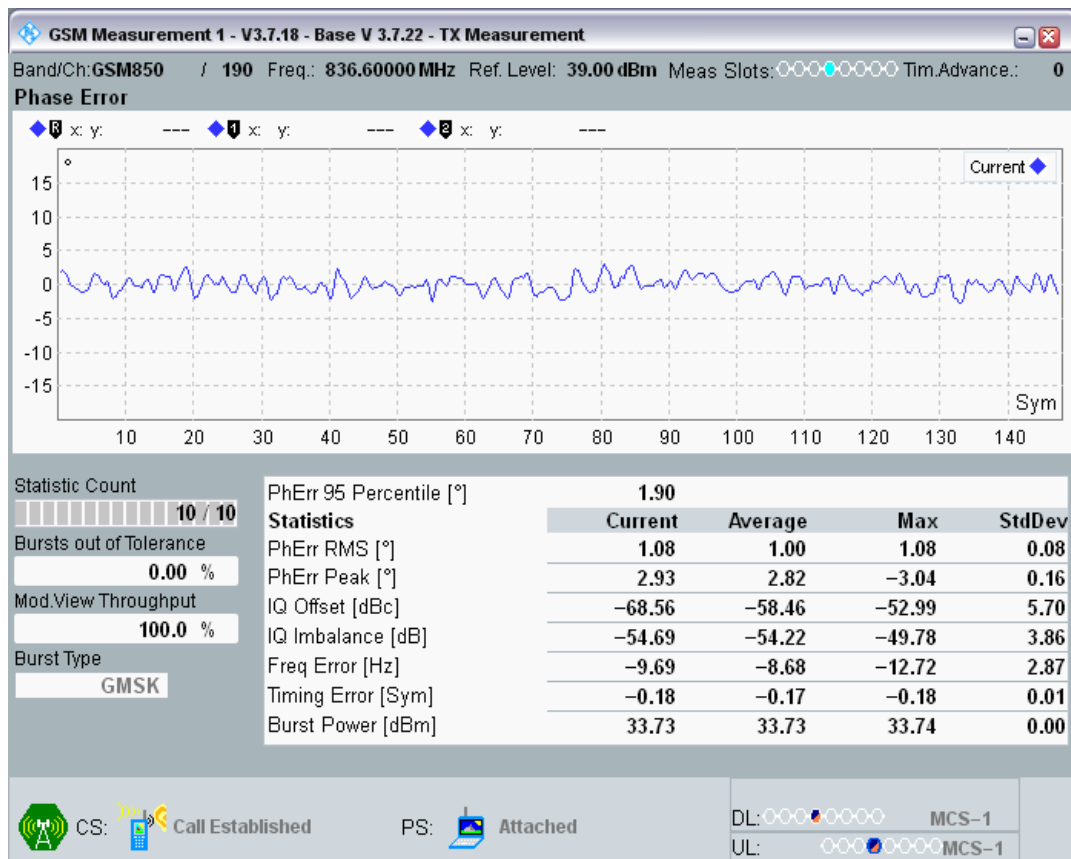


GSM850 Channel=190 PCL=5 TU3 @7

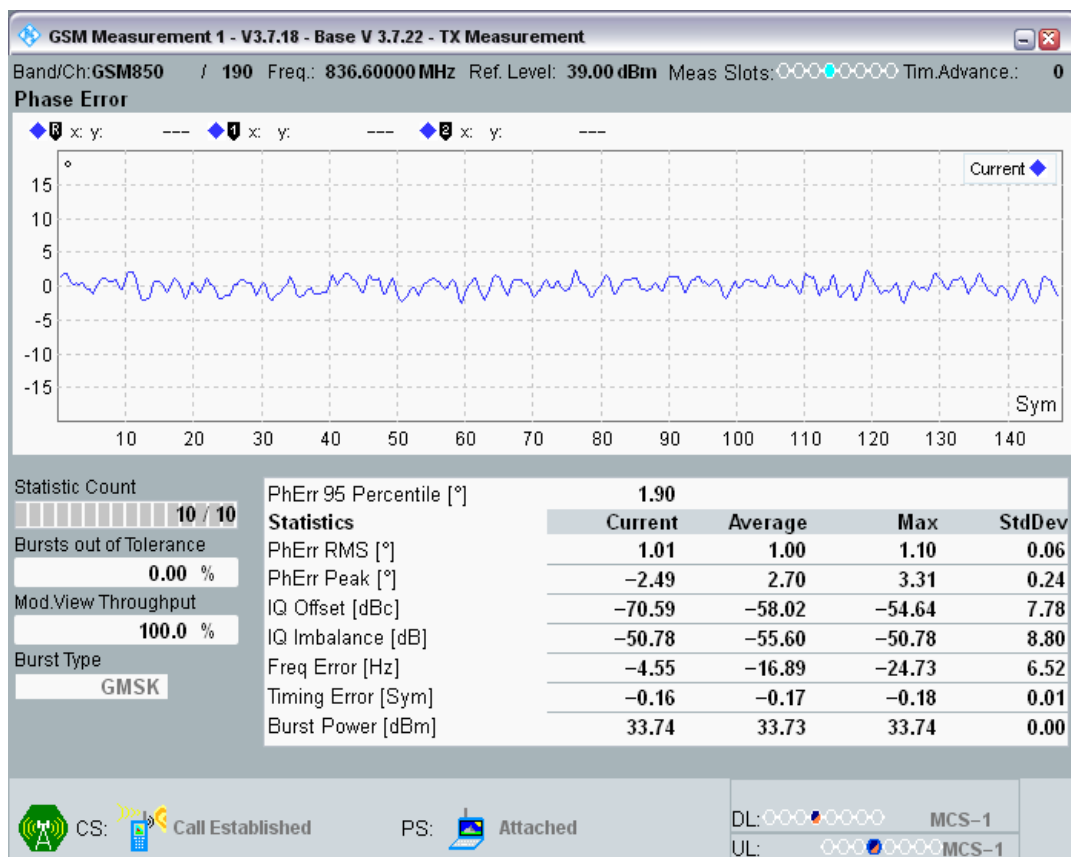


GSM850 Channel=190 PCL=5 TU3 @9

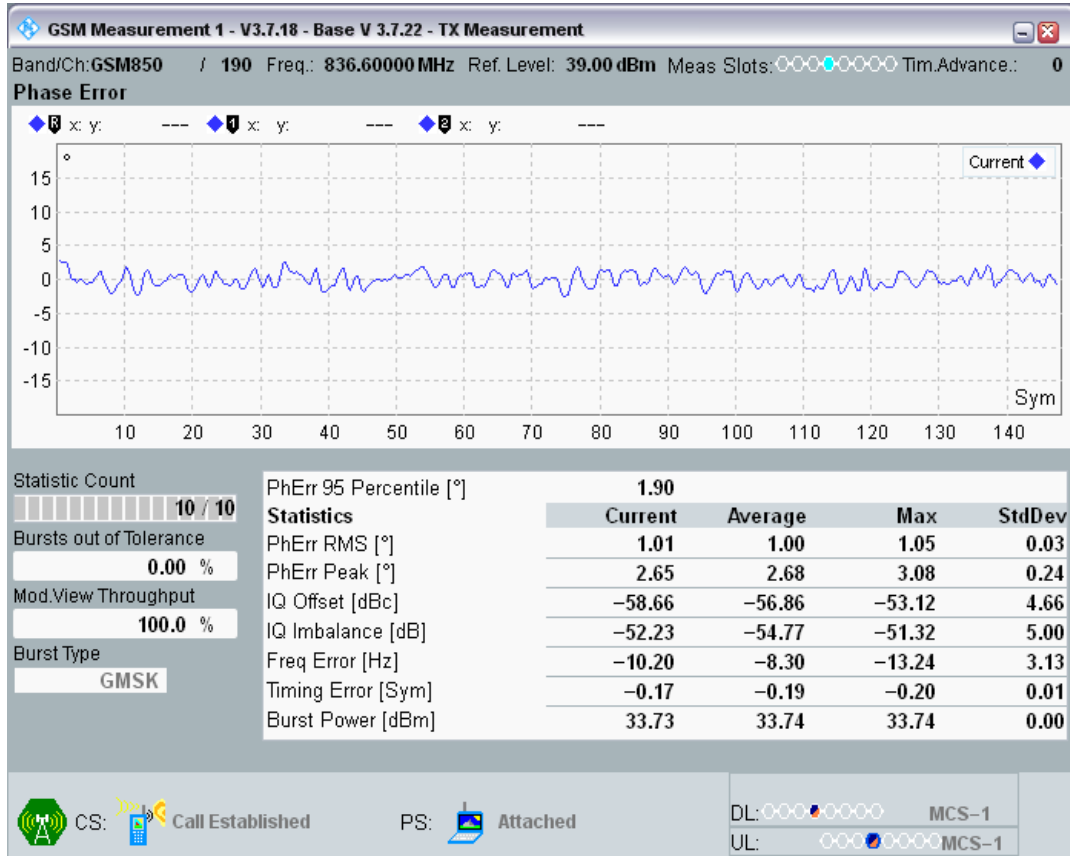


GSM850 Channel=190 PCL=5 TU3 @11

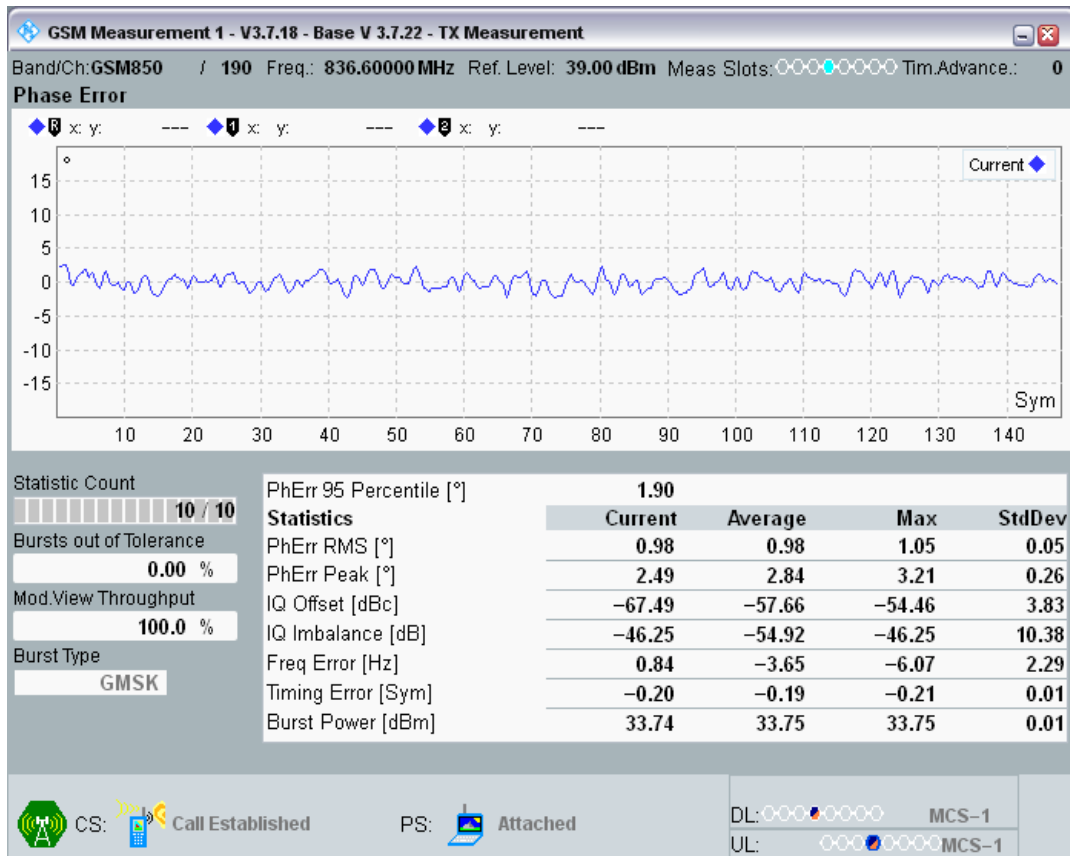


GSM850 Channel=190 PCL=5 TU3 @10

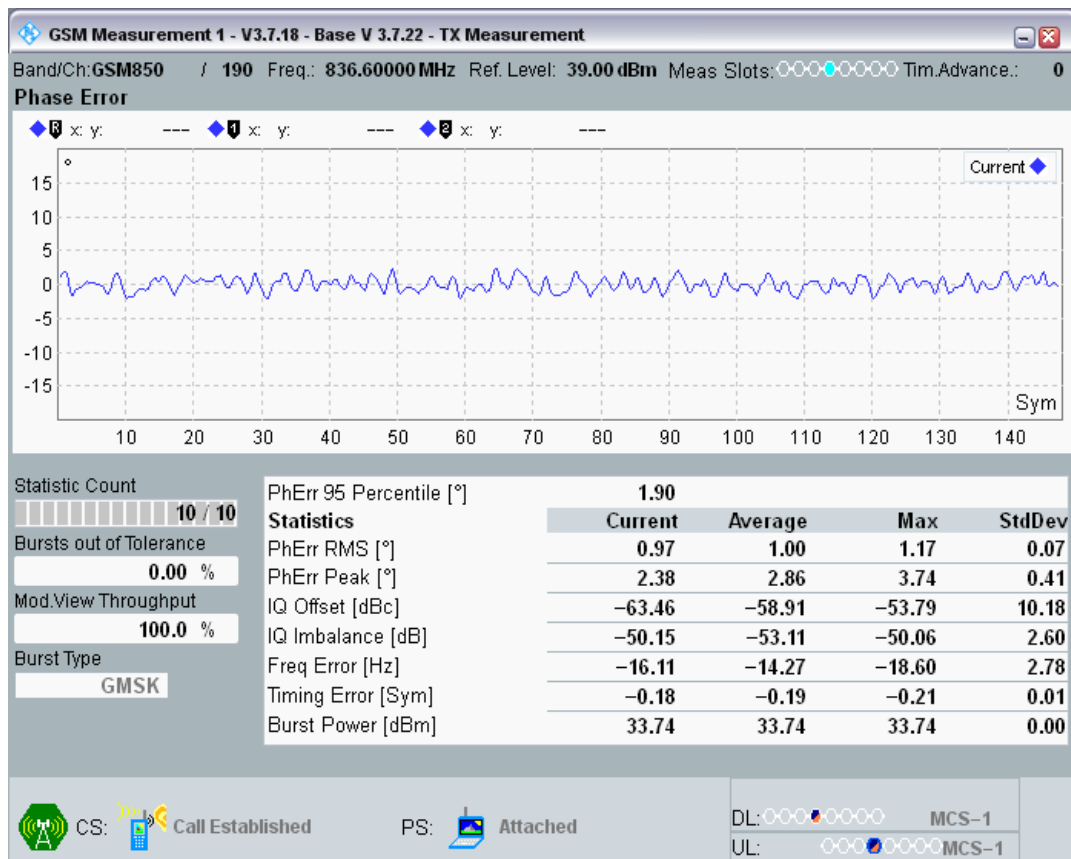


GSM850 Channel=190 PCL=5 TU3 @12

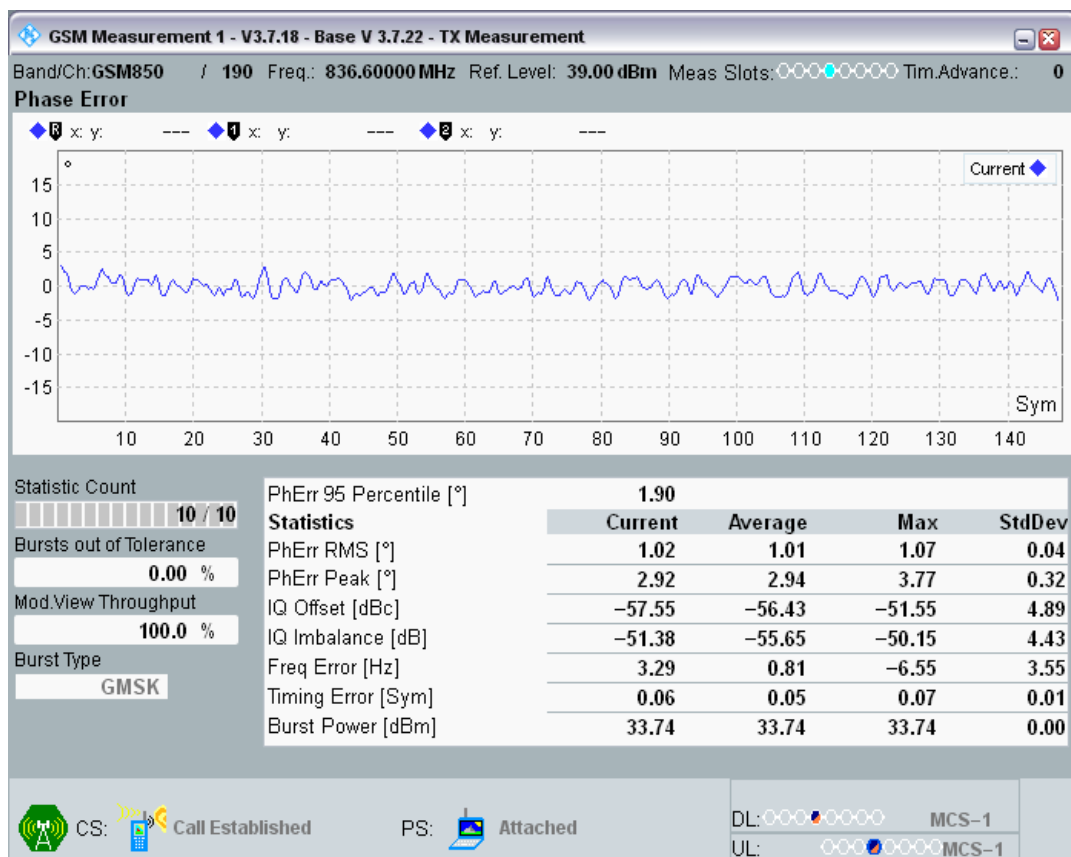


GSM850 Channel=190 PCL=5 TU3 @13

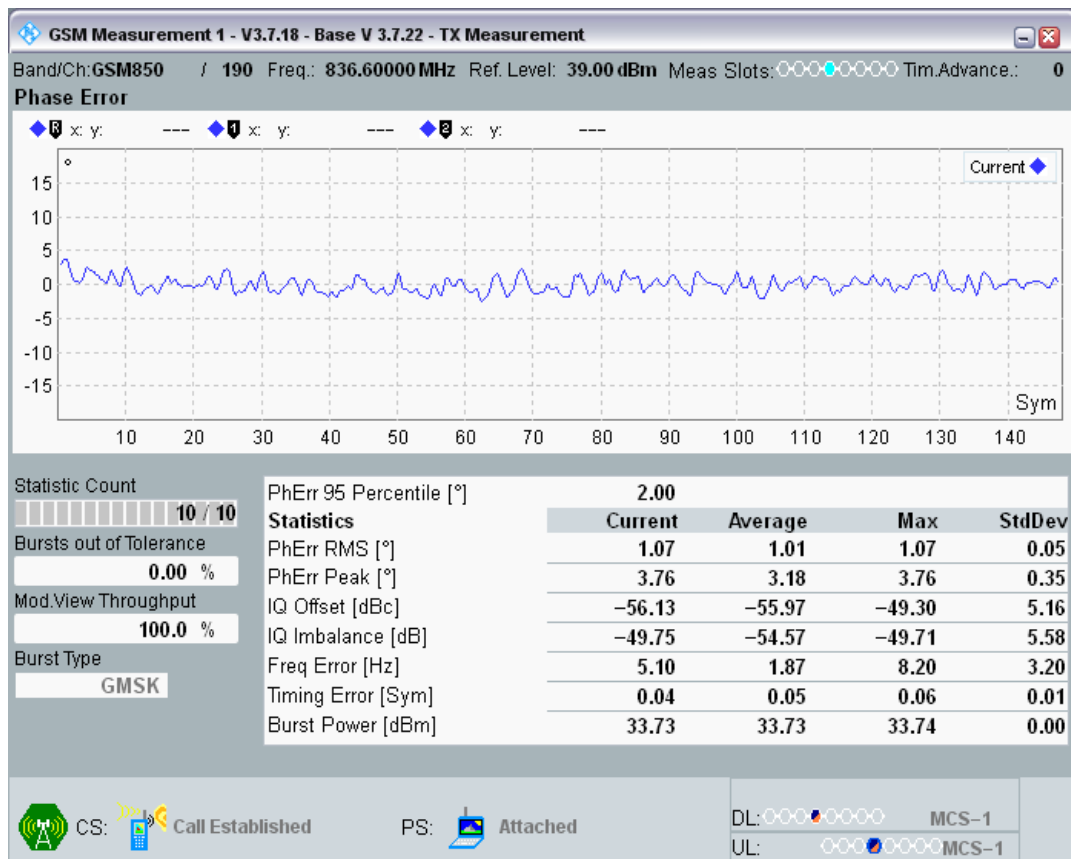

GSM850 Channel=190 PCL=5 TU3 @14

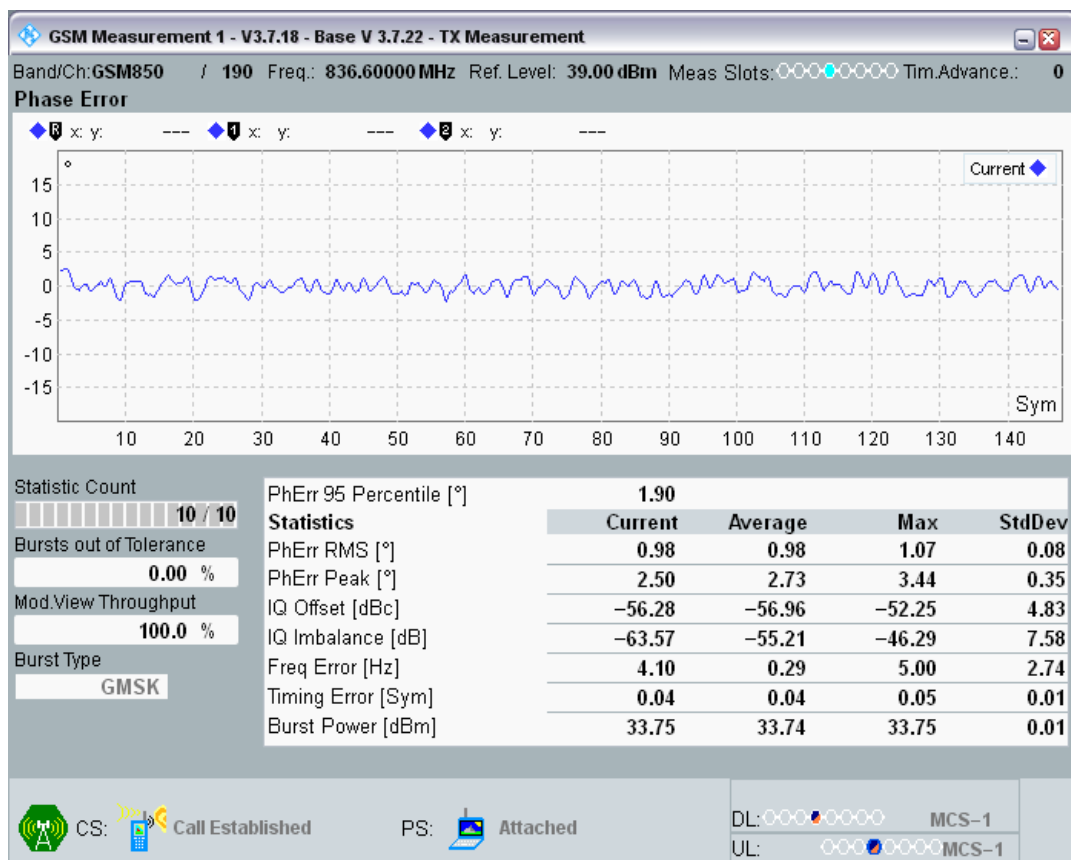


GSM850 Channel=190 PCL=5 TU3 @16

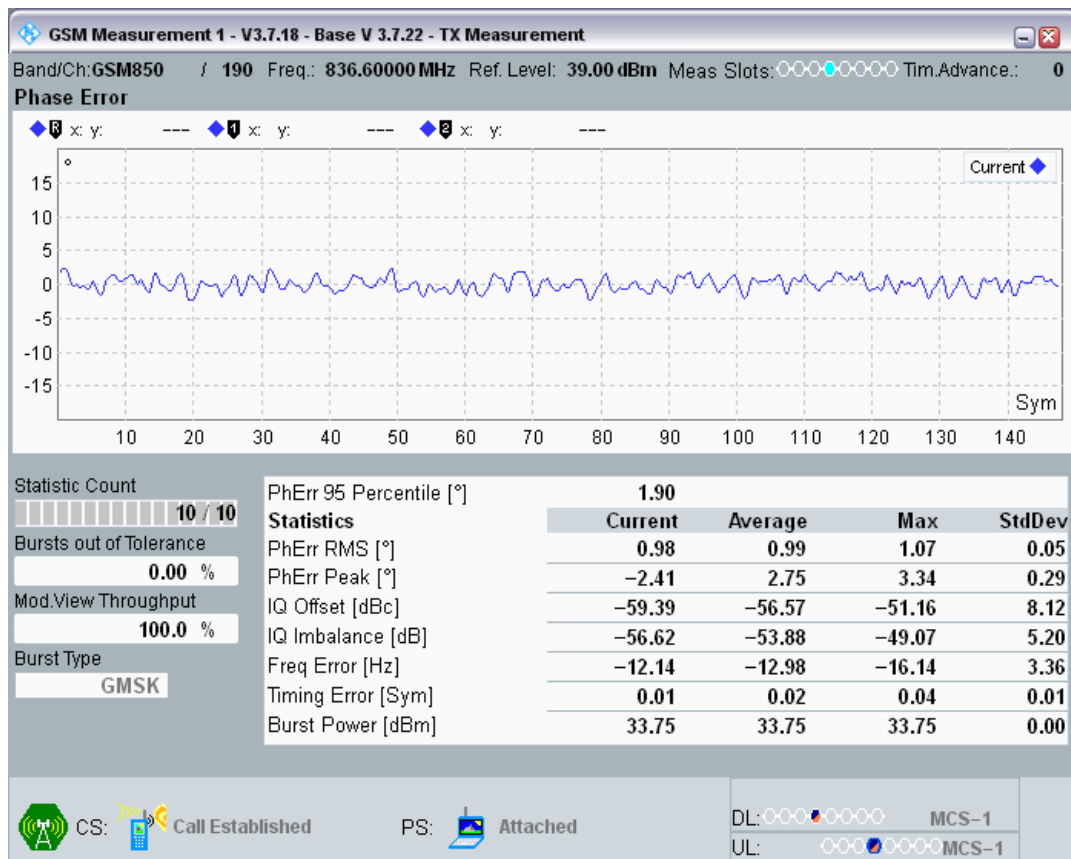


GSM850 Channel=190 PCL=5 TU3 @15




GSM850 Channel=190 PCL=5 TU3 @17

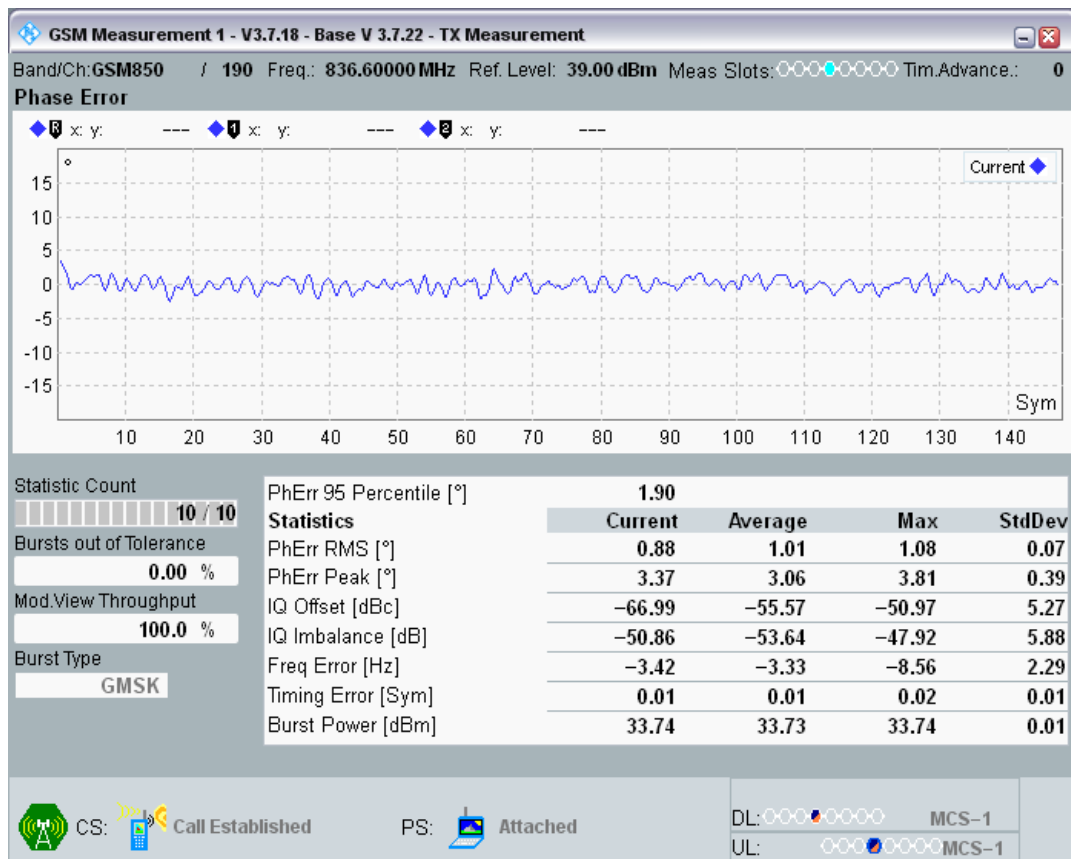


GSM850 Channel=190 PCL=5 TU3 @19

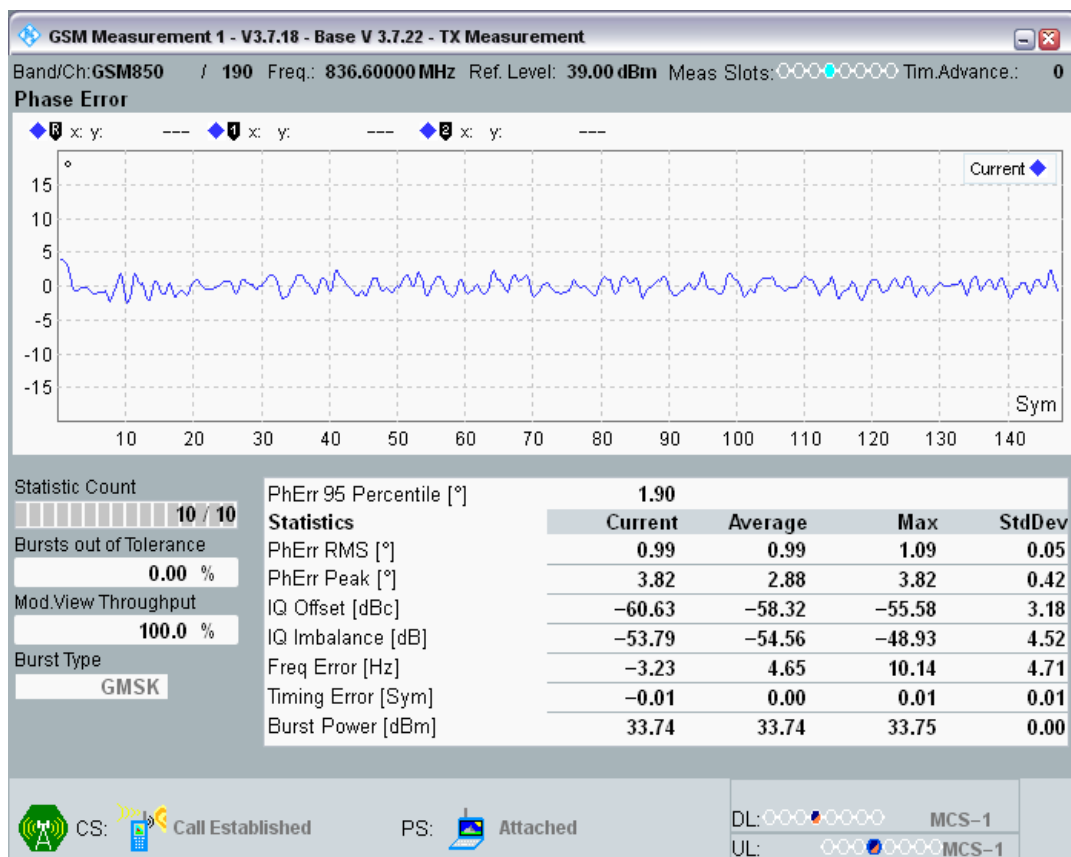


GSM850 Channel=190 PCL=5 TU3 @18

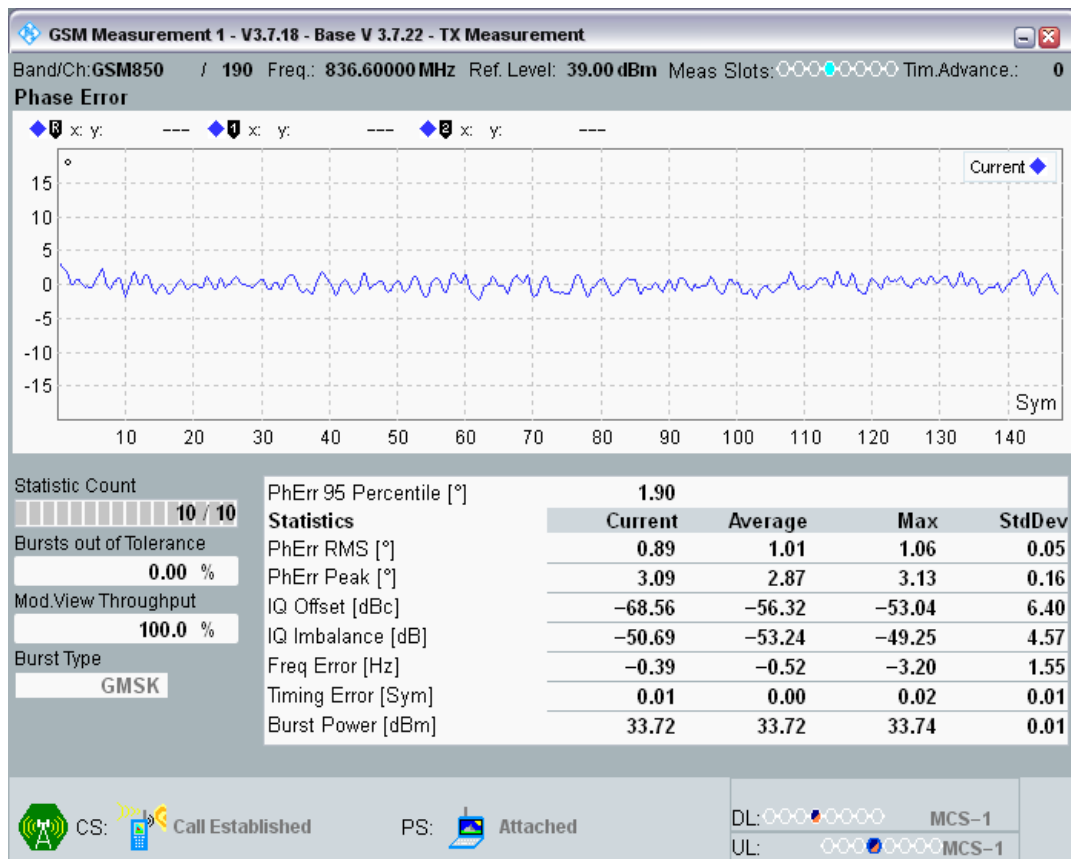


GSM850 Channel=190 PCL=5 TU3 @20

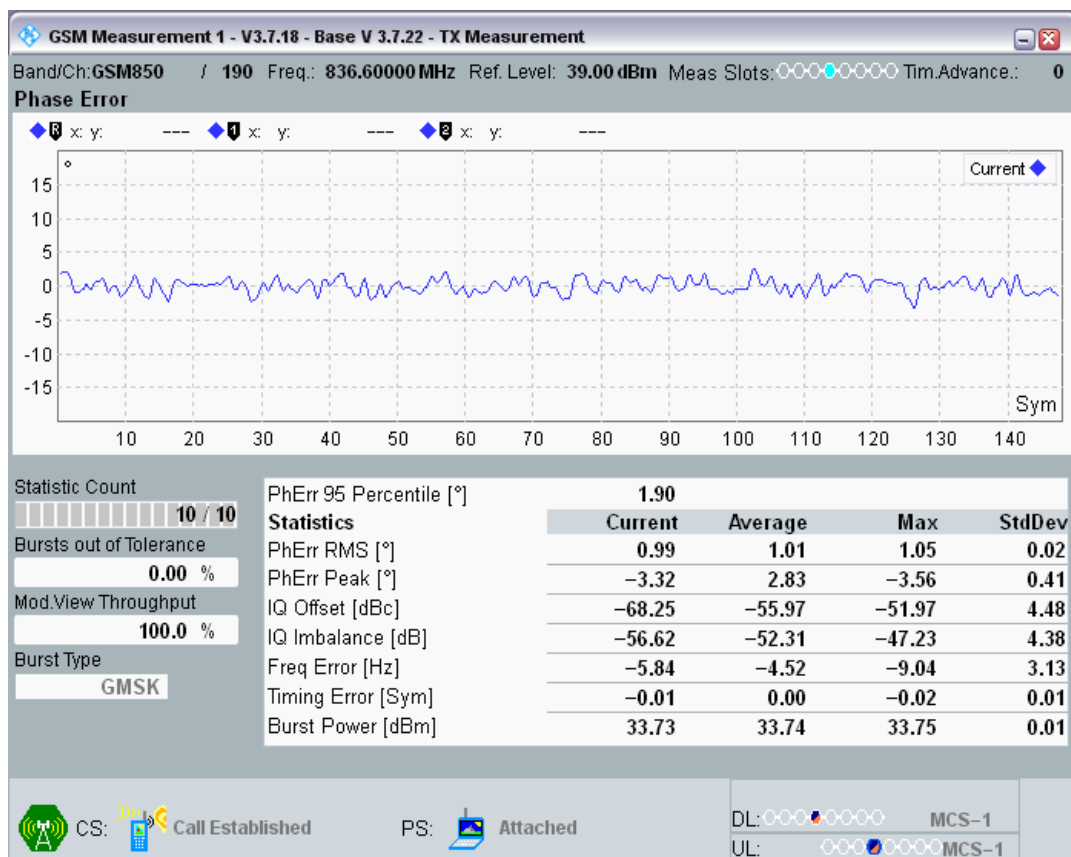


GSM900 Channel=38 PCL=5 RA250 @Sens1

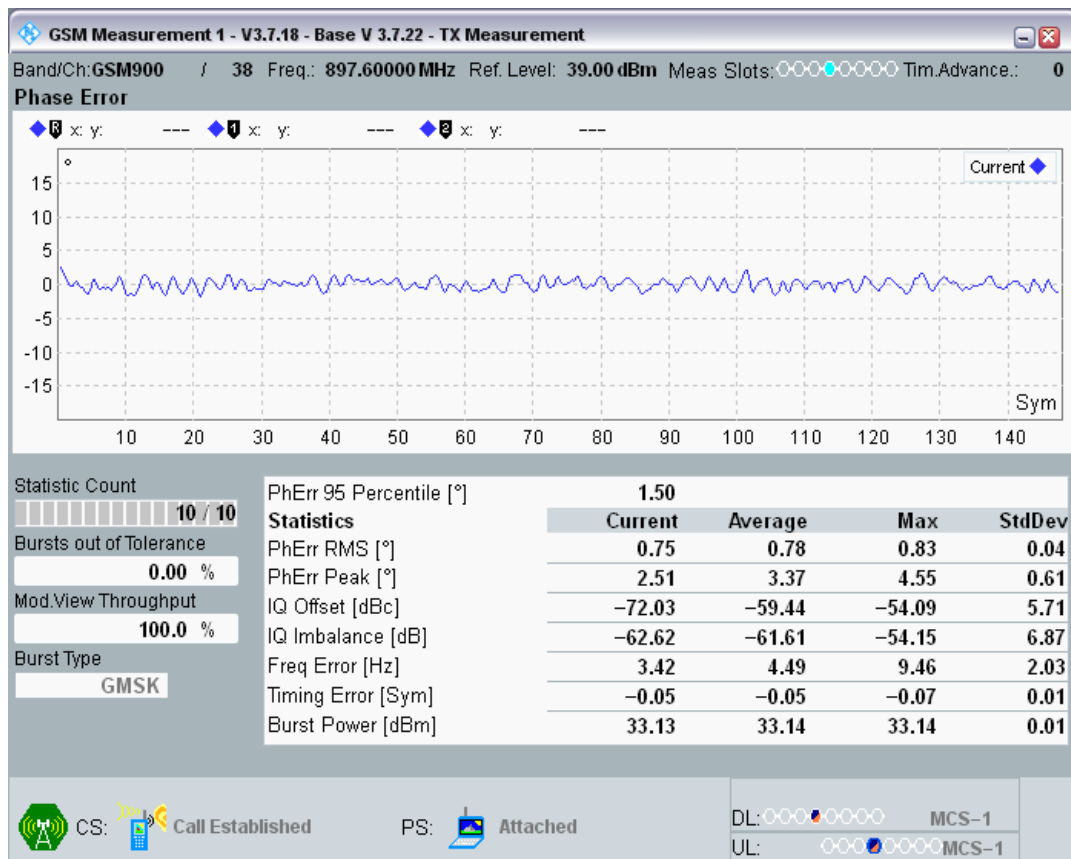


GSM900 Channel=38 PCL=5 RA250 @RACH

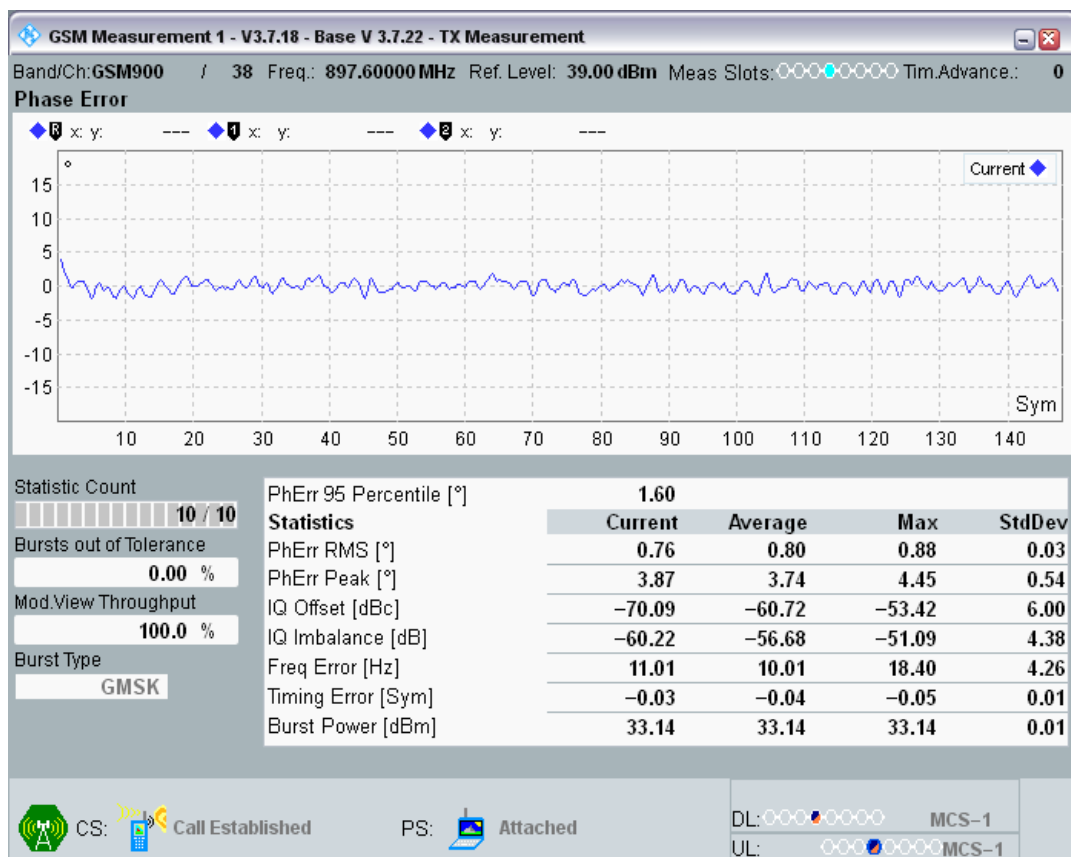


GSM900 Channel=38 PCL=5 RA250 @Sens2

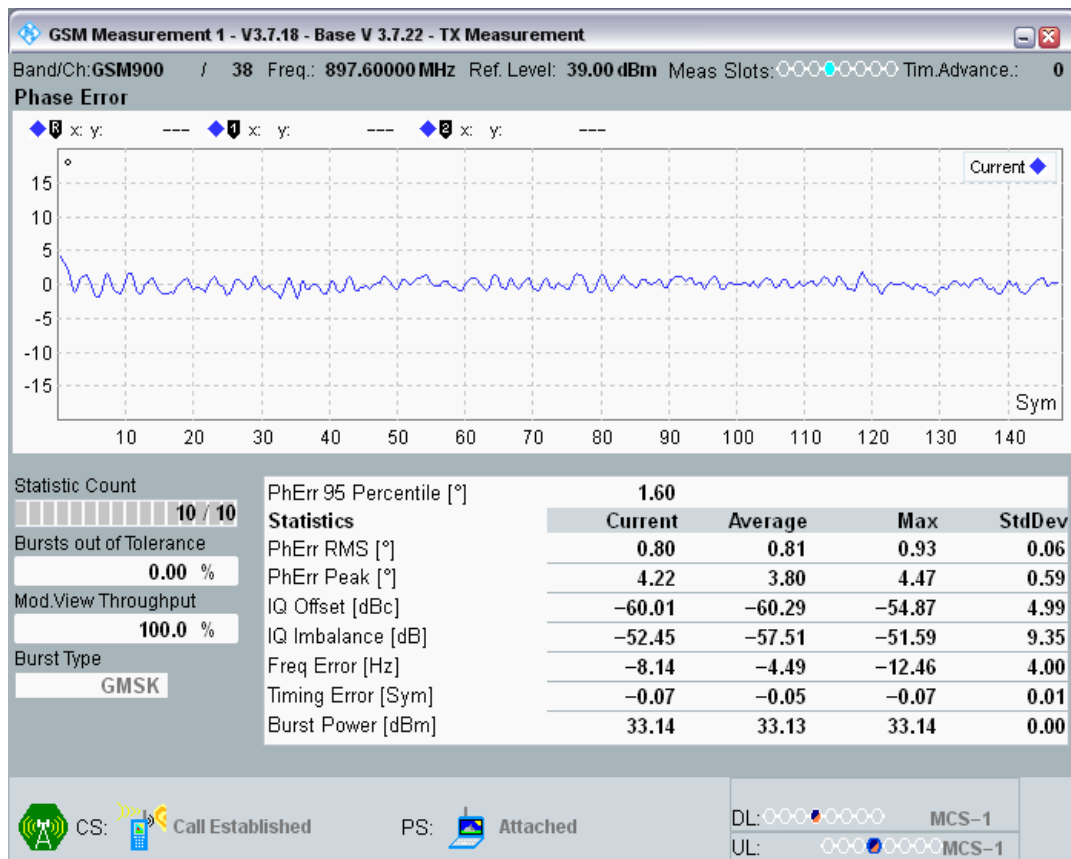


GSM900 Channel=38 PCL=5 RA250 @Sens3

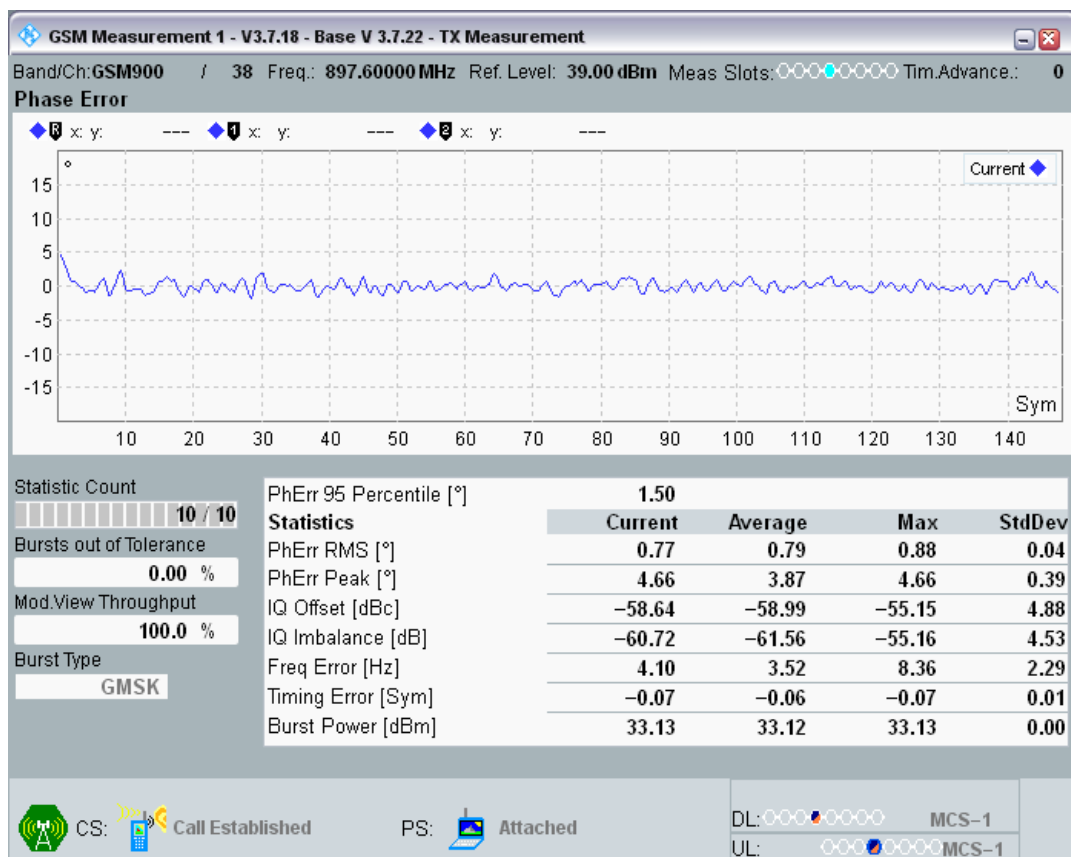


GSM900 Channel=38 PCL=5 RA250 @Sens5

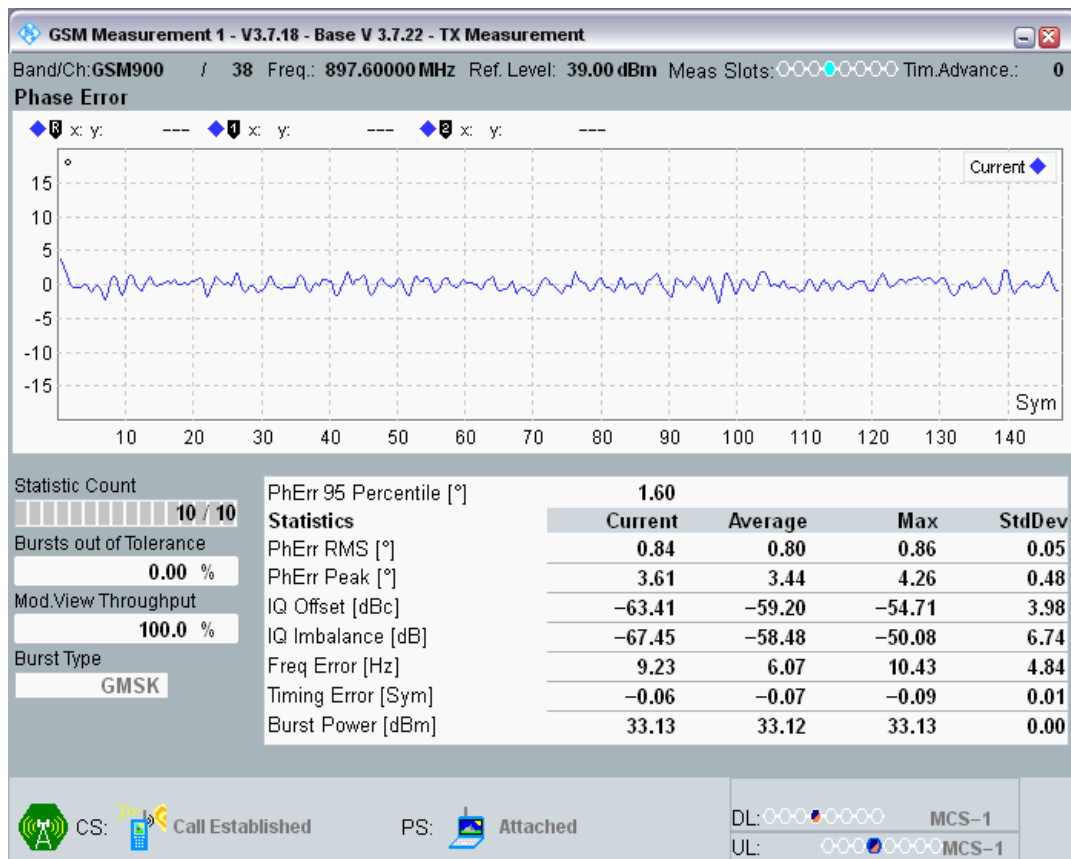


GSM900 Channel=38 PCL=5 RA250 @Sens4

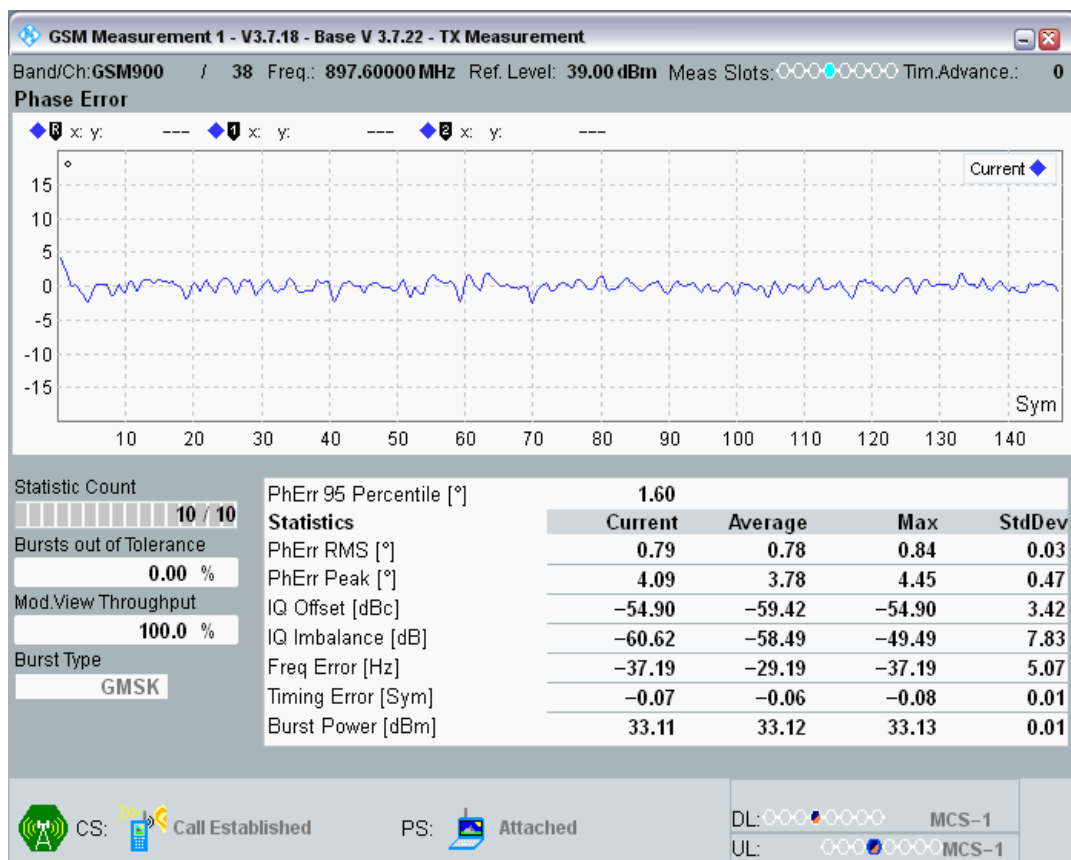


GSM900 Channel=38 PCL=5 HT100 @RACH

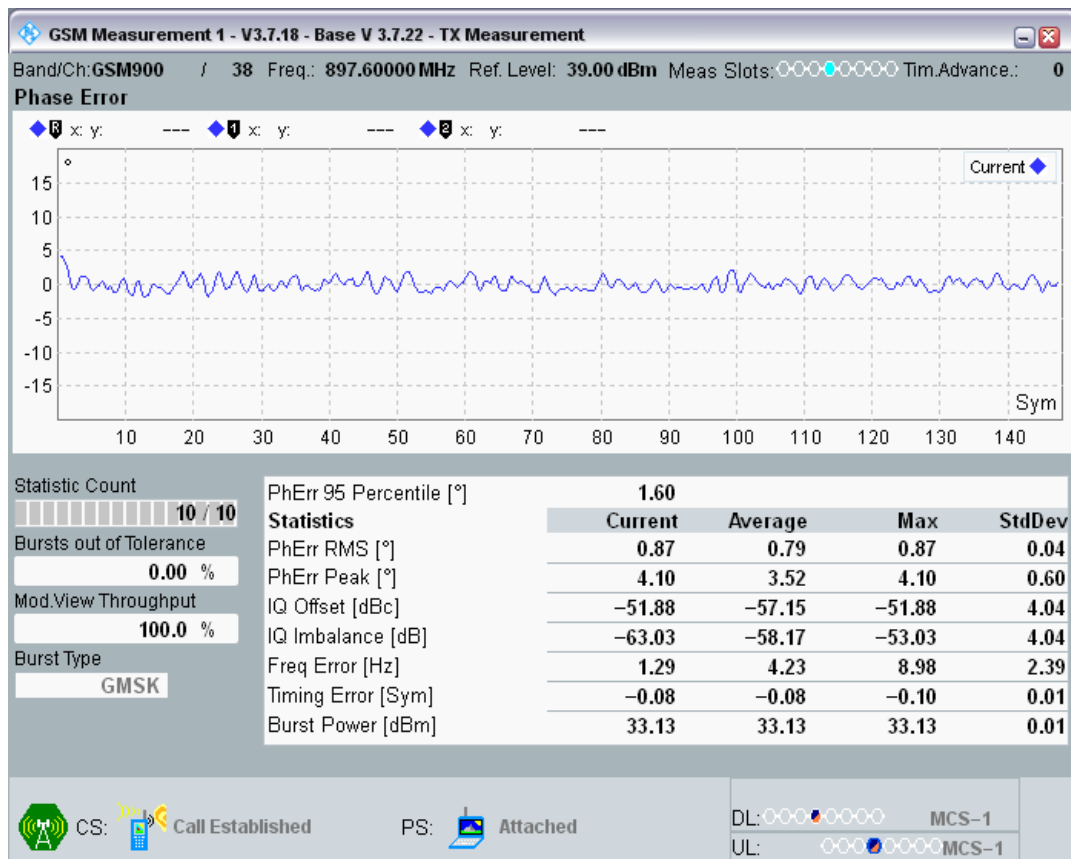


GSM900 Channel=38 PCL=5 HT100 @Sens2

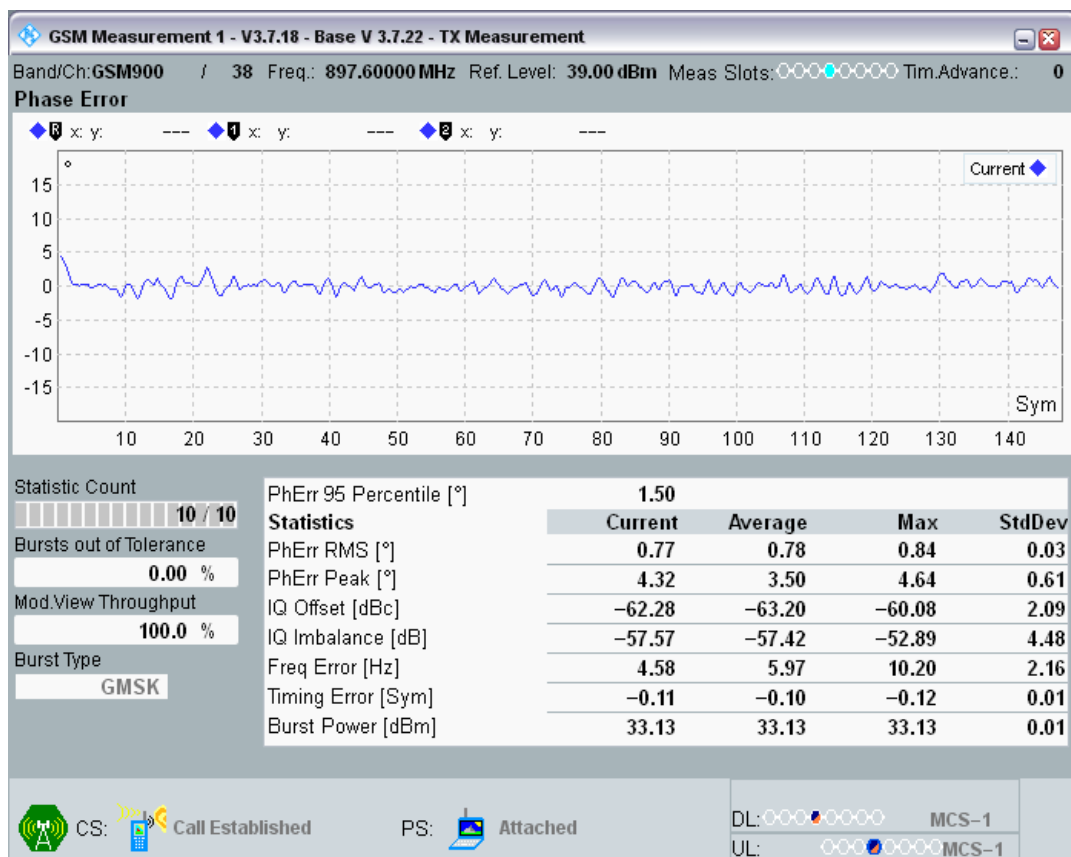


GSM900 Channel=38 PCL=5 HT100 @Sens1

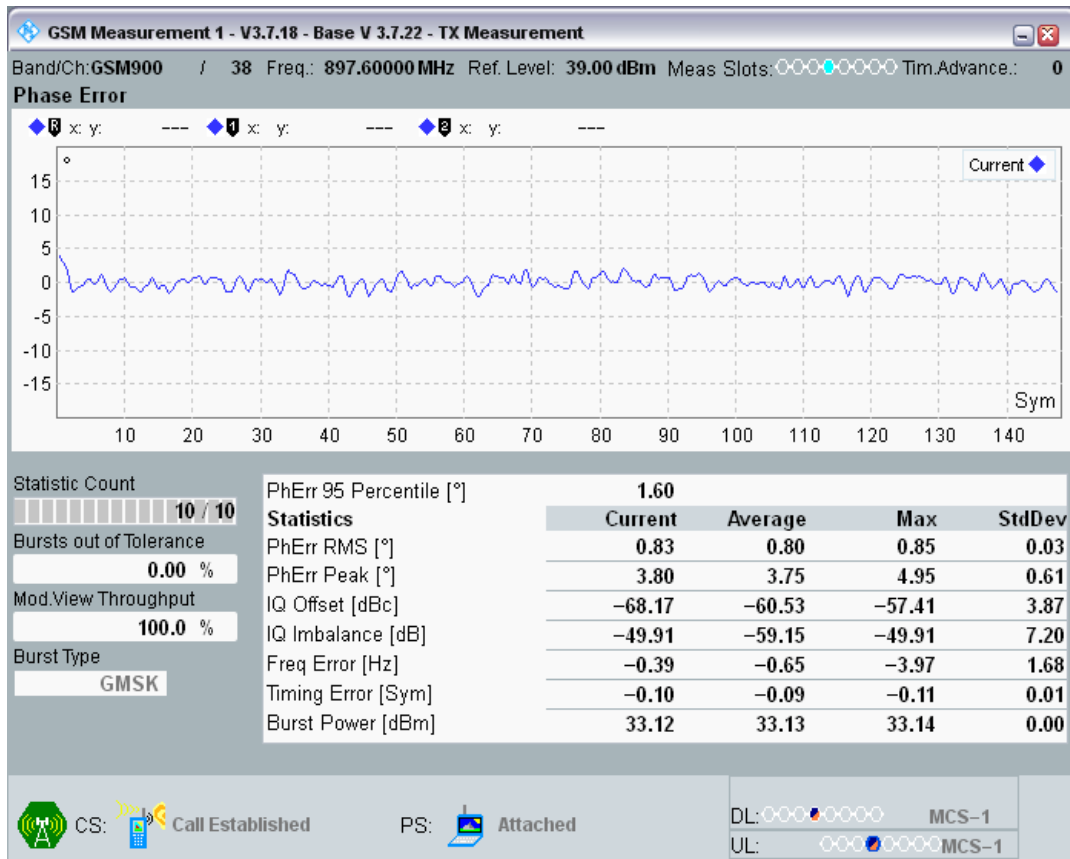


GSM900 Channel=38 PCL=5 HT100 @Sens3

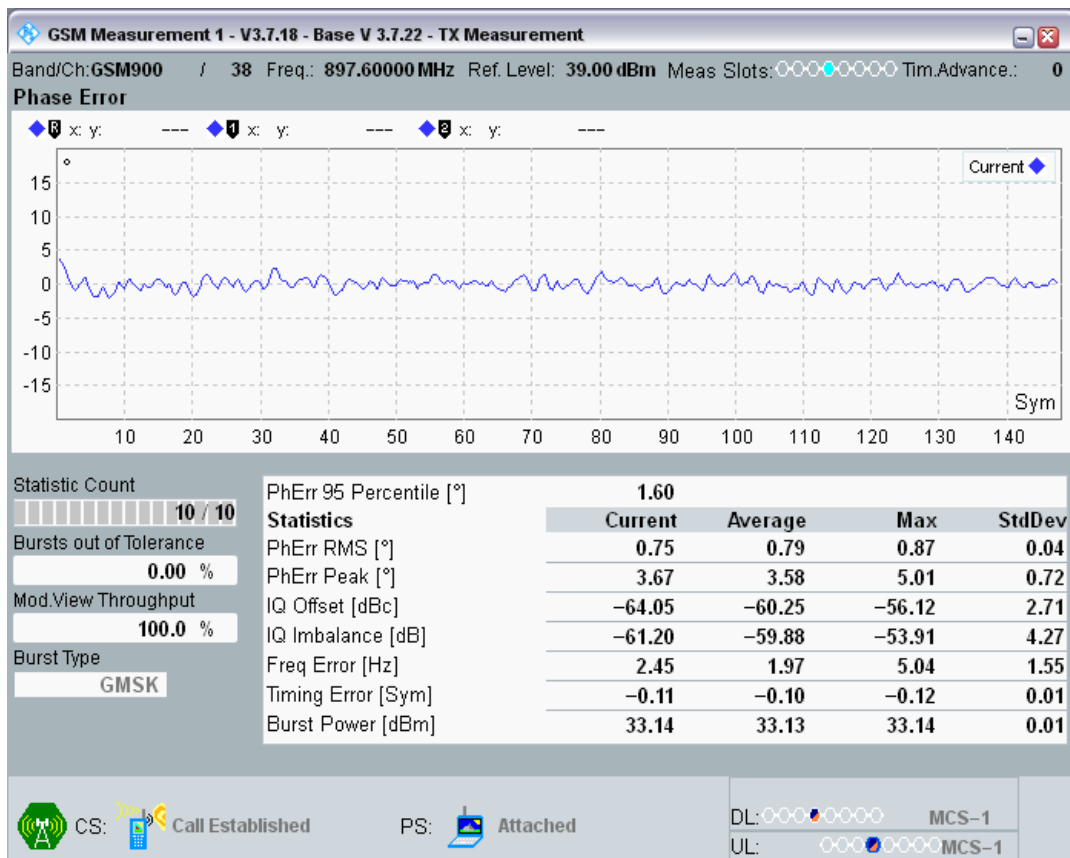


GSM900 Channel=38 PCL=5 HT100 @Sens5

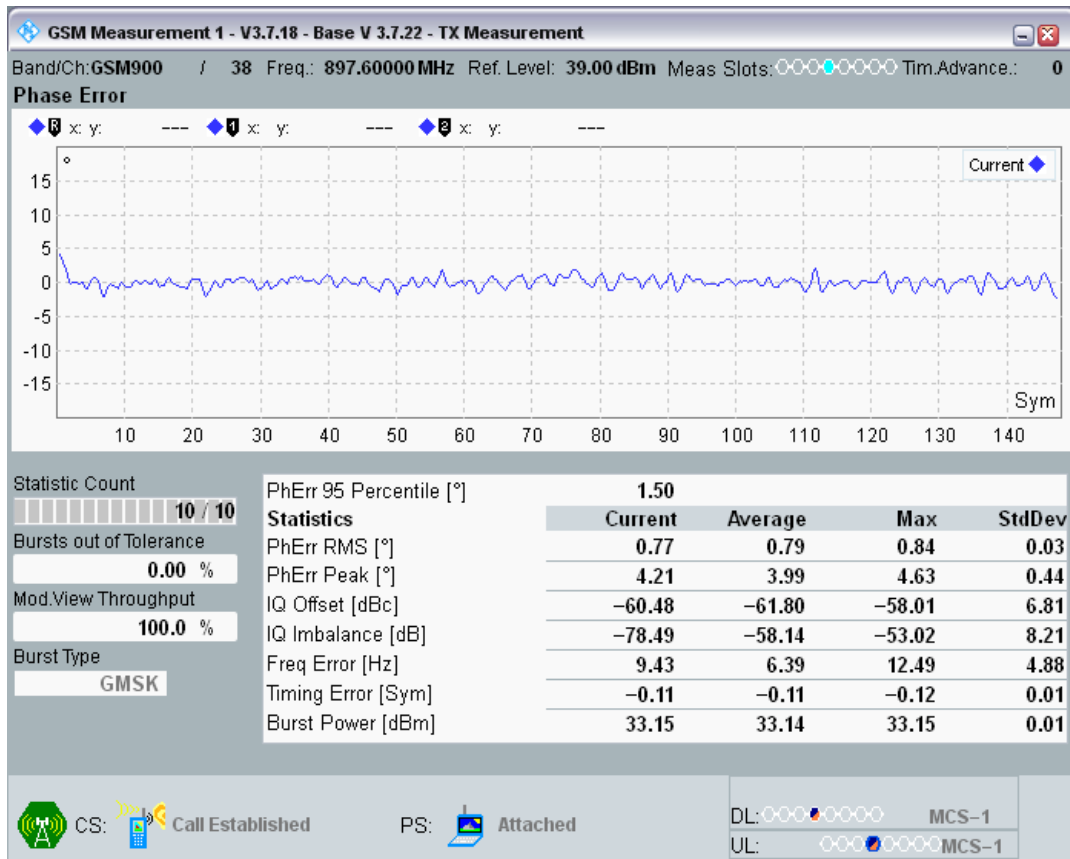


GSM900 Channel=38 PCL=5 HT100 @Sens4

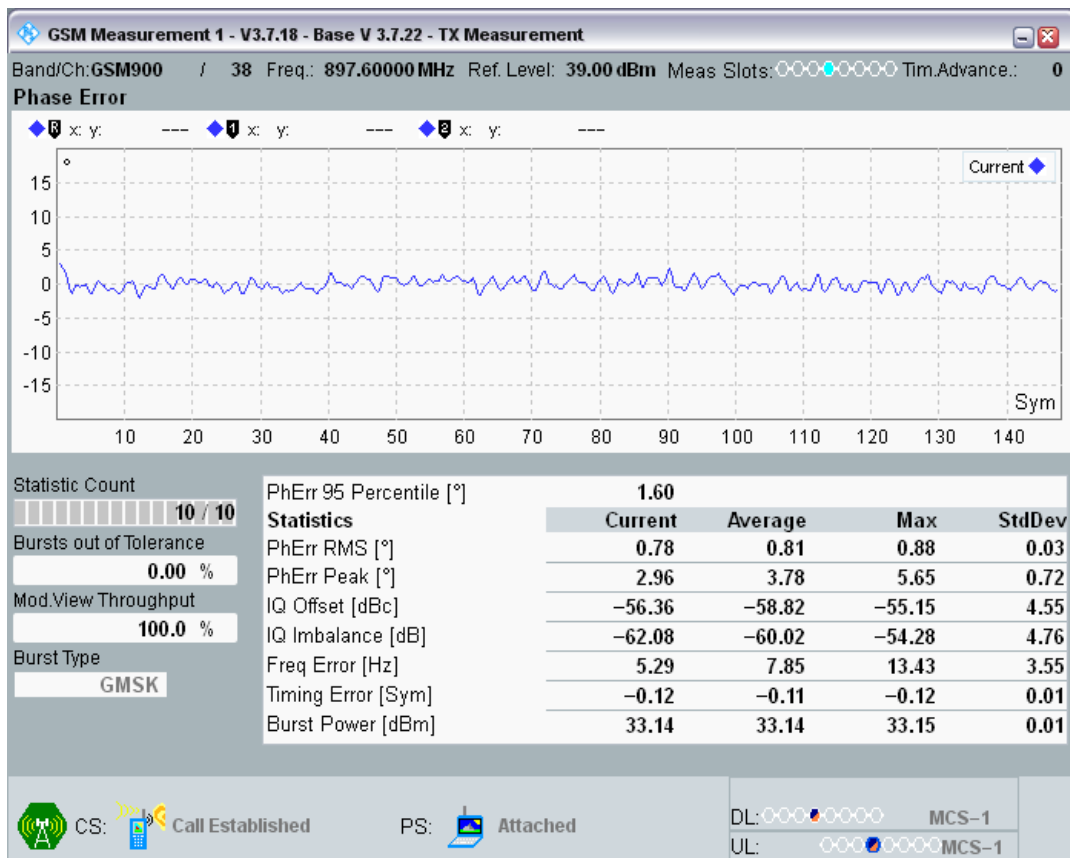


GSM900 Channel=38 PCL=5 TU50 @RACH

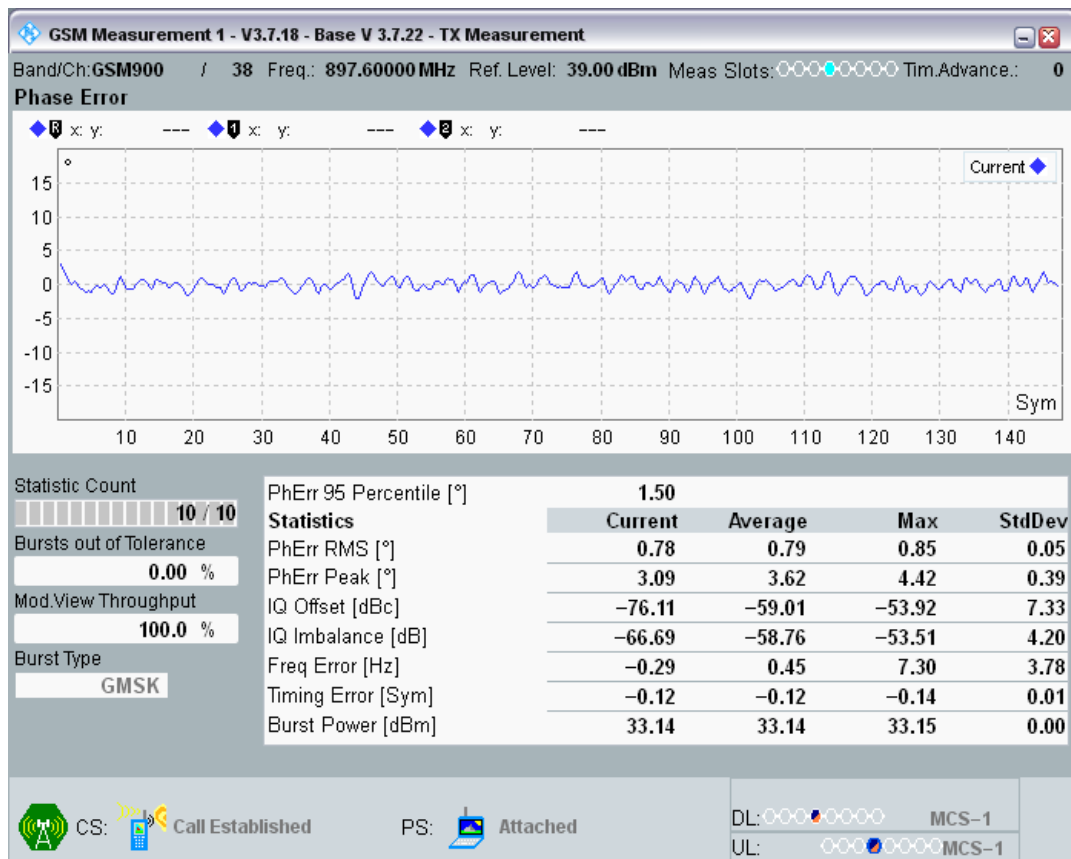


GSM900 Channel=38 PCL=5 TU50 @Sens1

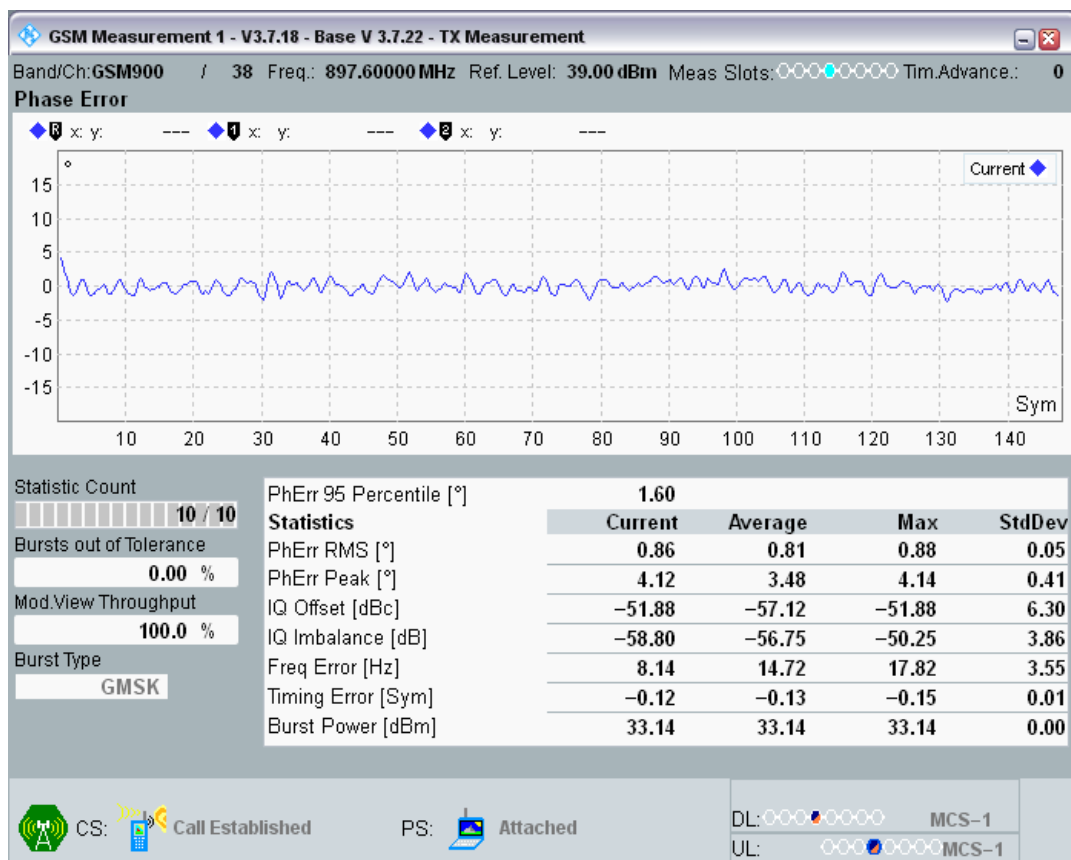


GSM900 Channel=38 PCL=5 TU50 @Sens2

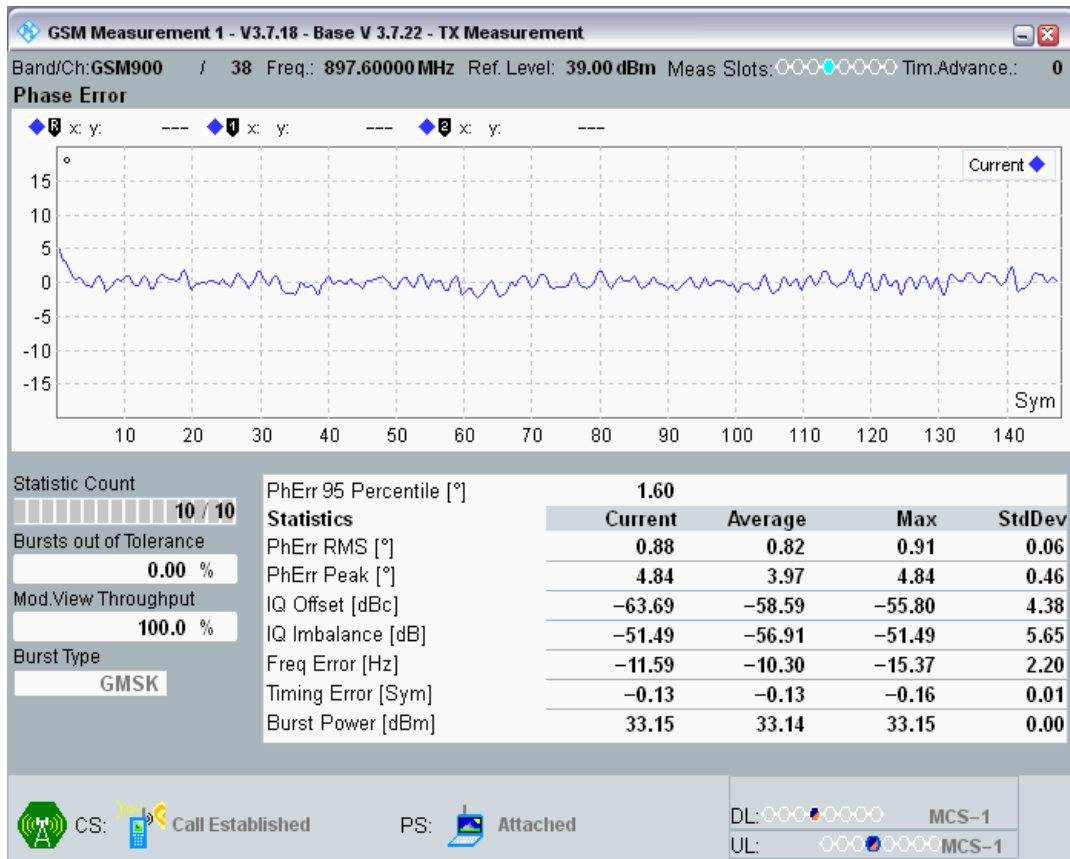


GSM900 Channel=38 PCL=5 TU50 @Sens3

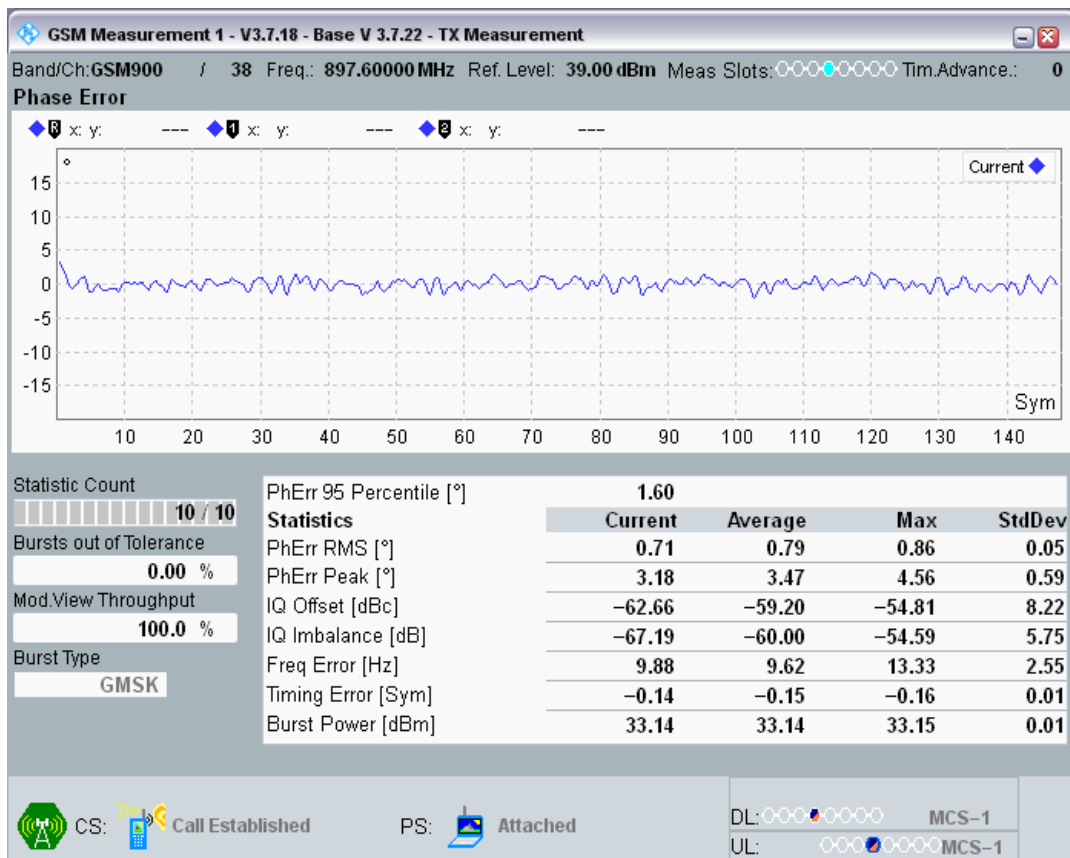


GSM900 Channel=38 PCL=5 TU50 @Sens5

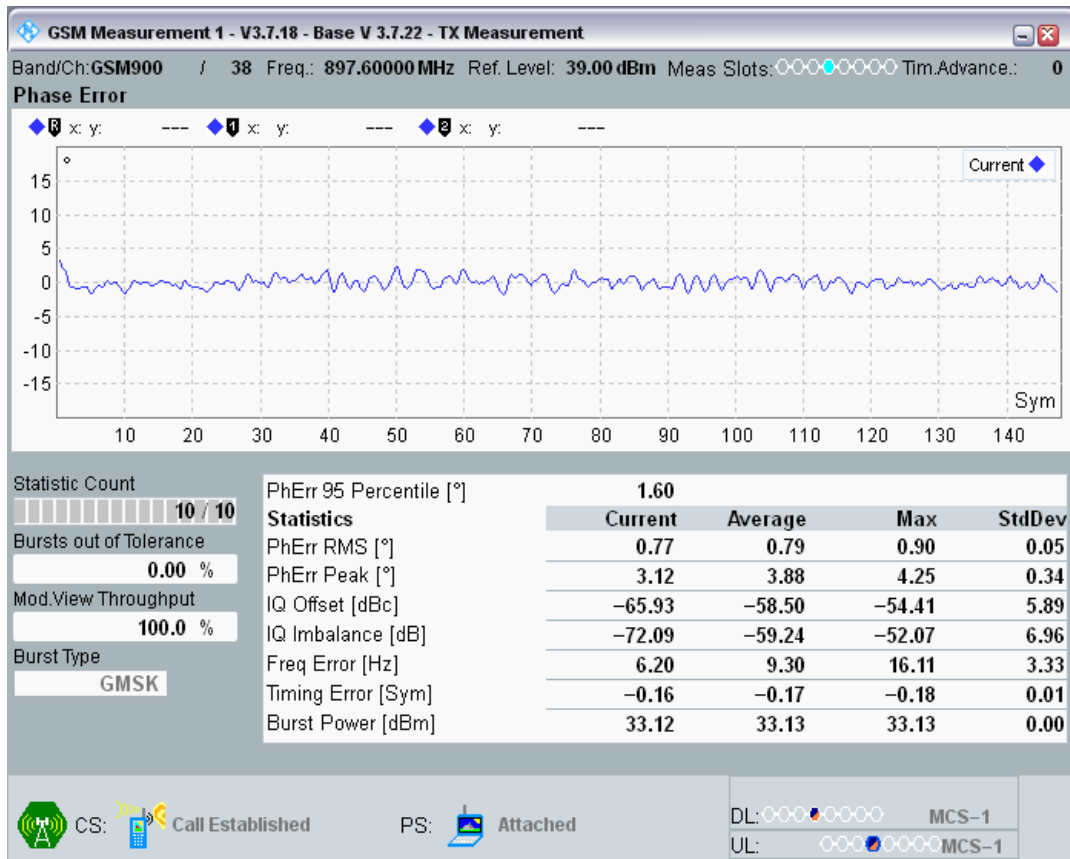


GSM900 Channel=38 PCL=5 TU50 @Sens4

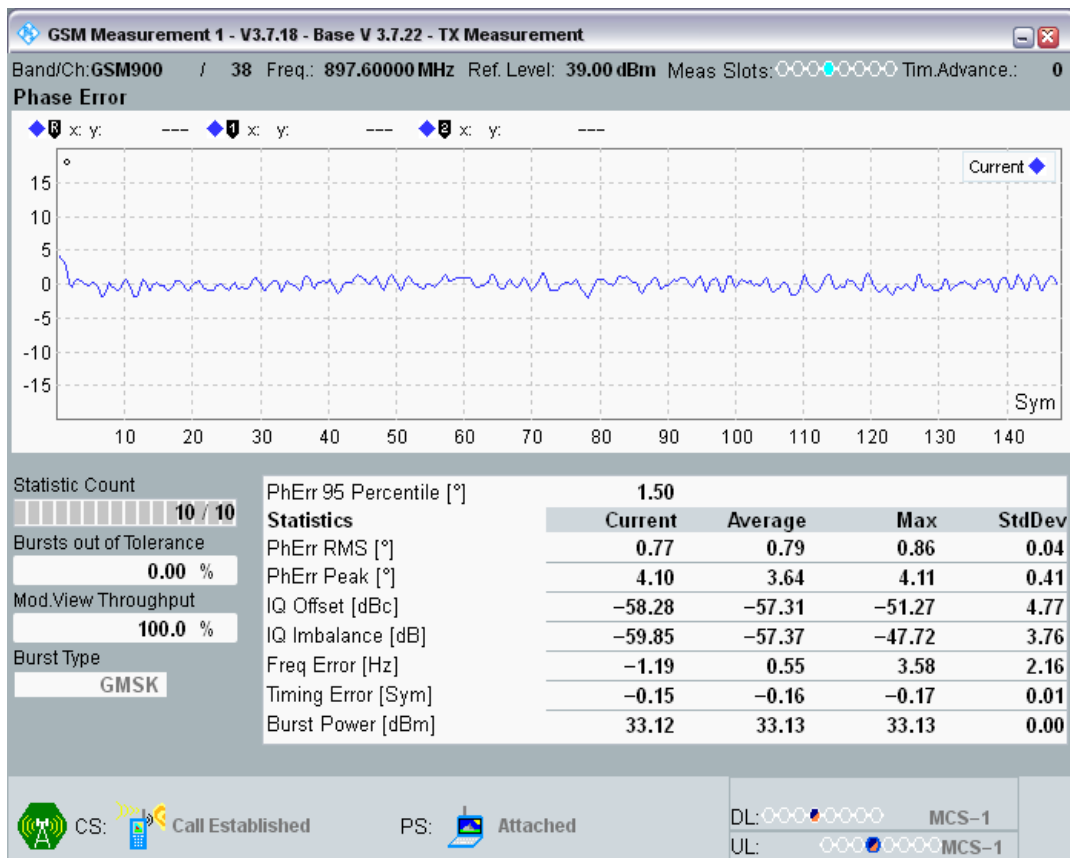


GSM900 Channel=38 PCL=5 TU3 @RACH

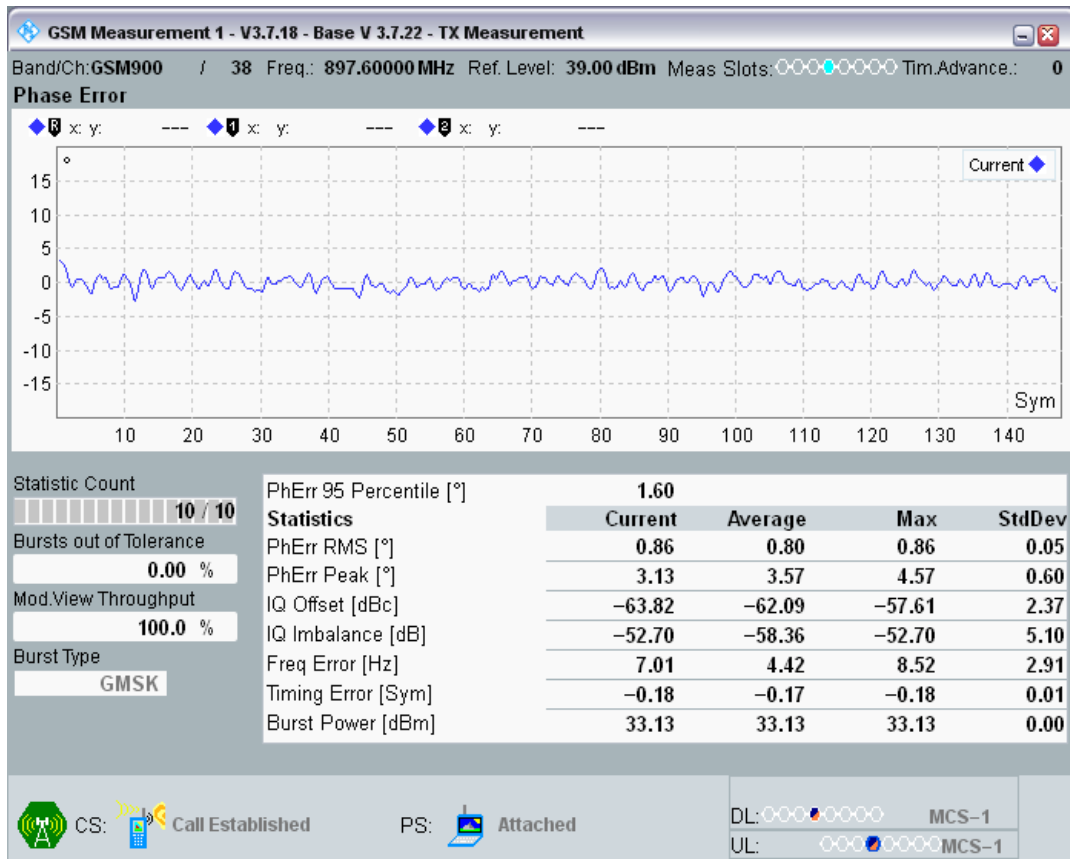


GSM900 Channel=38 PCL=5 TU3 @2

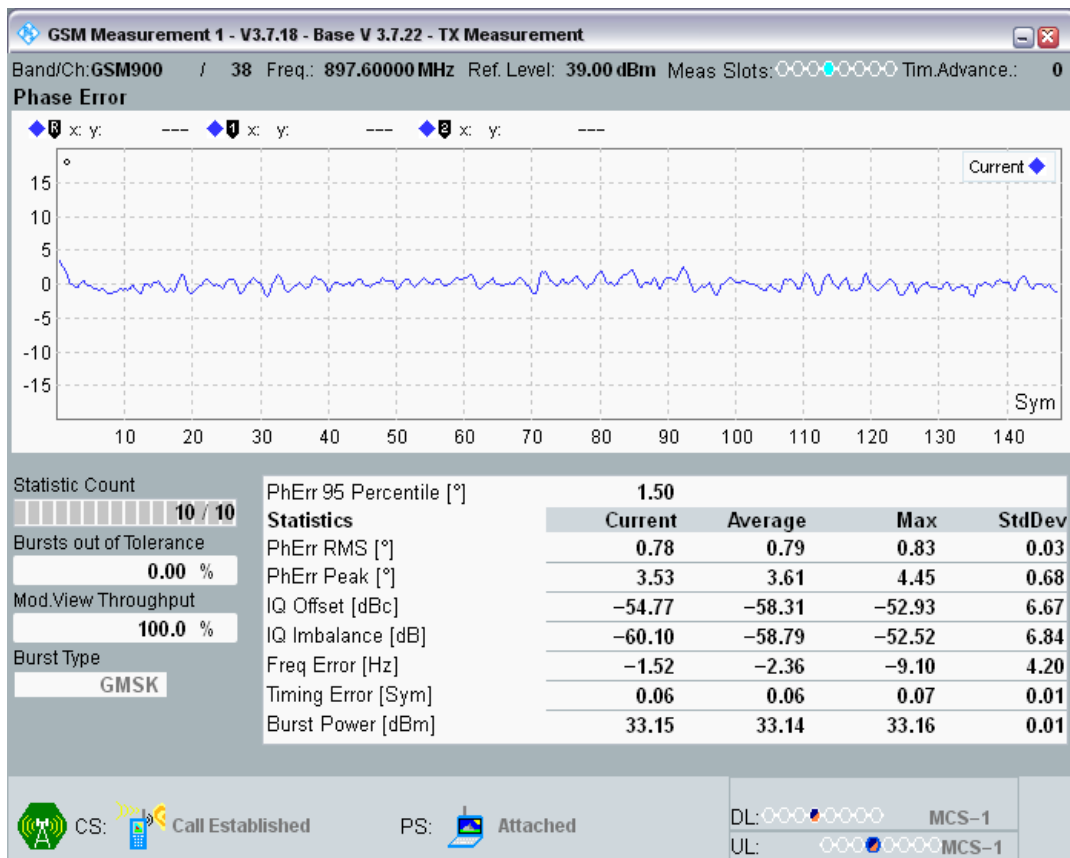


GSM900 Channel=38 PCL=5 TU3 @1

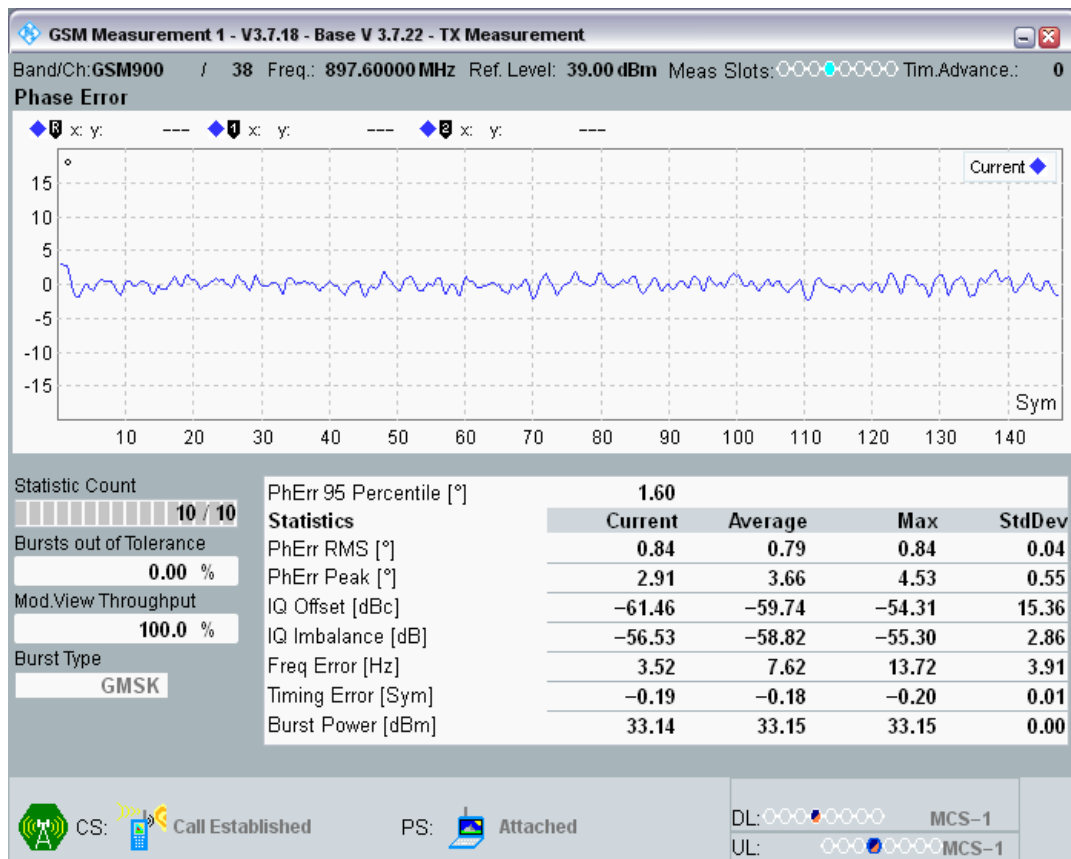

GSM900 Channel=38 PCL=5 TU3 @4

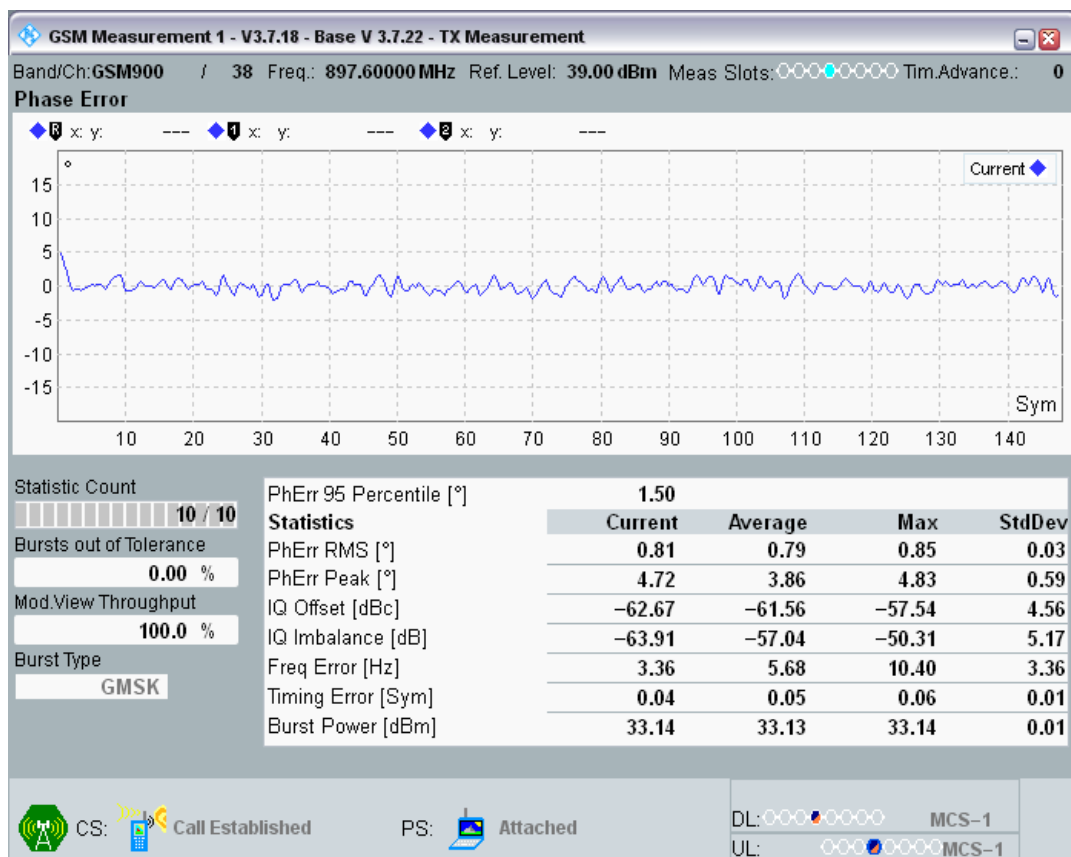


GSM900 Channel=38 PCL=5 TU3 @3

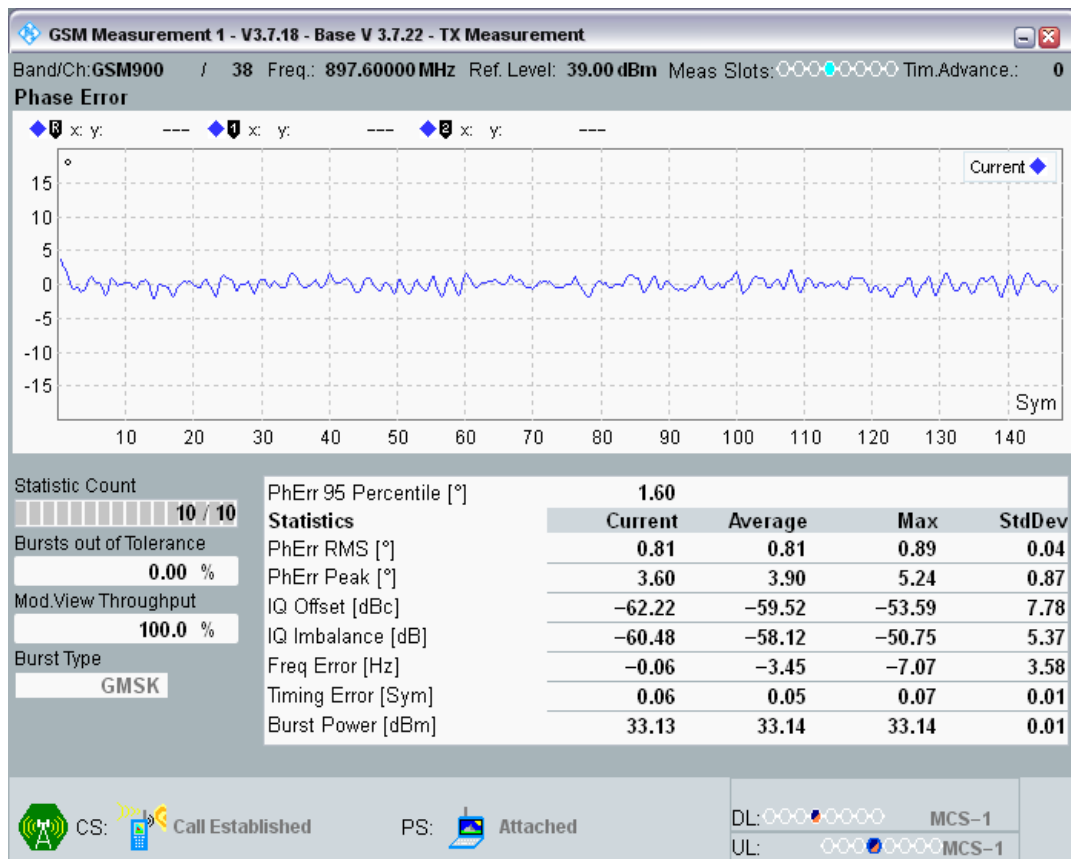

GSM900 Channel=38 PCL=5 TU3 @5




GSM900 Channel=38 PCL=5 TU3 @6

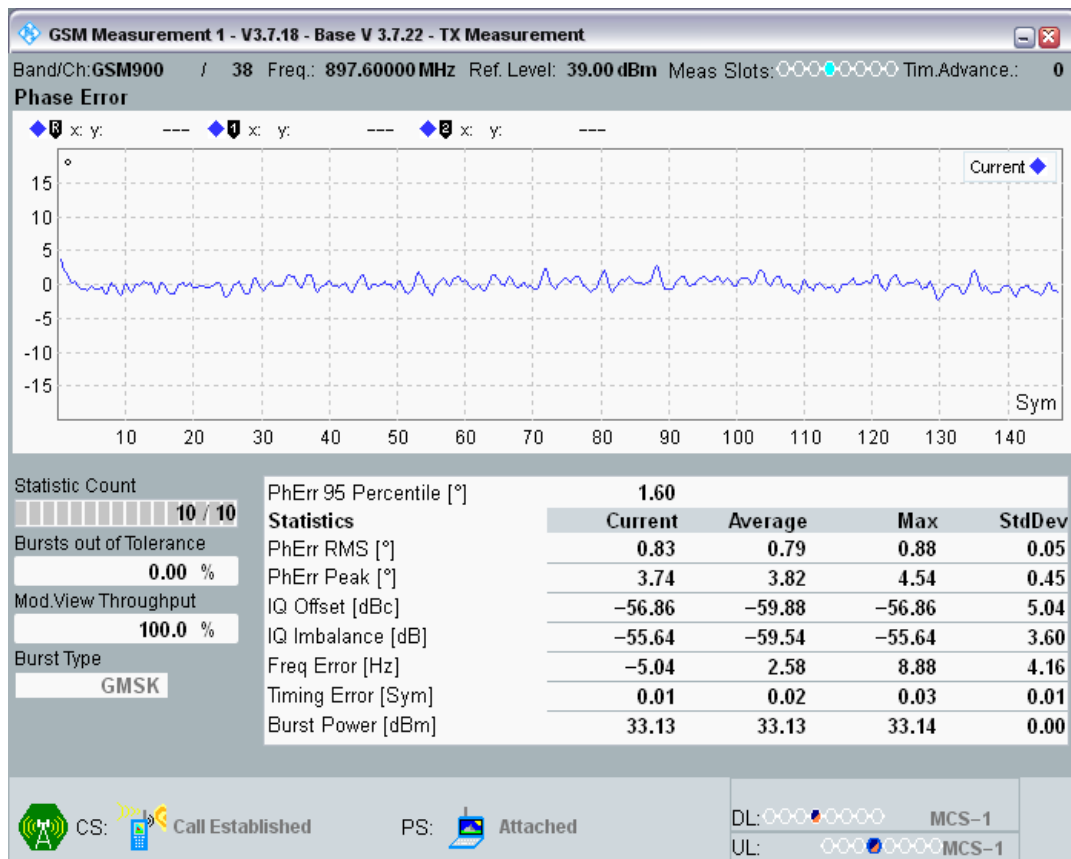


GSM900 Channel=38 PCL=5 TU3 @7




GSM900 Channel=38 PCL=5 TU3 @8

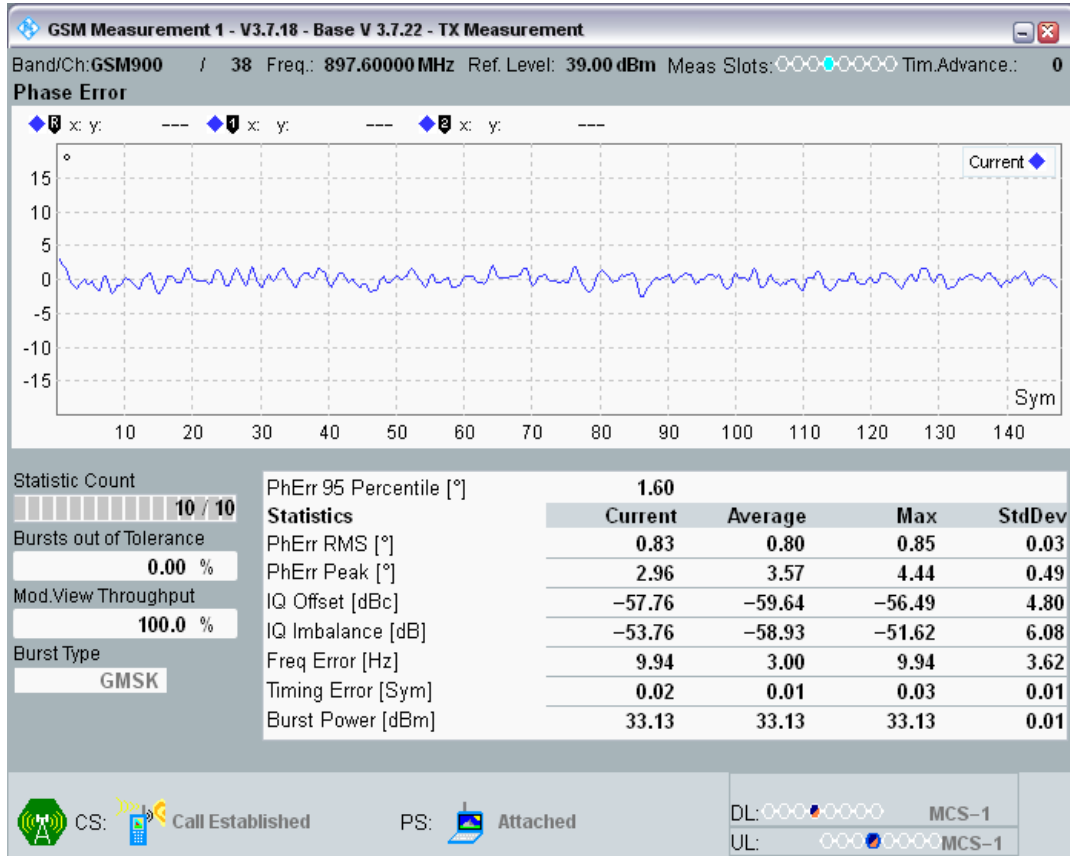


GSM900 Channel=38 PCL=5 TU3 @9

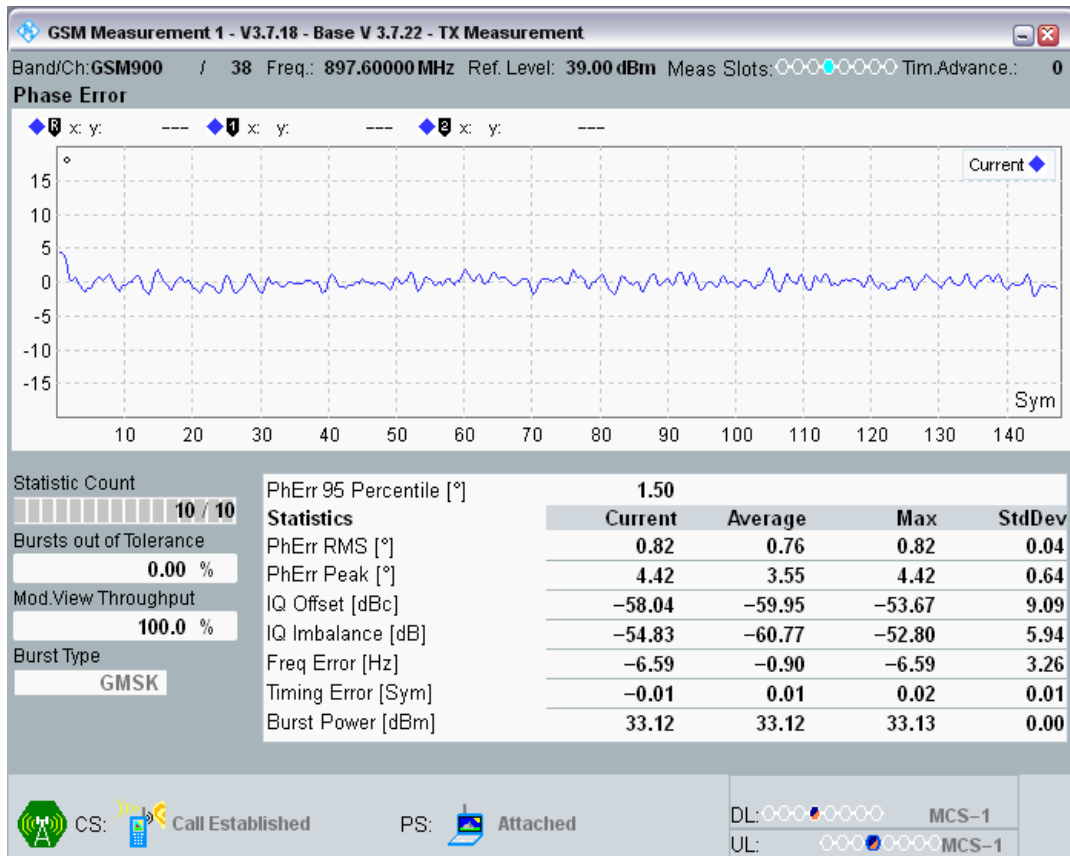


GSM900 Channel=38 PCL=5 TU3 @11

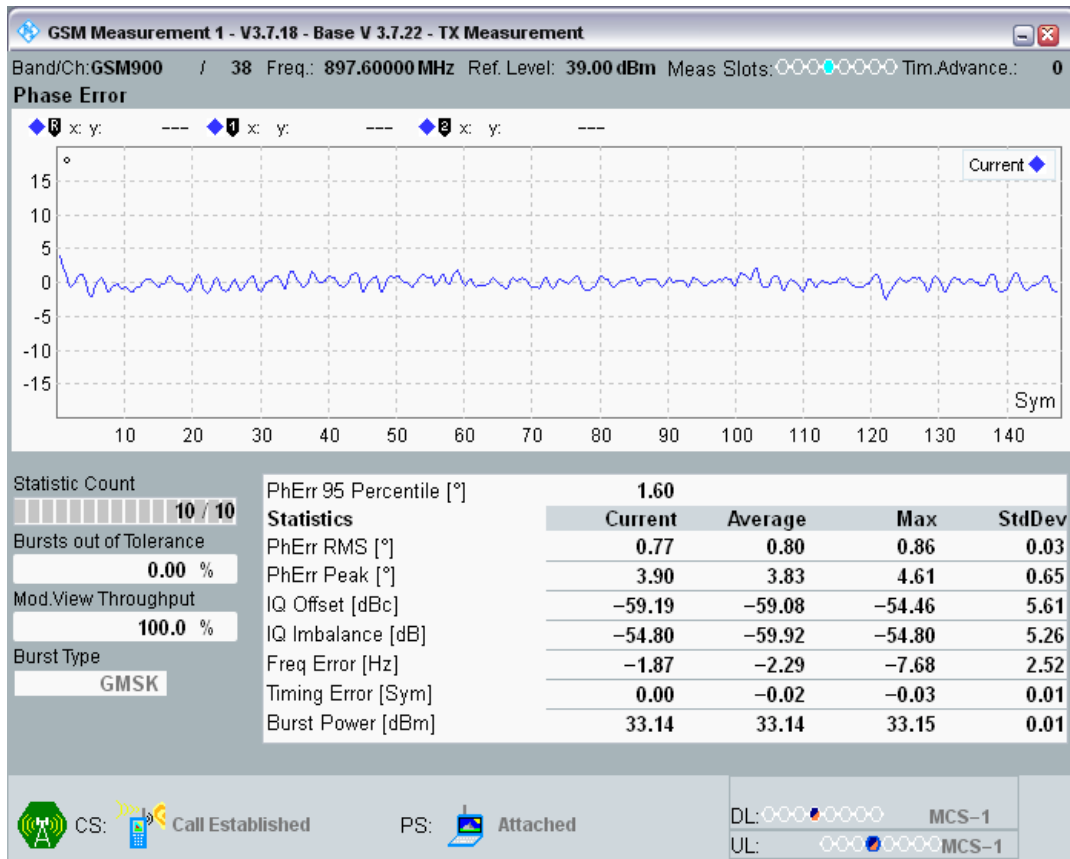


GSM900 Channel=38 PCL=5 TU3 @10

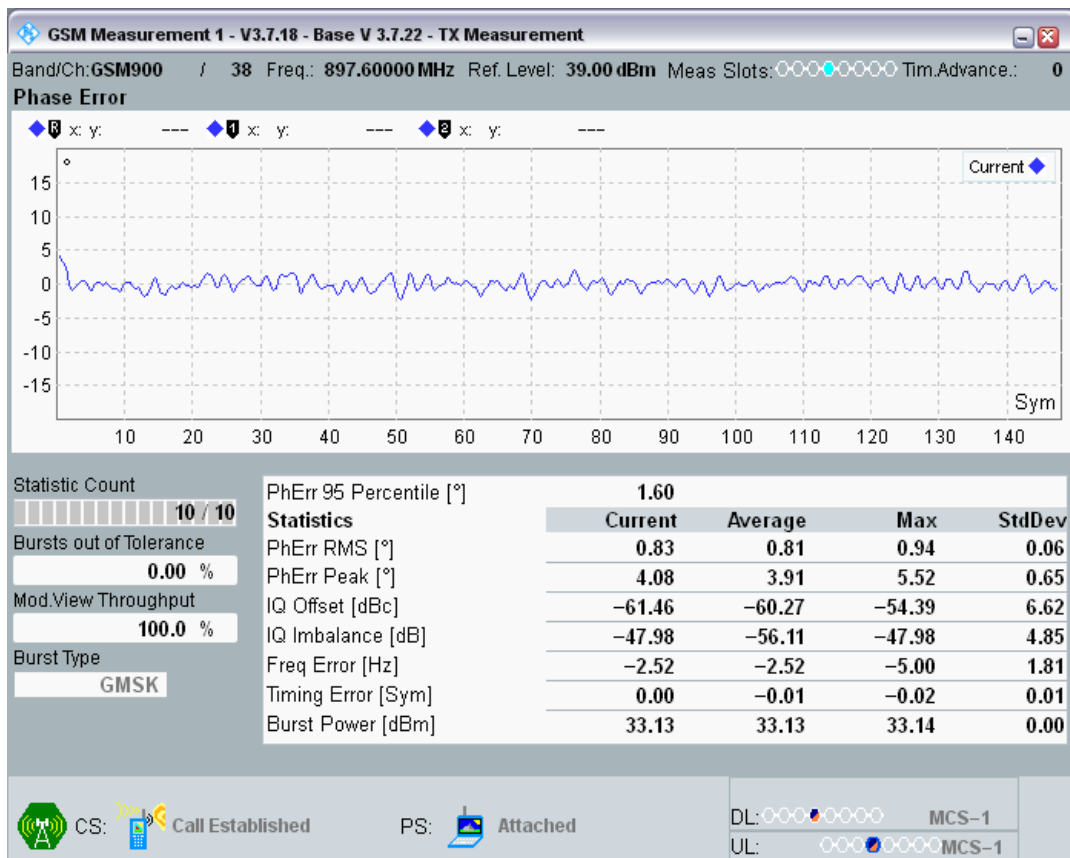


GSM900 Channel=38 PCL=5 TU3 @12

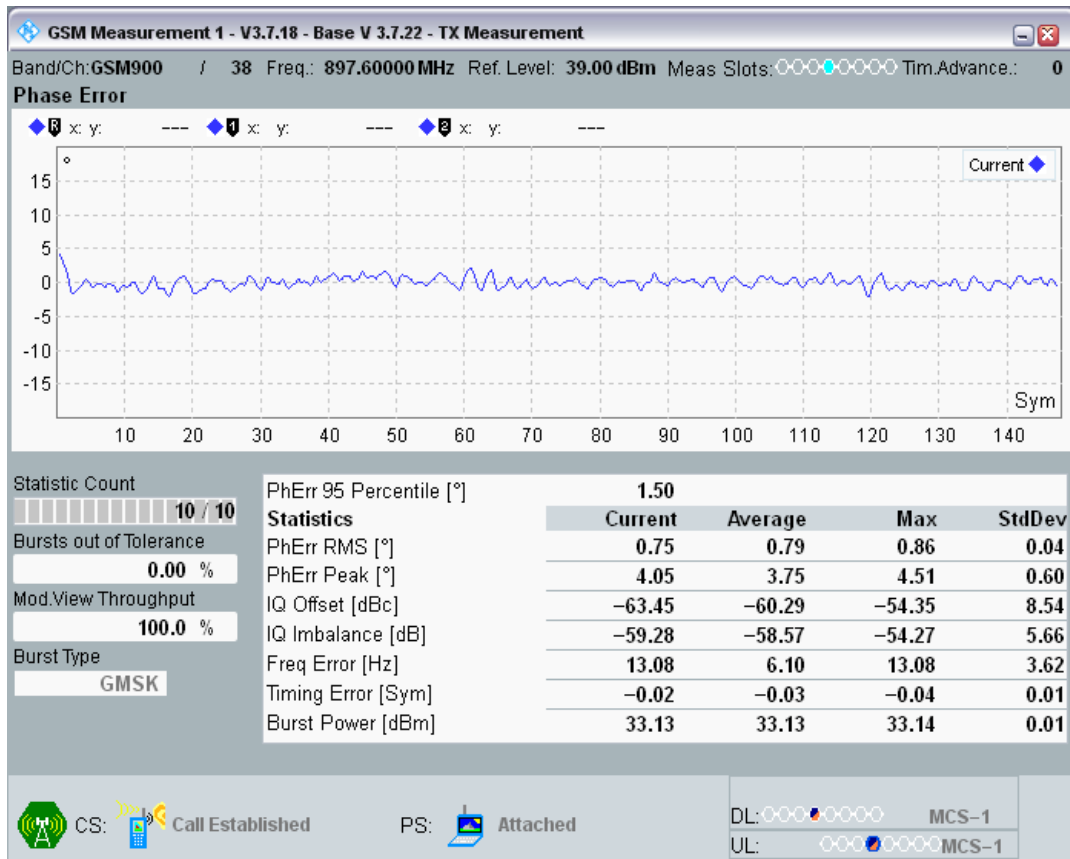


GSM900 Channel=38 PCL=5 TU3 @13

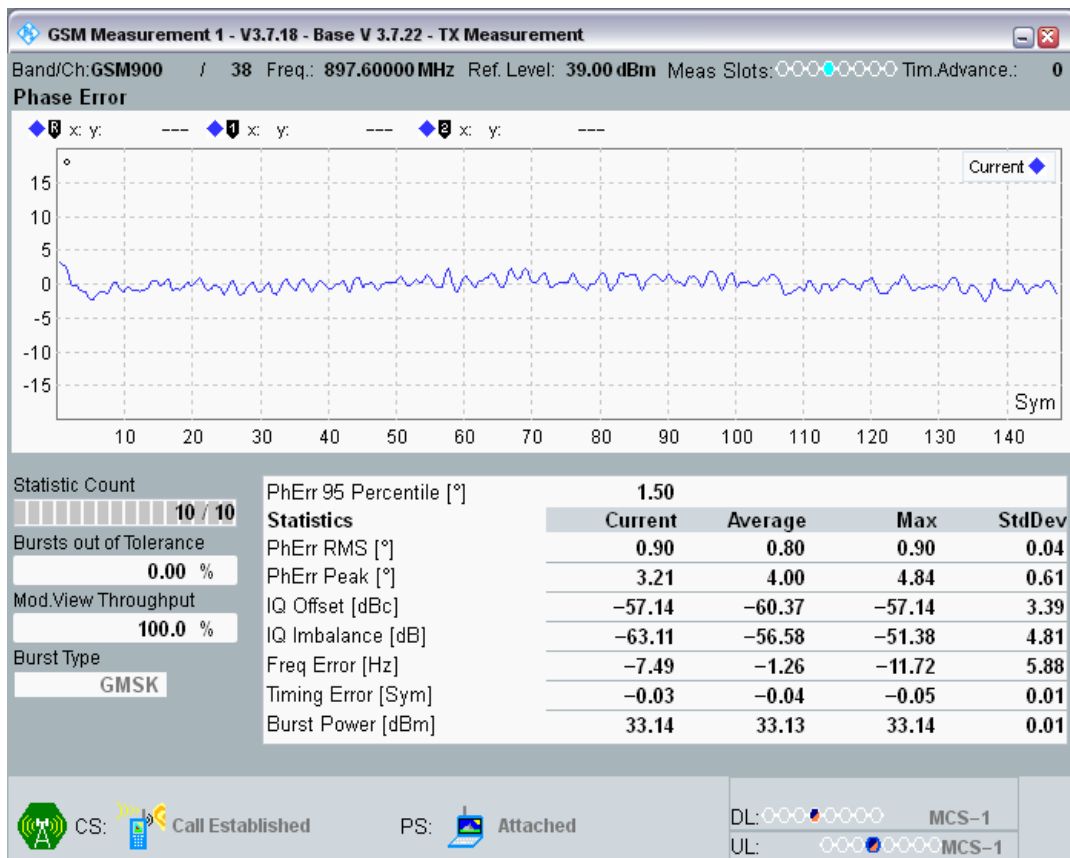


GSM900 Channel=38 PCL=5 TU3 @14

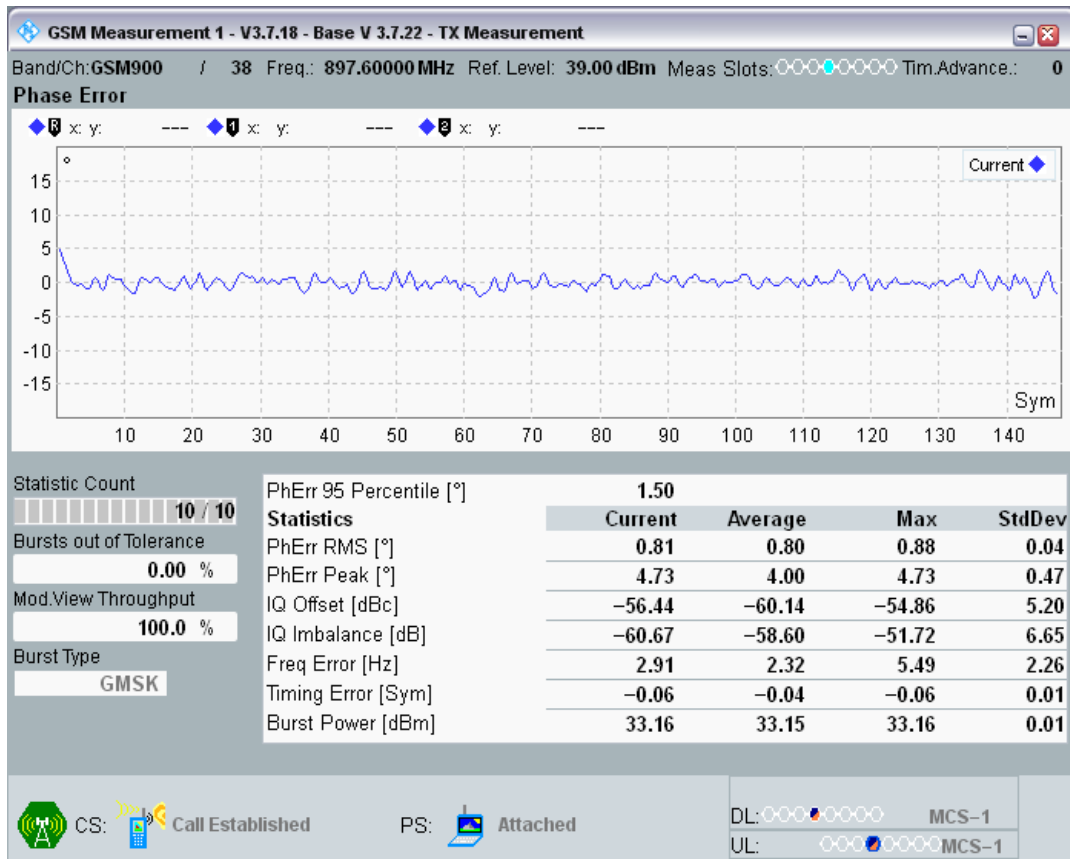


GSM900 Channel=38 PCL=5 TU3 @15

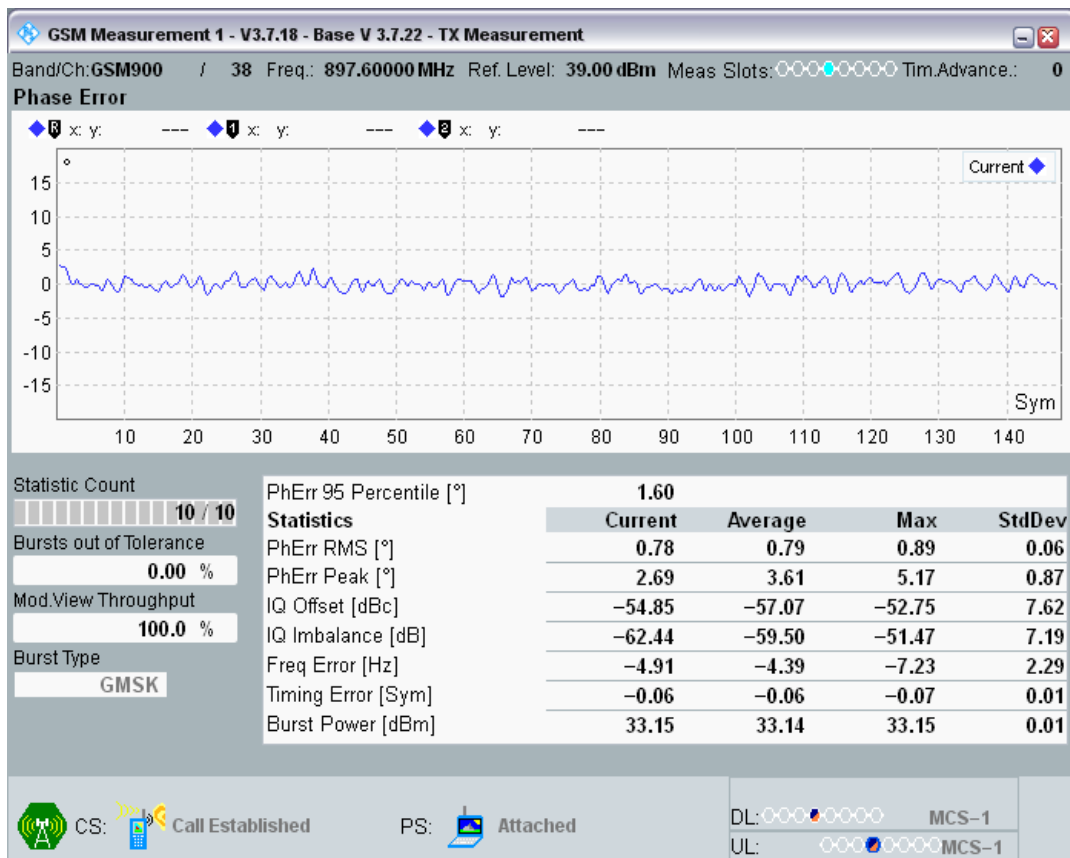


GSM900 Channel=38 PCL=5 TU3 @17

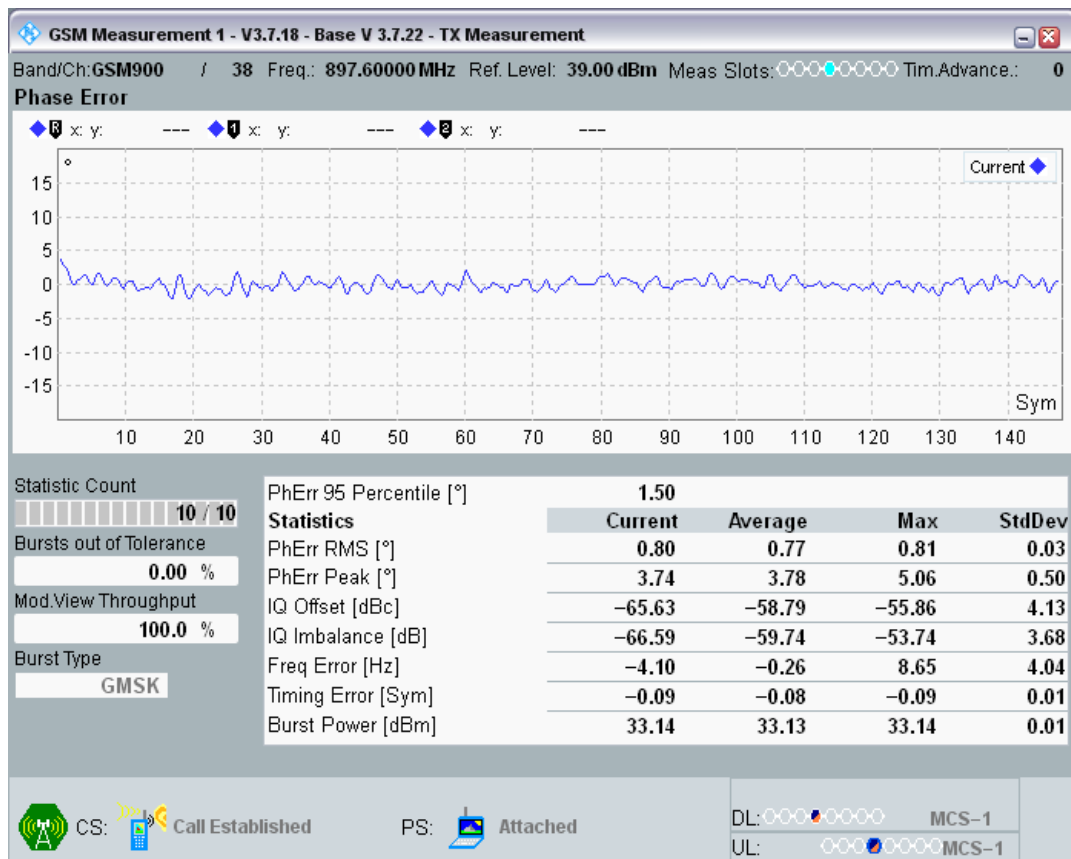


GSM900 Channel=38 PCL=5 TU3 @16

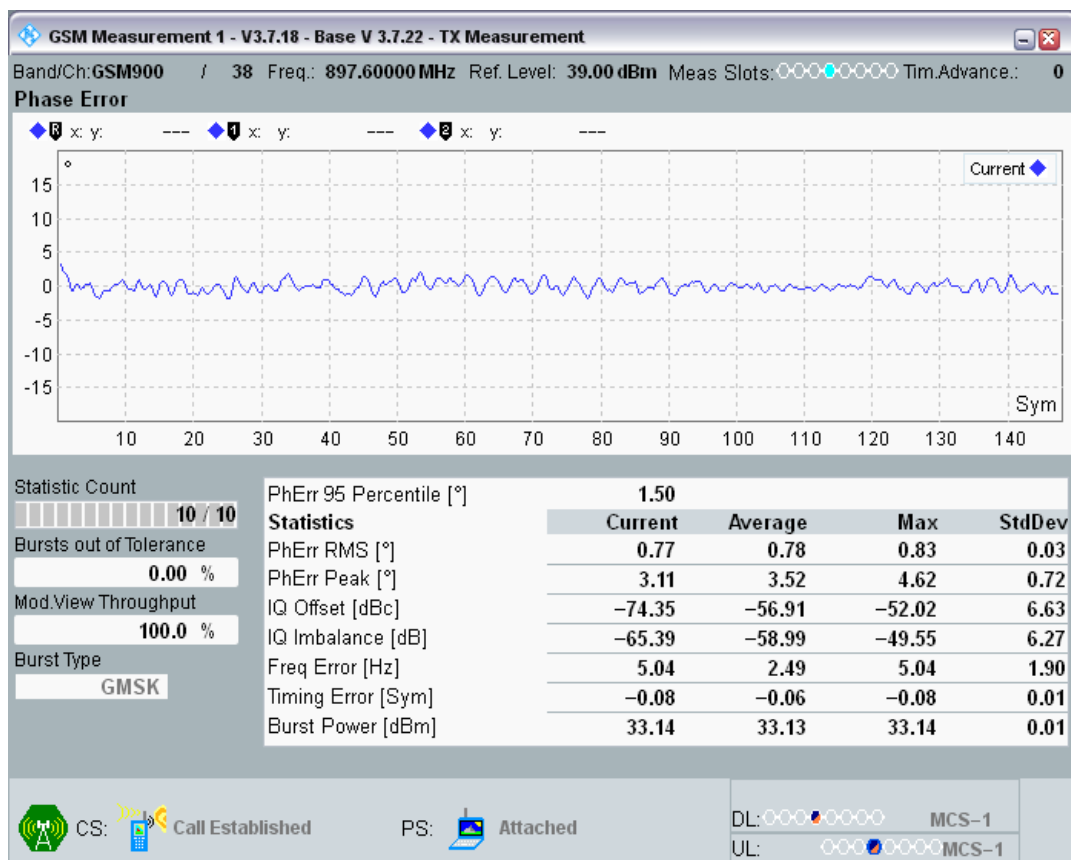


GSM900 Channel=38 PCL=5 TU3 @18

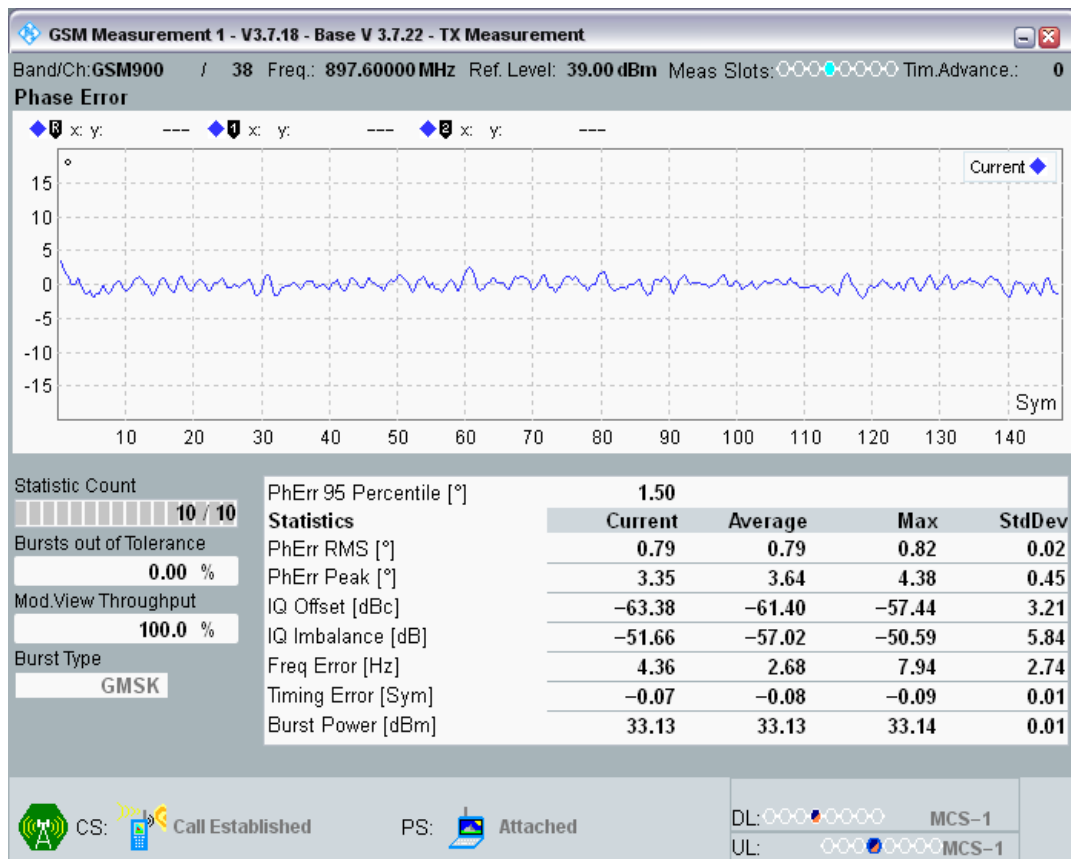

GSM900 Channel=38 PCL=5 TU3 @19

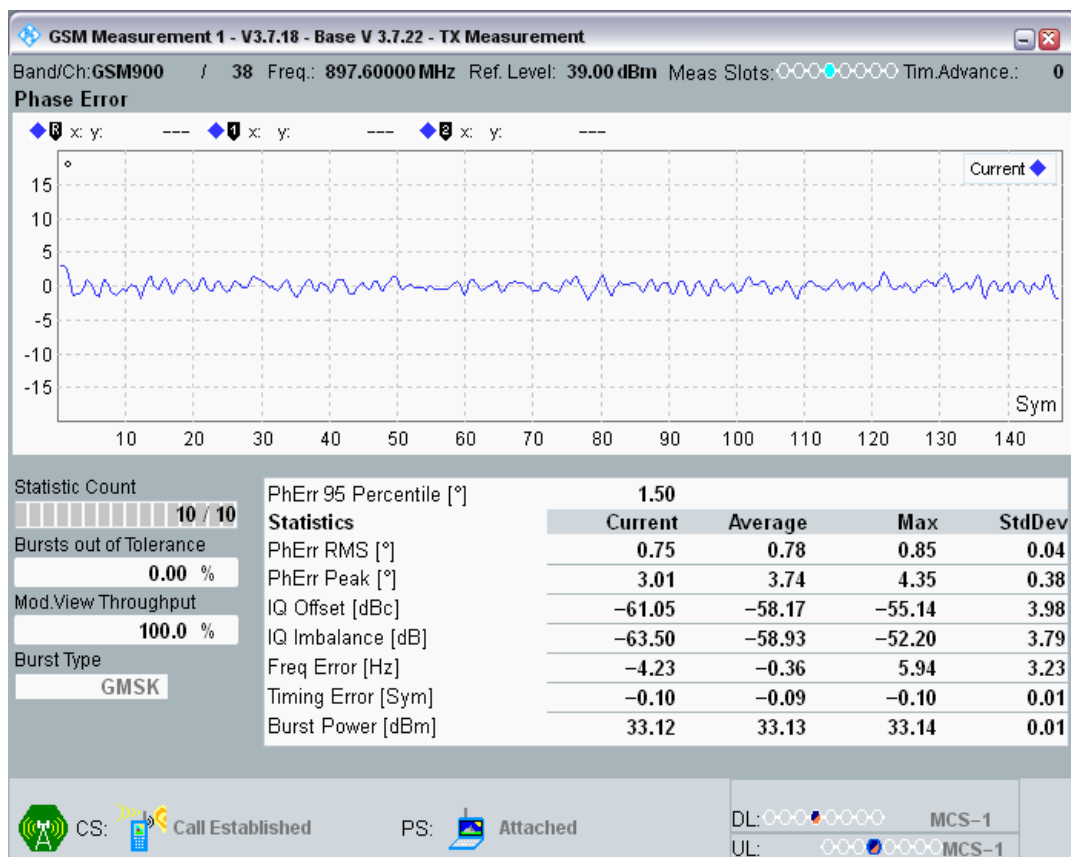

GSM900 Channel=38 PCL=5 TU3 @20

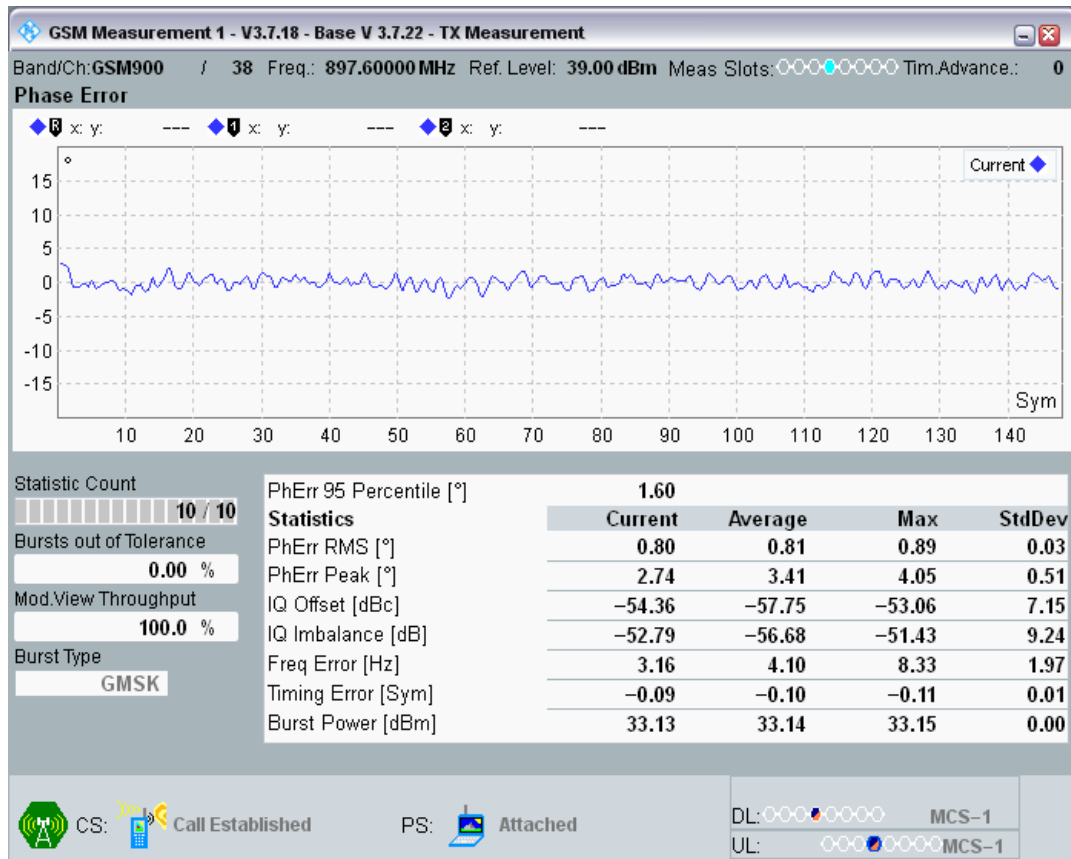

Clause 4.2.5 Transmitter output power and burst timing

Band	Channel	Frequency (MHz)	PCL	Type	Result	Low Limit	high Limit	Verdict
GSM1800	512	1710.2	0	Power	30.75	28	32	PASS
GSM1800	512	1710.2	0	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	1	Power	28.23	25	31	PASS
GSM1800	512	1710.2	1	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	2	Power	26.67	23	29	PASS
GSM1800	512	1710.2	2	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	3	Power	24.57	21	27	PASS
GSM1800	512	1710.2	3	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	4	Power	22.55	19	25	PASS
GSM1800	512	1710.2	4	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	5	Power	20.57	17	23	PASS
GSM1800	512	1710.2	5	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	6	Power	18.52	15	21	PASS
GSM1800	512	1710.2	6	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	7	Power	16.58	13	19	PASS
GSM1800	512	1710.2	7	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	8	Power	14.61	11	17	PASS
GSM1800	512	1710.2	8	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	9	Power	12.57	8	16	PASS
GSM1800	512	1710.2	9	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	10	Power	10.68	6	14	PASS

GSM1800	512	1710.2	10	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	11	Power	8.68	4	12	PASS
GSM1800	512	1710.2	11	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	12	Power	6.89	2	10	PASS
GSM1800	512	1710.2	12	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	13	Power	5.06	0	8	PASS
GSM1800	512	1710.2	13	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	14	Power	3.37	-3	7	PASS
GSM1800	512	1710.2	14	PvT(%)	0.00	0	0	PASS
GSM1800	512	1710.2	15	Power	1.65	-5	5	PASS
GSM1800	512	1710.2	15	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	0	Power	31.23	28	32	PASS
GSM1800	698	1747.4	0	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	1	Power	28.30	25	31	PASS
GSM1800	698	1747.4	1	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	2	Power	26.65	23	29	PASS
GSM1800	698	1747.4	2	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	3	Power	24.48	21	27	PASS
GSM1800	698	1747.4	3	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	4	Power	22.46	19	25	PASS
GSM1800	698	1747.4	4	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	5	Power	20.42	17	23	PASS
GSM1800	698	1747.4	5	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	6	Power	18.38	15	21	PASS
GSM1800	698	1747.4	6	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	7	Power	16.42	13	19	PASS
GSM1800	698	1747.4	7	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	8	Power	14.39	11	17	PASS
GSM1800	698	1747.4	8	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	9	Power	12.46	8	16	PASS
GSM1800	698	1747.4	9	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	10	Power	10.57	6	14	PASS
GSM1800	698	1747.4	10	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	11	Power	8.60	4	12	PASS
GSM1800	698	1747.4	11	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	12	Power	6.71	2	10	PASS
GSM1800	698	1747.4	12	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	13	Power	4.92	0	8	PASS
GSM1800	698	1747.4	13	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	14	Power	3.16	-3	7	PASS
GSM1800	698	1747.4	14	PvT(%)	0.00	0	0	PASS
GSM1800	698	1747.4	15	Power	1.36	-5	5	PASS
GSM1800	698	1747.4	15	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	0	Power	31.53	28	32	PASS

GSM1800	885	1784.8	0	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	1	Power	28.51	25	31	PASS
GSM1800	885	1784.8	1	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	2	Power	26.78	23	29	PASS
GSM1800	885	1784.8	2	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	3	Power	24.54	21	27	PASS
GSM1800	885	1784.8	3	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	4	Power	22.56	19	25	PASS
GSM1800	885	1784.8	4	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	5	Power	20.54	17	23	PASS
GSM1800	885	1784.8	5	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	6	Power	18.48	15	21	PASS
GSM1800	885	1784.8	6	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	7	Power	16.51	13	19	PASS
GSM1800	885	1784.8	7	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	8	Power	14.43	11	17	PASS
GSM1800	885	1784.8	8	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	9	Power	12.44	8	16	PASS
GSM1800	885	1784.8	9	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	10	Power	10.67	6	14	PASS
GSM1800	885	1784.8	10	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	11	Power	8.68	4	12	PASS
GSM1800	885	1784.8	11	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	12	Power	6.83	2	10	PASS
GSM1800	885	1784.8	12	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	13	Power	4.97	0	8	PASS
GSM1800	885	1784.8	13	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	14	Power	3.32	-3	7	PASS
GSM1800	885	1784.8	14	PvT(%)	0.00	0	0	PASS
GSM1800	885	1784.8	15	Power	1.54	-5	5	PASS
GSM1800	885	1784.8	15	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	0	Power	30.64	28	32	PASS
GSM1900	512	1850.2	0	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	1	Power	28.18	25	31	PASS
GSM1900	512	1850.2	1	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	2	Power	26.73	23	29	PASS
GSM1900	512	1850.2	2	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	3	Power	24.75	21	27	PASS
GSM1900	512	1850.2	3	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	4	Power	22.82	19	25	PASS
GSM1900	512	1850.2	4	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	5	Power	20.80	17	23	PASS
GSM1900	512	1850.2	5	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	6	Power	18.85	15	21	PASS

GSM1900	512	1850.2	6	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	7	Power	16.76	13	19	PASS
GSM1900	512	1850.2	7	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	8	Power	14.61	11	17	PASS
GSM1900	512	1850.2	8	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	9	Power	12.57	8	16	PASS
GSM1900	512	1850.2	9	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	10	Power	10.55	6	14	PASS
GSM1900	512	1850.2	10	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	11	Power	8.59	4	12	PASS
GSM1900	512	1850.2	11	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	12	Power	6.62	2	10	PASS
GSM1900	512	1850.2	12	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	13	Power	4.53	0	8	PASS
GSM1900	512	1850.2	13	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	14	Power	2.60	-3	7	PASS
GSM1900	512	1850.2	14	PvT(%)	0.00	0	0	PASS
GSM1900	512	1850.2	15	Power	0.63	-5	5	PASS
GSM1900	512	1850.2	15	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	0	Power	30.56	28	32	PASS
GSM1900	661	1880	0	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	1	Power	28.25	25	31	PASS
GSM1900	661	1880	1	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	2	Power	26.78	23	29	PASS
GSM1900	661	1880	2	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	3	Power	24.78	21	27	PASS
GSM1900	661	1880	3	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	4	Power	22.84	19	25	PASS
GSM1900	661	1880	4	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	5	Power	20.82	17	23	PASS
GSM1900	661	1880	5	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	6	Power	18.83	15	21	PASS
GSM1900	661	1880	6	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	7	Power	16.75	13	19	PASS
GSM1900	661	1880	7	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	8	Power	14.67	11	17	PASS
GSM1900	661	1880	8	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	9	Power	12.58	8	16	PASS
GSM1900	661	1880	9	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	10	Power	10.59	6	14	PASS
GSM1900	661	1880	10	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	11	Power	8.58	4	12	PASS
GSM1900	661	1880	11	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	12	Power	6.68	2	10	PASS

GSM1900	661	1880	12	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	13	Power	4.56	0	8	PASS
GSM1900	661	1880	13	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	14	Power	2.64	-3	7	PASS
GSM1900	661	1880	14	PvT(%)	0.00	0	0	PASS
GSM1900	661	1880	15	Power	0.72	-5	5	PASS
GSM1900	661	1880	15	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	0	Power	30.61	28	32	PASS
GSM1900	810	1909.8	0	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	1	Power	28.31	25	31	PASS
GSM1900	810	1909.8	1	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	2	Power	26.78	23	29	PASS
GSM1900	810	1909.8	2	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	3	Power	24.79	21	27	PASS
GSM1900	810	1909.8	3	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	4	Power	22.84	19	25	PASS
GSM1900	810	1909.8	4	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	5	Power	20.81	17	23	PASS
GSM1900	810	1909.8	5	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	6	Power	18.78	15	21	PASS
GSM1900	810	1909.8	6	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	7	Power	16.73	13	19	PASS
GSM1900	810	1909.8	7	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	8	Power	14.62	11	17	PASS
GSM1900	810	1909.8	8	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	9	Power	12.57	8	16	PASS
GSM1900	810	1909.8	9	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	10	Power	10.57	6	14	PASS
GSM1900	810	1909.8	10	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	11	Power	8.59	4	12	PASS
GSM1900	810	1909.8	11	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	12	Power	6.62	2	10	PASS
GSM1900	810	1909.8	12	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	13	Power	4.56	0	8	PASS
GSM1900	810	1909.8	13	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	14	Power	2.73	-3	7	PASS
GSM1900	810	1909.8	14	PvT(%)	0.00	0	0	PASS
GSM1900	810	1909.8	15	Power	0.79	-5	5	PASS
GSM1900	810	1909.8	15	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	5	Power	34.07	31	35	PASS
GSM850	128	824.2	5	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	6	Power	31.54	28	34	PASS
GSM850	128	824.2	6	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	7	Power	29.67	26	32	PASS


GSM850	128	824.2	7	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	8	Power	27.60	24	30	PASS
GSM850	128	824.2	8	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	9	Power	25.54	22	28	PASS
GSM850	128	824.2	9	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	10	Power	23.54	20	26	PASS
GSM850	128	824.2	10	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	11	Power	21.59	18	24	PASS
GSM850	128	824.2	11	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	12	Power	19.52	16	22	PASS
GSM850	128	824.2	12	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	13	Power	17.61	14	20	PASS
GSM850	128	824.2	13	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	14	Power	15.61	12	18	PASS
GSM850	128	824.2	14	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	15	Power	13.72	10	16	PASS
GSM850	128	824.2	15	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	16	Power	11.70	6	16	PASS
GSM850	128	824.2	16	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	17	Power	9.90	4	14	PASS
GSM850	128	824.2	17	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	18	Power	8.15	2	12	PASS
GSM850	128	824.2	18	PvT(%)	0.00	0	0	PASS
GSM850	128	824.2	19	Power	6.28	0	10	PASS
GSM850	128	824.2	19	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	5	Power	33.62	31	35	PASS
GSM850	190	836.6	5	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	6	Power	31.30	28	34	PASS
GSM850	190	836.6	6	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	7	Power	29.38	26	32	PASS
GSM850	190	836.6	7	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	8	Power	27.28	24	30	PASS
GSM850	190	836.6	8	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	9	Power	25.25	22	28	PASS
GSM850	190	836.6	9	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	10	Power	23.25	20	26	PASS
GSM850	190	836.6	10	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	11	Power	21.23	18	24	PASS
GSM850	190	836.6	11	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	12	Power	19.26	16	22	PASS
GSM850	190	836.6	12	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	13	Power	17.31	14	20	PASS
GSM850	190	836.6	13	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	14	Power	15.32	12	18	PASS

GSM850	190	836.6	14	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	15	Power	13.43	10	16	PASS
GSM850	190	836.6	15	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	16	Power	11.42	6	16	PASS
GSM850	190	836.6	16	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	17	Power	9.66	4	14	PASS
GSM850	190	836.6	17	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	18	Power	7.89	2	12	PASS
GSM850	190	836.6	18	PvT(%)	0.00	0	0	PASS
GSM850	190	836.6	19	Power	6.05	0	10	PASS
GSM850	190	836.6	19	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	5	Power	33.63	31	35	PASS
GSM850	251	848.8	5	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	6	Power	31.40	28	34	PASS
GSM850	251	848.8	6	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	7	Power	29.47	26	32	PASS
GSM850	251	848.8	7	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	8	Power	27.38	24	30	PASS
GSM850	251	848.8	8	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	9	Power	25.34	22	28	PASS
GSM850	251	848.8	9	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	10	Power	23.34	20	26	PASS
GSM850	251	848.8	10	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	11	Power	21.29	18	24	PASS
GSM850	251	848.8	11	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	12	Power	19.31	16	22	PASS
GSM850	251	848.8	12	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	13	Power	17.39	14	20	PASS
GSM850	251	848.8	13	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	14	Power	15.46	12	18	PASS
GSM850	251	848.8	14	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	15	Power	13.57	10	16	PASS
GSM850	251	848.8	15	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	16	Power	11.58	6	16	PASS
GSM850	251	848.8	16	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	17	Power	9.82	4	14	PASS
GSM850	251	848.8	17	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	18	Power	8.02	2	12	PASS
GSM850	251	848.8	18	PvT(%)	0.00	0	0	PASS
GSM850	251	848.8	19	Power	6.16	0	10	PASS
GSM850	251	848.8	19	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	5	Power	32.85	31	35	PASS
GSM900	975	880.2	5	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	6	Power	30.57	28	34	PASS


GSM900	975	880.2	6	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	7	Power	28.81	26	32	PASS
GSM900	975	880.2	7	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	8	Power	26.76	24	30	PASS
GSM900	975	880.2	8	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	9	Power	24.82	22	28	PASS
GSM900	975	880.2	9	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	10	Power	22.69	20	26	PASS
GSM900	975	880.2	10	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	11	Power	20.64	18	24	PASS
GSM900	975	880.2	11	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	12	Power	18.73	16	22	PASS
GSM900	975	880.2	12	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	13	Power	16.74	14	20	PASS
GSM900	975	880.2	13	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	14	Power	14.67	12	18	PASS
GSM900	975	880.2	14	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	15	Power	12.71	10	16	PASS
GSM900	975	880.2	15	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	16	Power	10.58	6	16	PASS
GSM900	975	880.2	16	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	17	Power	8.67	4	14	PASS
GSM900	975	880.2	17	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	18	Power	6.54	2	12	PASS
GSM900	975	880.2	18	PvT(%)	0.00	0	0	PASS
GSM900	975	880.2	19	Power	4.69	0	10	PASS
GSM900	975	880.2	19	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	5	Power	33.06	31	35	PASS
GSM900	38	897.6	5	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	6	Power	30.84	28	34	PASS
GSM900	38	897.6	6	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	7	Power	29.09	26	32	PASS
GSM900	38	897.6	7	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	8	Power	27.03	24	30	PASS
GSM900	38	897.6	8	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	9	Power	25.08	22	28	PASS
GSM900	38	897.6	9	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	10	Power	23.03	20	26	PASS
GSM900	38	897.6	10	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	11	Power	20.93	18	24	PASS
GSM900	38	897.6	11	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	12	Power	19.00	16	22	PASS
GSM900	38	897.6	12	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	13	Power	17.03	14	20	PASS

GSM900	38	897.6	13	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	14	Power	14.95	12	18	PASS
GSM900	38	897.6	14	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	15	Power	13.05	10	16	PASS
GSM900	38	897.6	15	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	16	Power	10.79	6	16	PASS
GSM900	38	897.6	16	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	17	Power	8.85	4	14	PASS
GSM900	38	897.6	17	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	18	Power	6.76	2	12	PASS
GSM900	38	897.6	18	PvT(%)	0.00	0	0	PASS
GSM900	38	897.6	19	Power	4.91	0	10	PASS
GSM900	38	897.6	19	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	5	Power	33.20	31	35	PASS
GSM900	124	914.8	5	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	6	Power	30.80	28	34	PASS
GSM900	124	914.8	6	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	7	Power	29.05	26	32	PASS
GSM900	124	914.8	7	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	8	Power	27.00	24	30	PASS
GSM900	124	914.8	8	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	9	Power	25.02	22	28	PASS
GSM900	124	914.8	9	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	10	Power	22.96	20	26	PASS
GSM900	124	914.8	10	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	11	Power	20.89	18	24	PASS
GSM900	124	914.8	11	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	12	Power	18.90	16	22	PASS
GSM900	124	914.8	12	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	13	Power	16.94	14	20	PASS
GSM900	124	914.8	13	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	14	Power	14.83	12	18	PASS
GSM900	124	914.8	14	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	15	Power	12.91	10	16	PASS
GSM900	124	914.8	15	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	16	Power	10.79	6	16	PASS
GSM900	124	914.8	16	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	17	Power	8.68	4	14	PASS
GSM900	124	914.8	17	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	18	Power	6.56	2	12	PASS
GSM900	124	914.8	18	PvT(%)	0.00	0	0	PASS
GSM900	124	914.8	19	Power	4.68	0	10	PASS
GSM900	124	914.8	19	PvT(%)	0.00	0	0	PASS


GSM1800 Channel=512 PCL=0

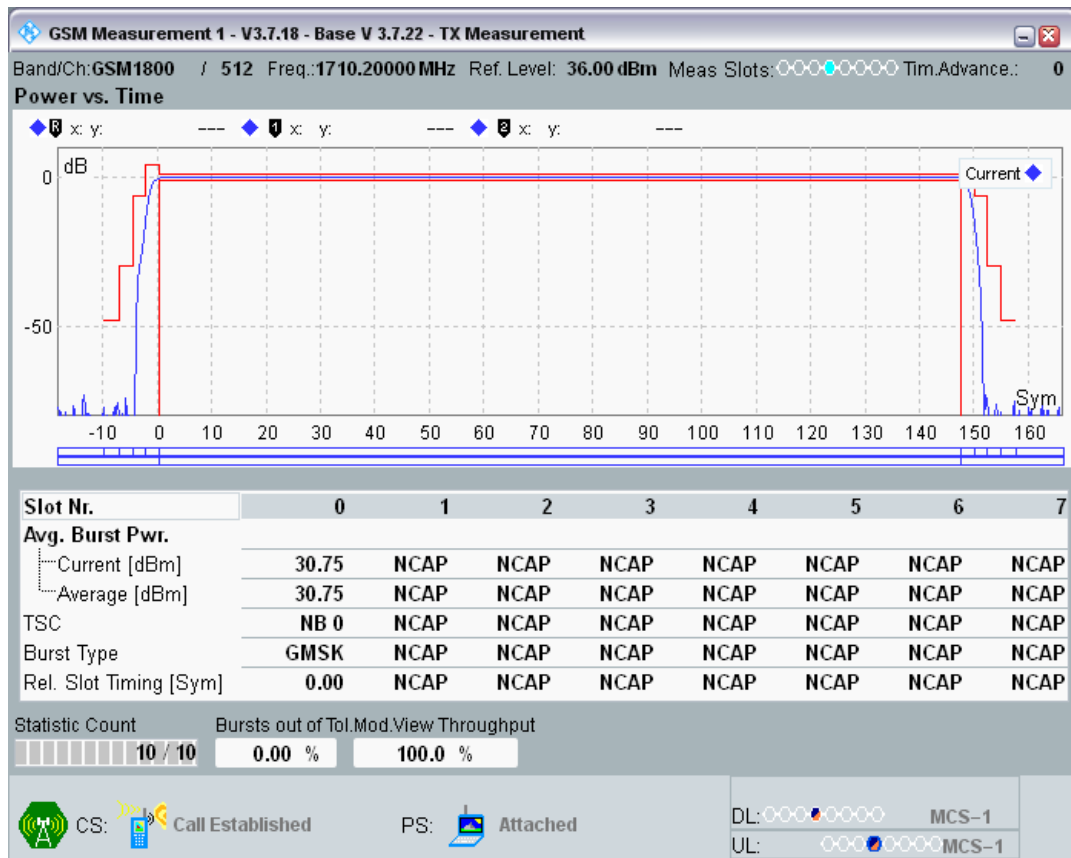


GSM1800 Channel=512 PCL=1

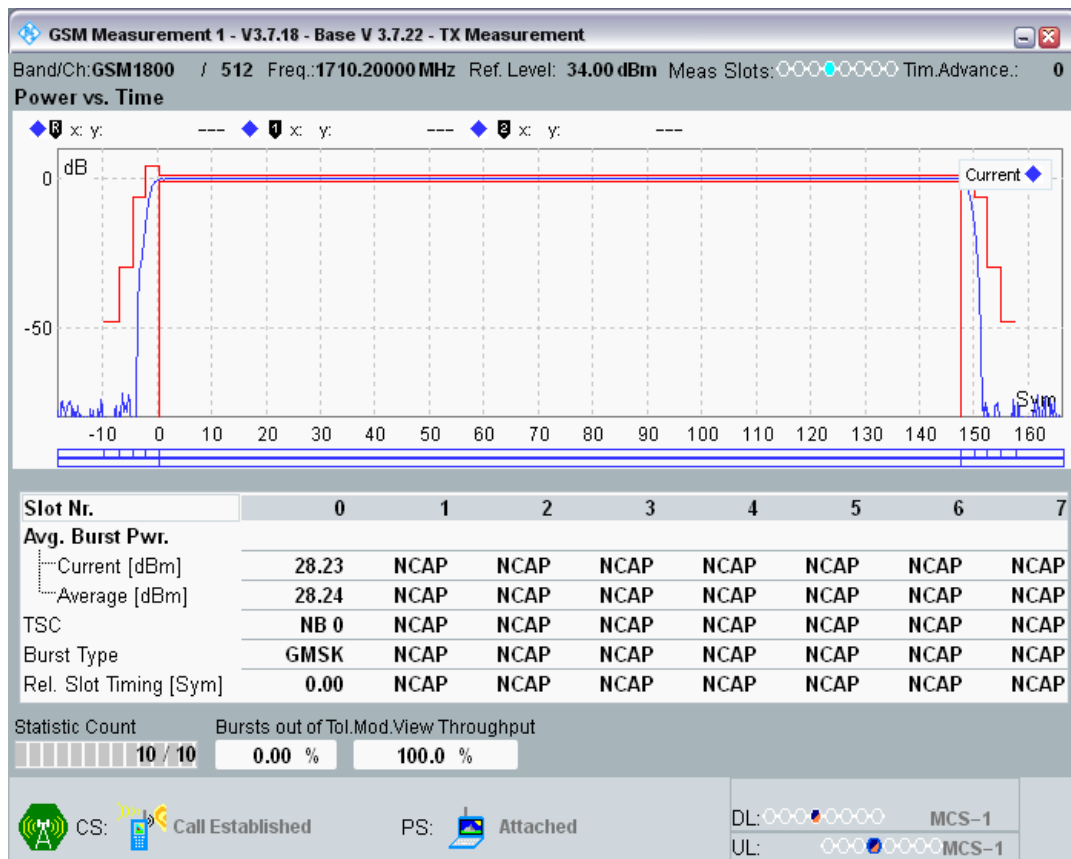


GSM1800 Channel=512 PCL=2

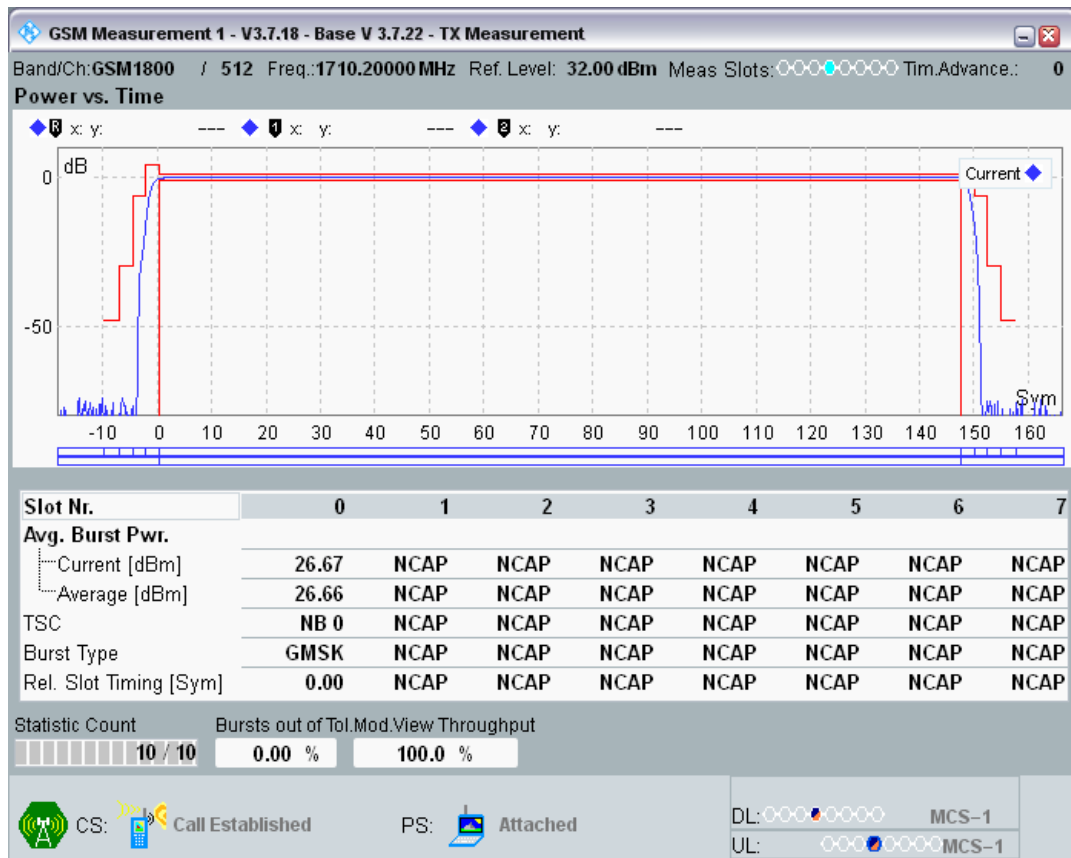


GSM1800 Channel=512 PCL=3

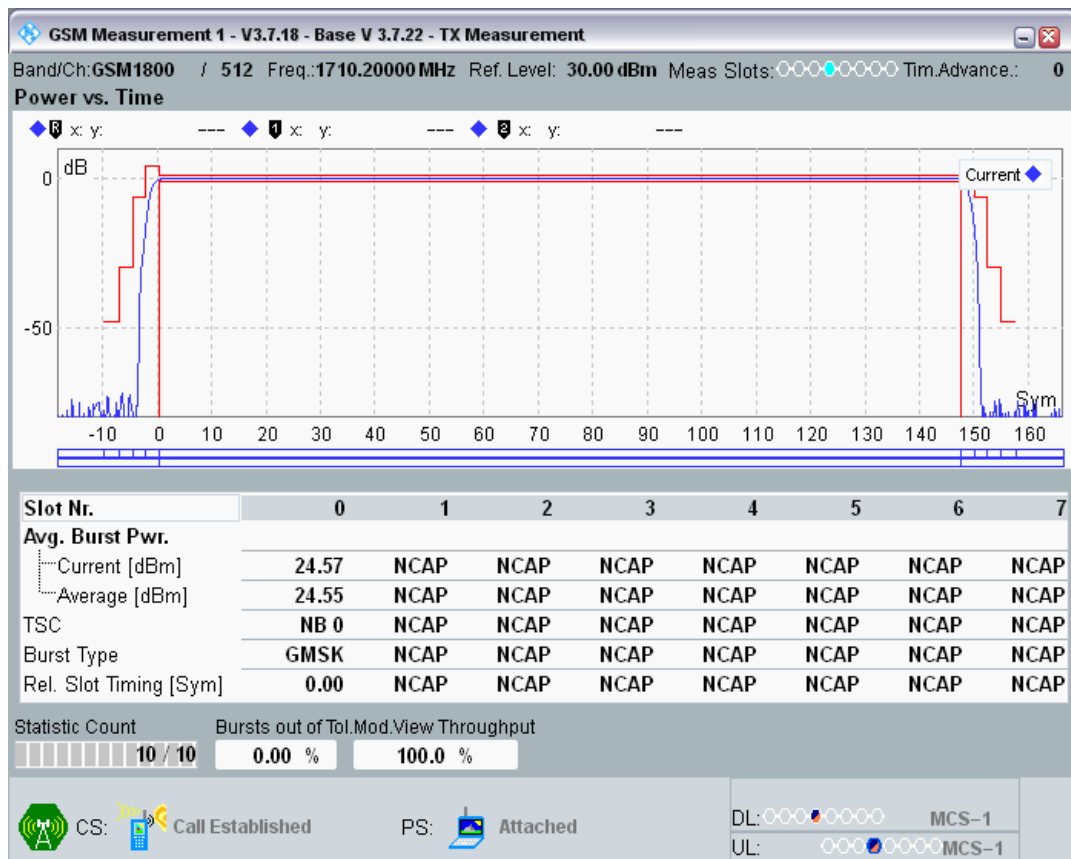


GSM1800 Channel=512 PCL=4

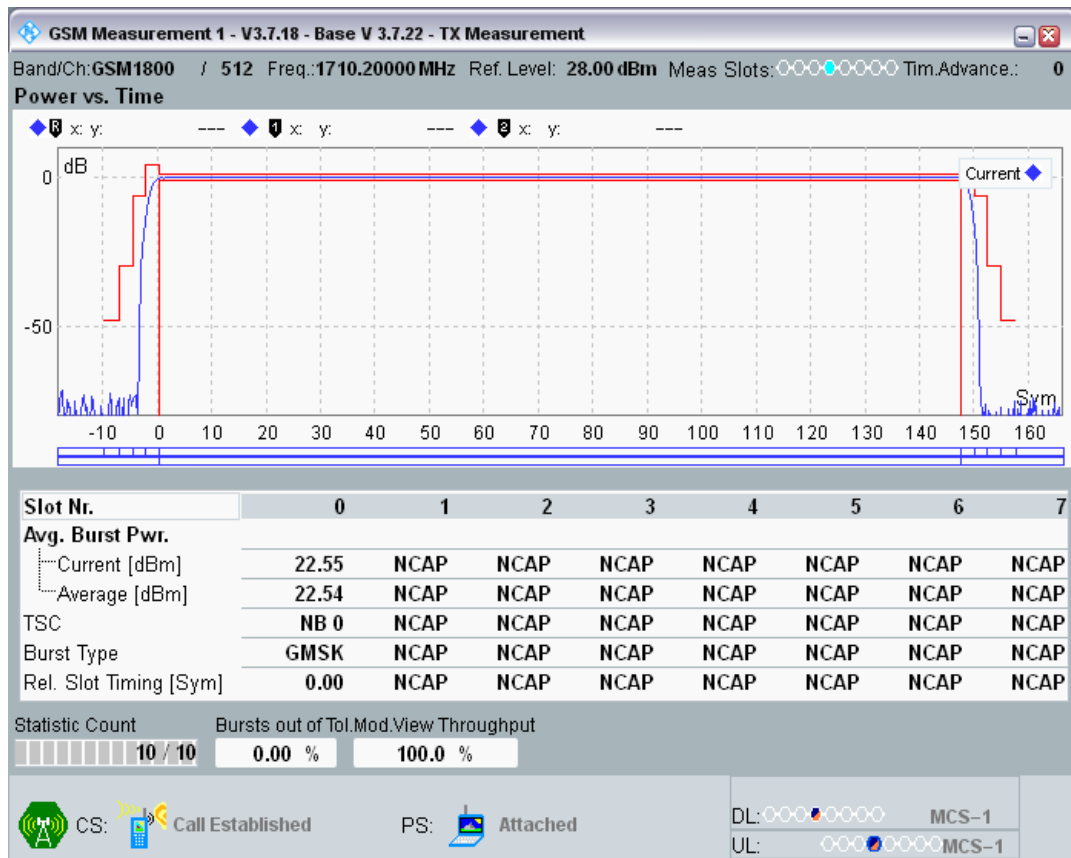


GSM1800 Channel=512 PCL=5

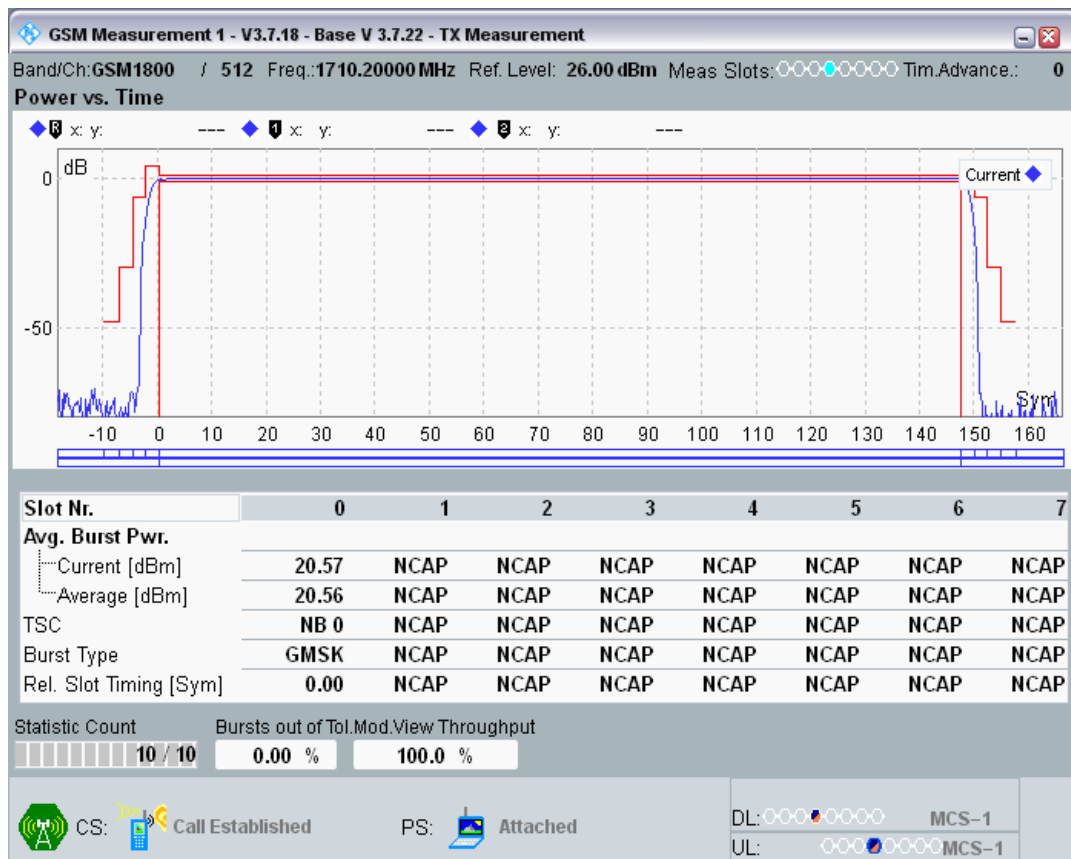


GSM1800 Channel=512 PCL=6

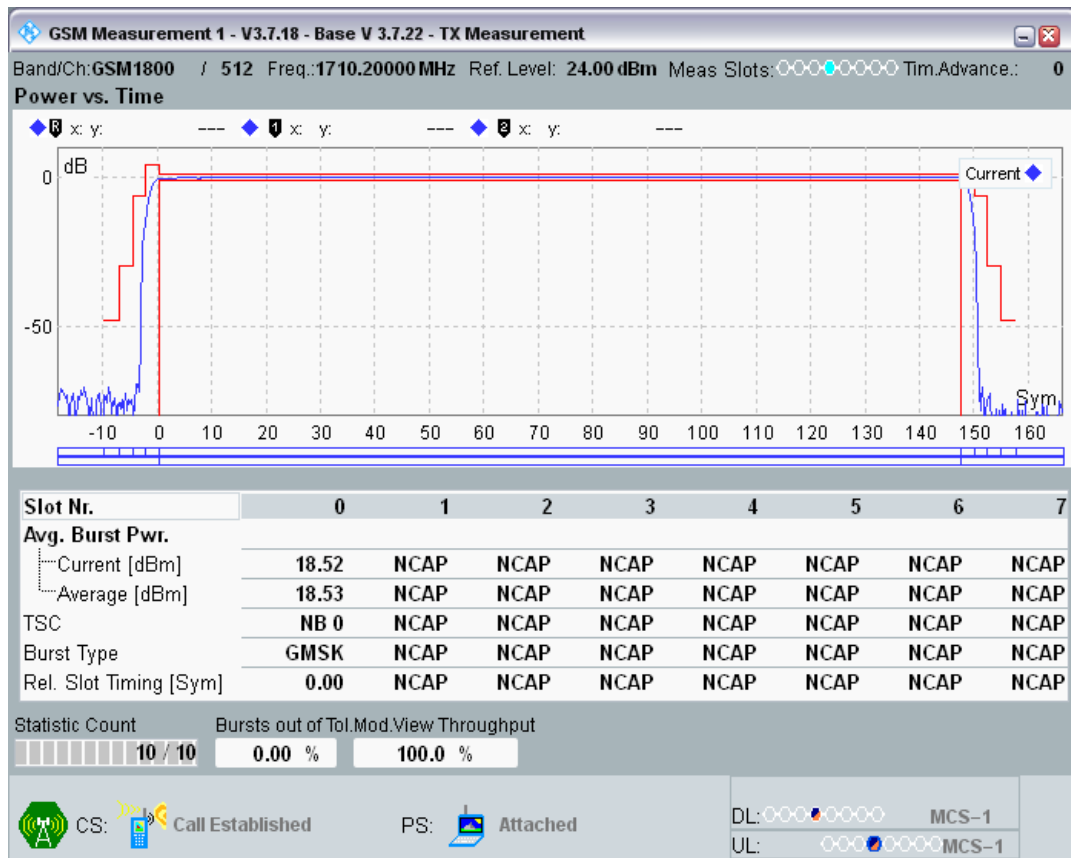


GSM1800 Channel=512 PCL=7

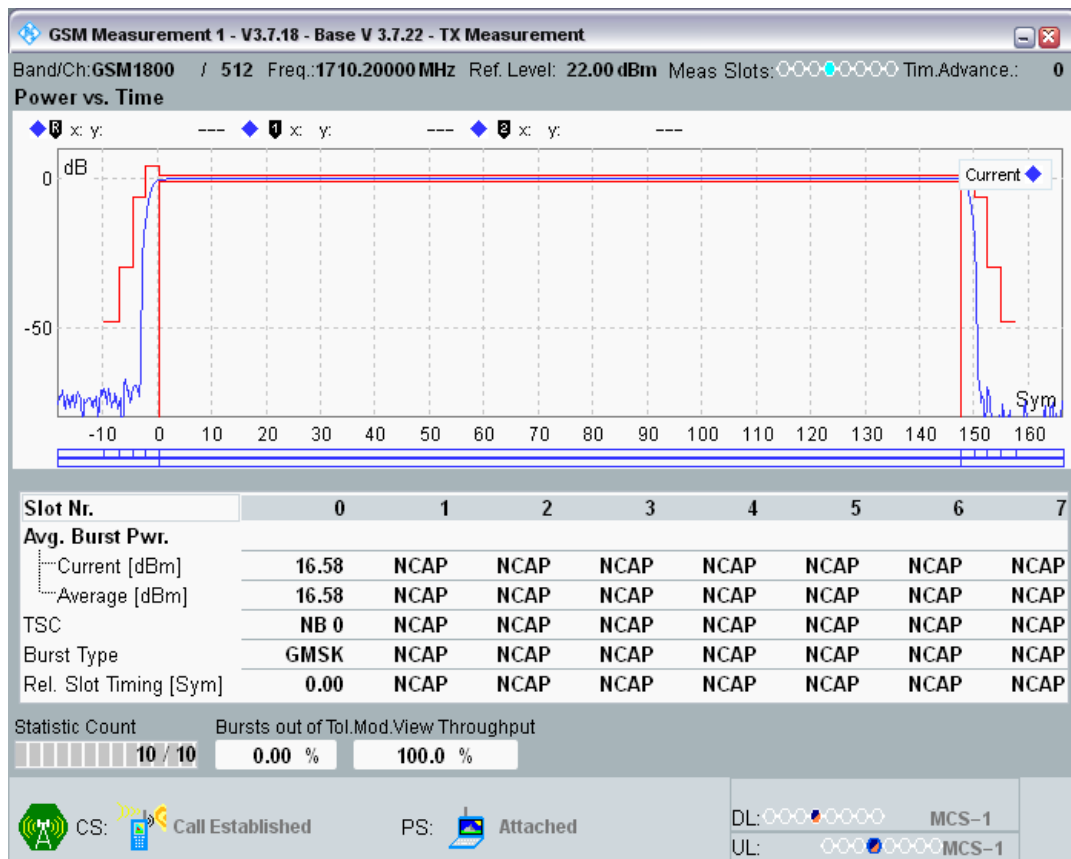


GSM1800 Channel=512 PCL=8

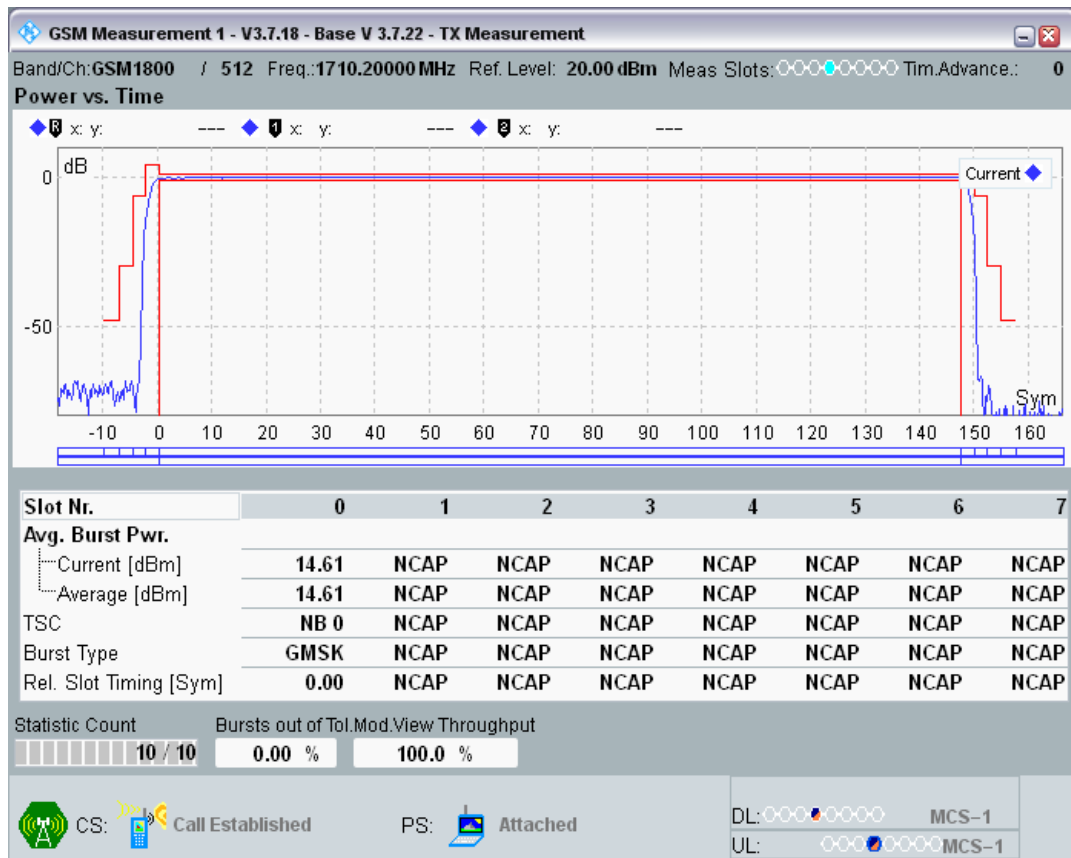


GSM1800 Channel=512 PCL=9

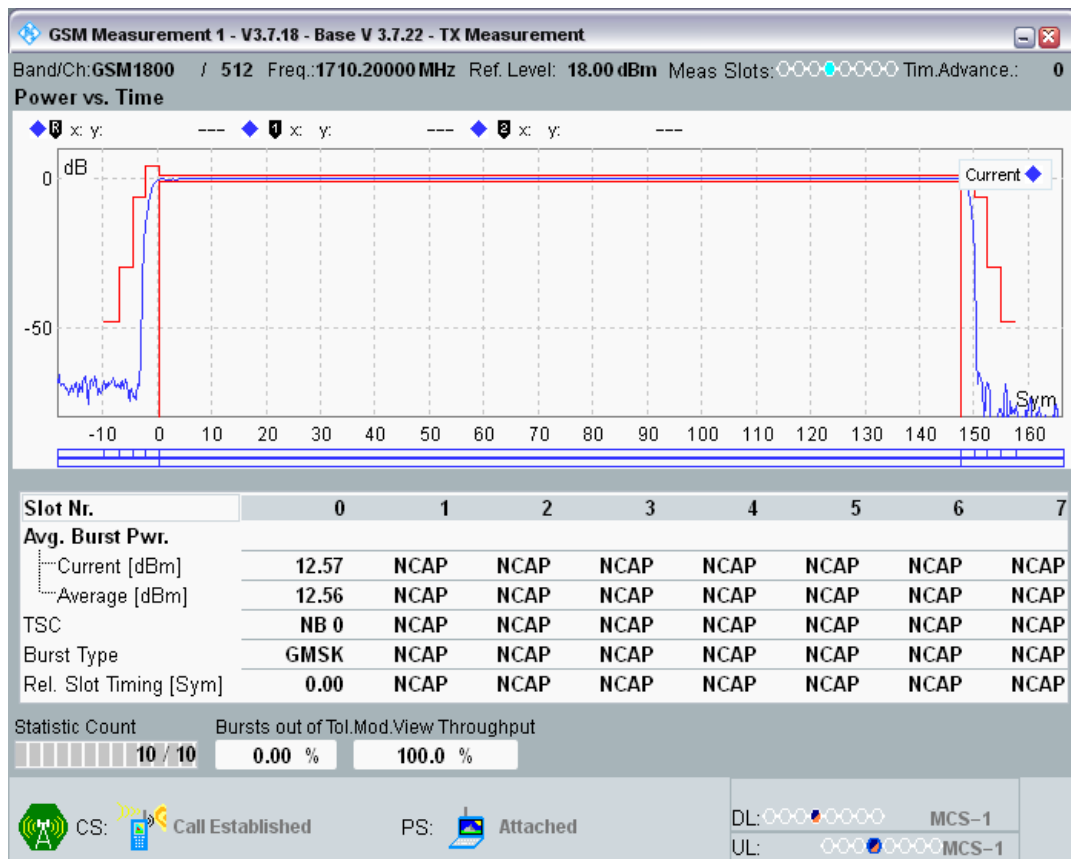


GSM1800 Channel=512 PCL=10

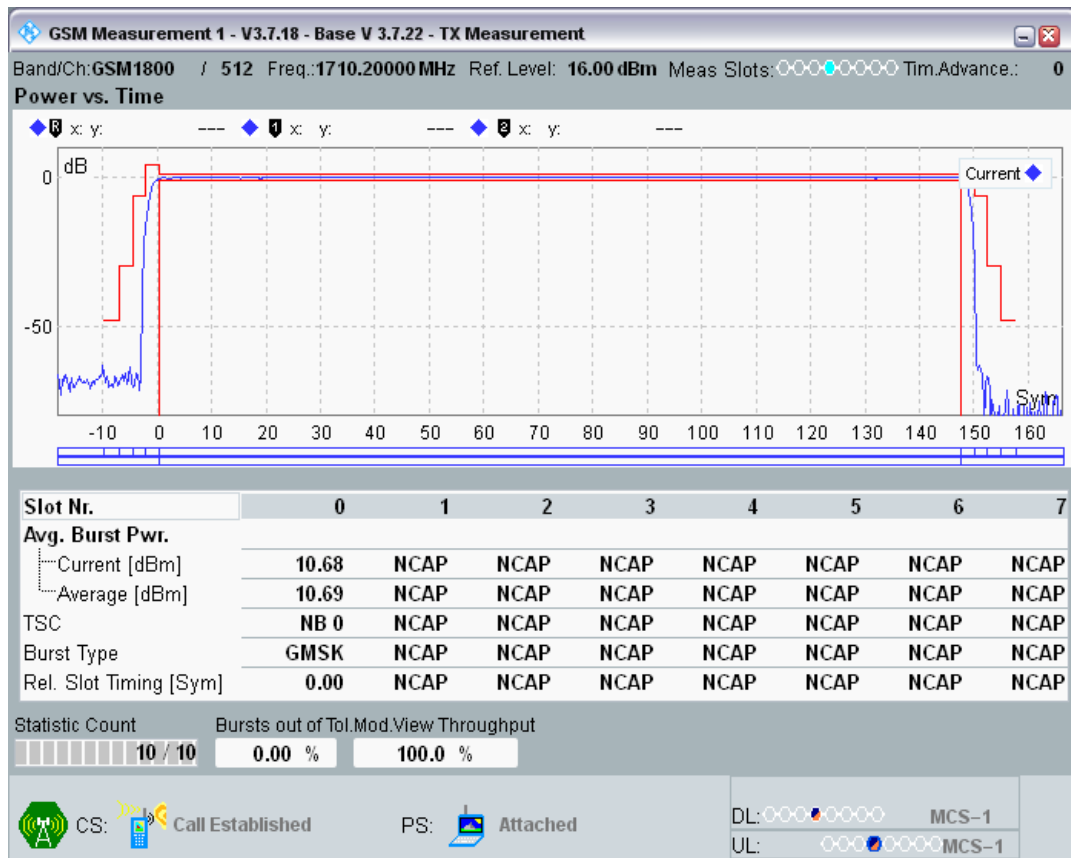


GSM1800 Channel=512 PCL=11

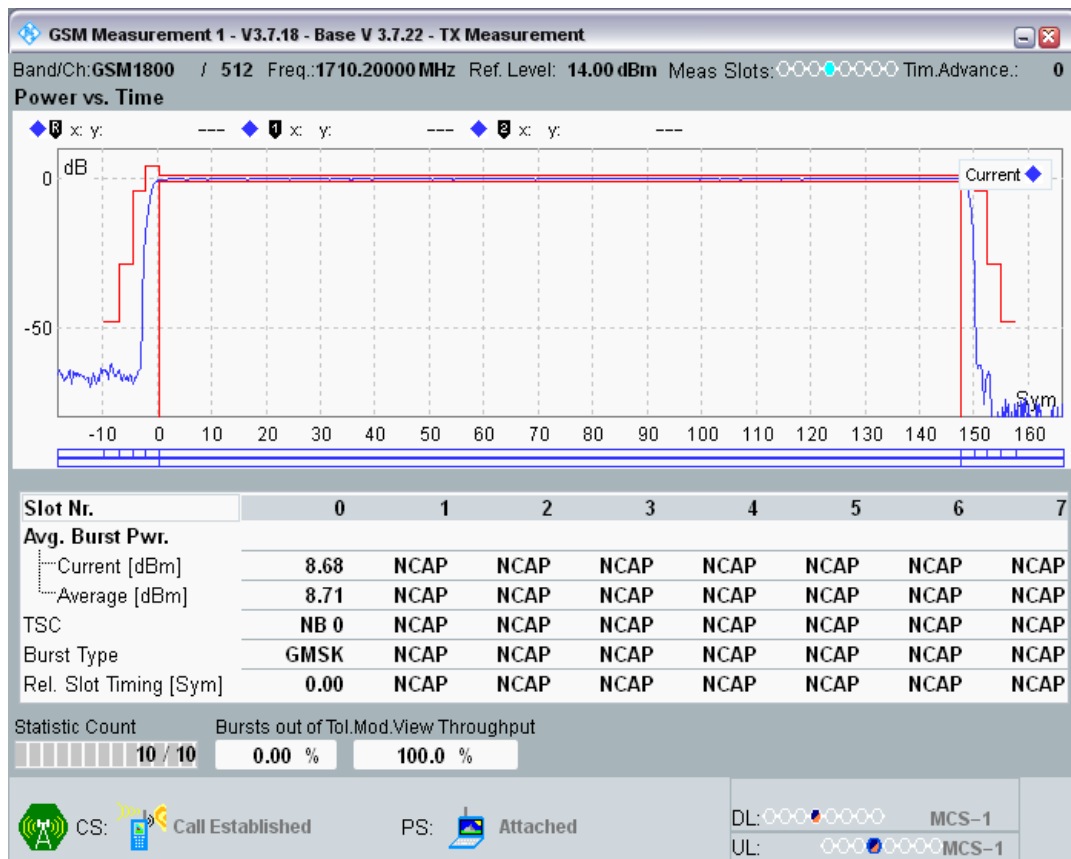


GSM1800 Channel=512 PCL=12

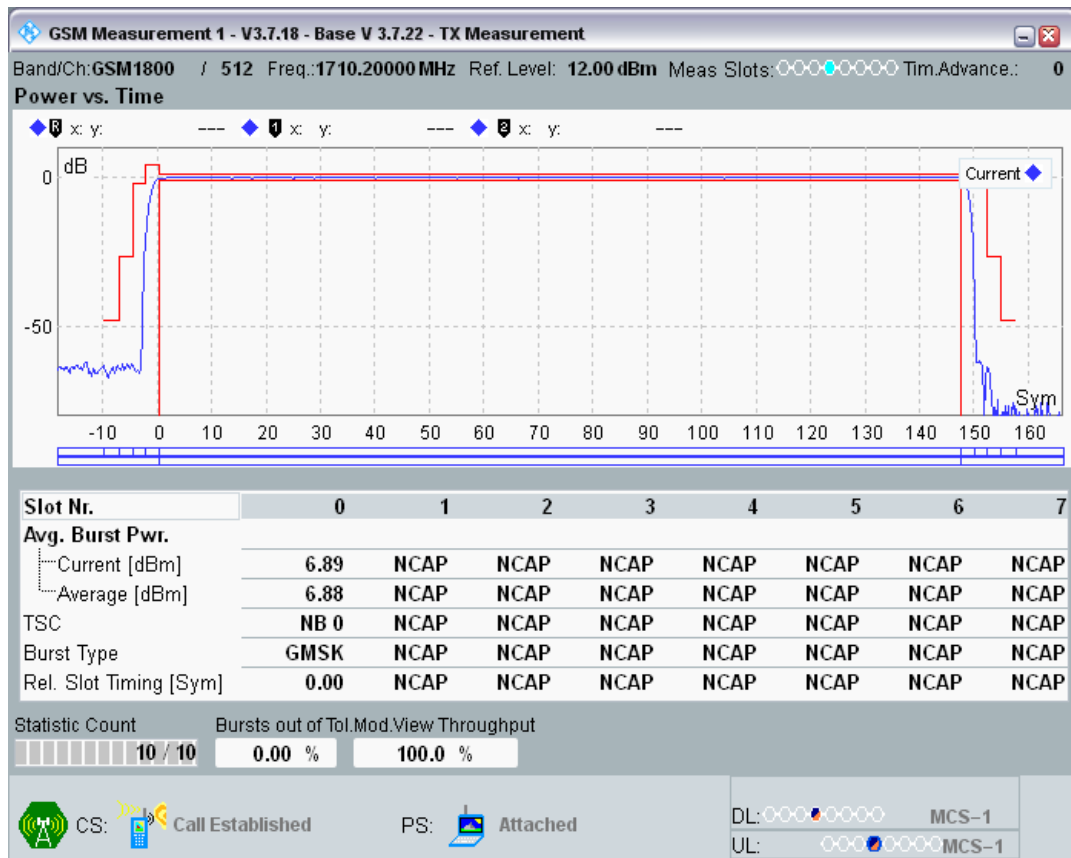


GSM1800 Channel=512 PCL=13

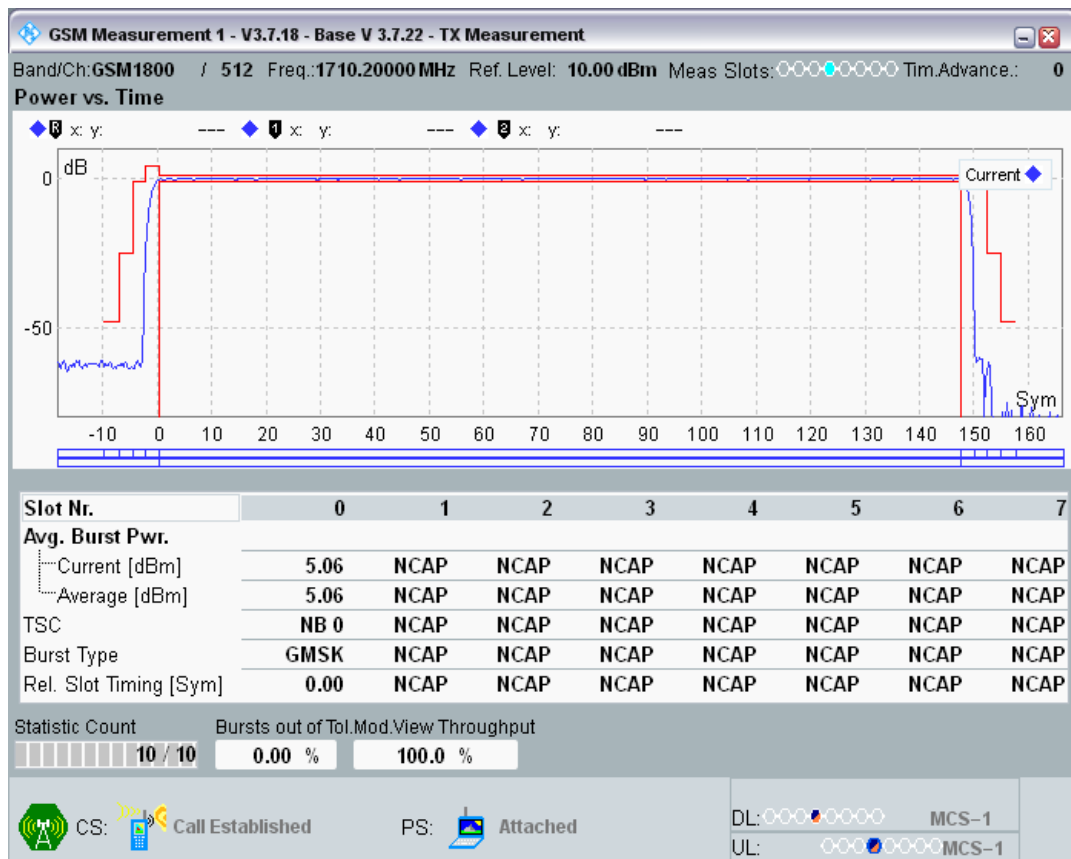


GSM1800 Channel=512 PCL=14

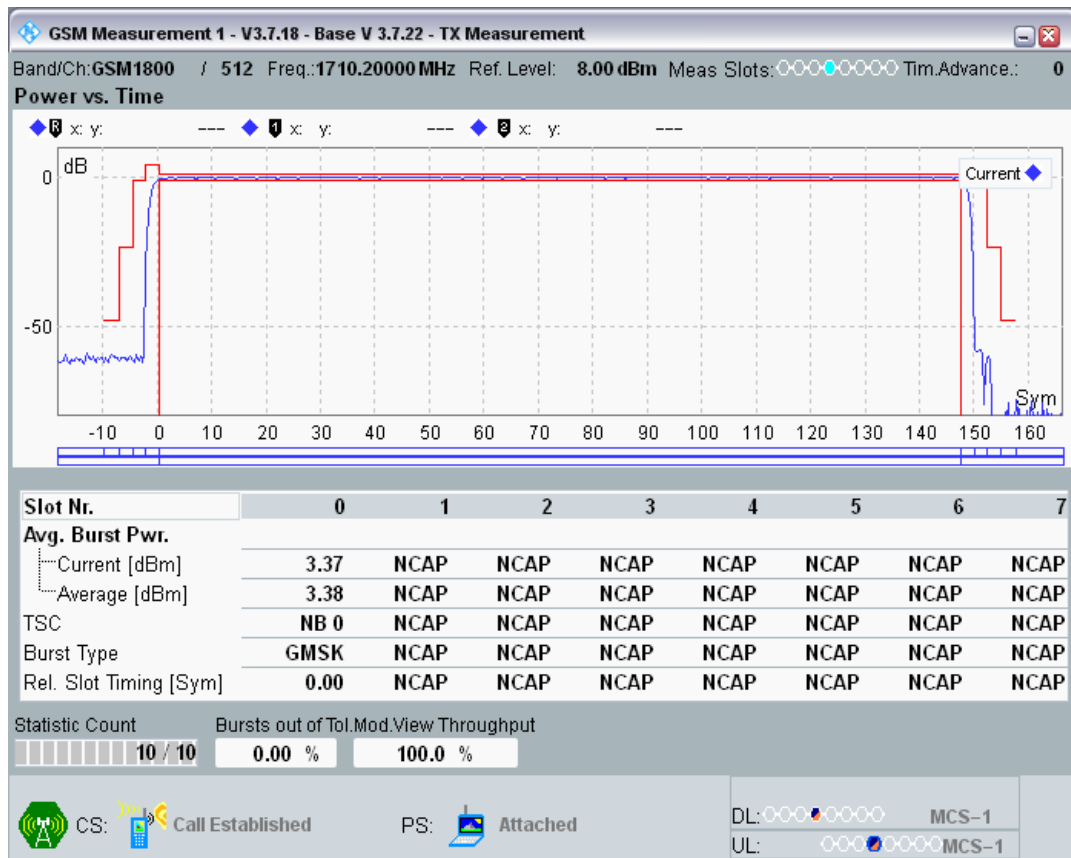


GSM1800 Channel=512 PCL=15

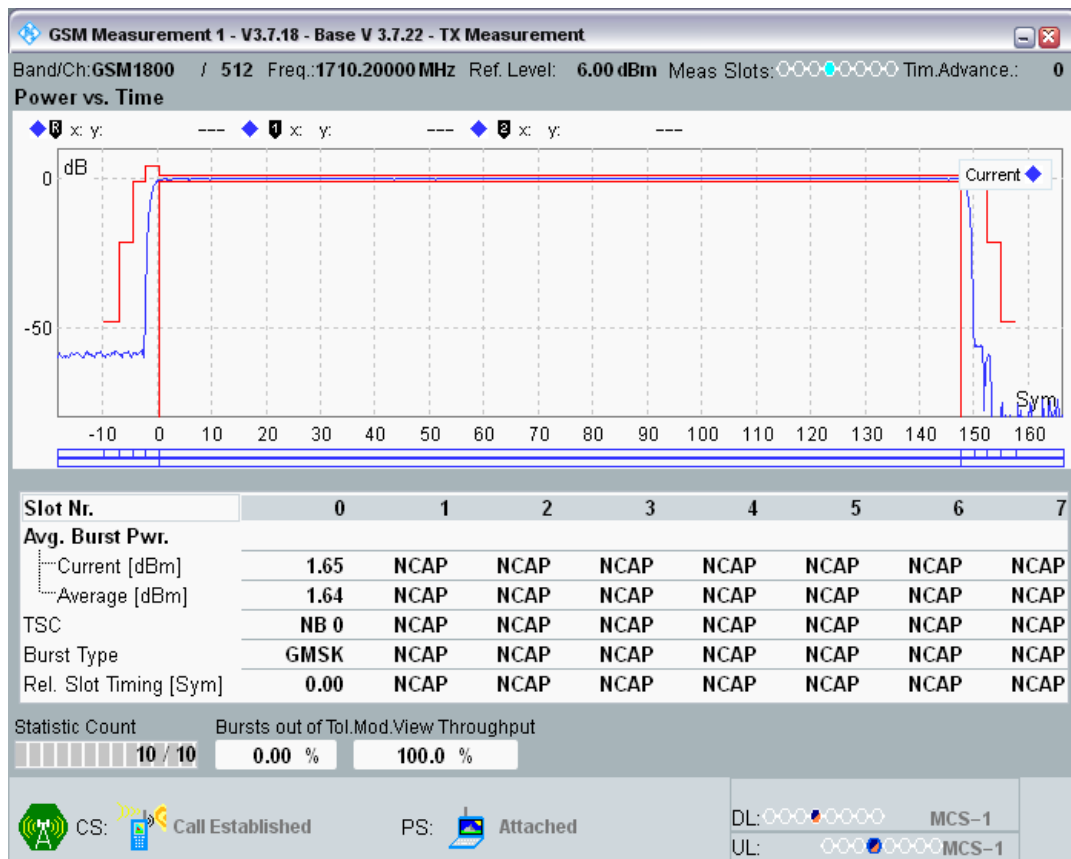


GSM1800 Channel=698 PCL=0

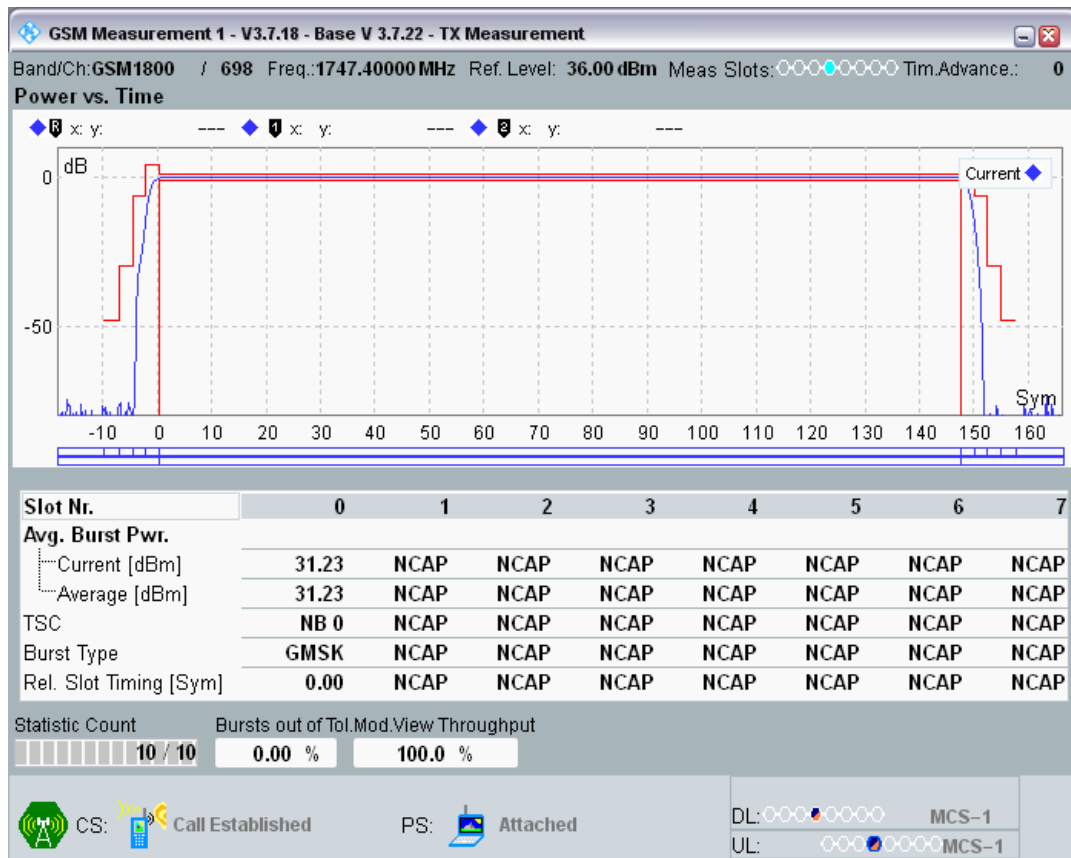


GSM1800 Channel=698 PCL=1

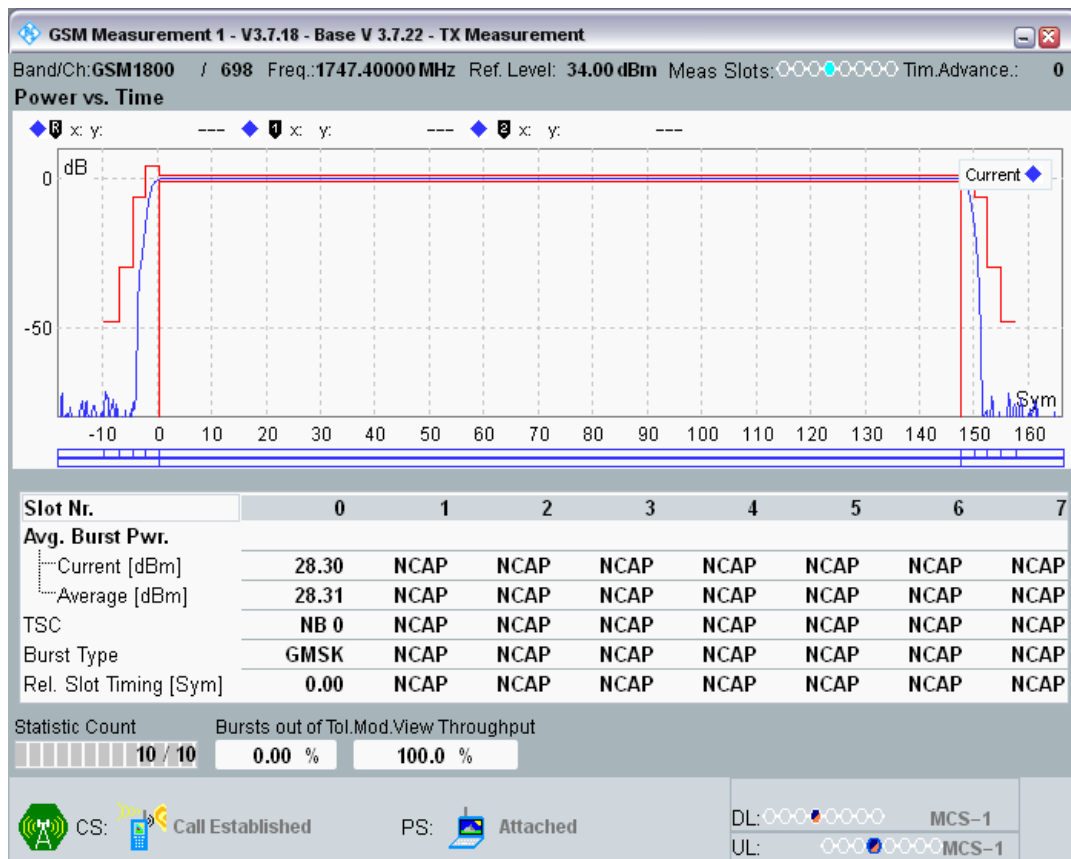


GSM1800 Channel=698 PCL=2

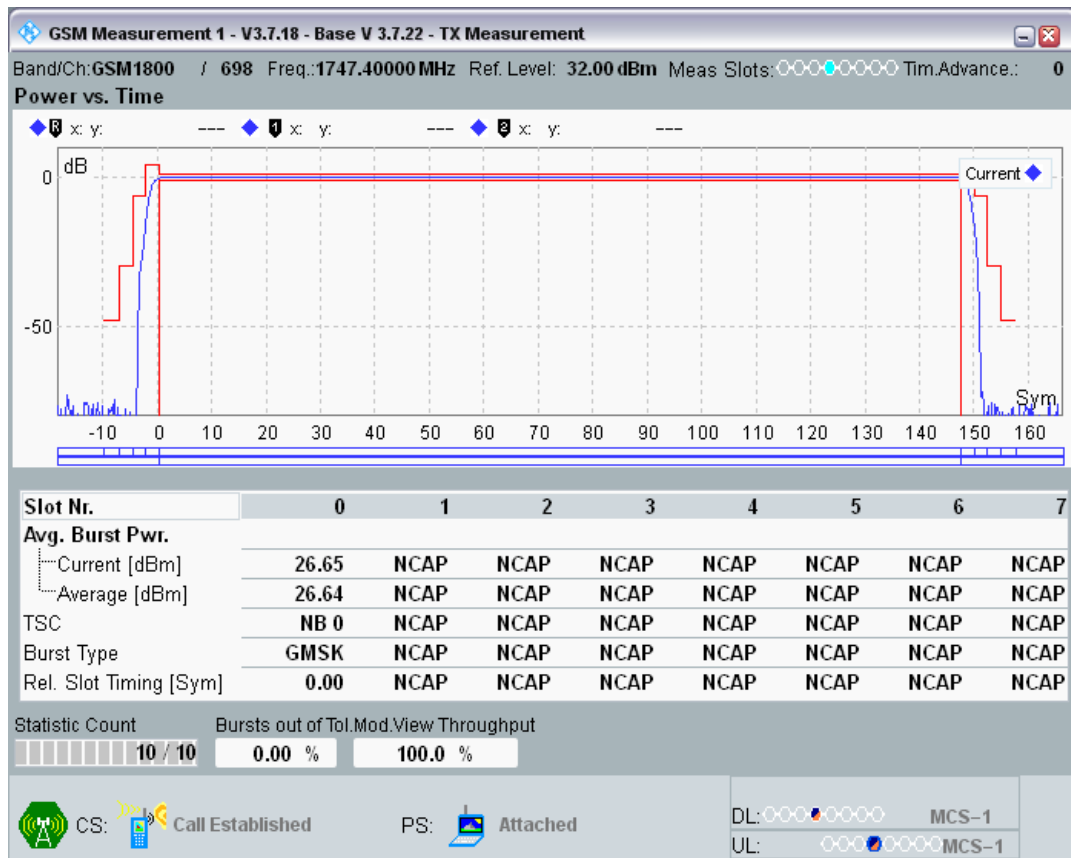


GSM1800 Channel=698 PCL=3

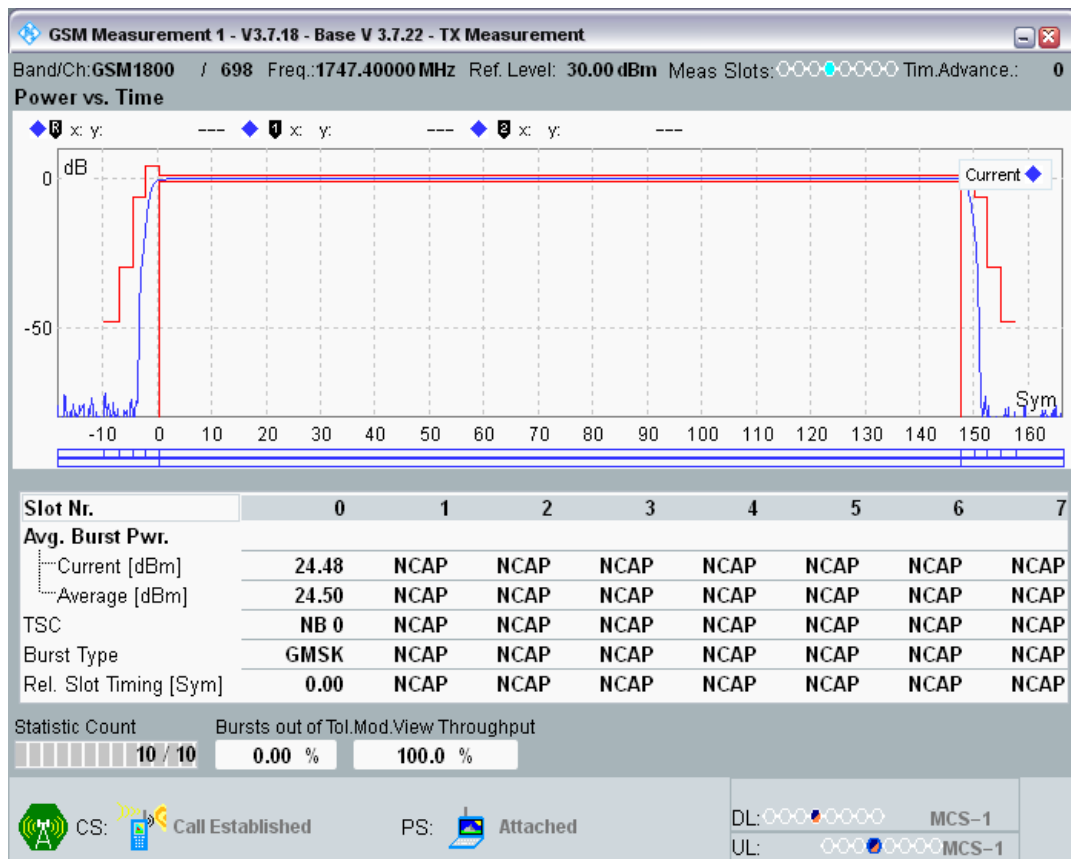


GSM1800 Channel=698 PCL=4

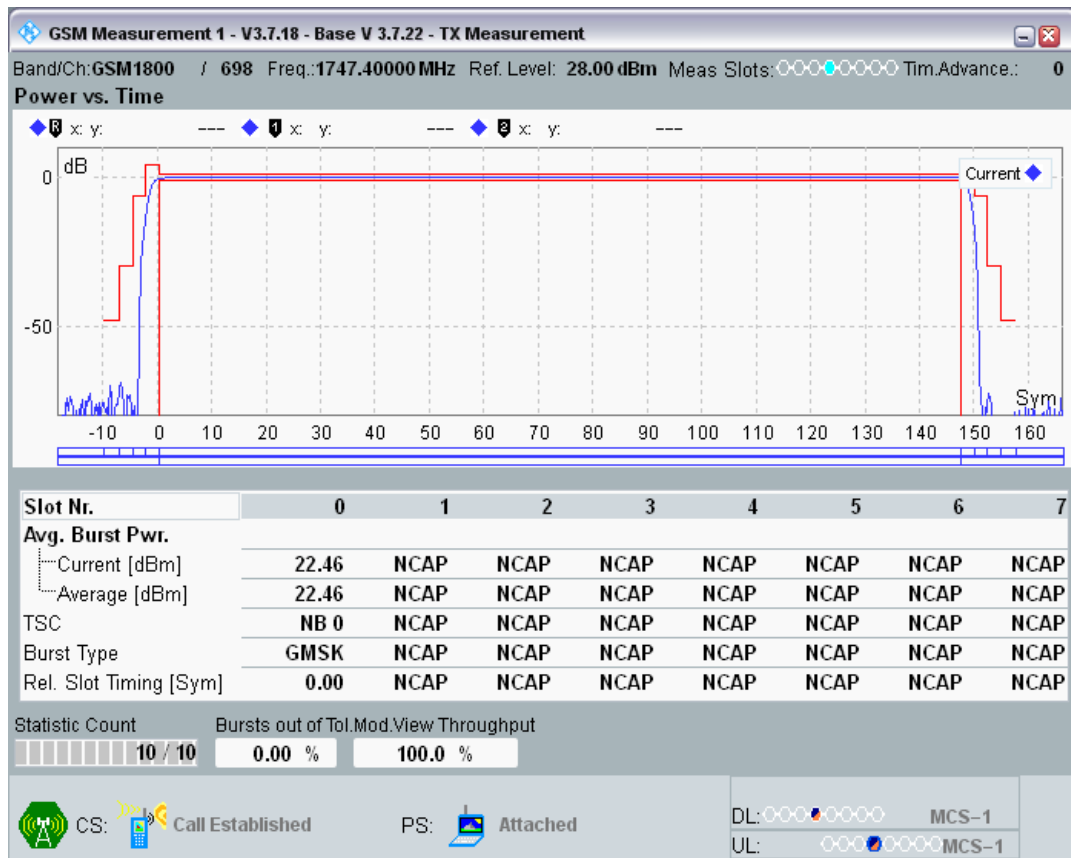


GSM1800 Channel=698 PCL=5

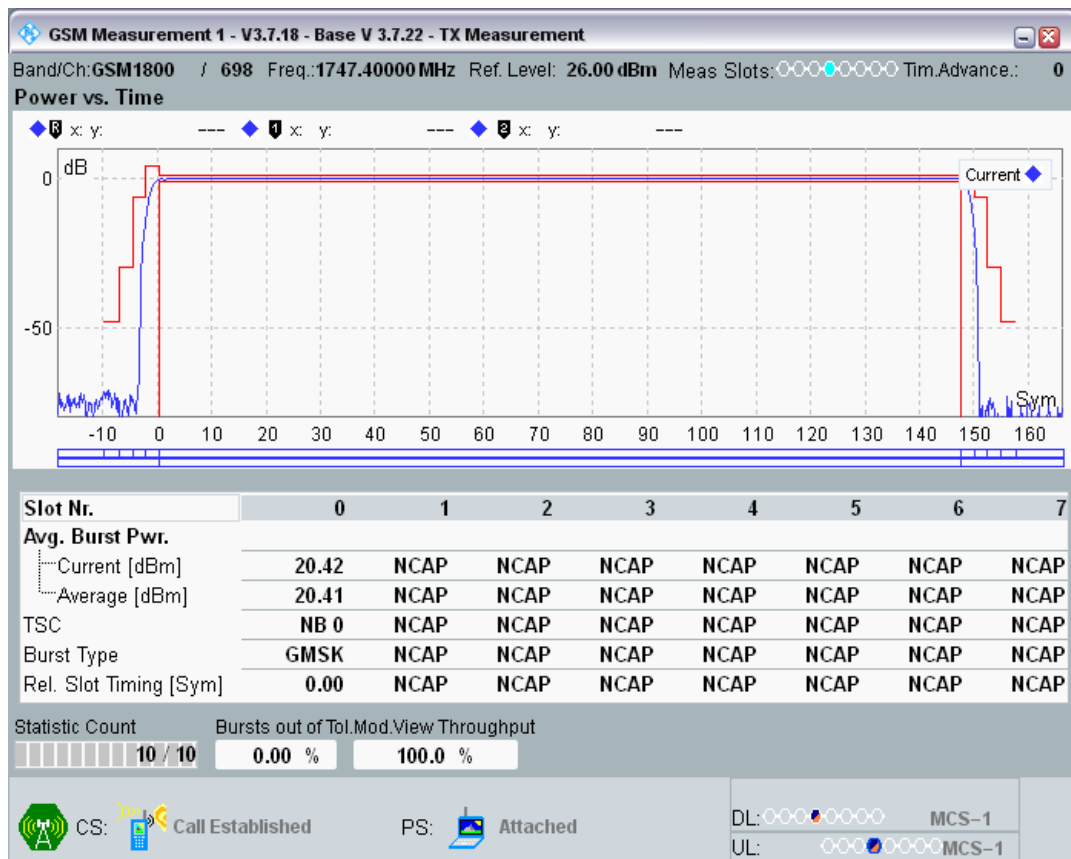


GSM1800 Channel=698 PCL=6

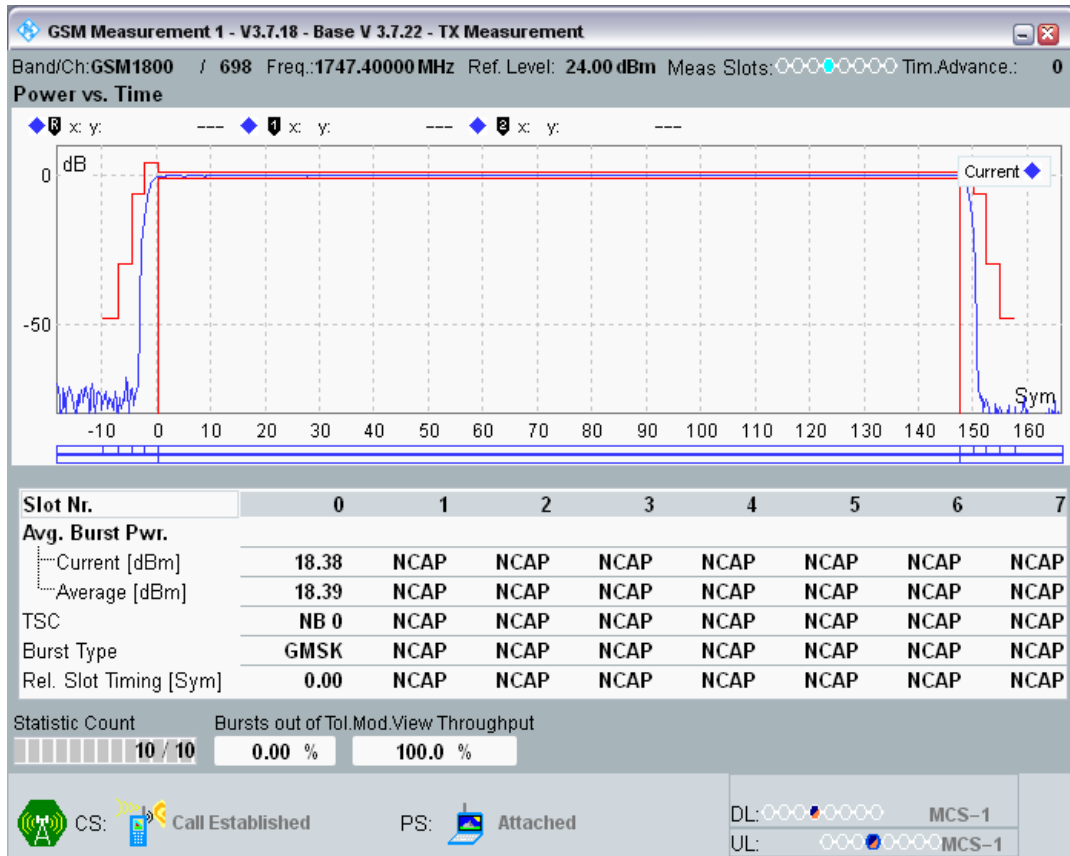


GSM1800 Channel=698 PCL=7

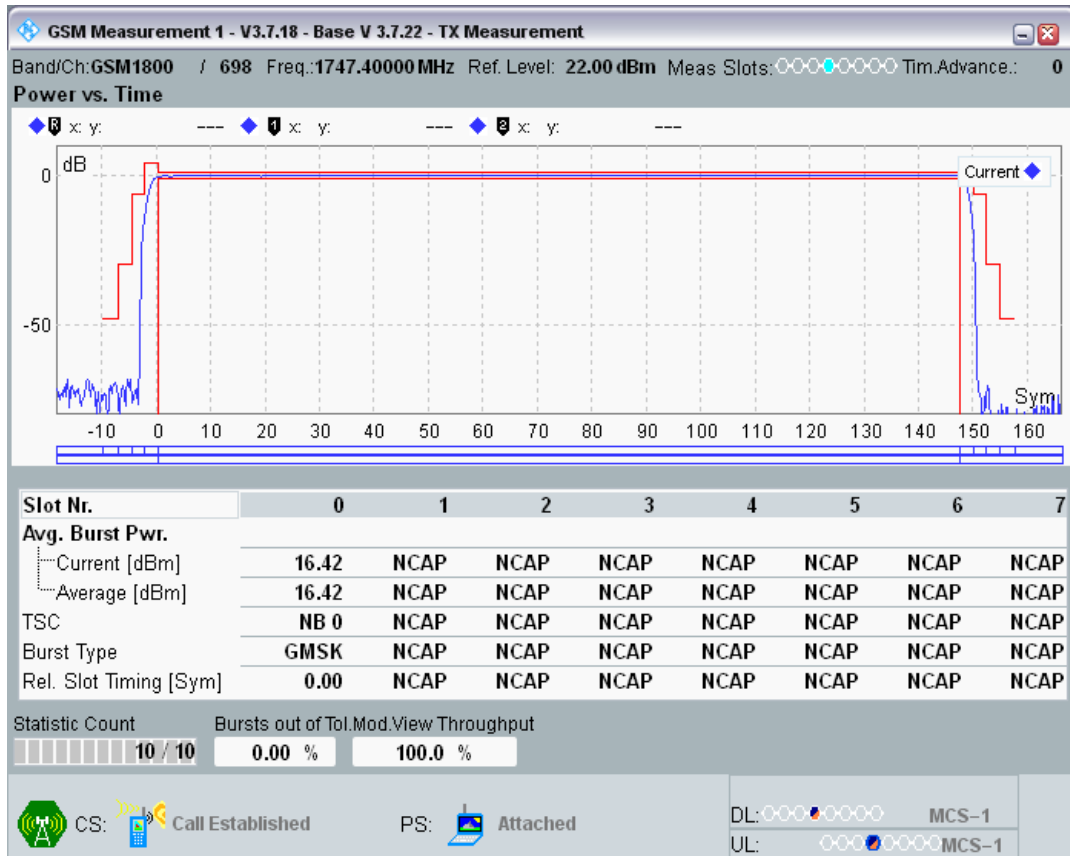


GSM1800 Channel=698 PCL=8

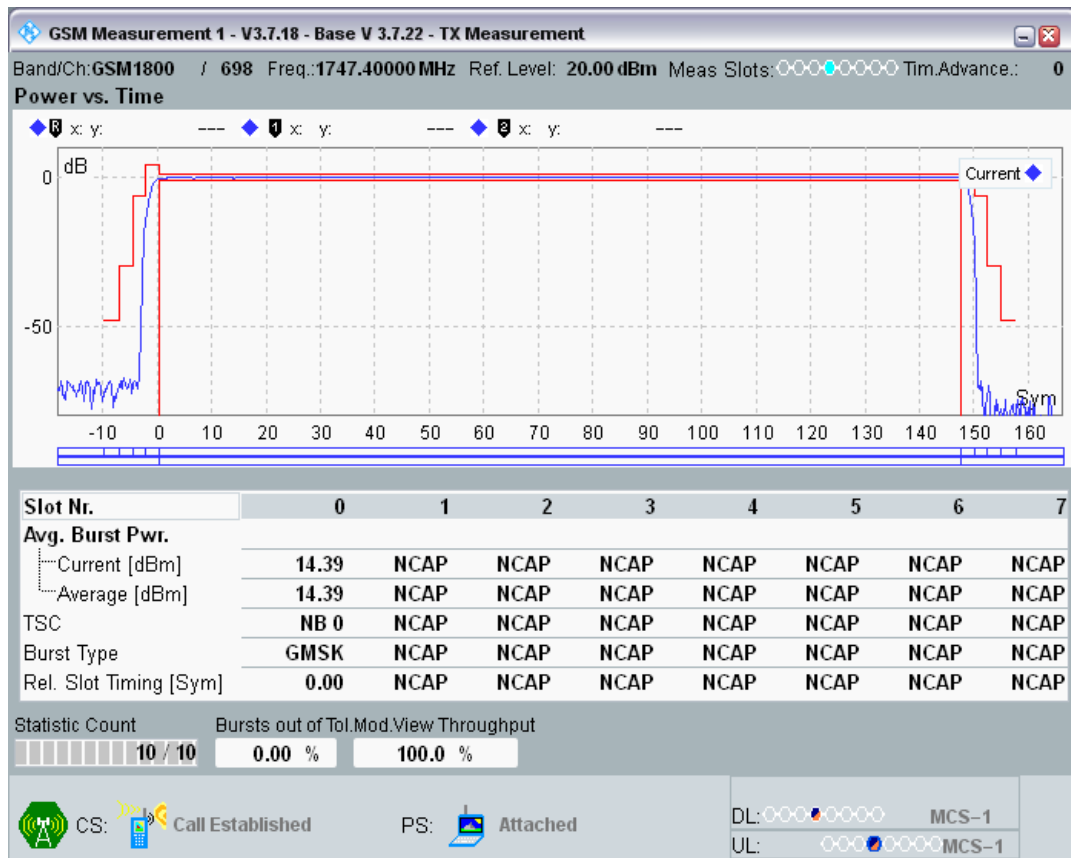


GSM1800 Channel=698 PCL=9

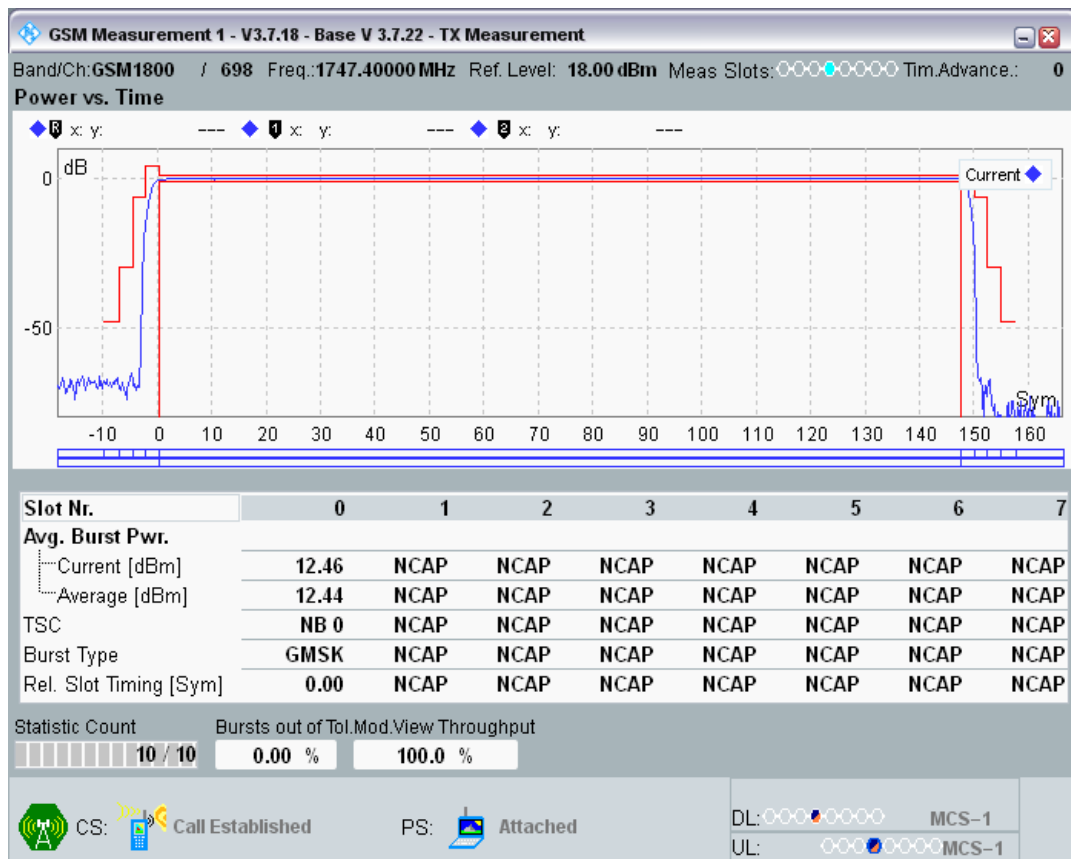


GSM1800 Channel=698 PCL=10

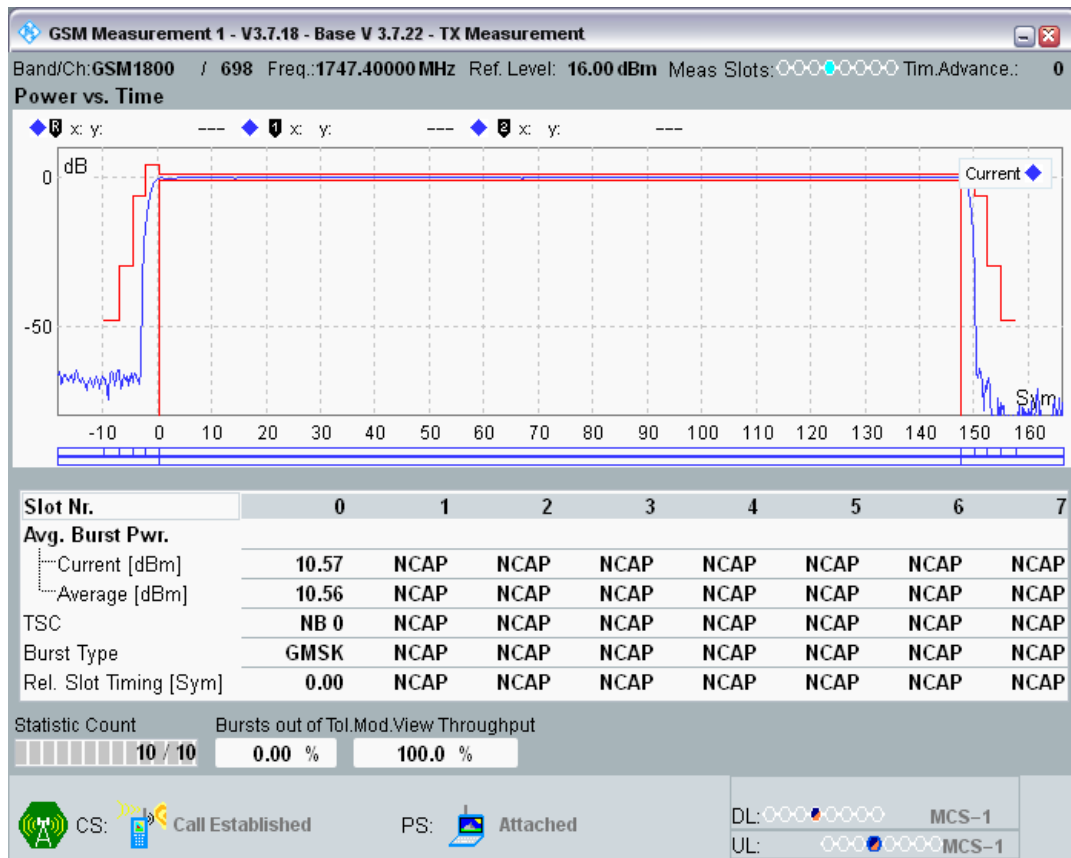


GSM1800 Channel=698 PCL=11

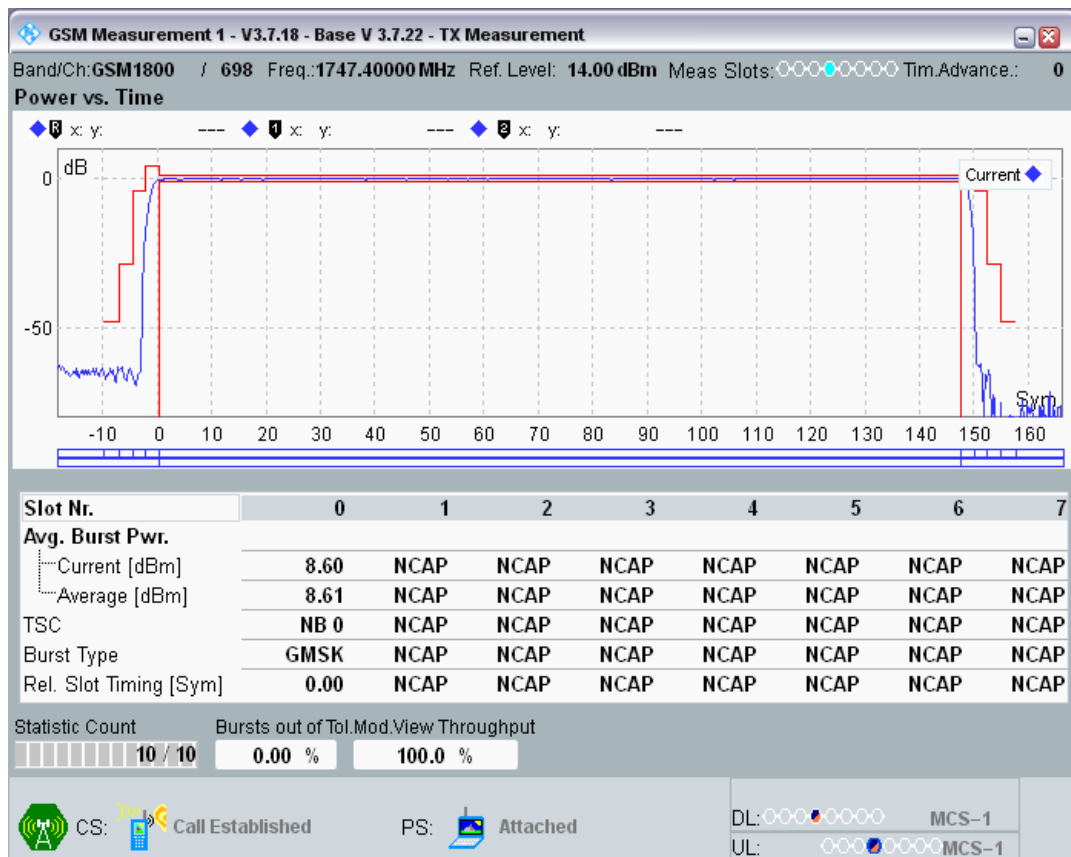


GSM1800 Channel=698 PCL=12

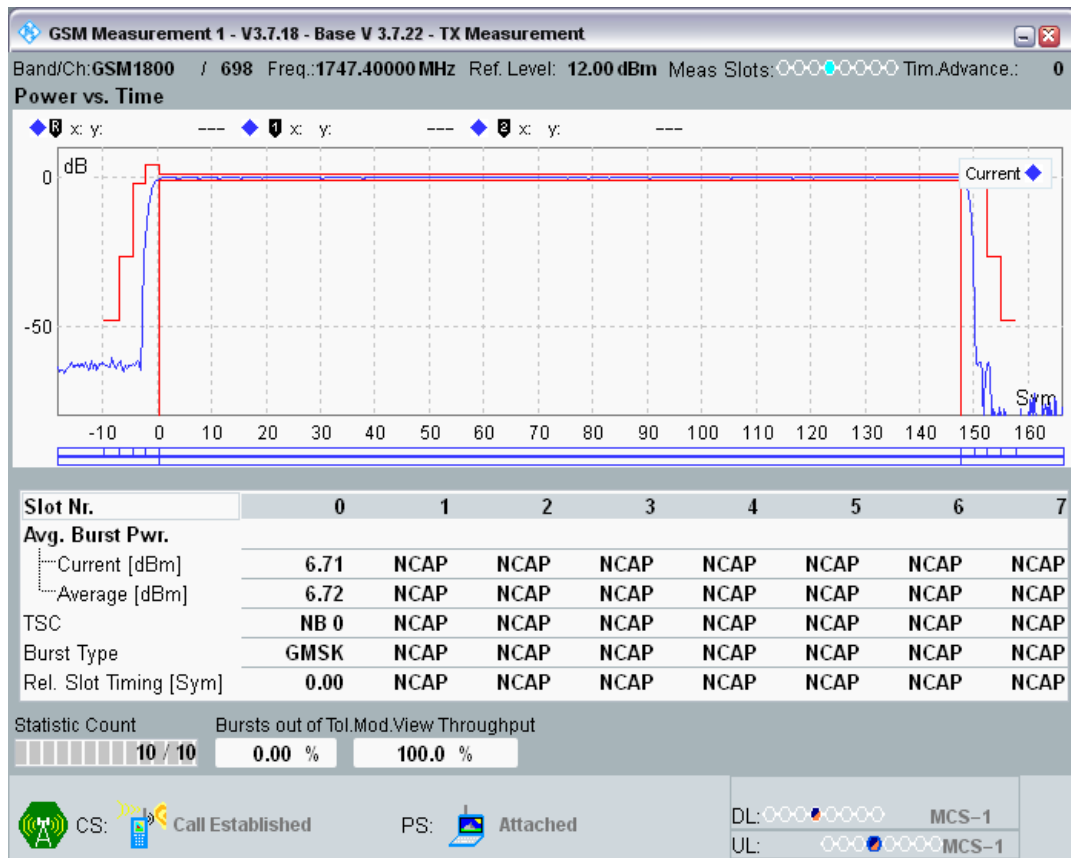


GSM1800 Channel=698 PCL=13

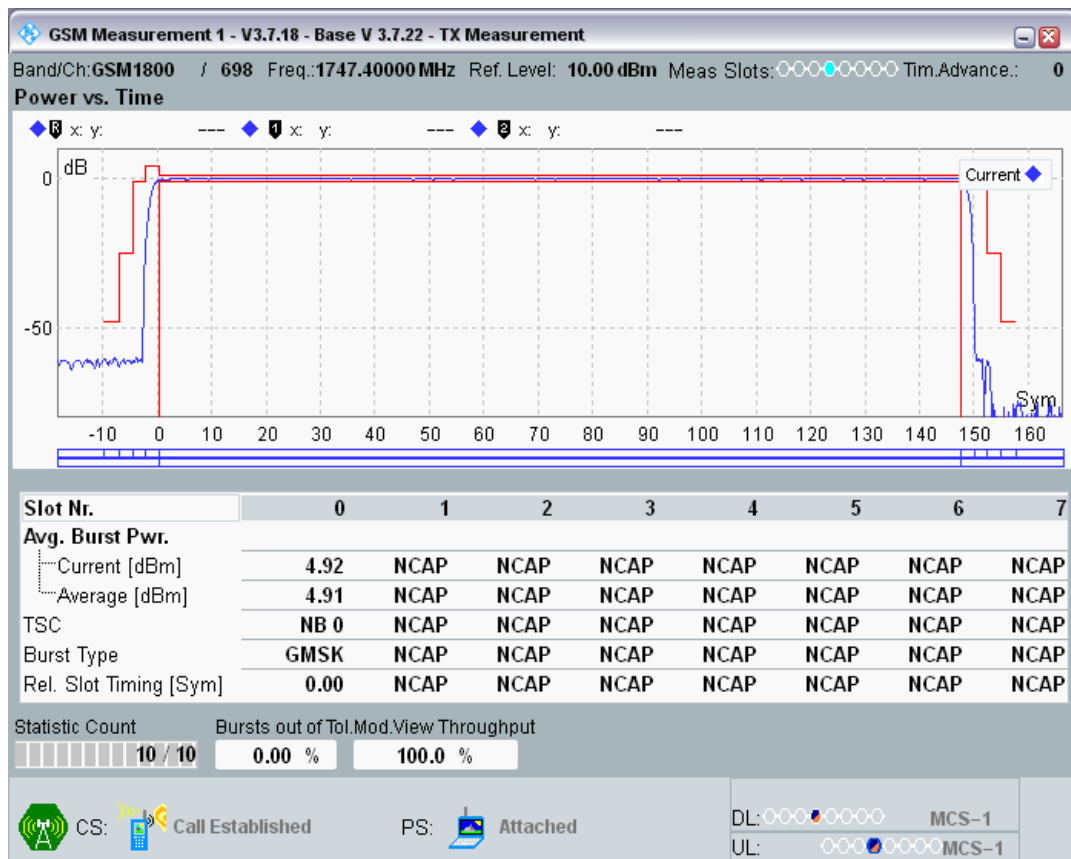


GSM1800 Channel=698 PCL=14

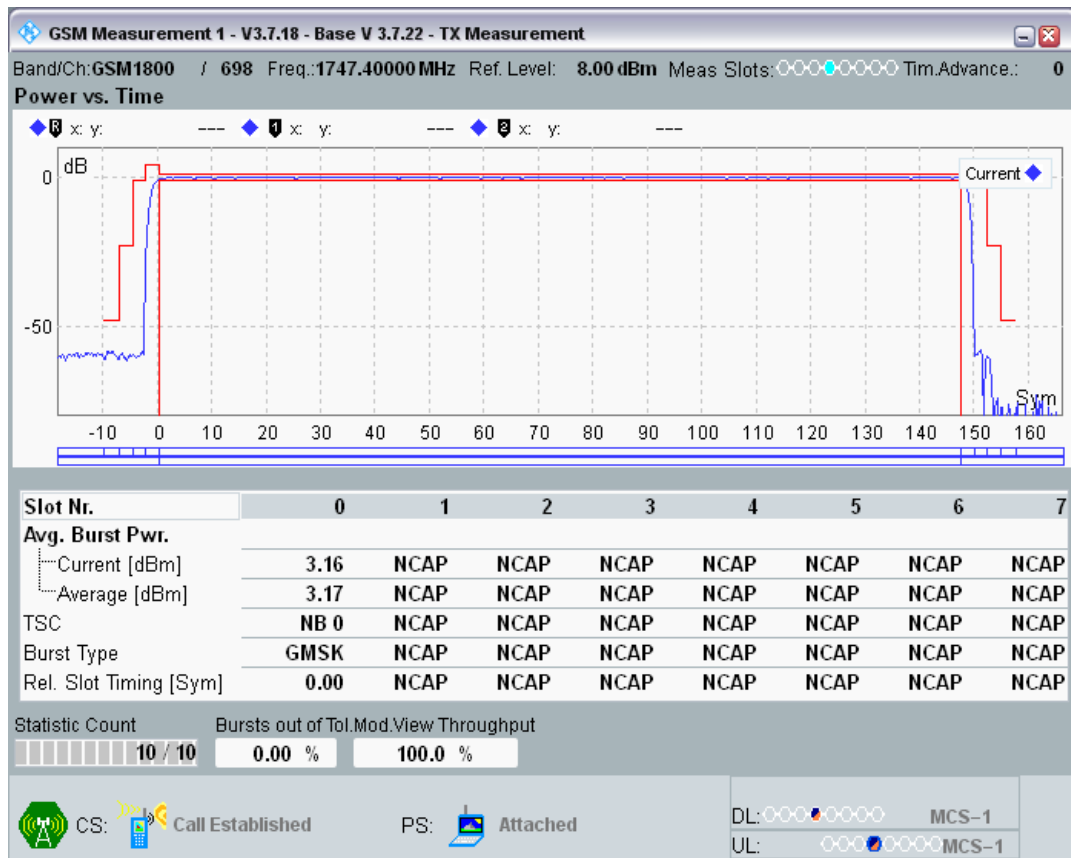


GSM1800 Channel=698 PCL=15

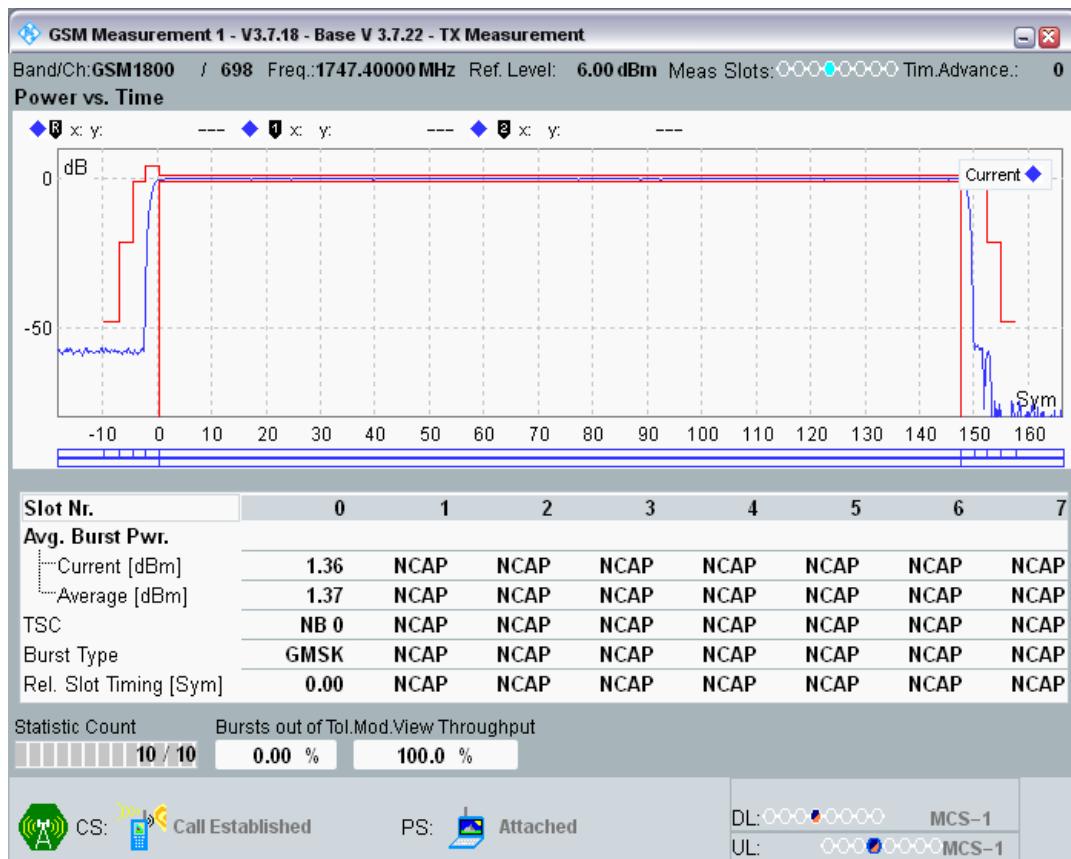


GSM1800 Channel=885 PCL=0

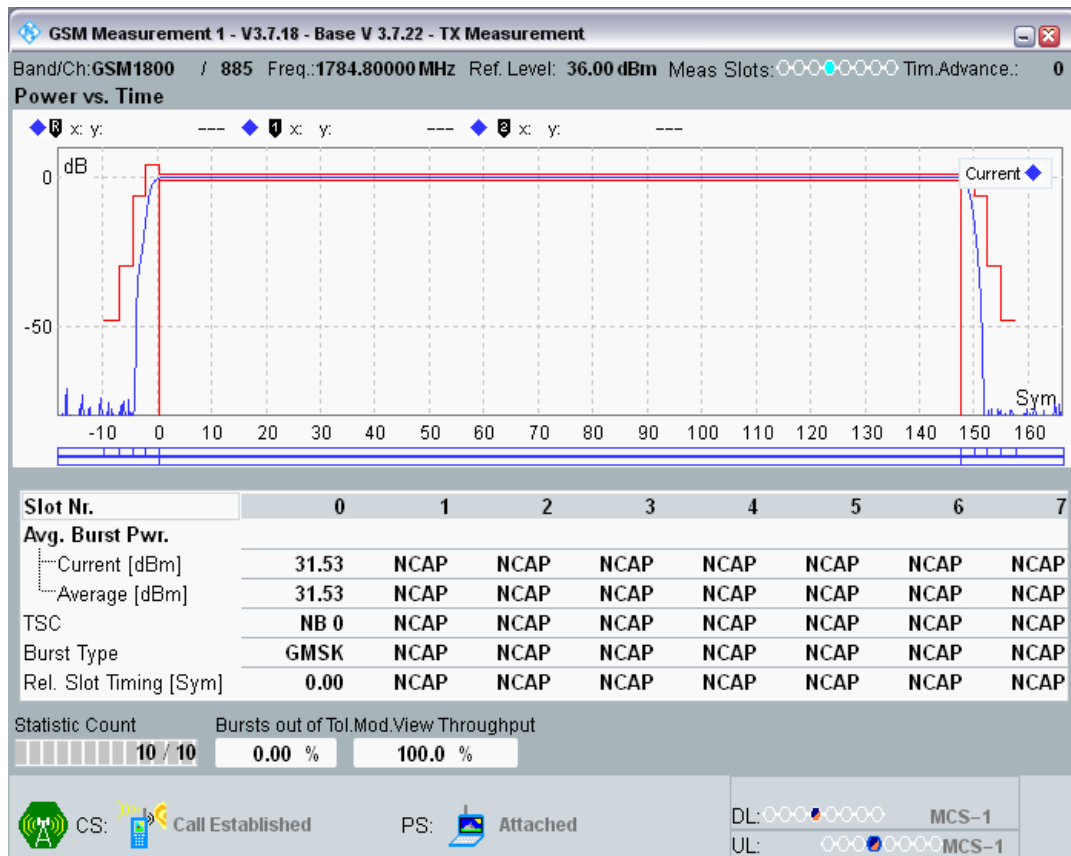


GSM1800 Channel=885 PCL=1

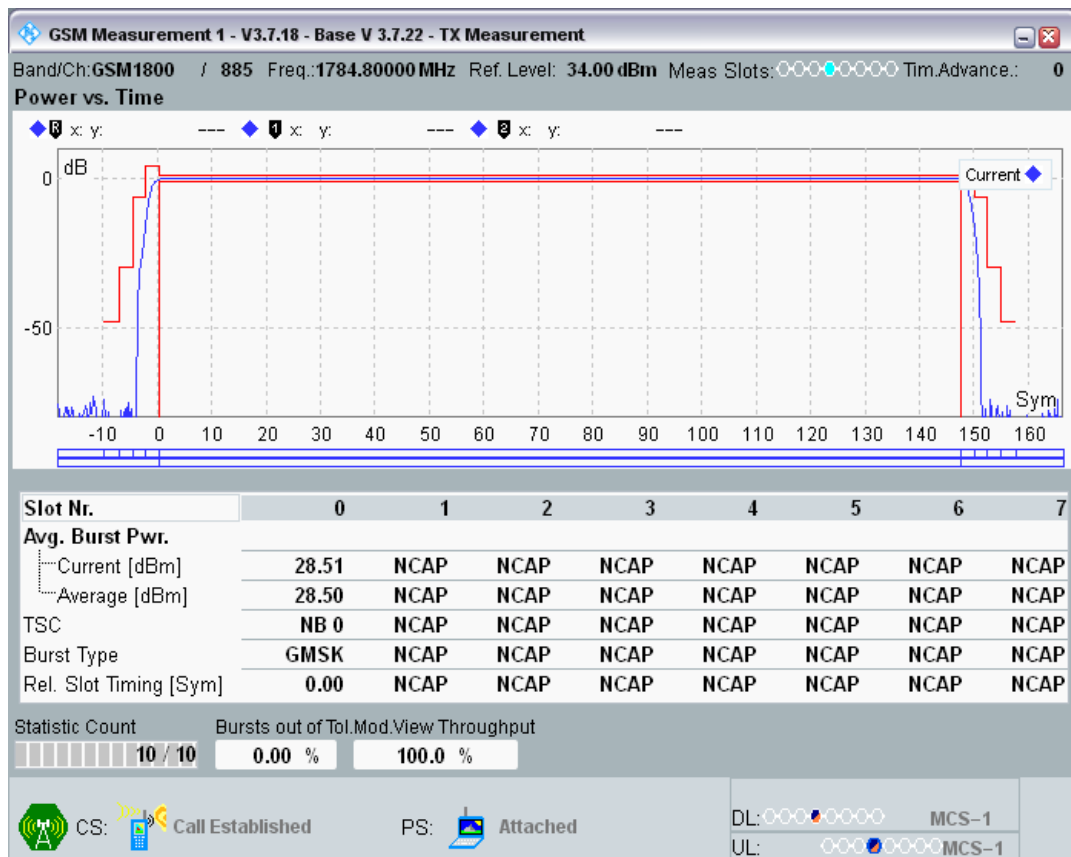


GSM1800 Channel=885 PCL=2

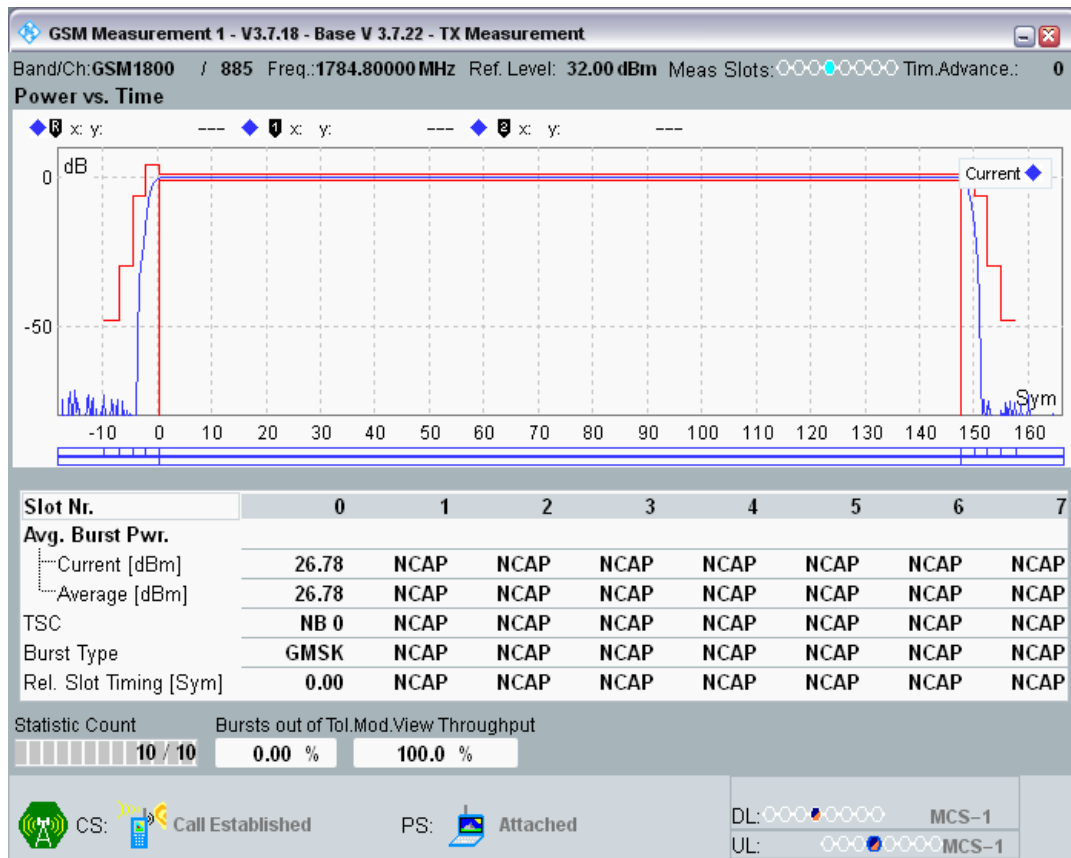


GSM1800 Channel=885 PCL=3

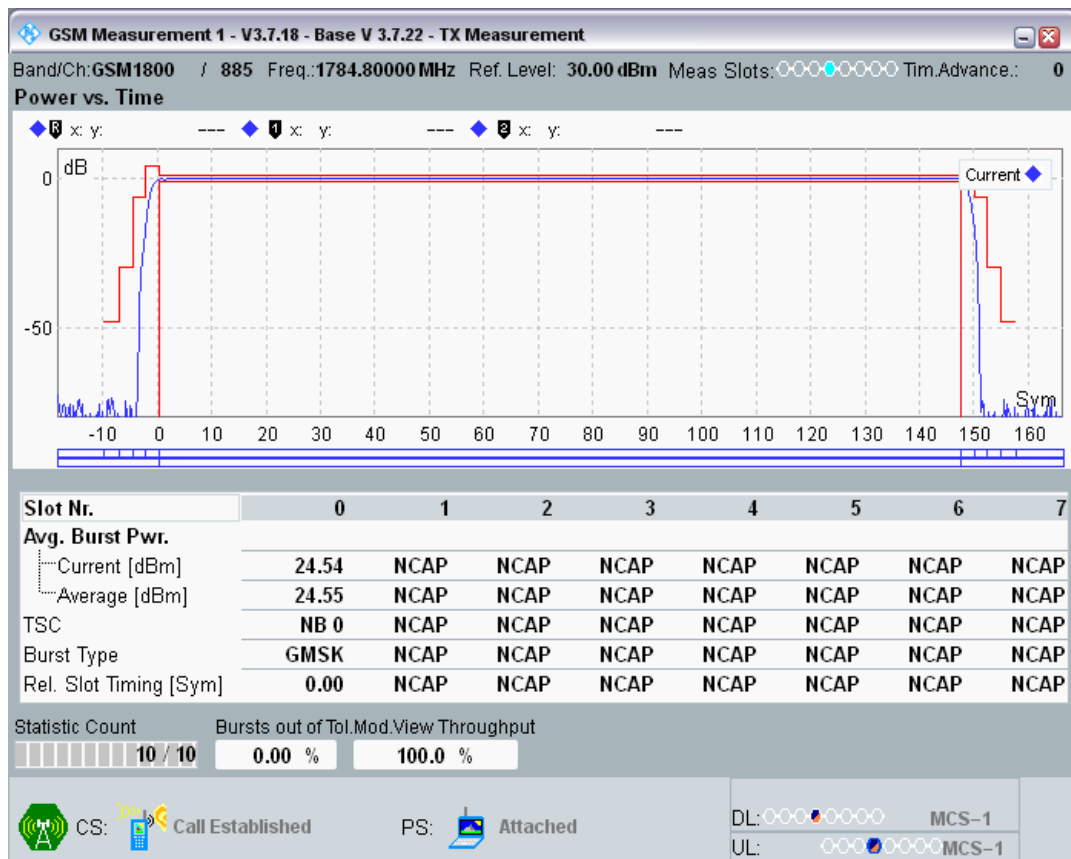


GSM1800 Channel=885 PCL=4

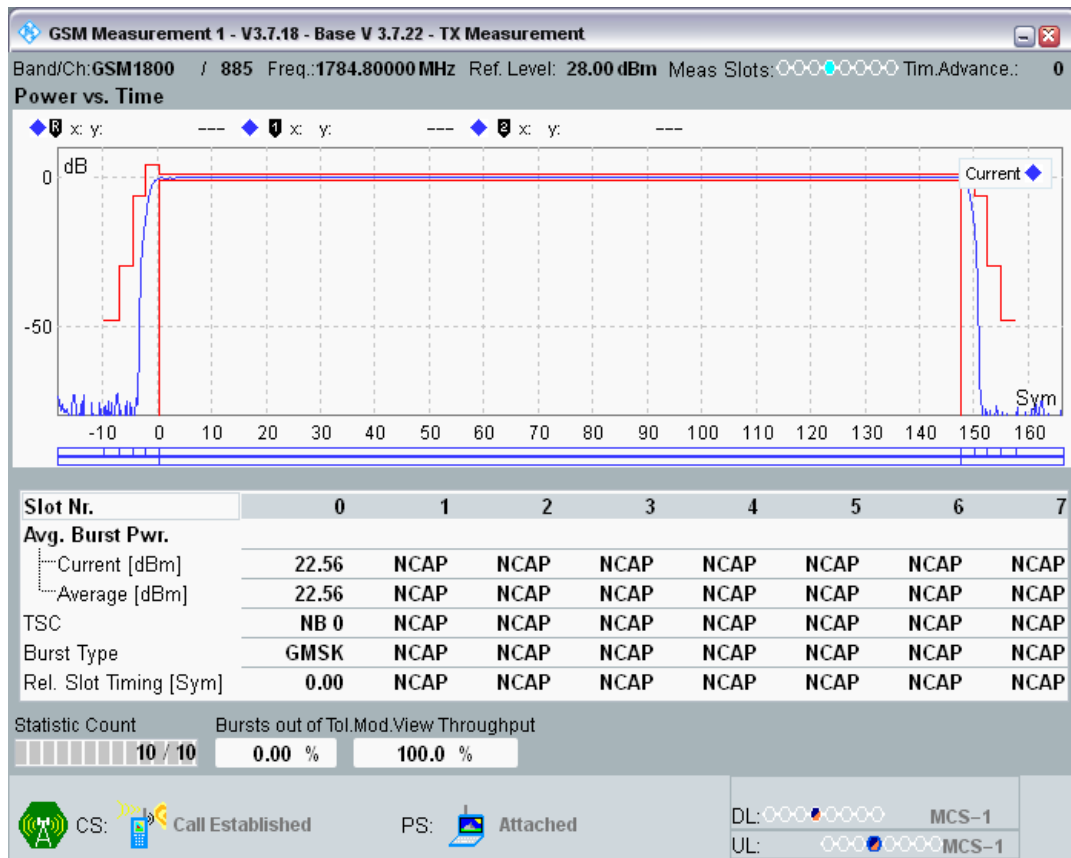


GSM1800 Channel=885 PCL=5

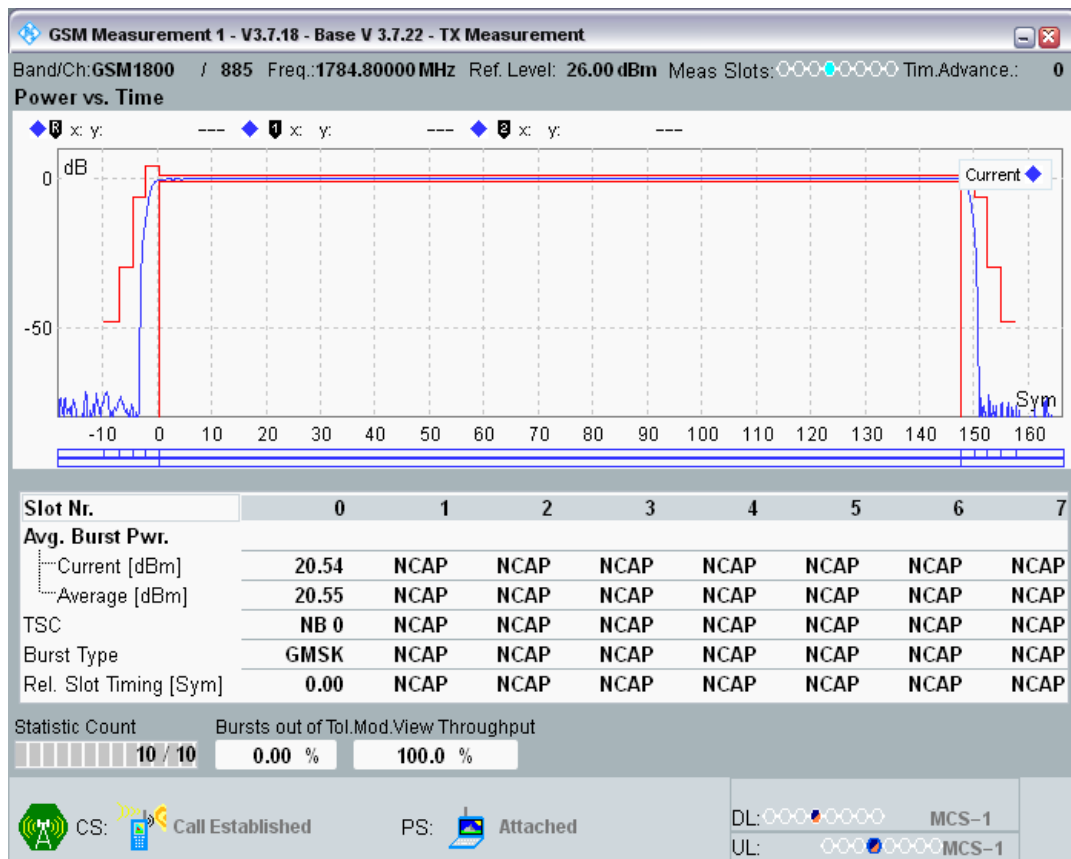


GSM1800 Channel=885 PCL=6

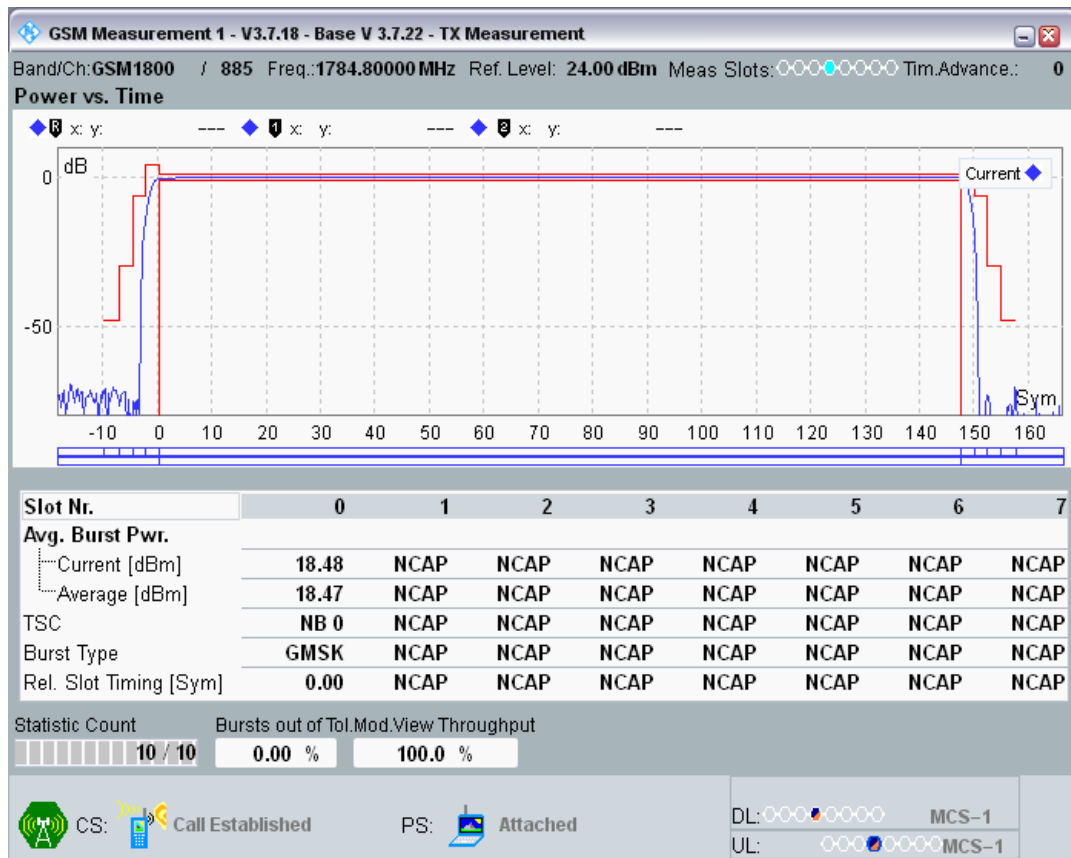


GSM1800 Channel=885 PCL=7

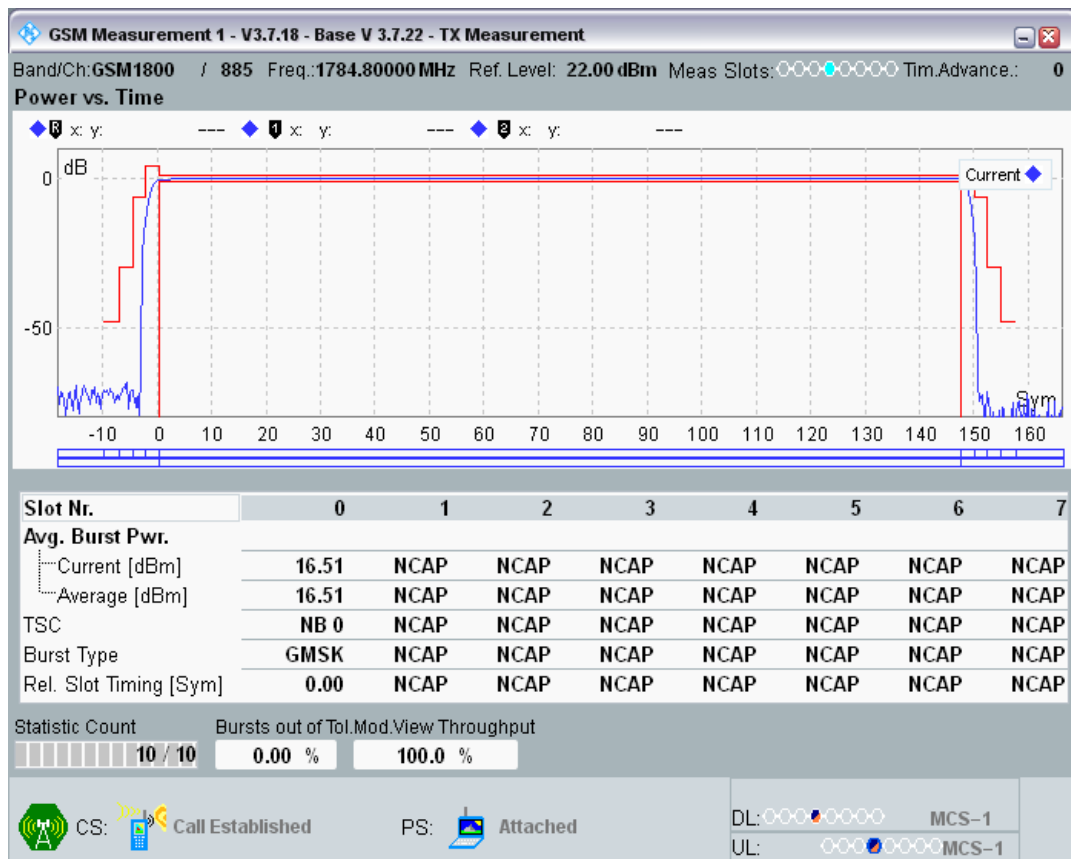


GSM1800 Channel=885 PCL=8

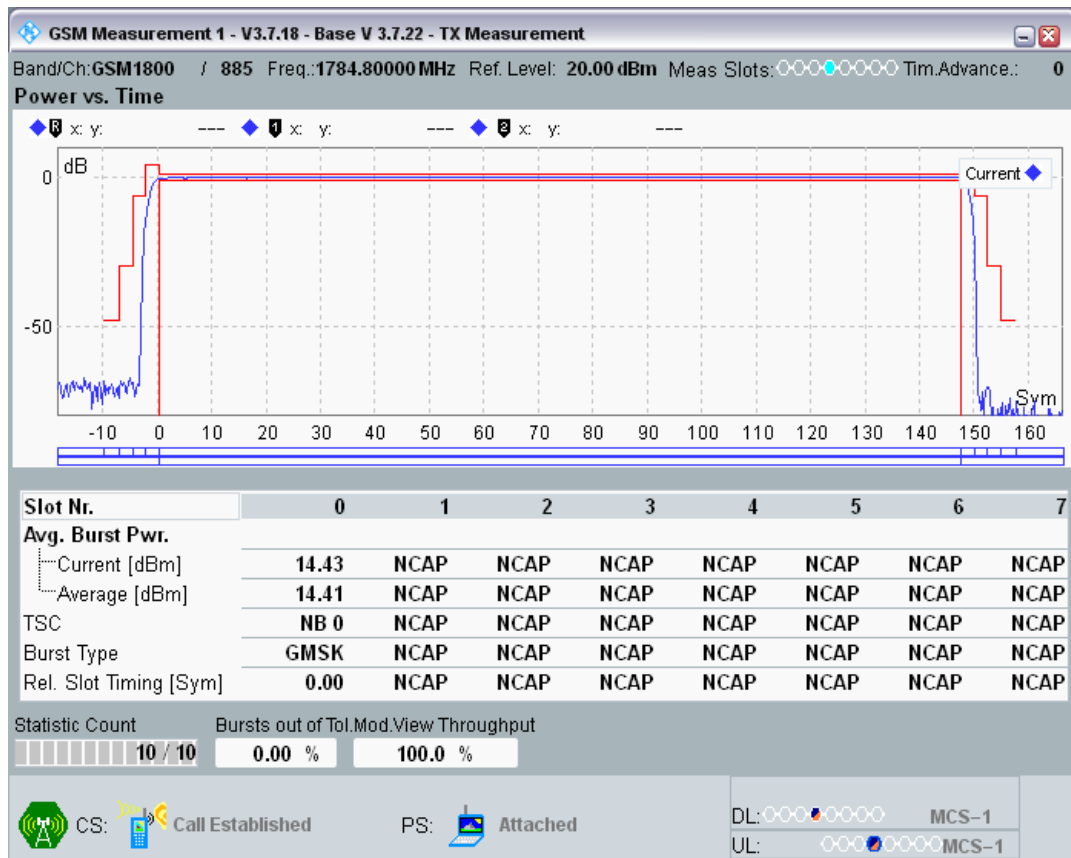


GSM1800 Channel=885 PCL=9

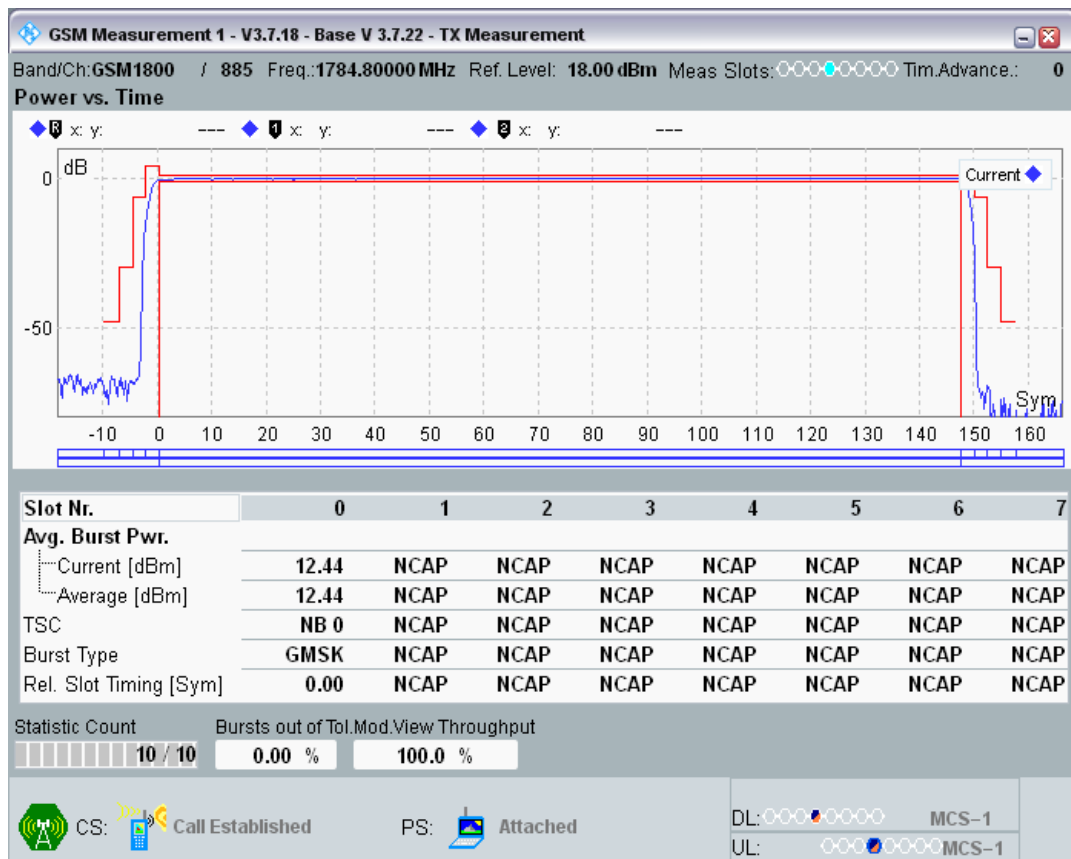


GSM1800 Channel=885 PCL=10

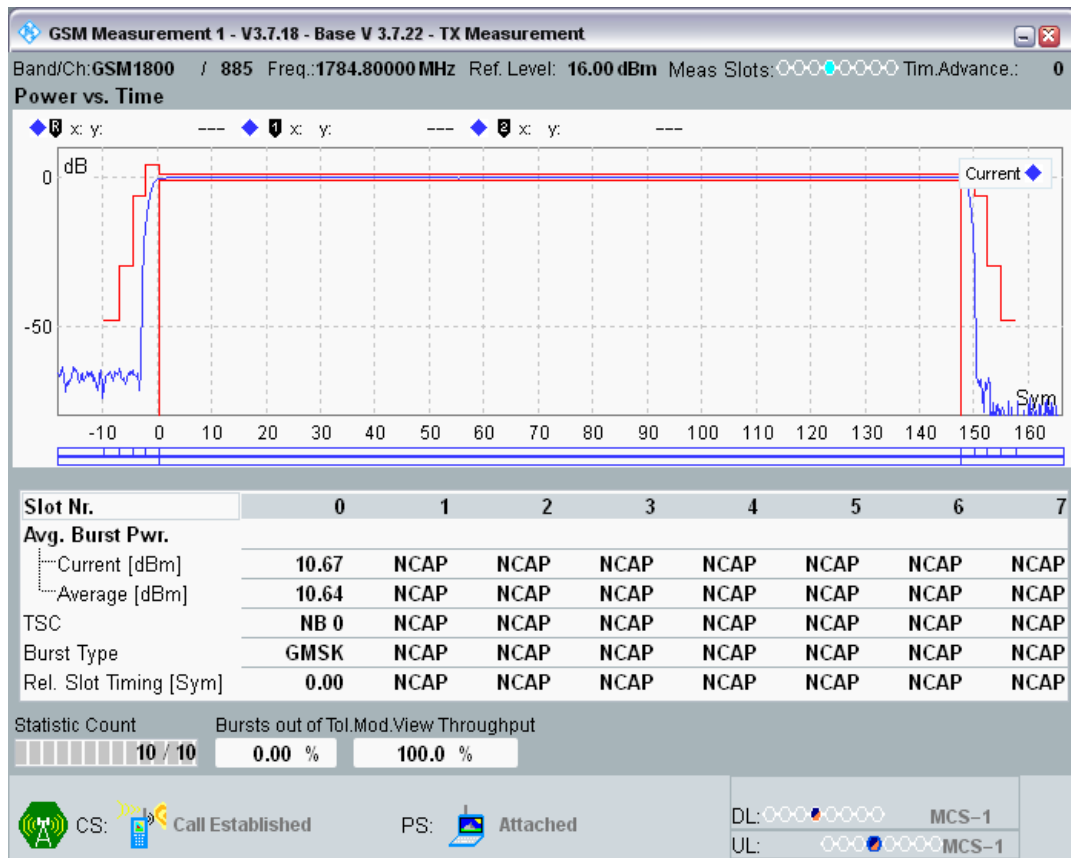


GSM1800 Channel=885 PCL=11

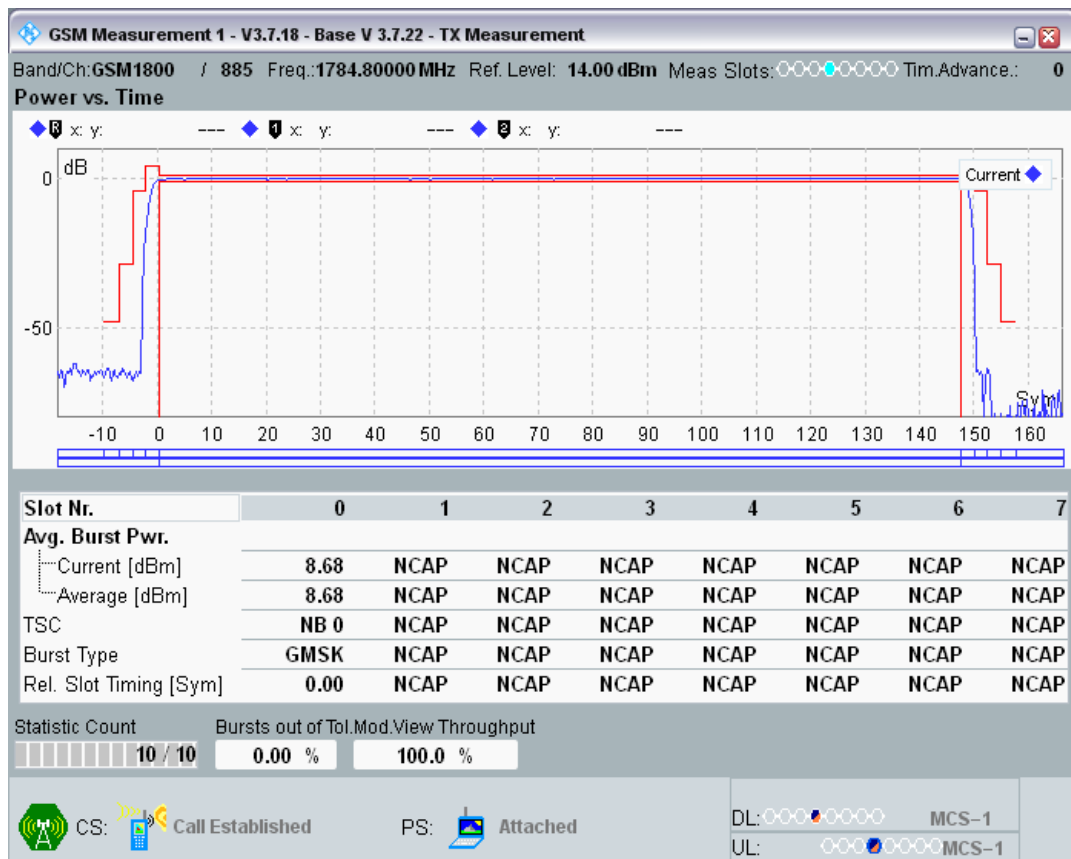


GSM1800 Channel=885 PCL=12

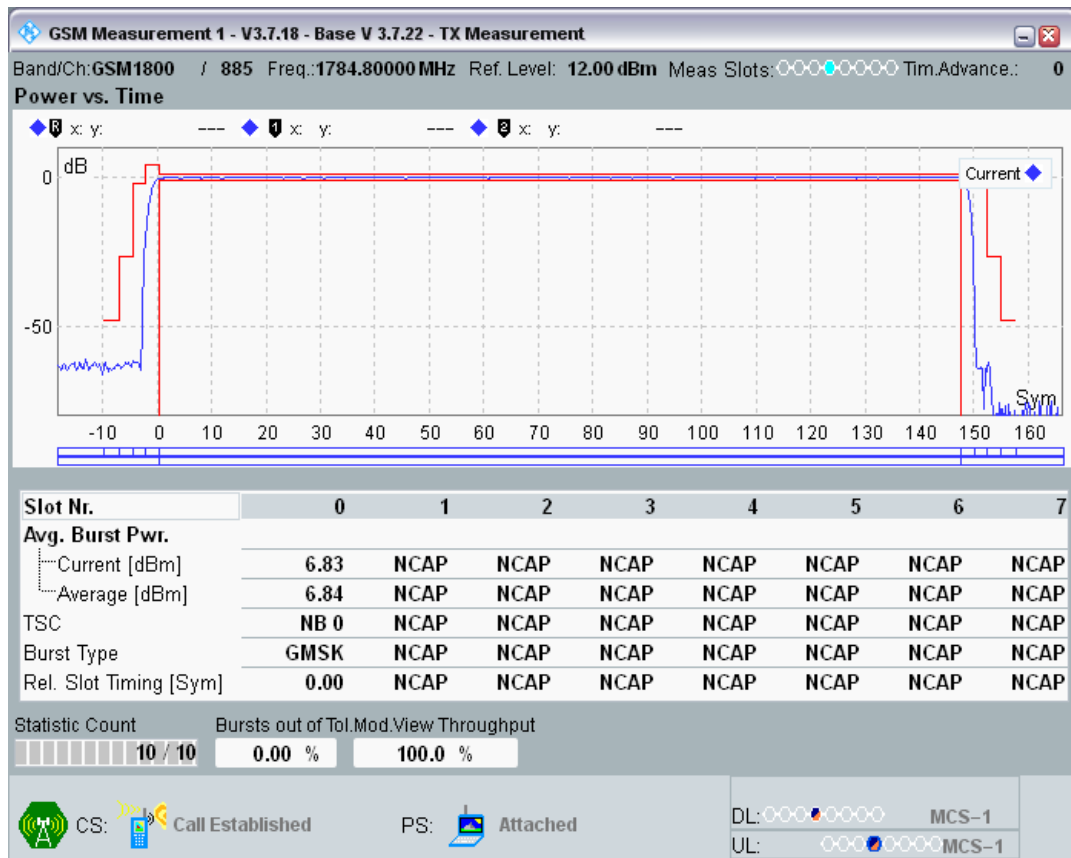


GSM1800 Channel=885 PCL=13

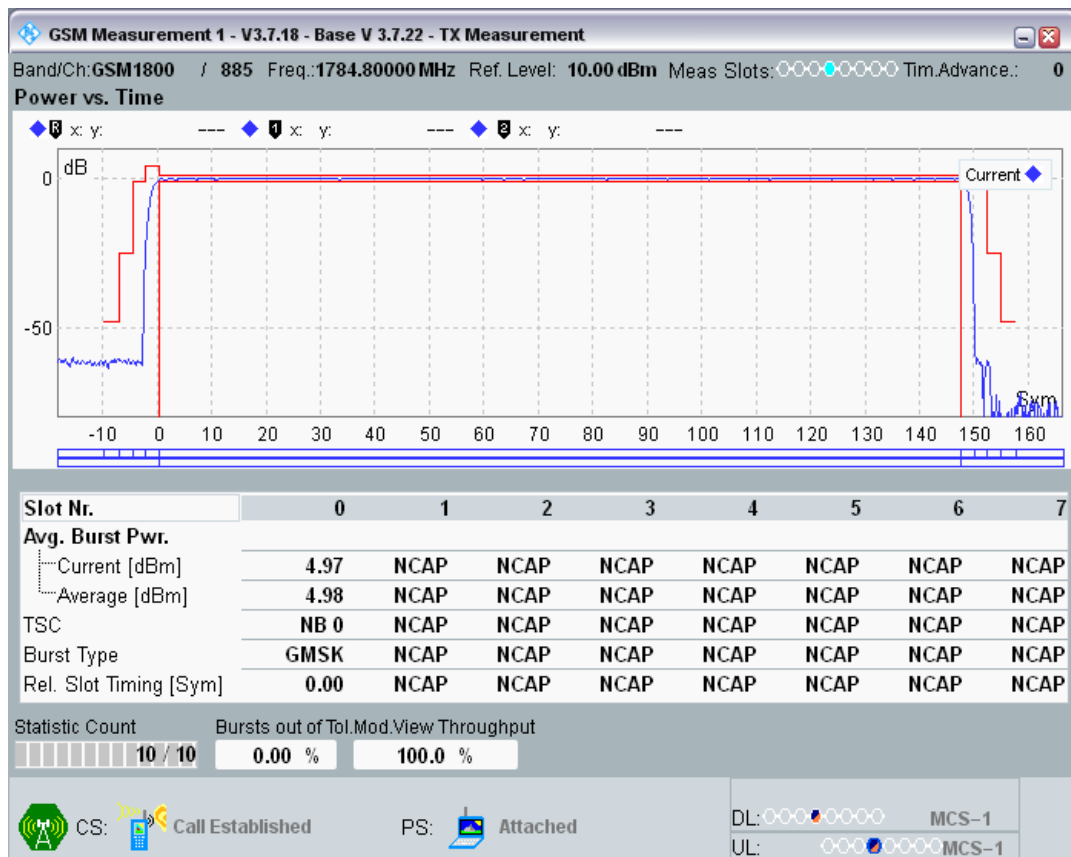


GSM1800 Channel=885 PCL=14

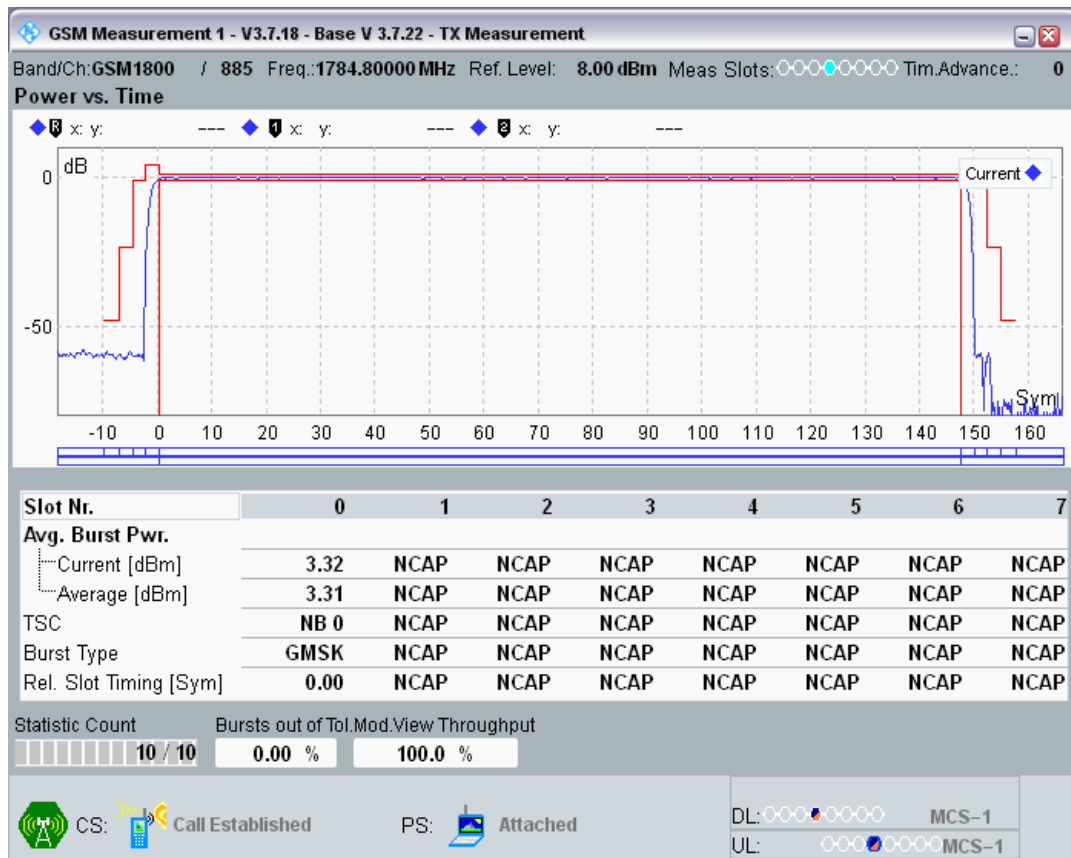


GSM1800 Channel=885 PCL=15

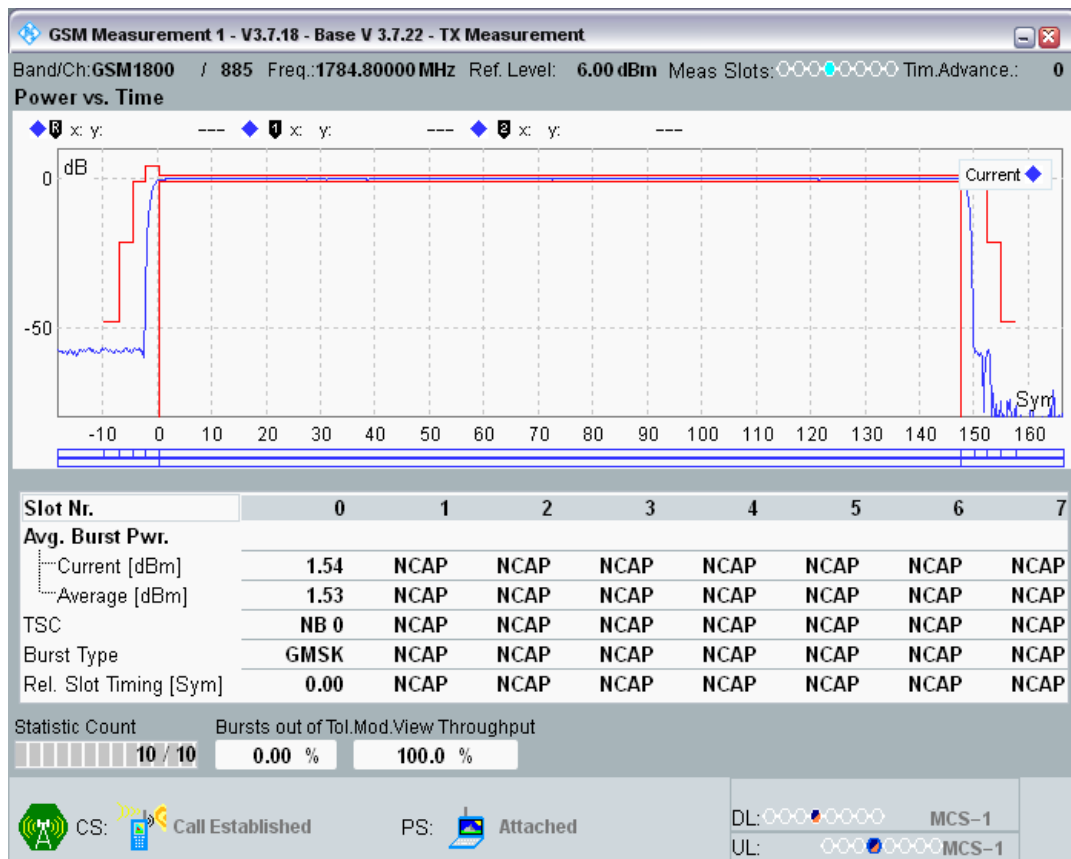


GSM1900 Channel=512 PCL=0

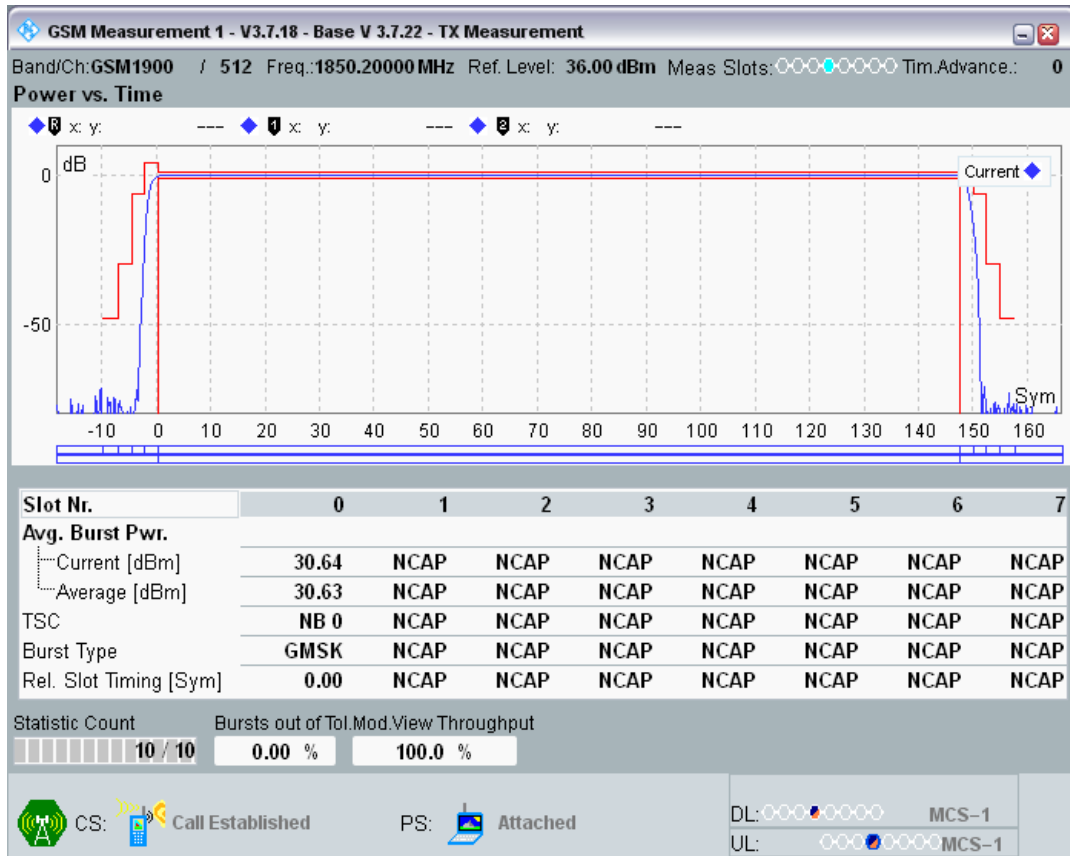


GSM1900 Channel=512 PCL=1

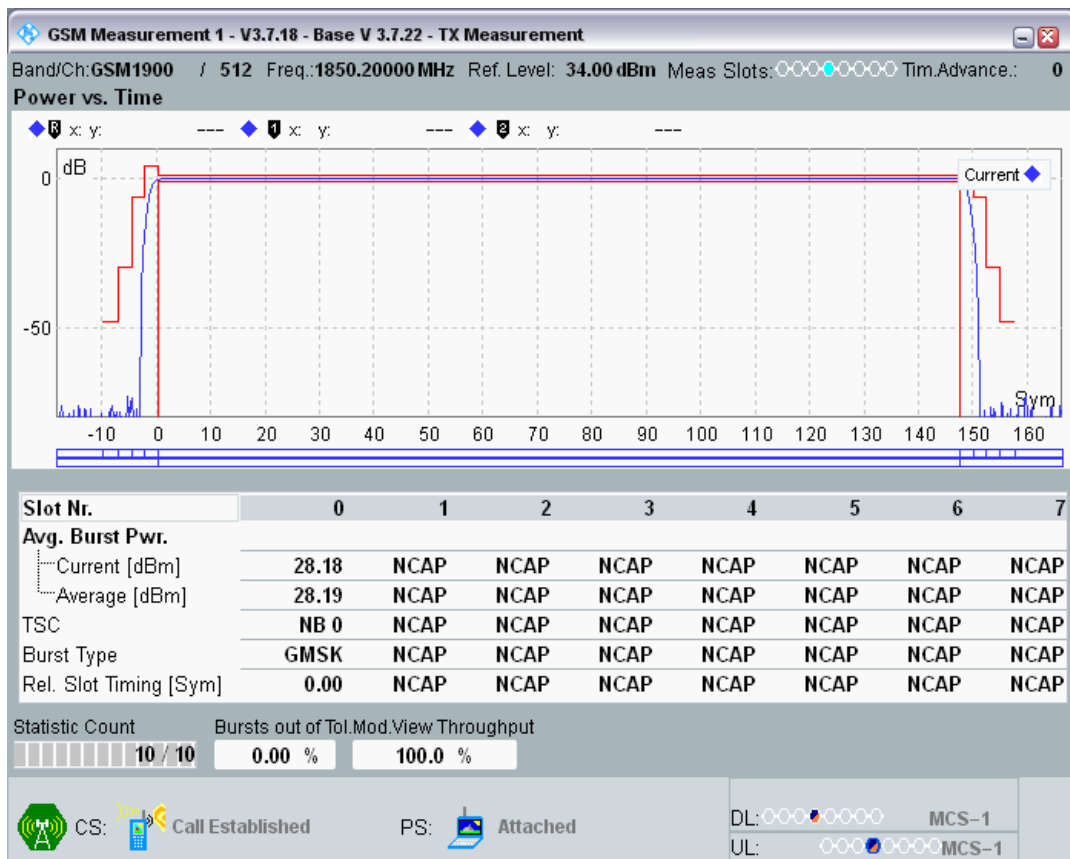

GSM1900 Channel=512 PCL=2

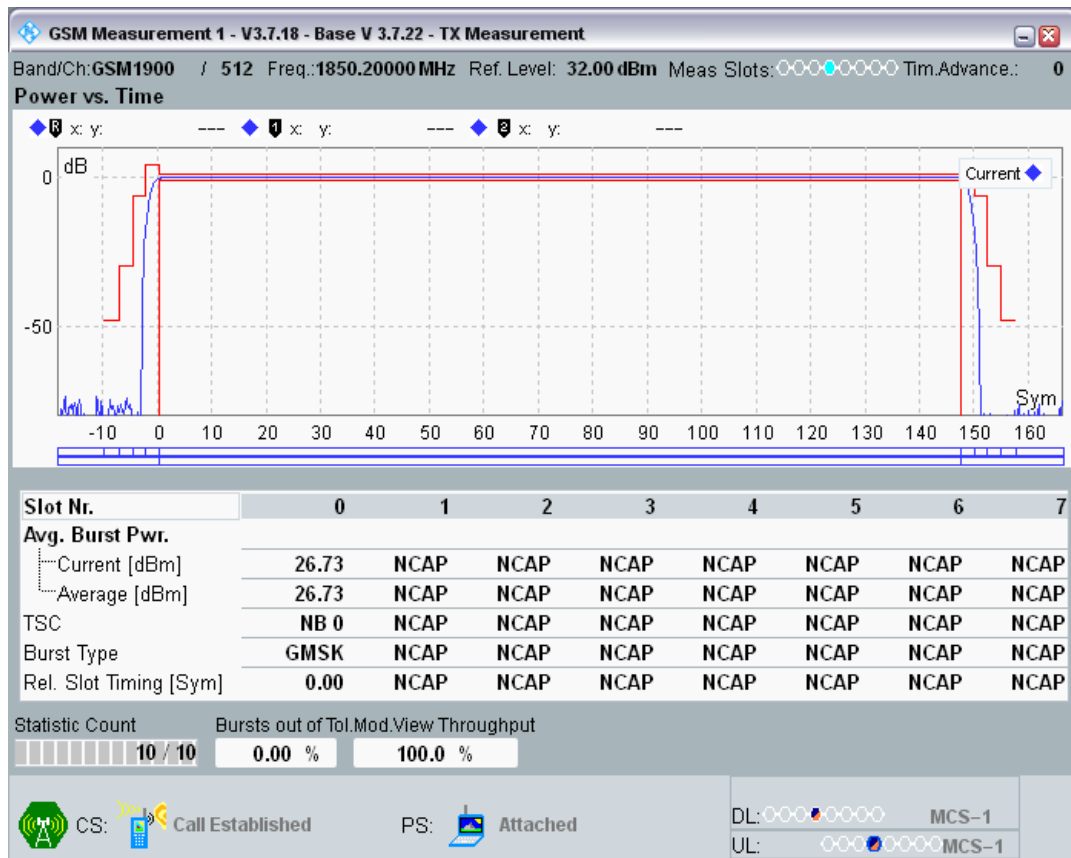


GSM1900 Channel=512 PCL=3

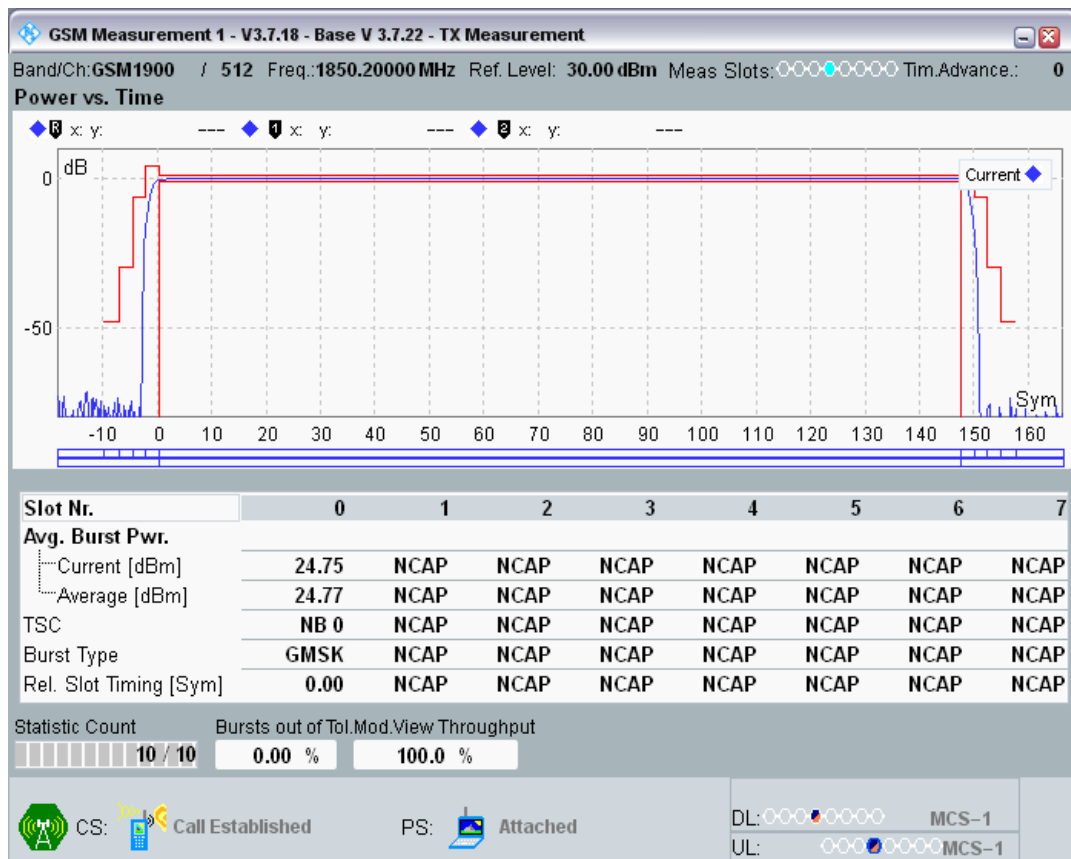


GSM1900 Channel=512 PCL=4




GSM1900 Channel=512 PCL=5

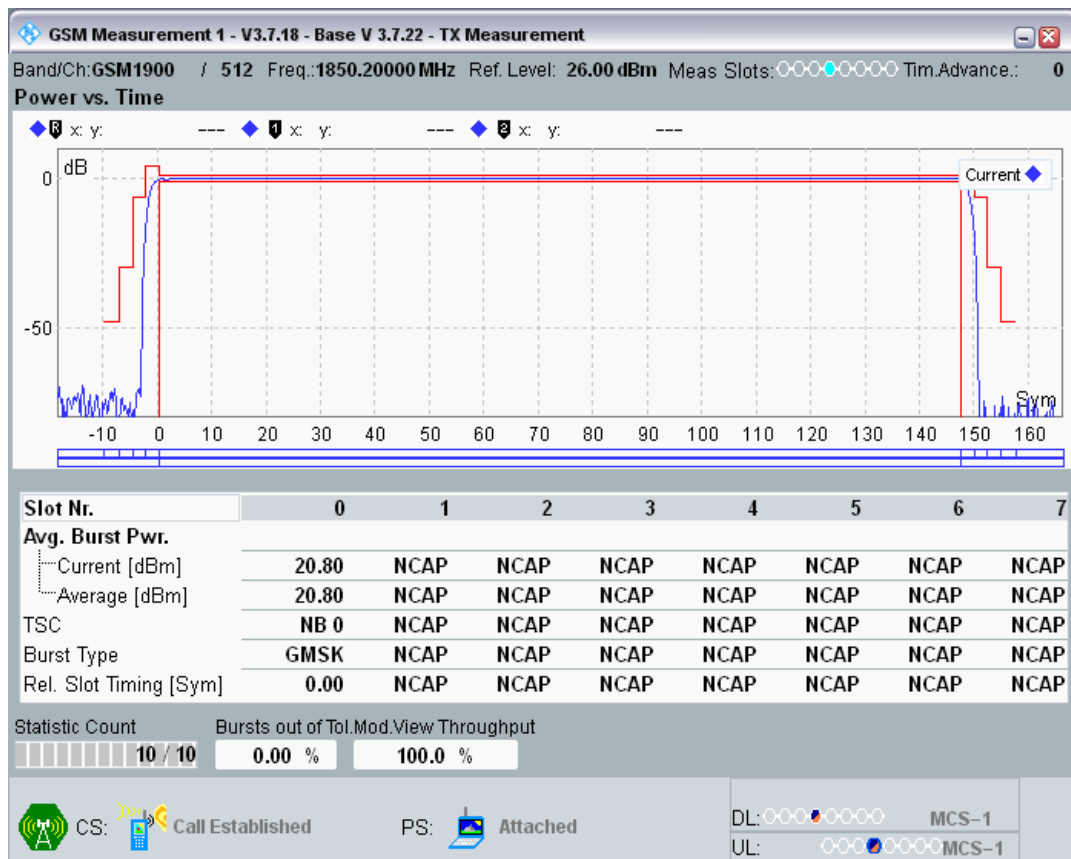


GSM1900 Channel=512 PCL=6

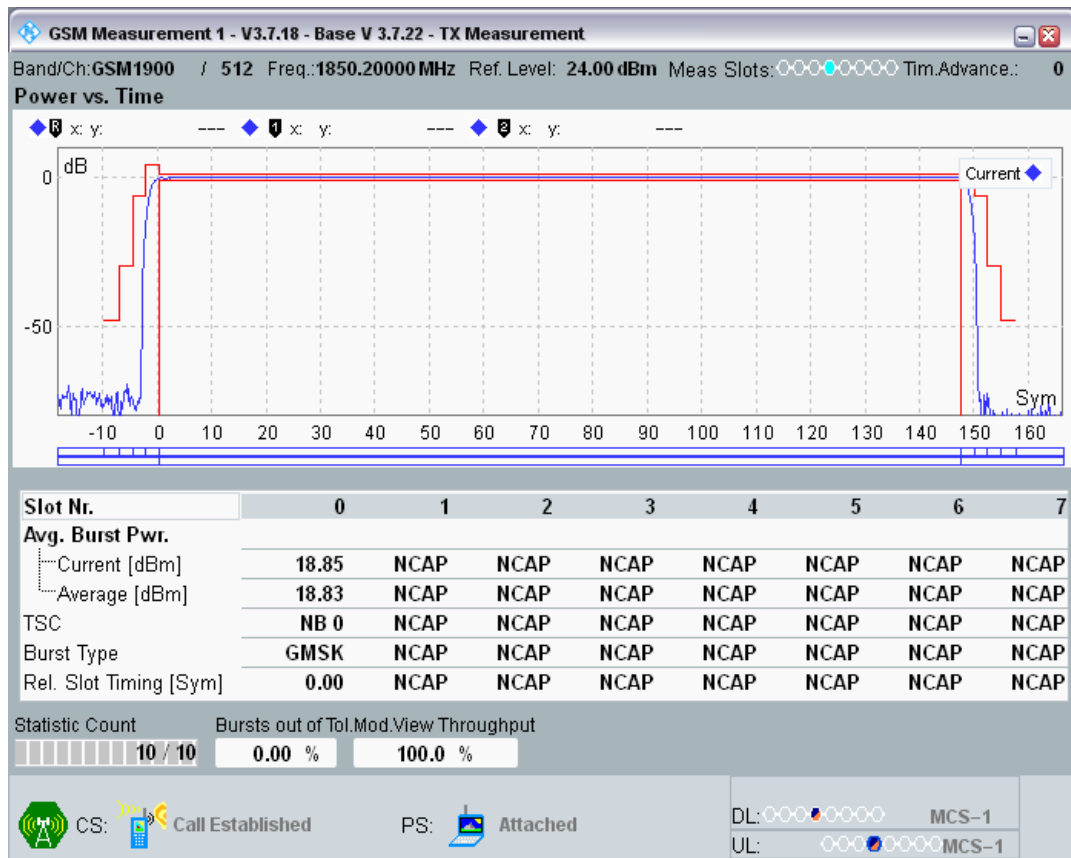


GSM1900 Channel=512 PCL=7

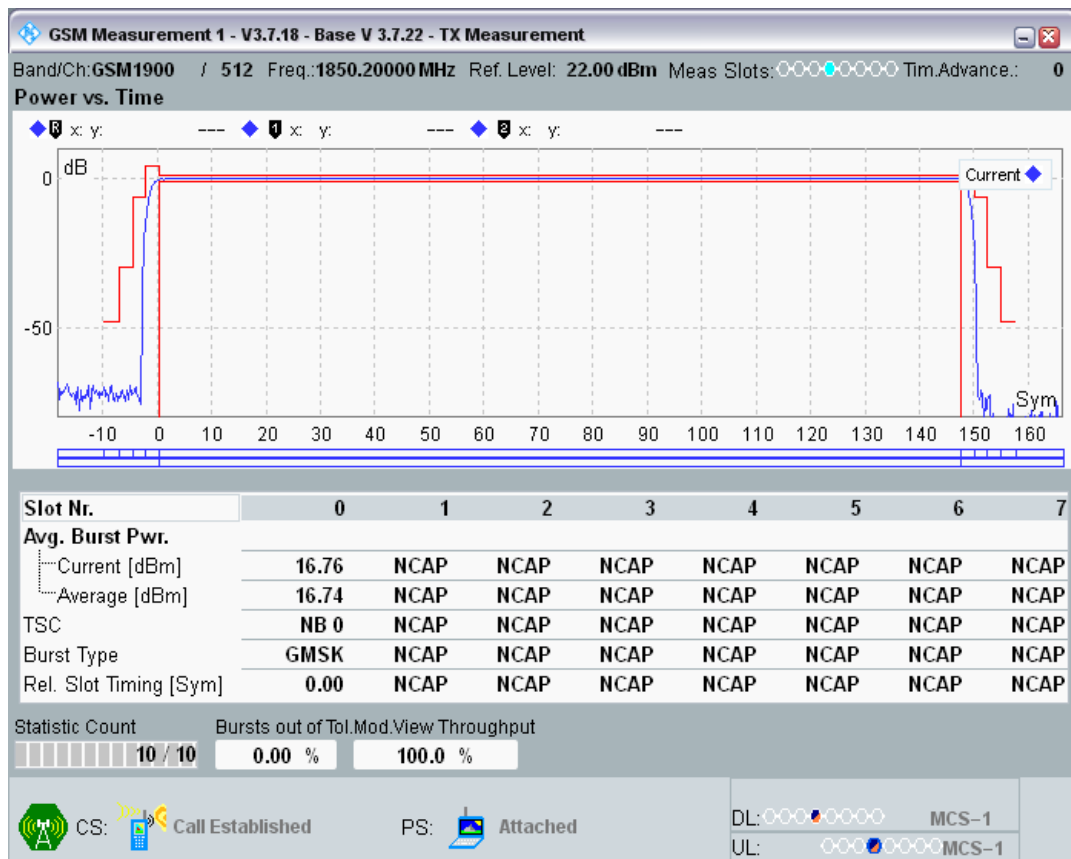


GSM1900 Channel=512 PCL=8

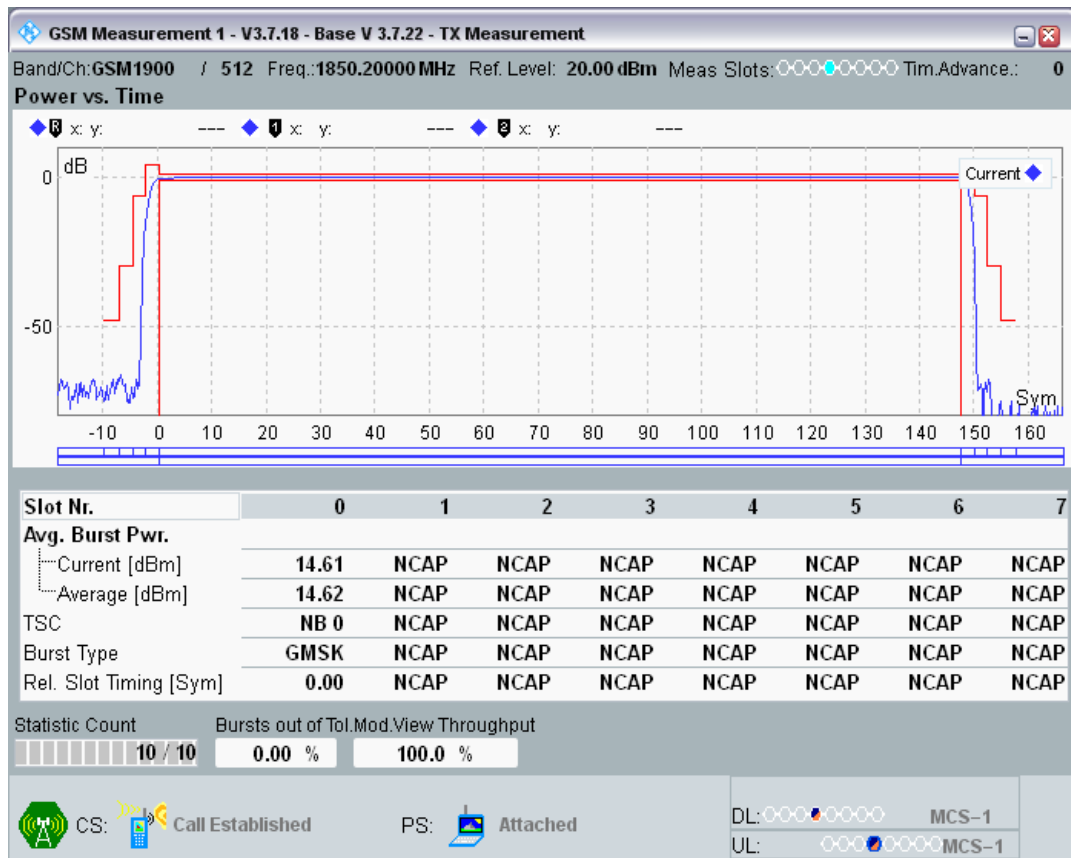


GSM1900 Channel=512 PCL=9

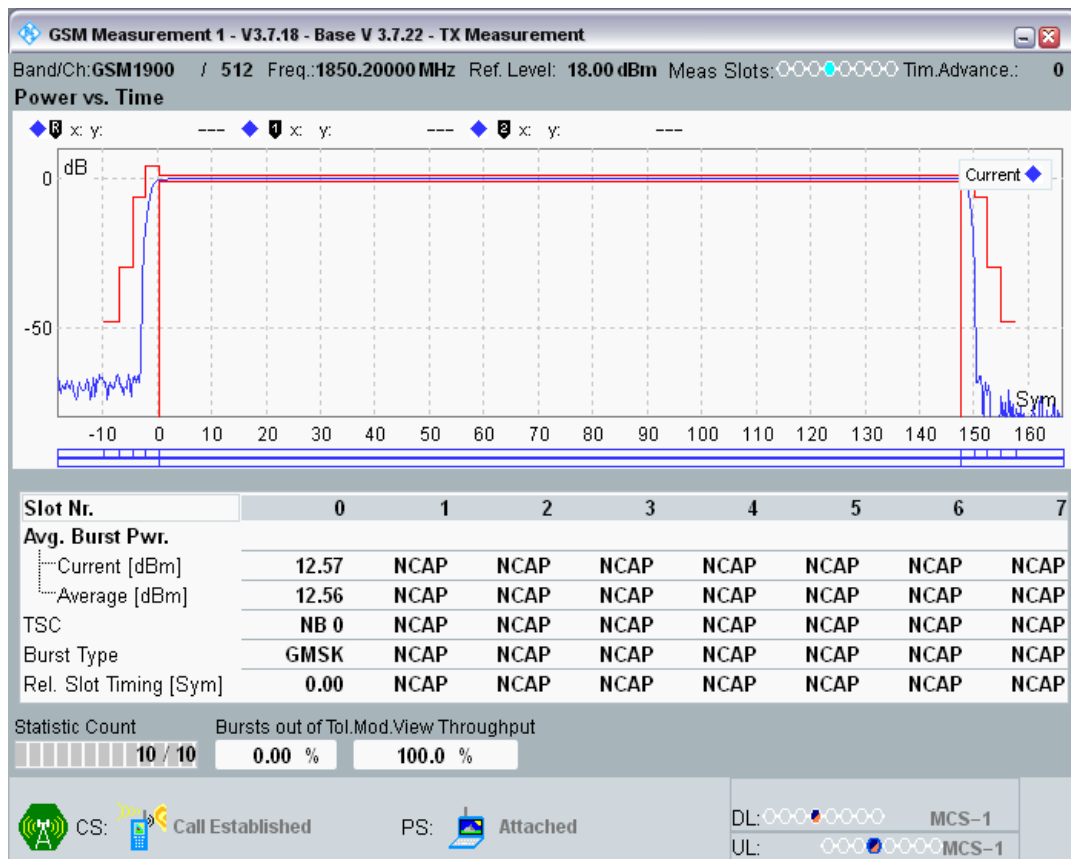


GSM1900 Channel=512 PCL=10

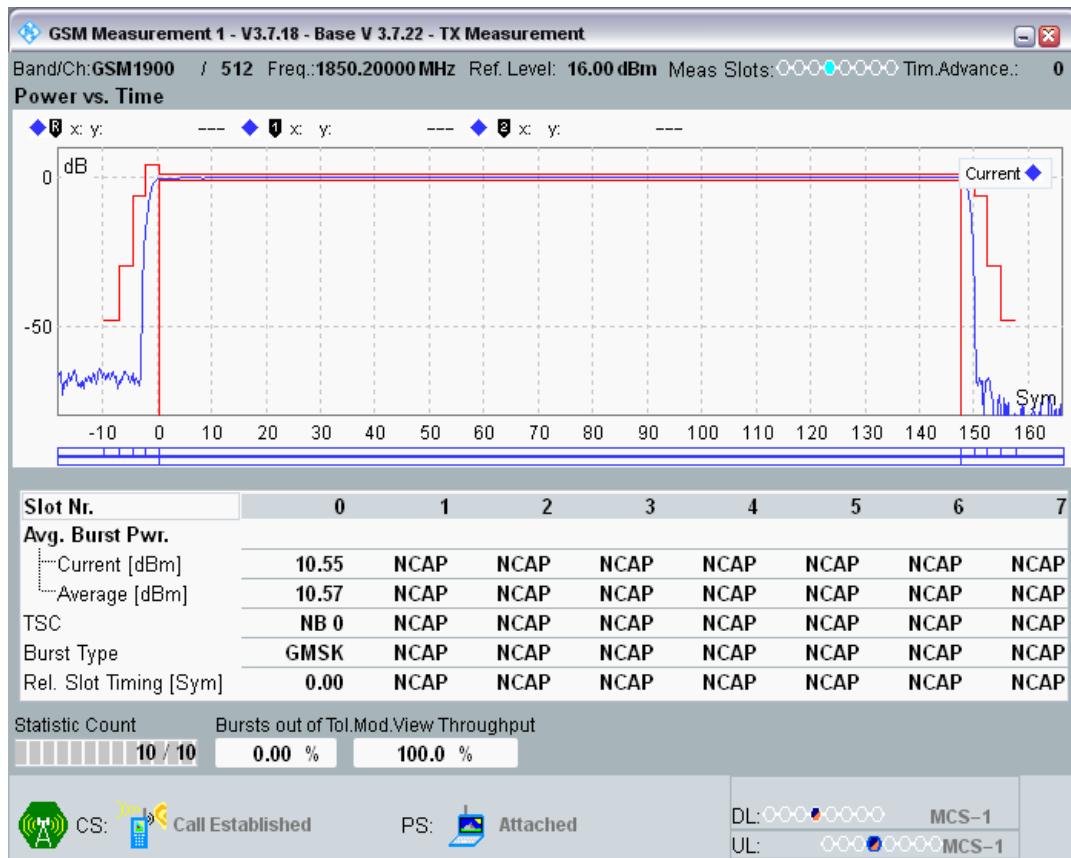


GSM1900 Channel=512 PCL=11

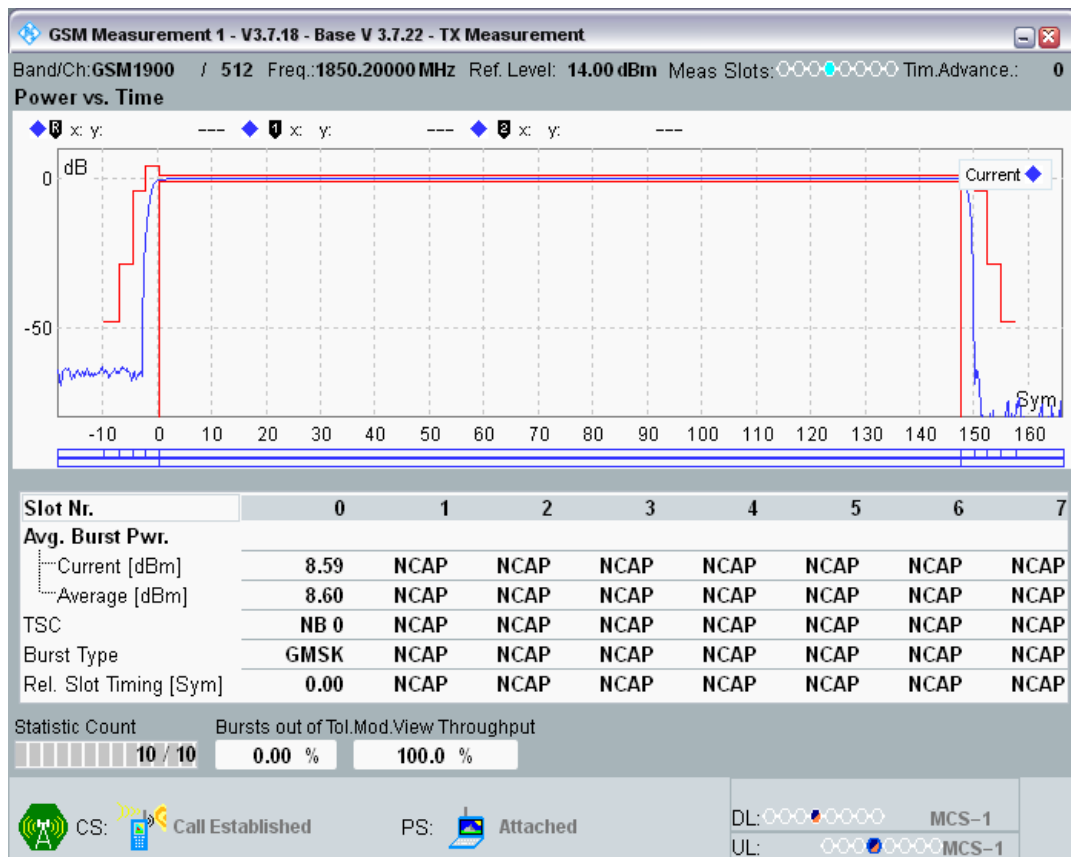


GSM1900 Channel=512 PCL=12

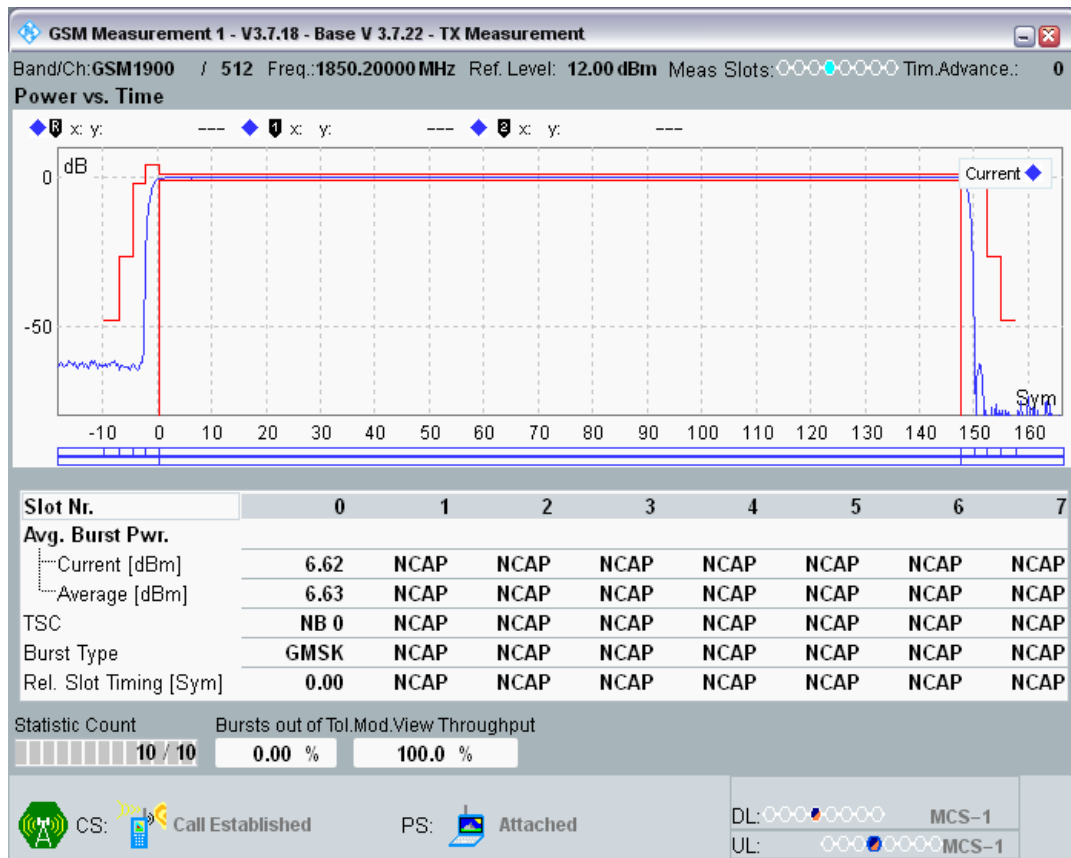


GSM1900 Channel=512 PCL=13

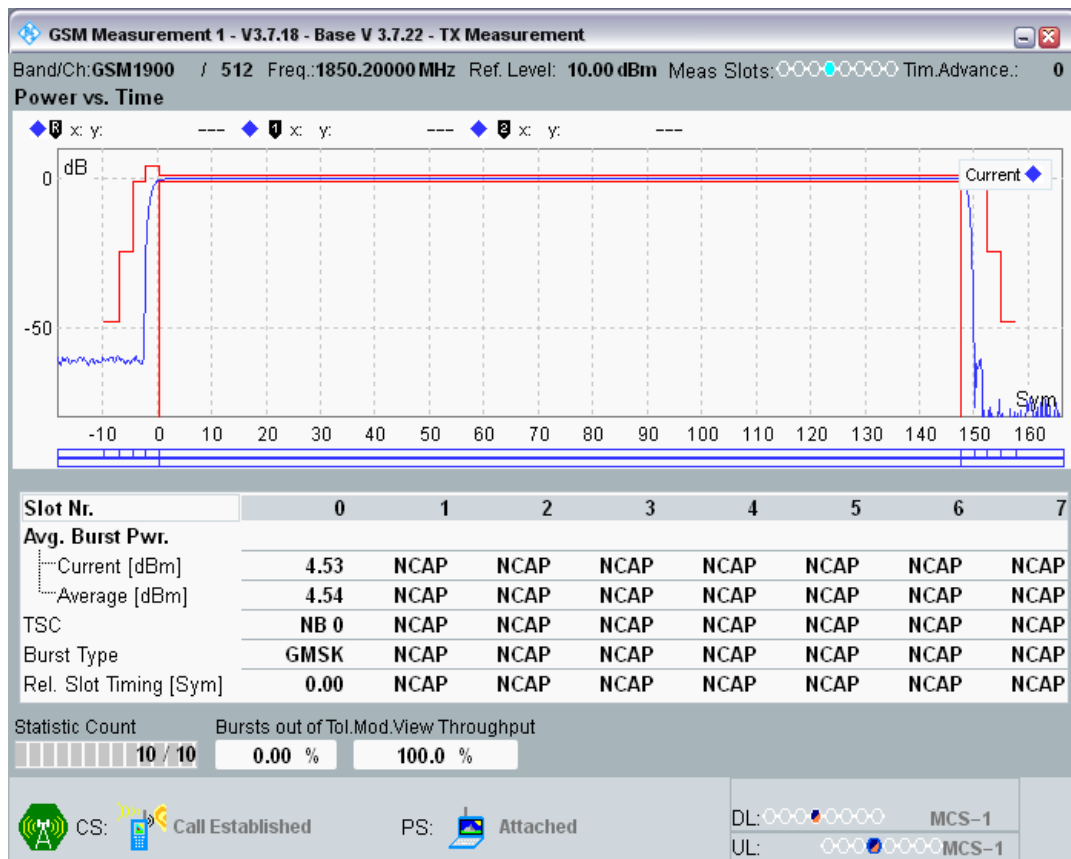


GSM1900 Channel=512 PCL=14

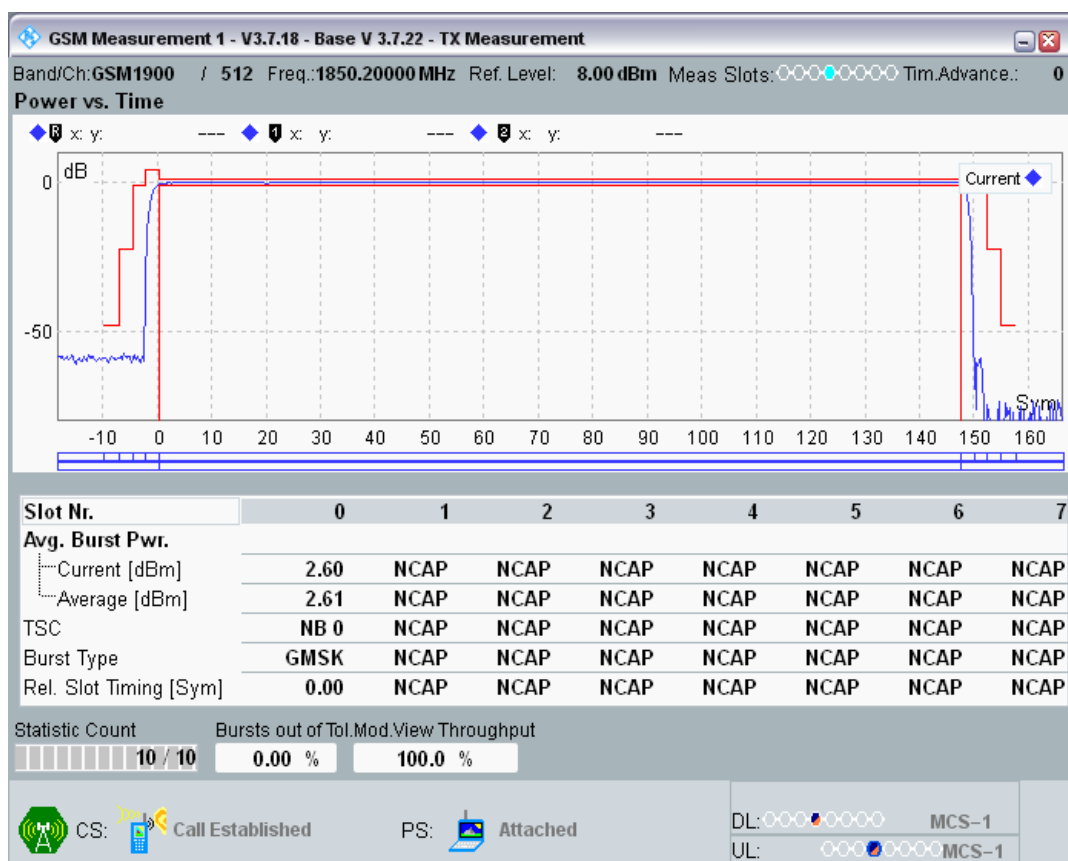


GSM1900 Channel=512 PCL=15

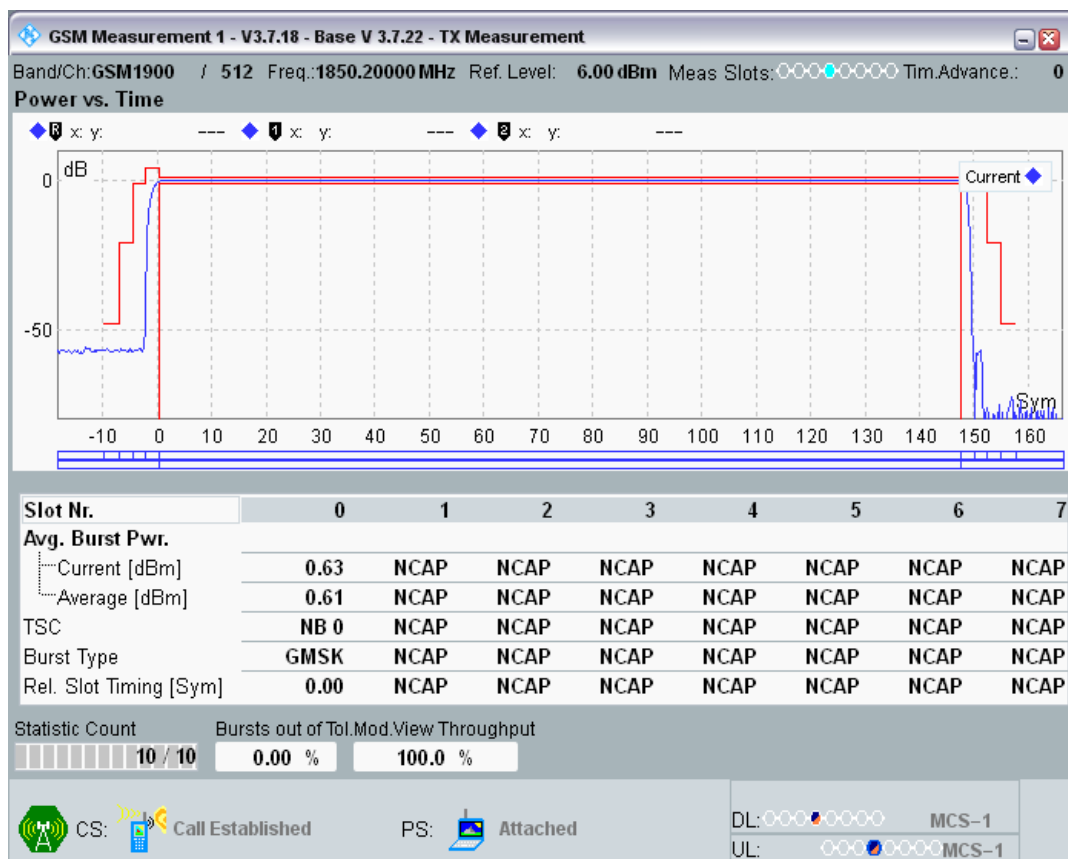


GSM1900 Channel=661 PCL=0

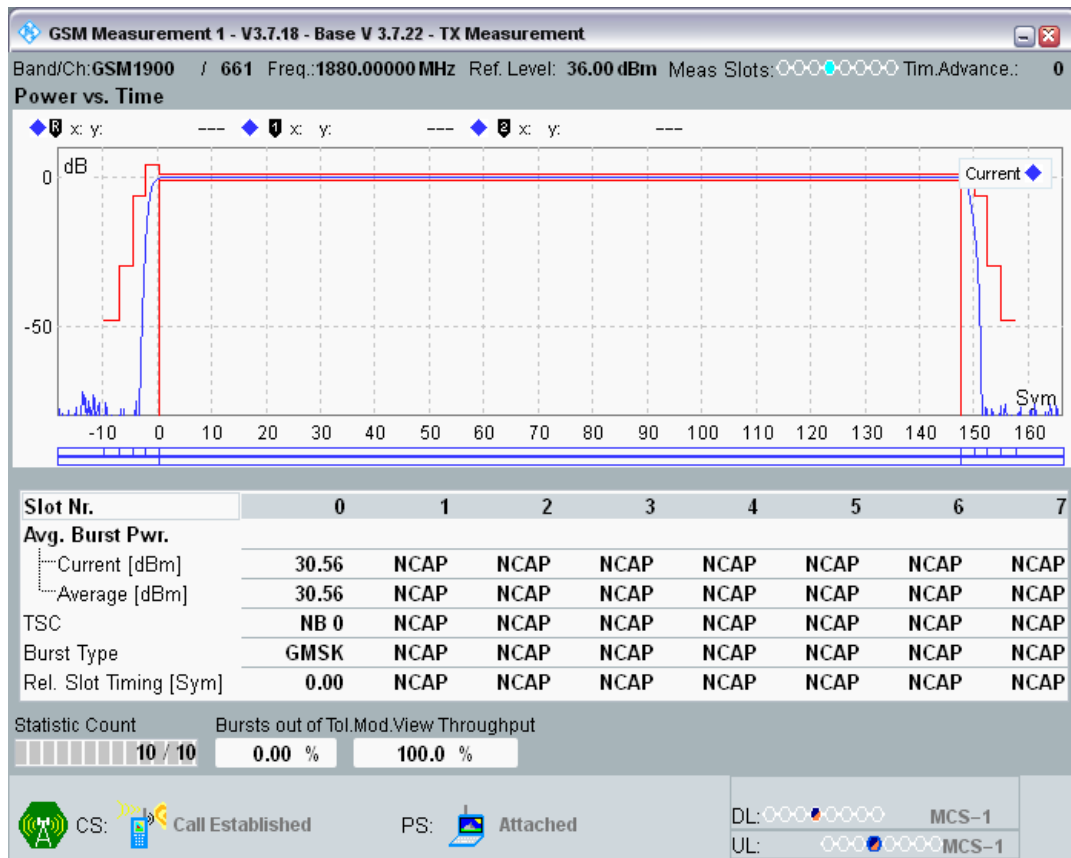


GSM1900 Channel=661 PCL=1

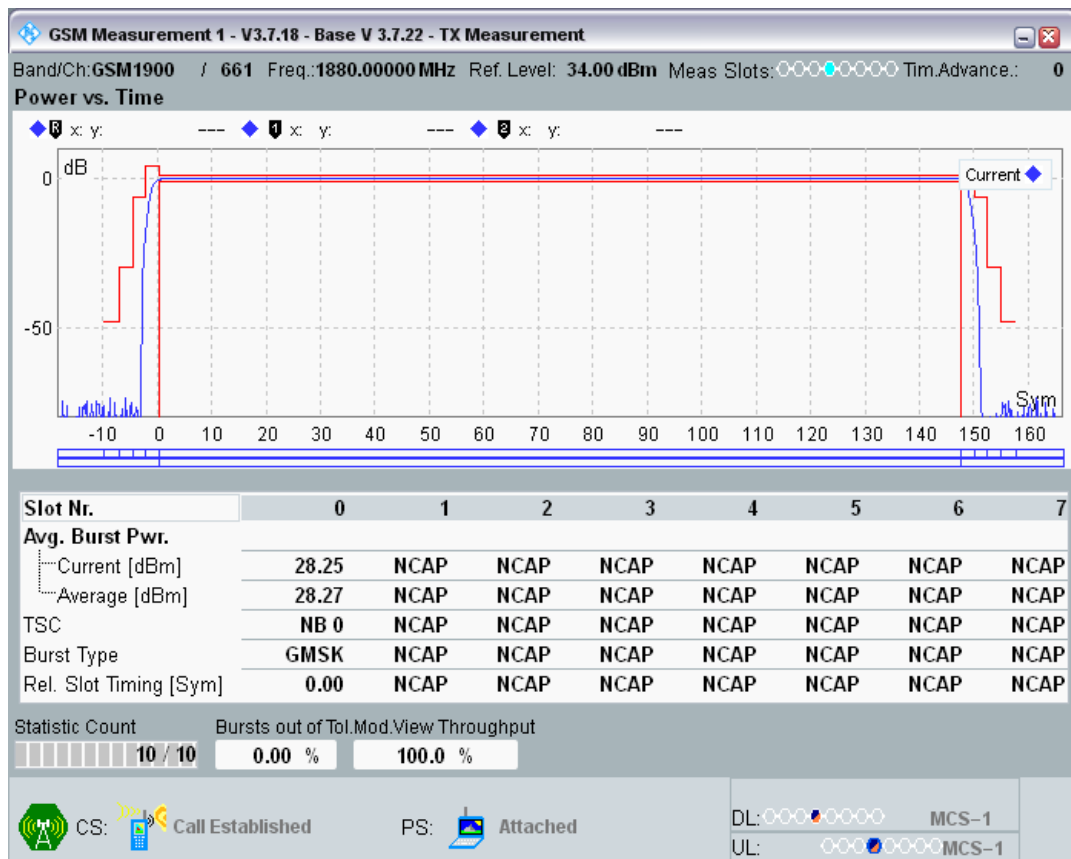


GSM1900 Channel=661 PCL=2

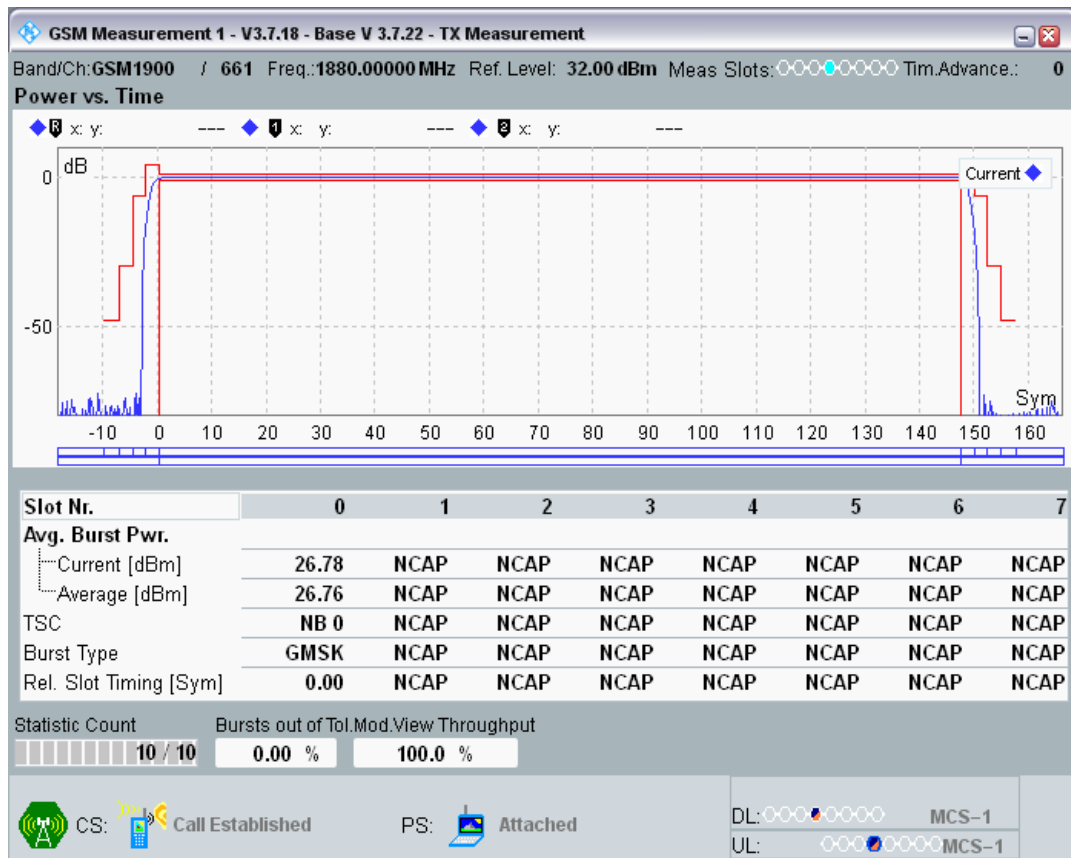


GSM1900 Channel=661 PCL=3

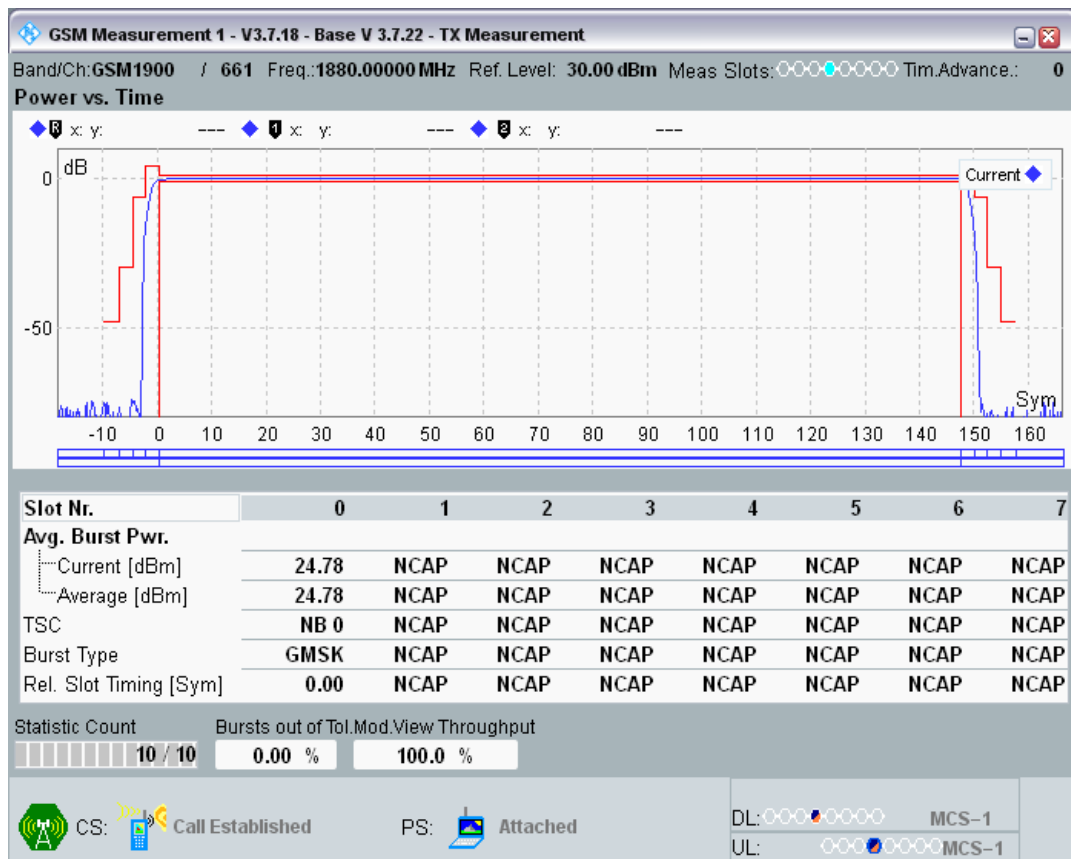


GSM1900 Channel=661 PCL=4

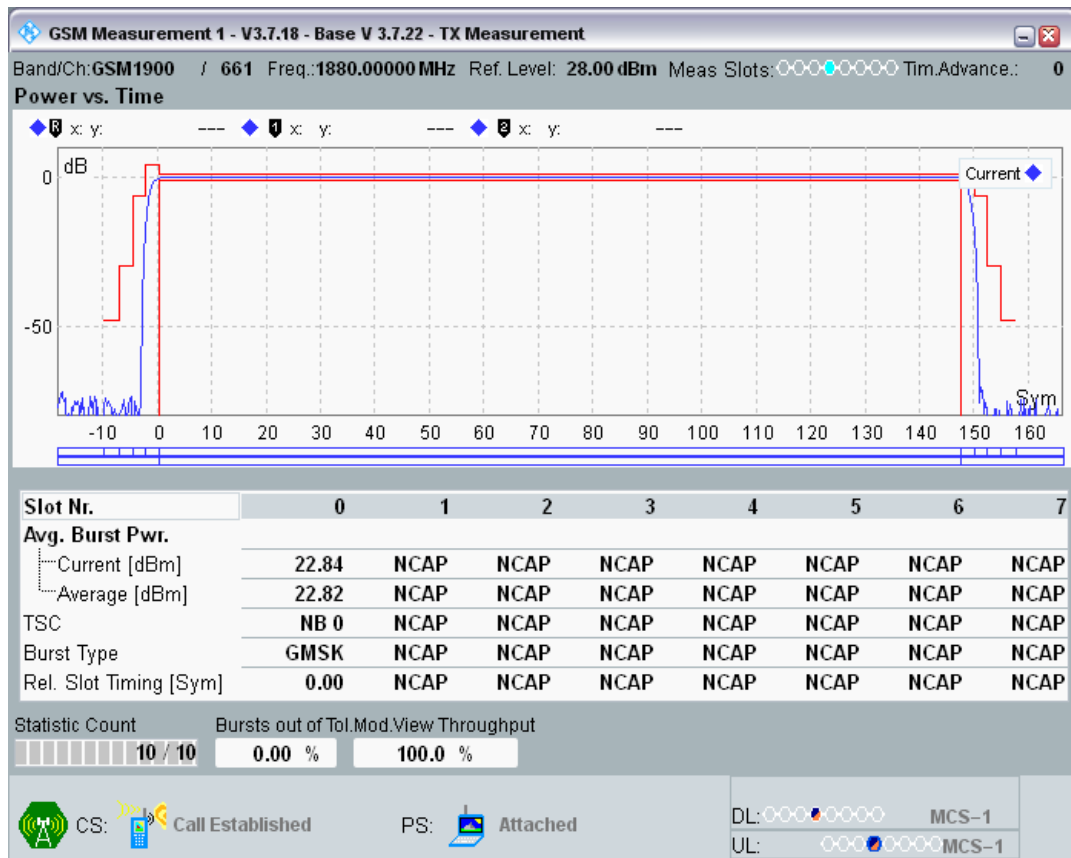


GSM1900 Channel=661 PCL=5

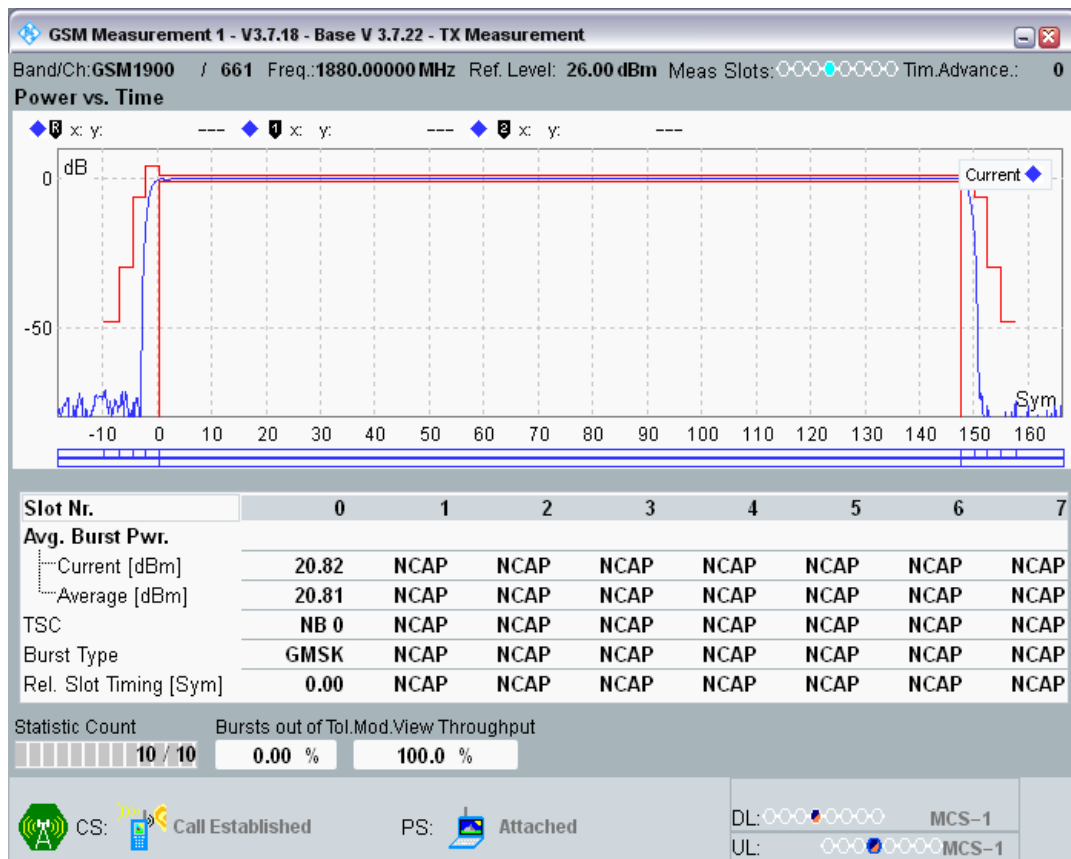


GSM1900 Channel=661 PCL=6

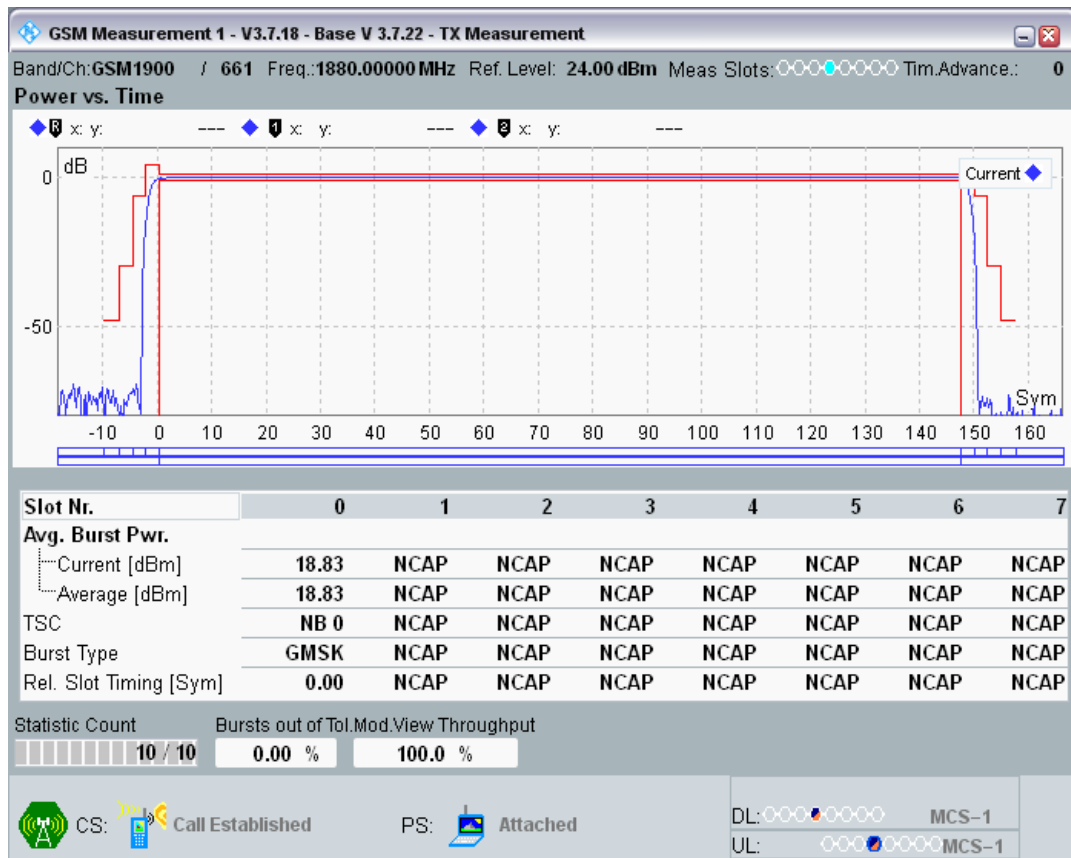


GSM1900 Channel=661 PCL=7

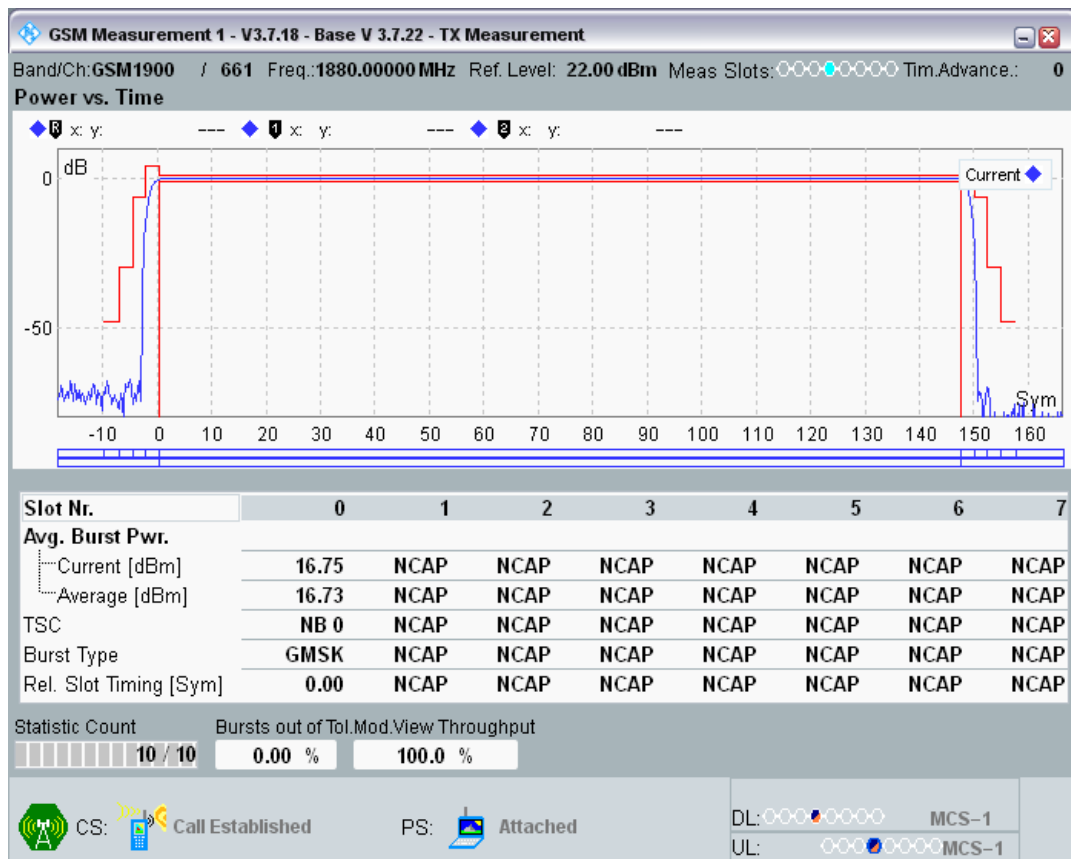


GSM1900 Channel=661 PCL=8

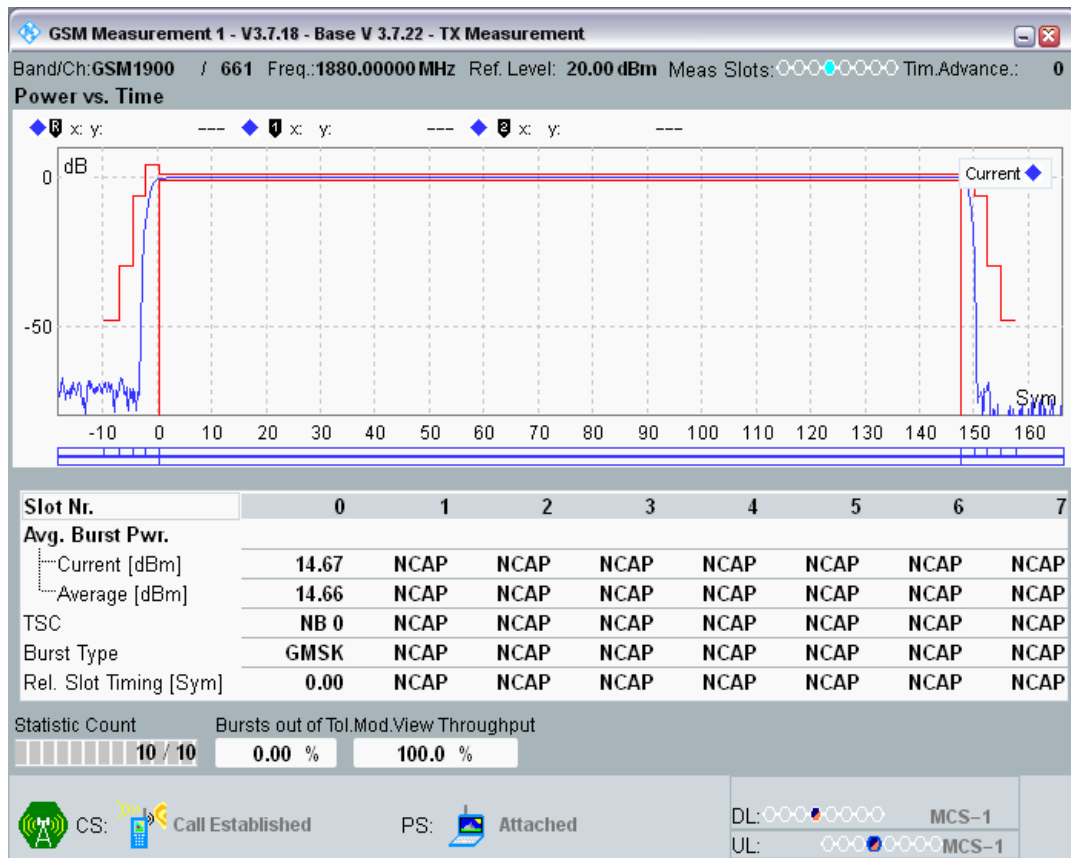


GSM1900 Channel=661 PCL=9

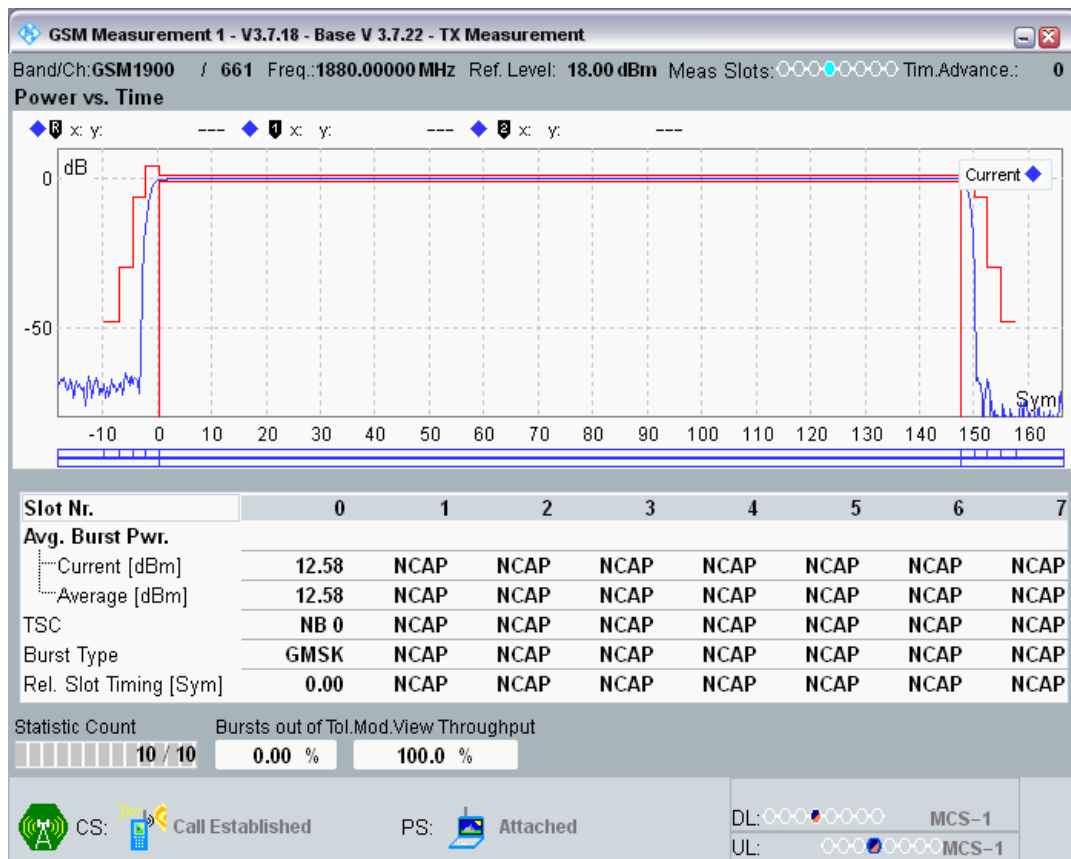


GSM1900 Channel=661 PCL=10

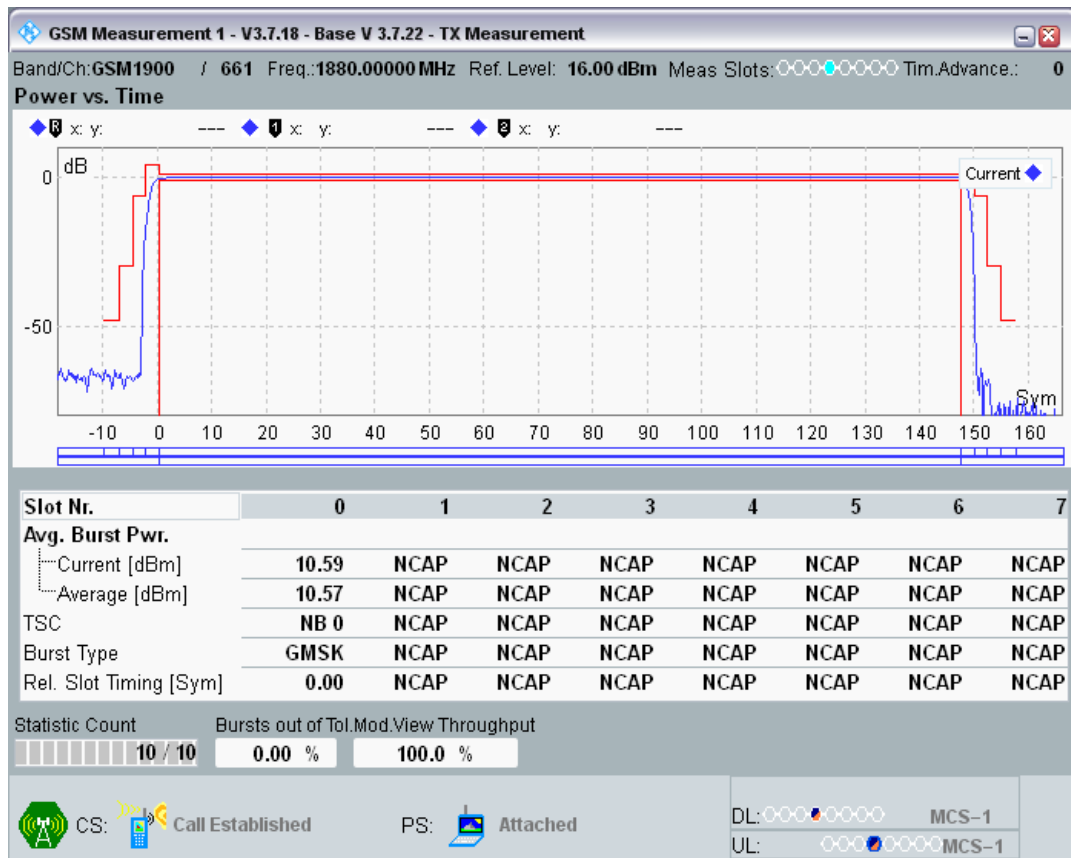


GSM1900 Channel=661 PCL=11

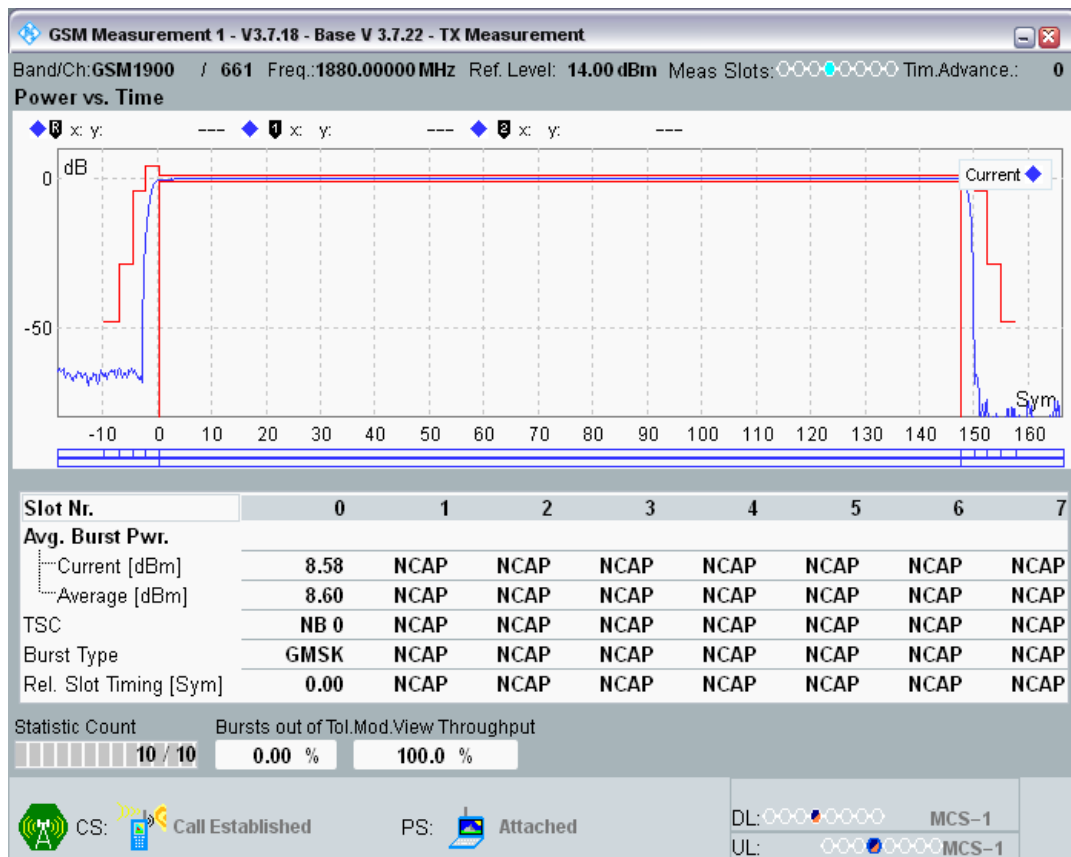


GSM1900 Channel=661 PCL=12

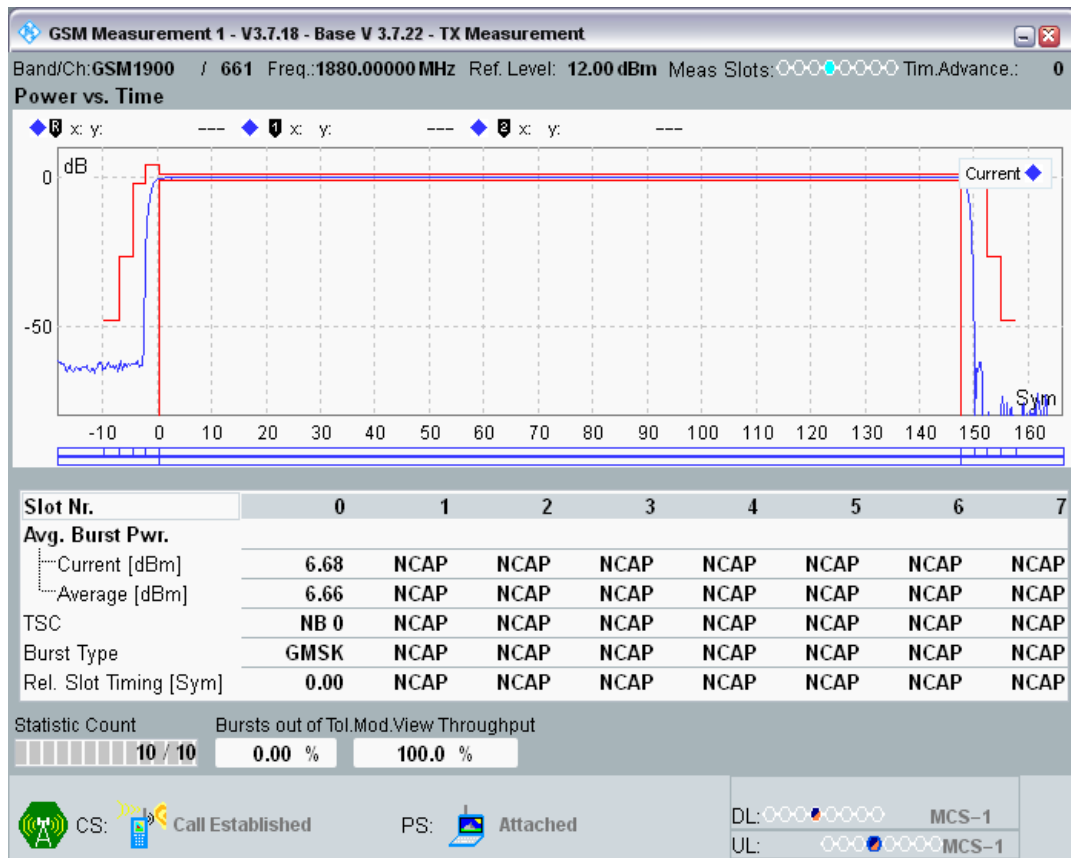


GSM1900 Channel=661 PCL=13

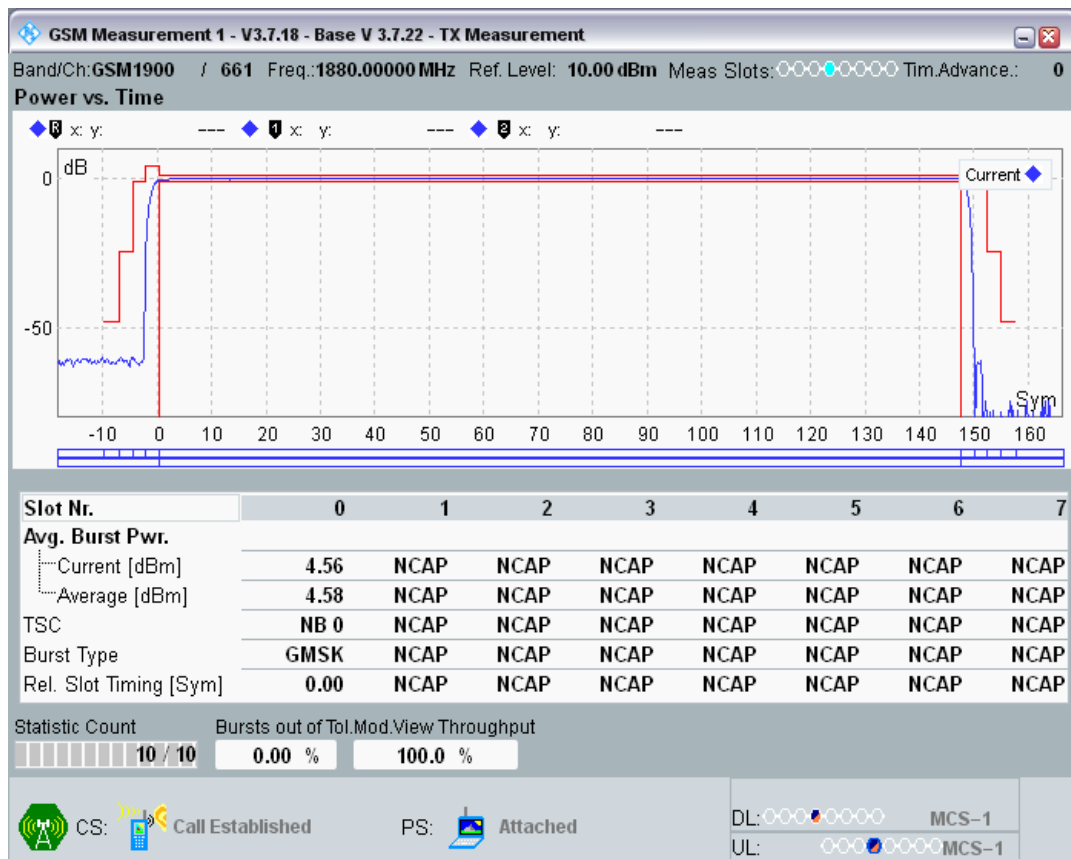


GSM1900 Channel=661 PCL=14

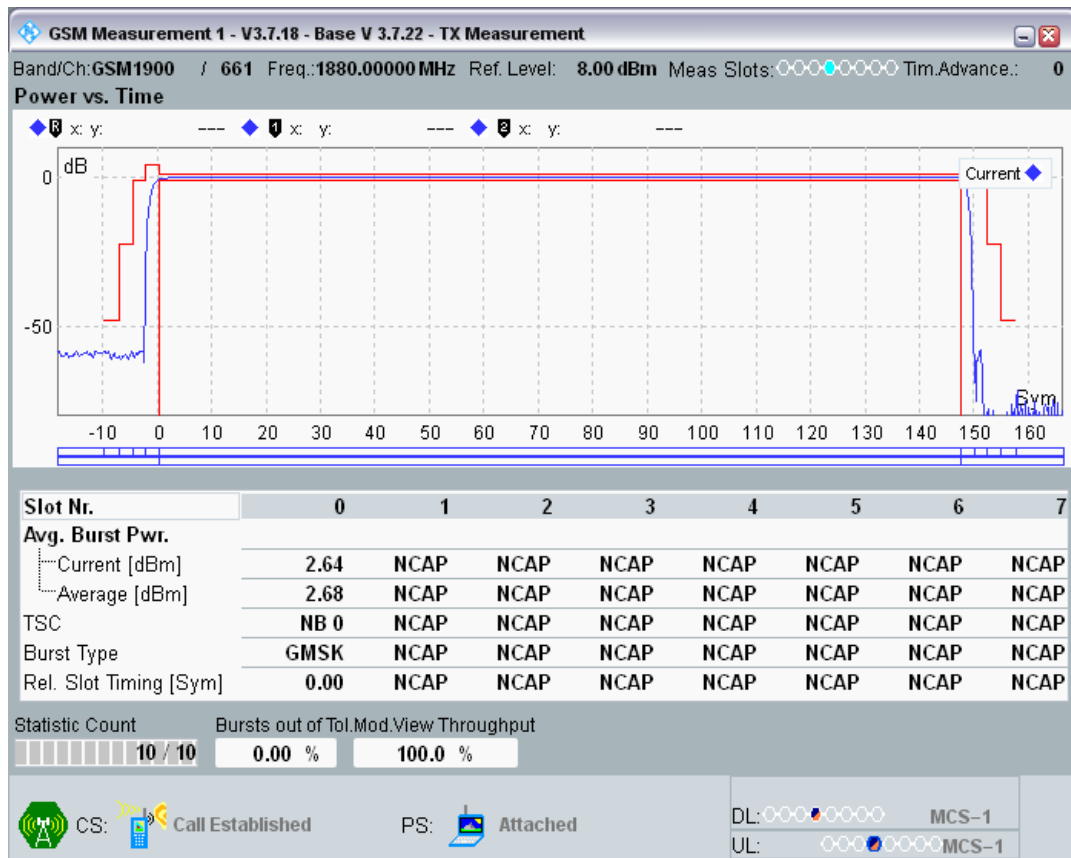


GSM1900 Channel=661 PCL=15

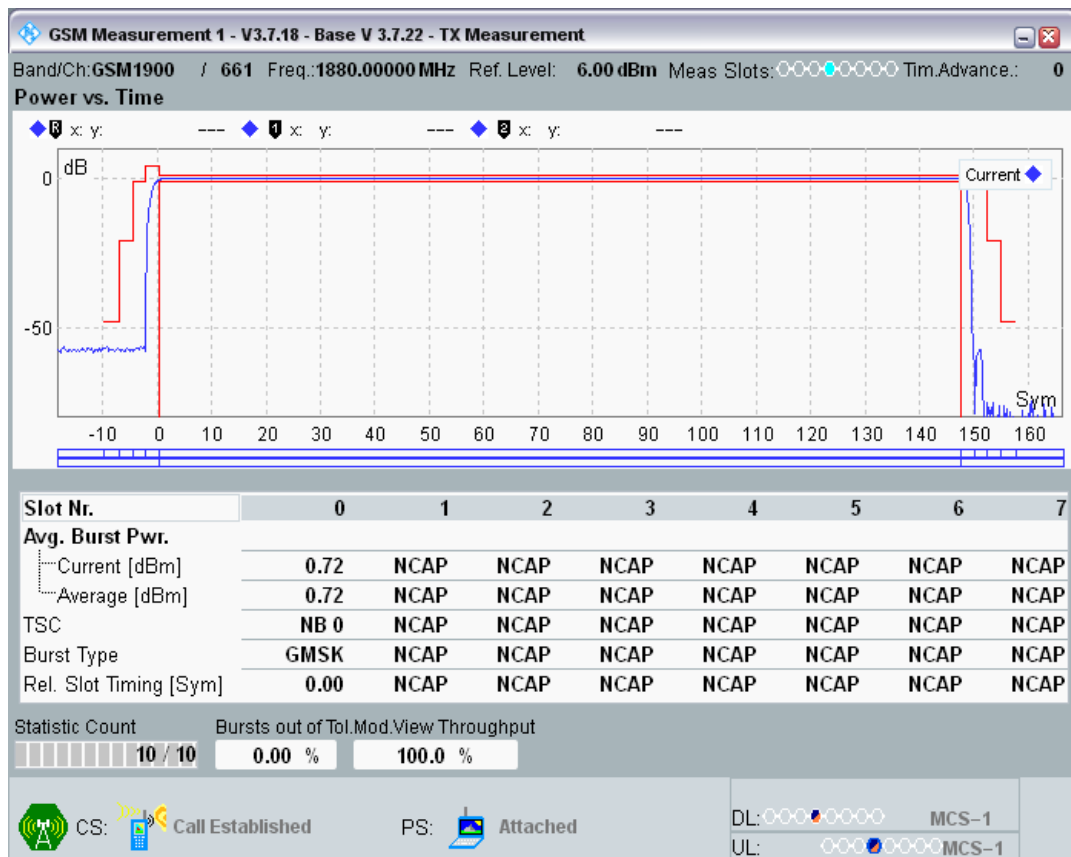


GSM1900 Channel=810 PCL=0

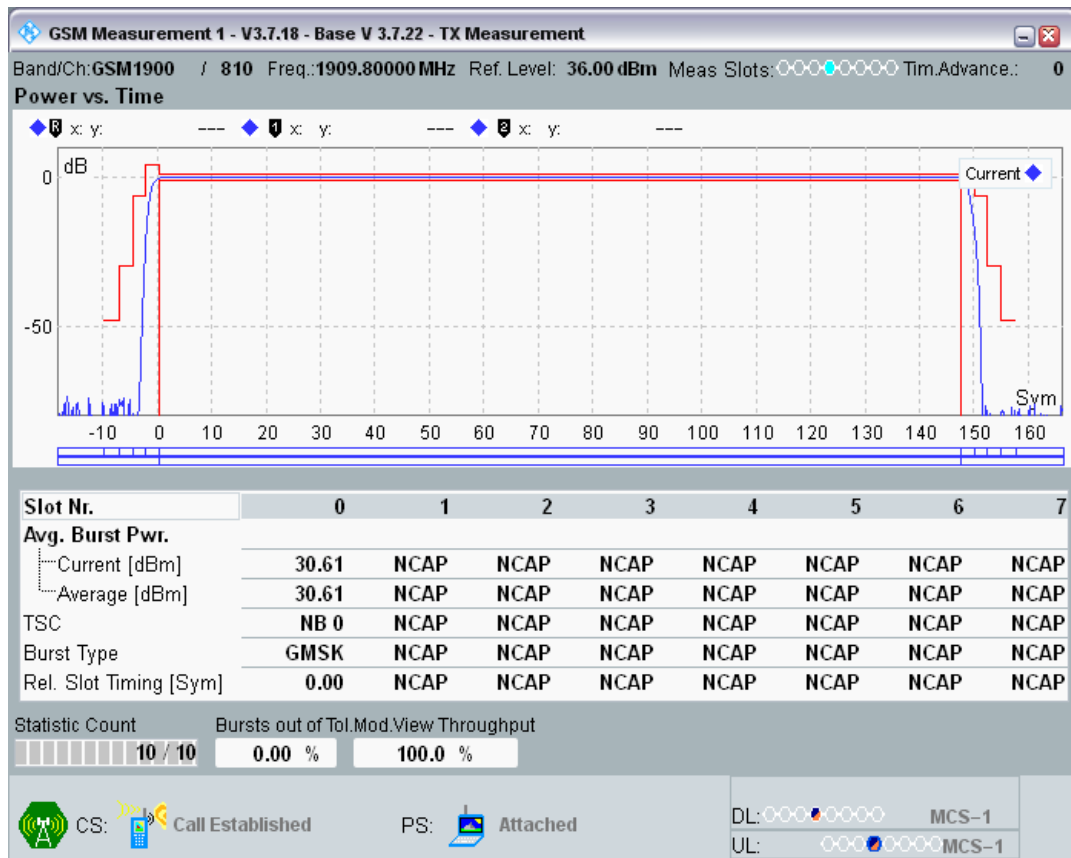


GSM1900 Channel=810 PCL=1

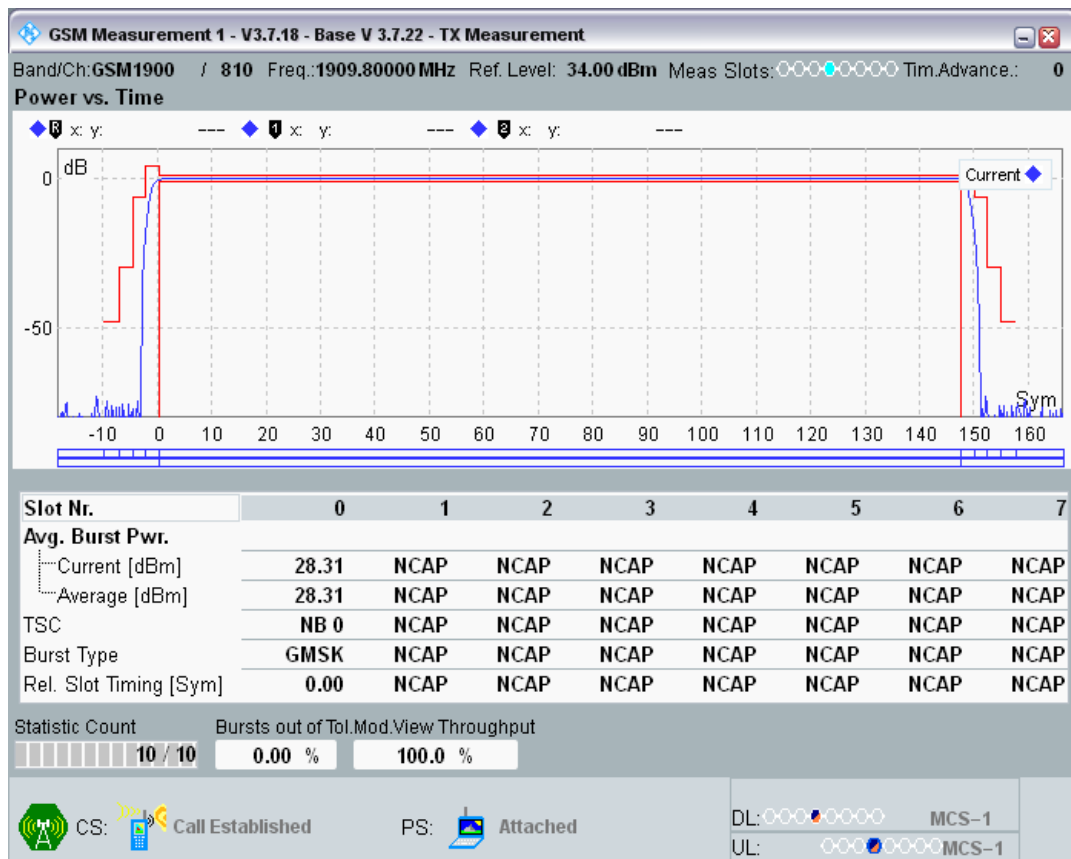


GSM1900 Channel=810 PCL=2

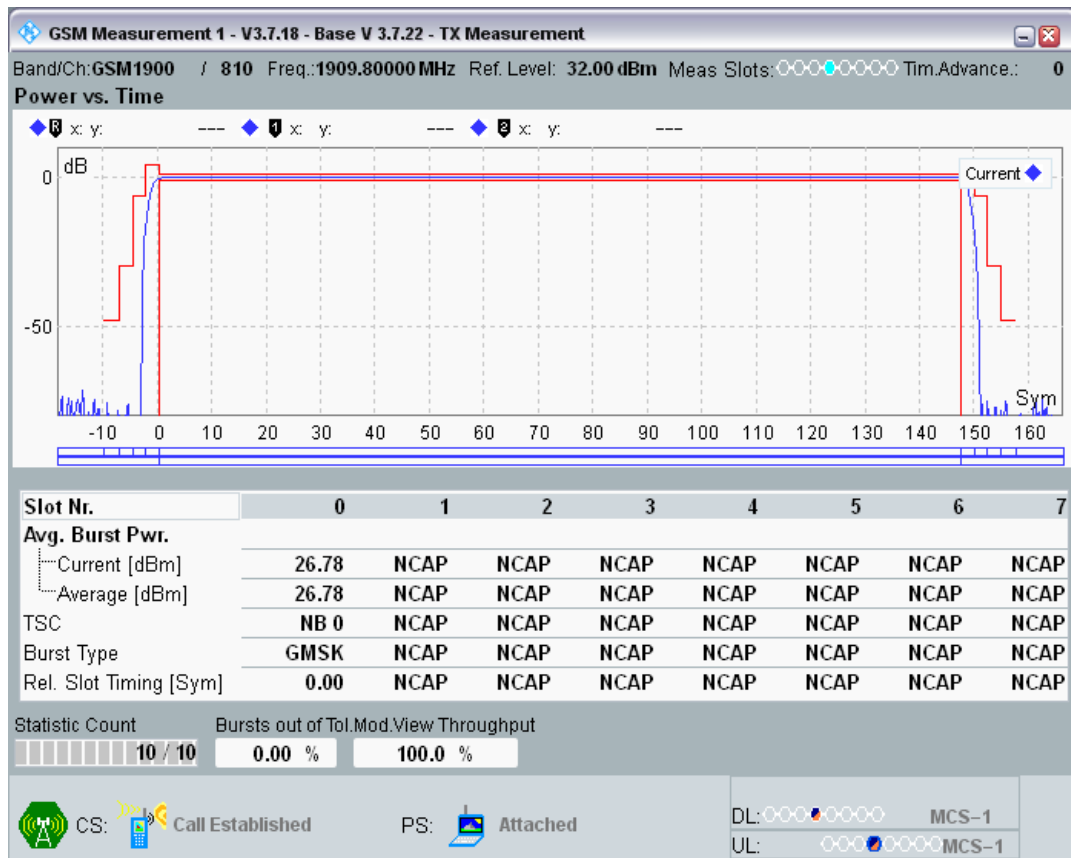


GSM1900 Channel=810 PCL=3

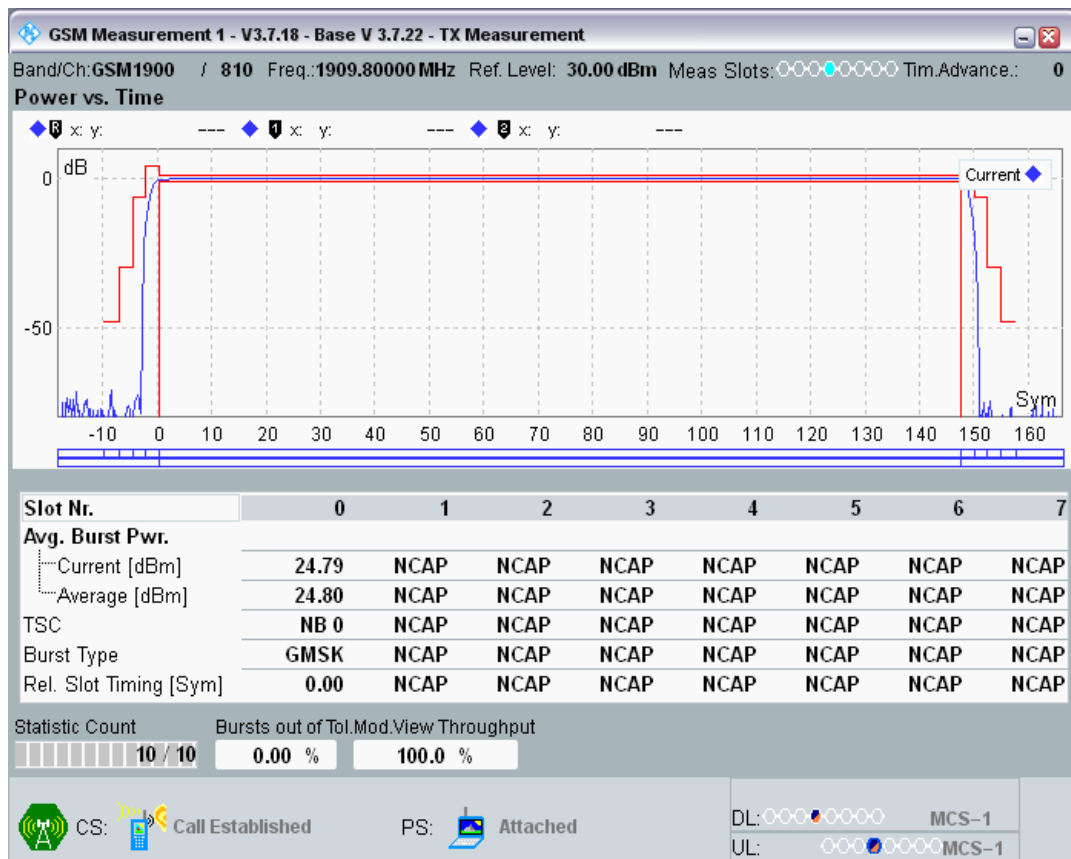


GSM1900 Channel=810 PCL=4

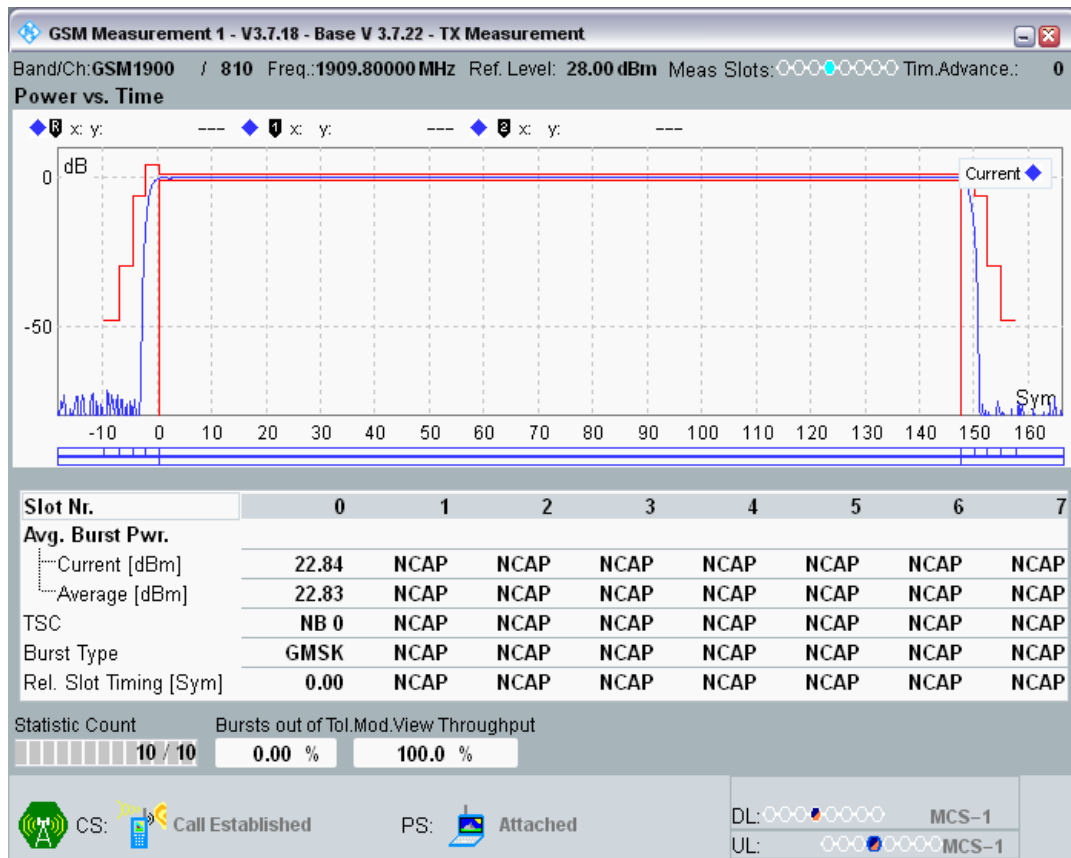


GSM1900 Channel=810 PCL=5

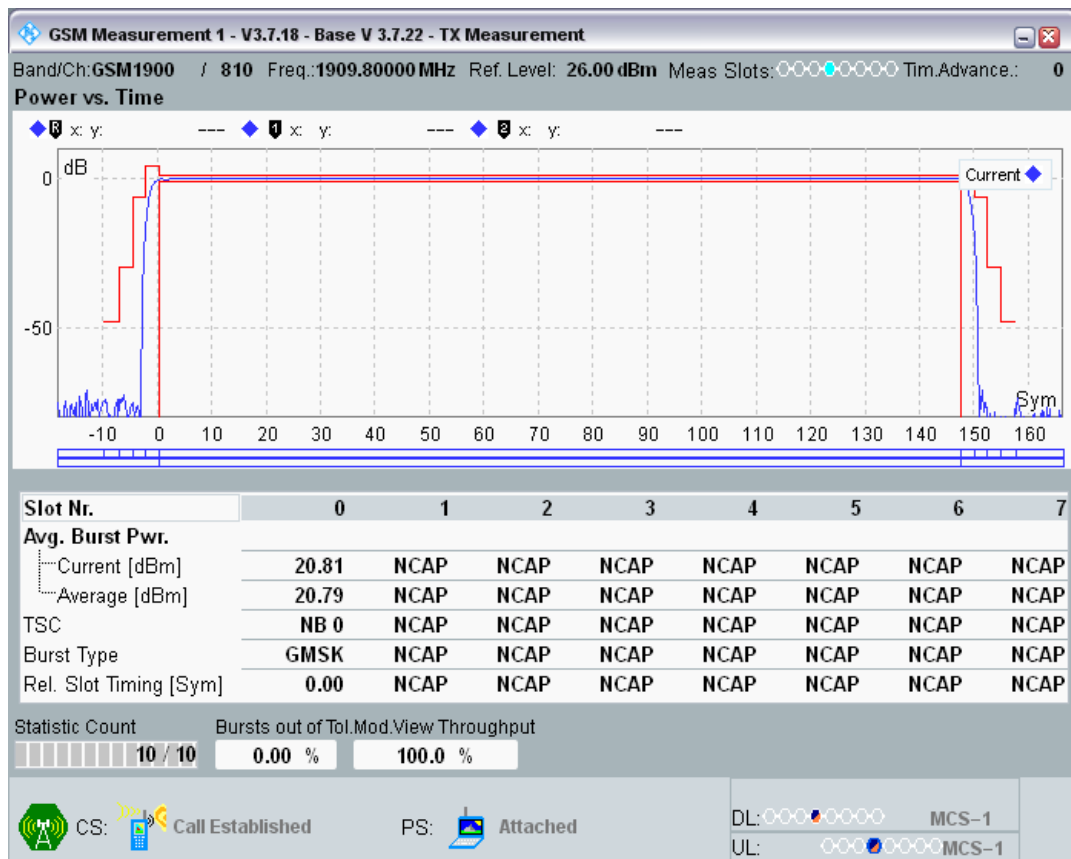


GSM1900 Channel=810 PCL=6

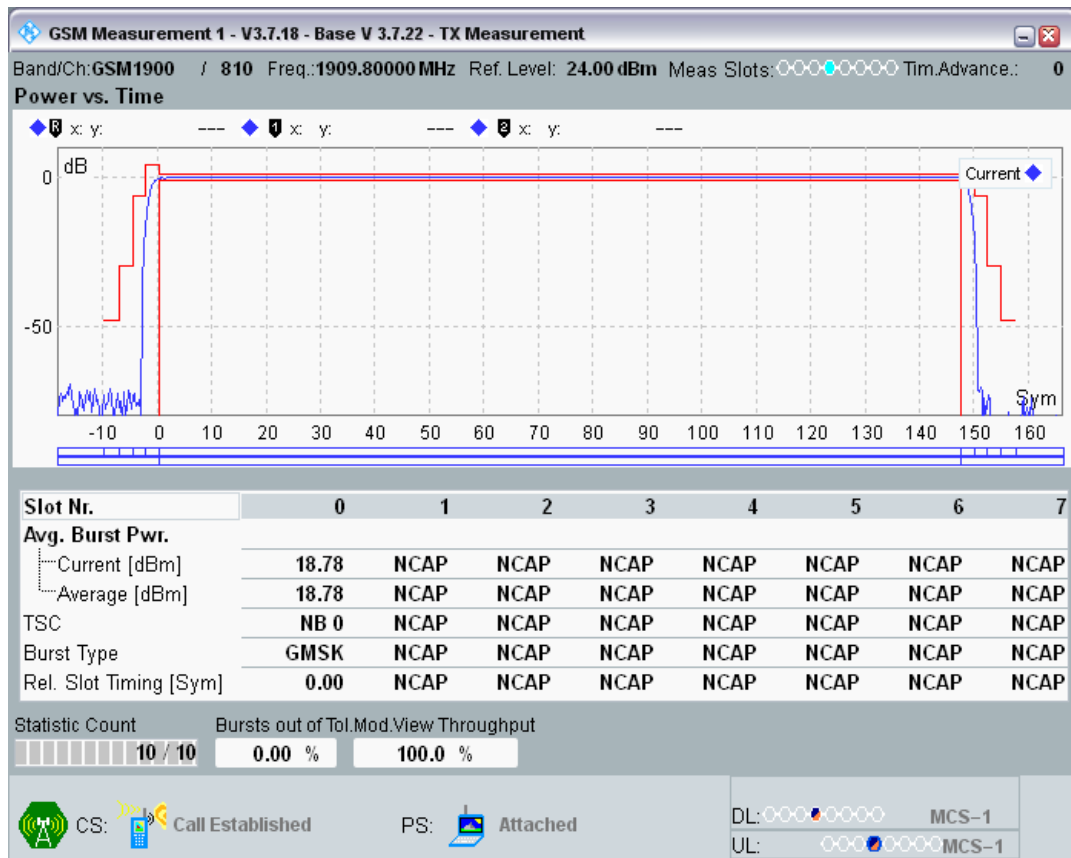


GSM1900 Channel=810 PCL=7

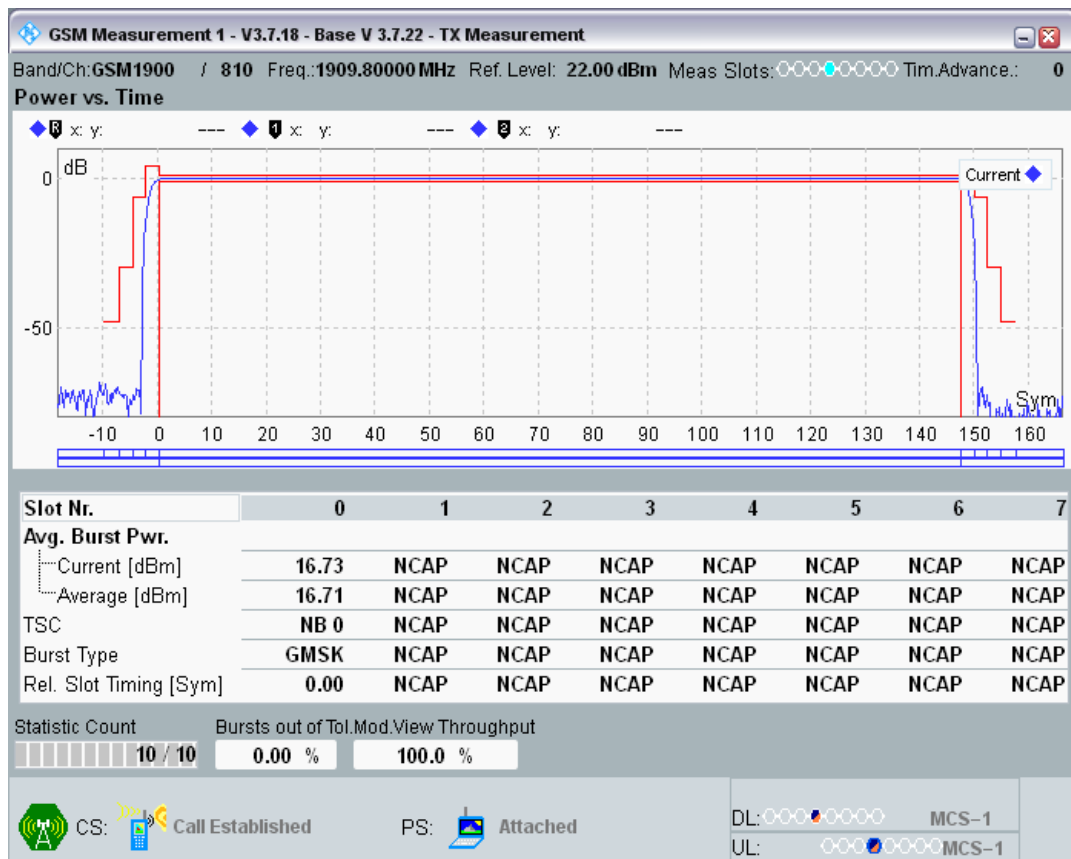


GSM1900 Channel=810 PCL=8

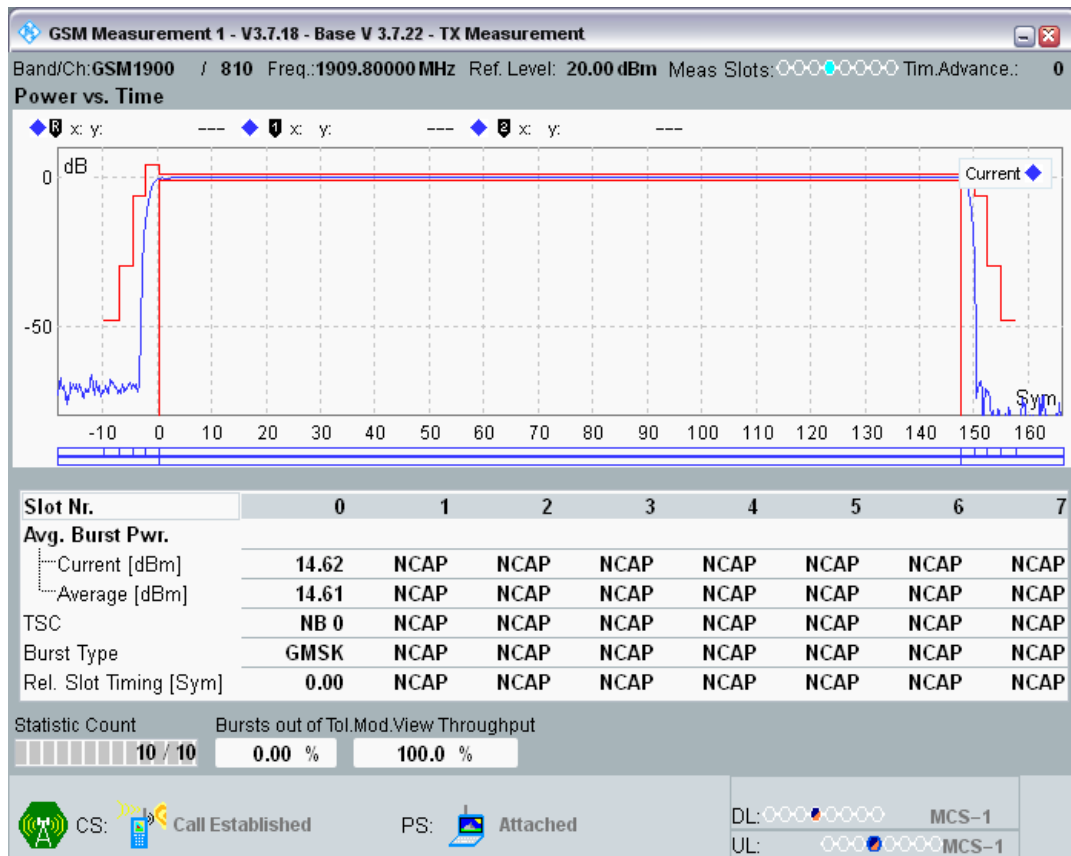


GSM1900 Channel=810 PCL=9

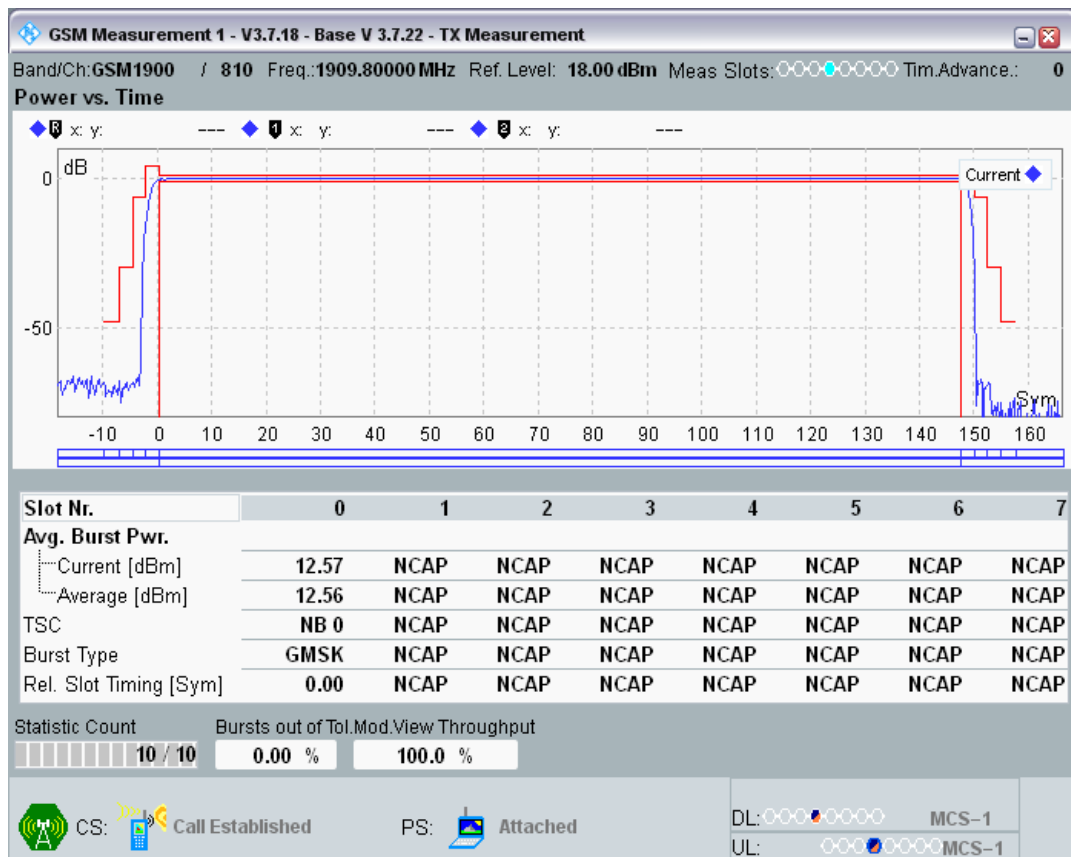


GSM1900 Channel=810 PCL=10

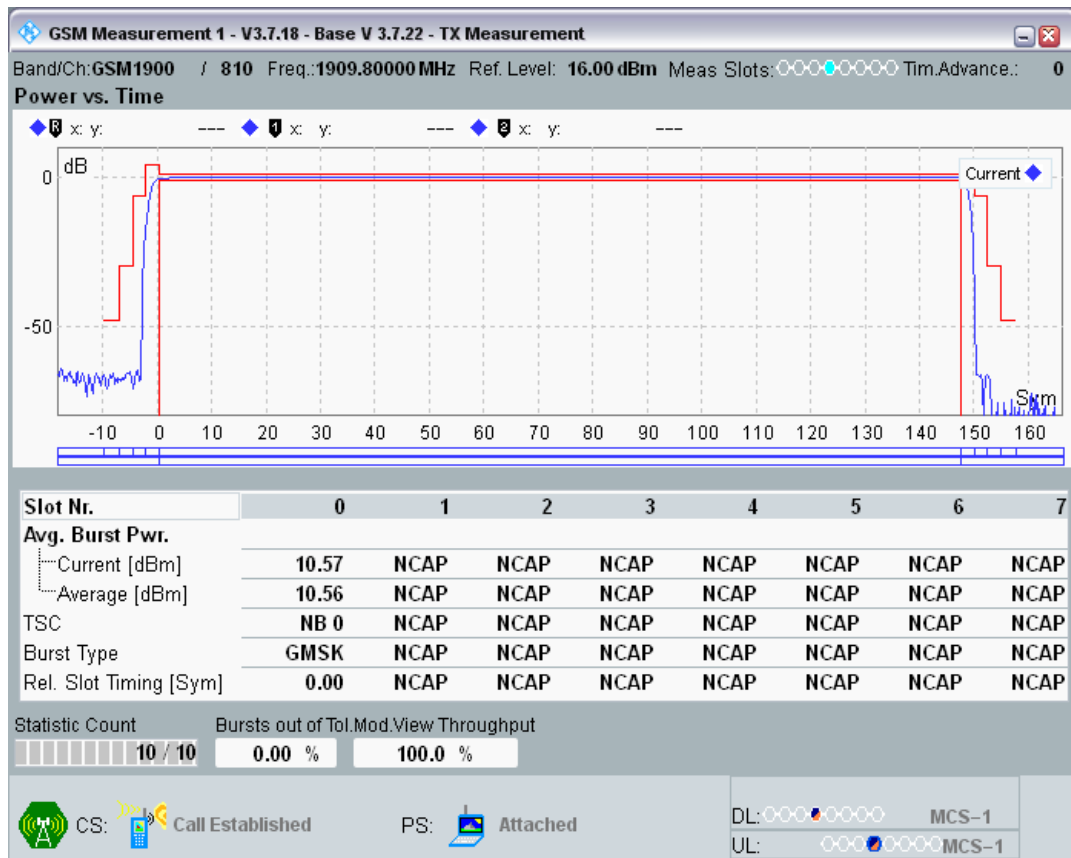


GSM1900 Channel=810 PCL=11

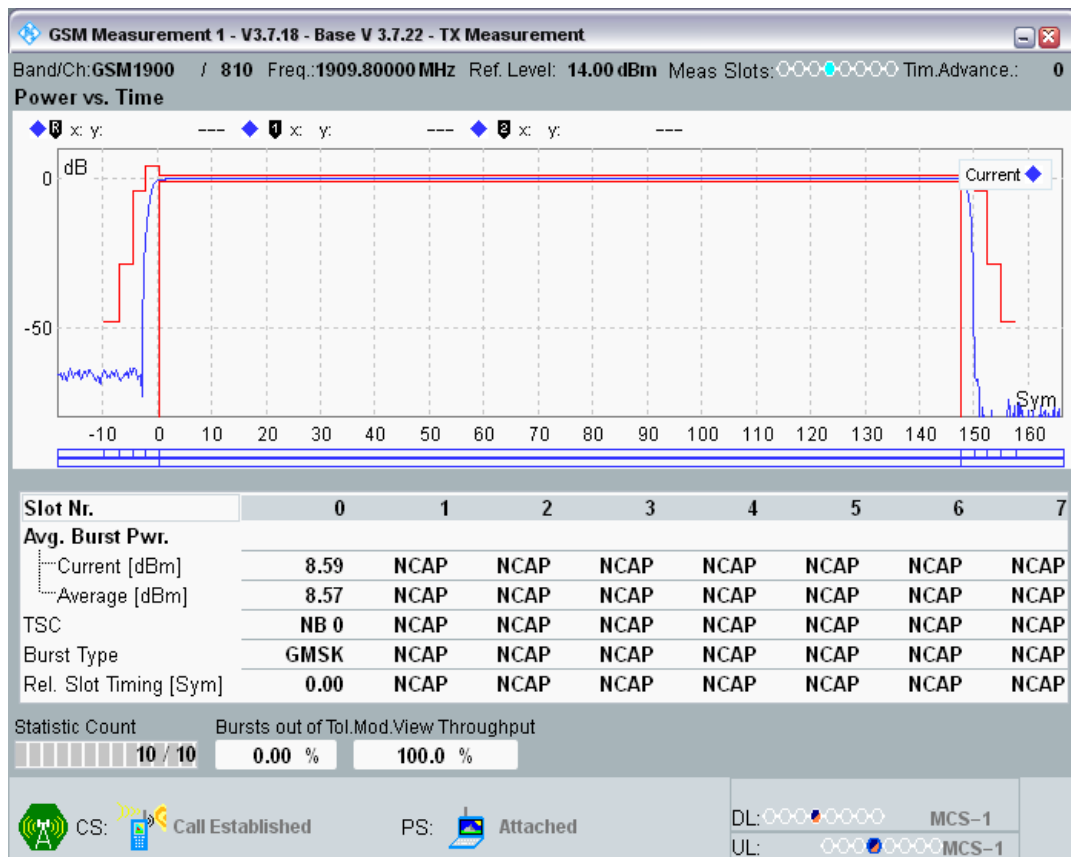


GSM1900 Channel=810 PCL=12

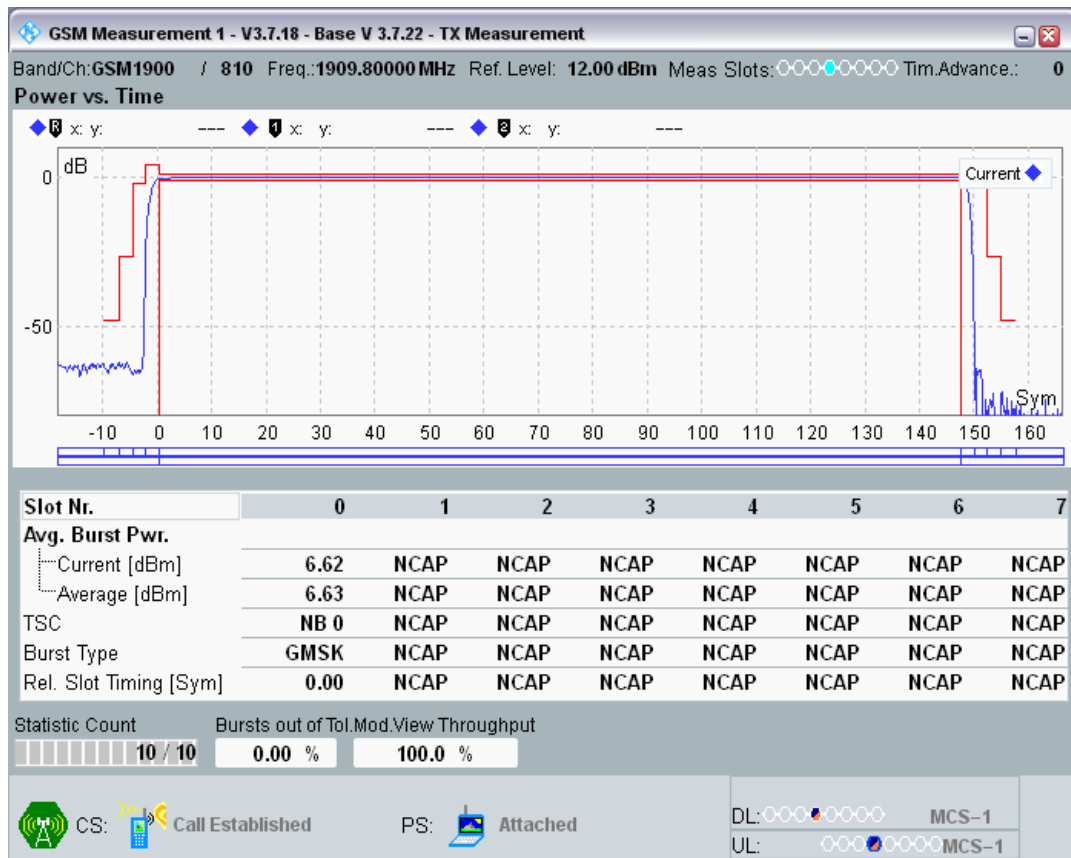


GSM1900 Channel=810 PCL=13

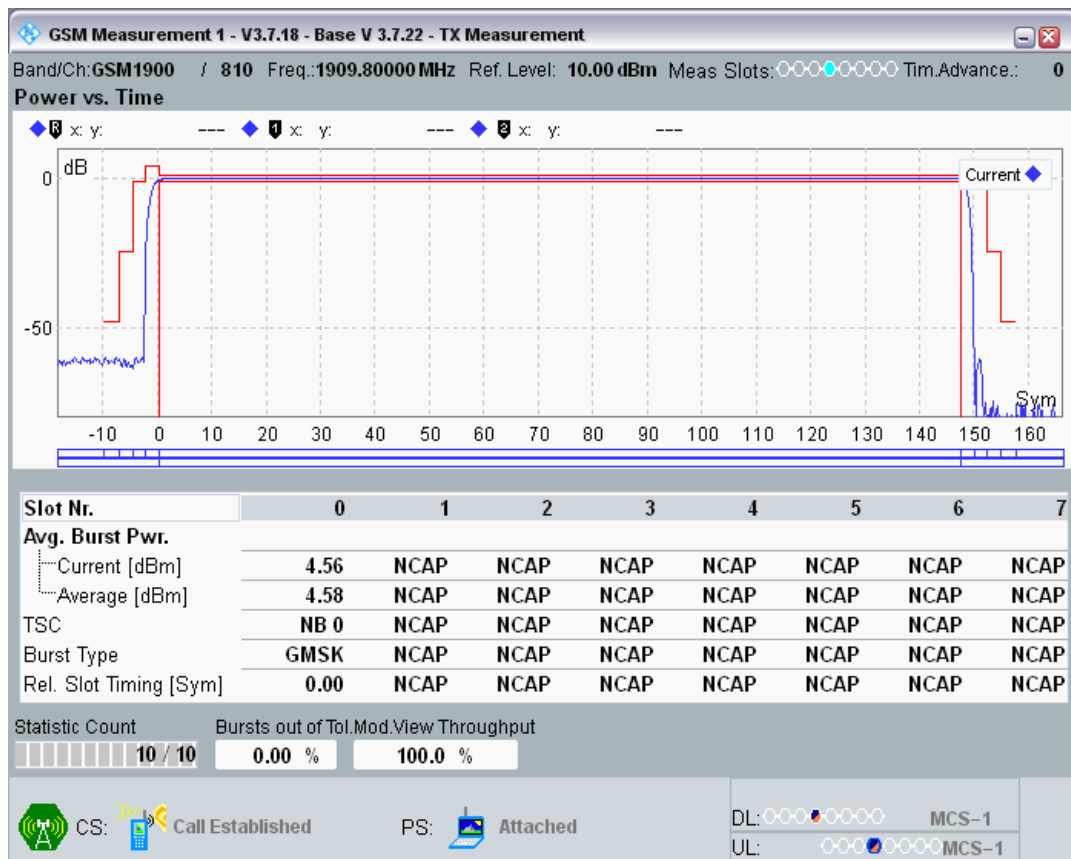


GSM1900 Channel=810 PCL=14

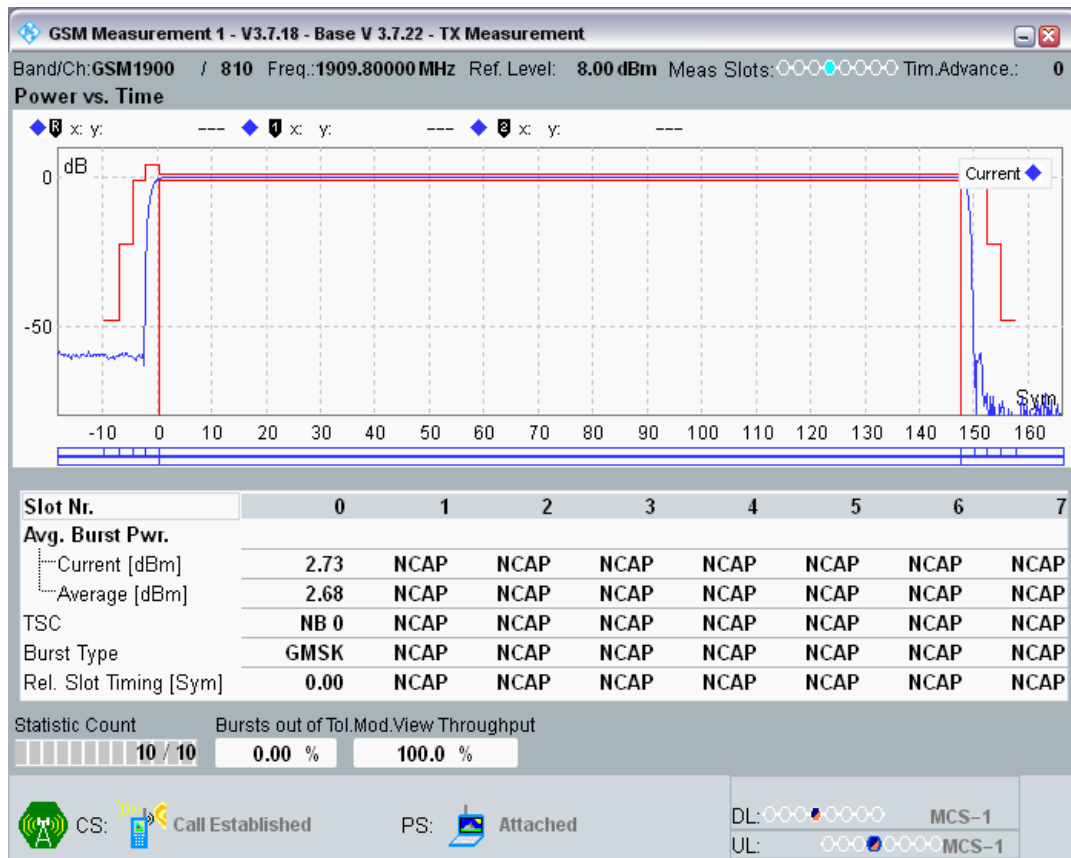


GSM1900 Channel=810 PCL=15

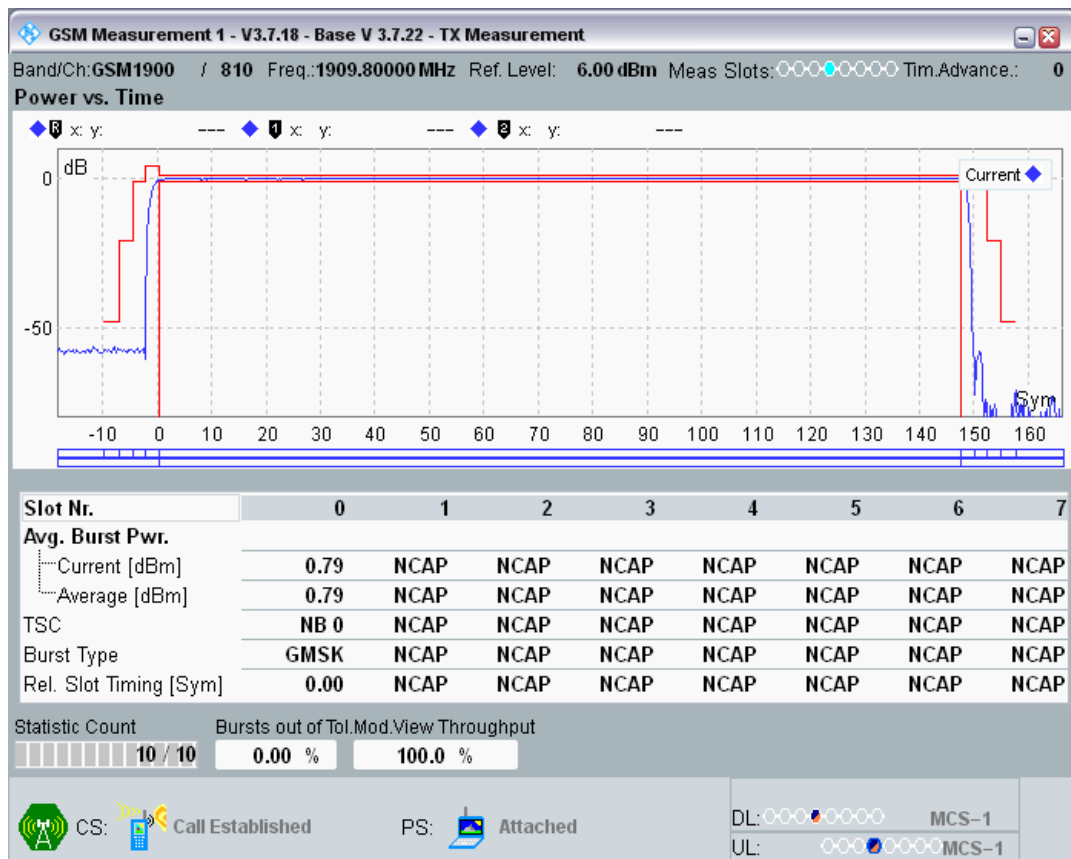


GSM850 Channel=128 PCL=5

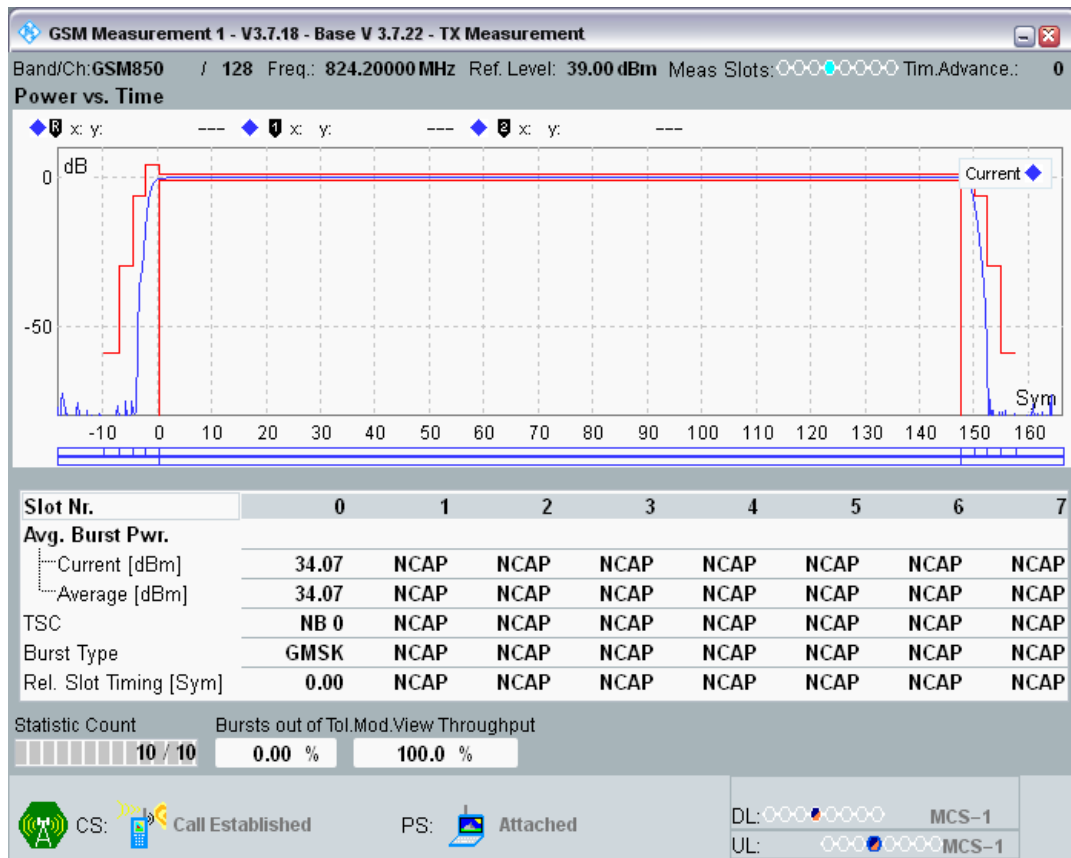


GSM850 Channel=128 PCL=6

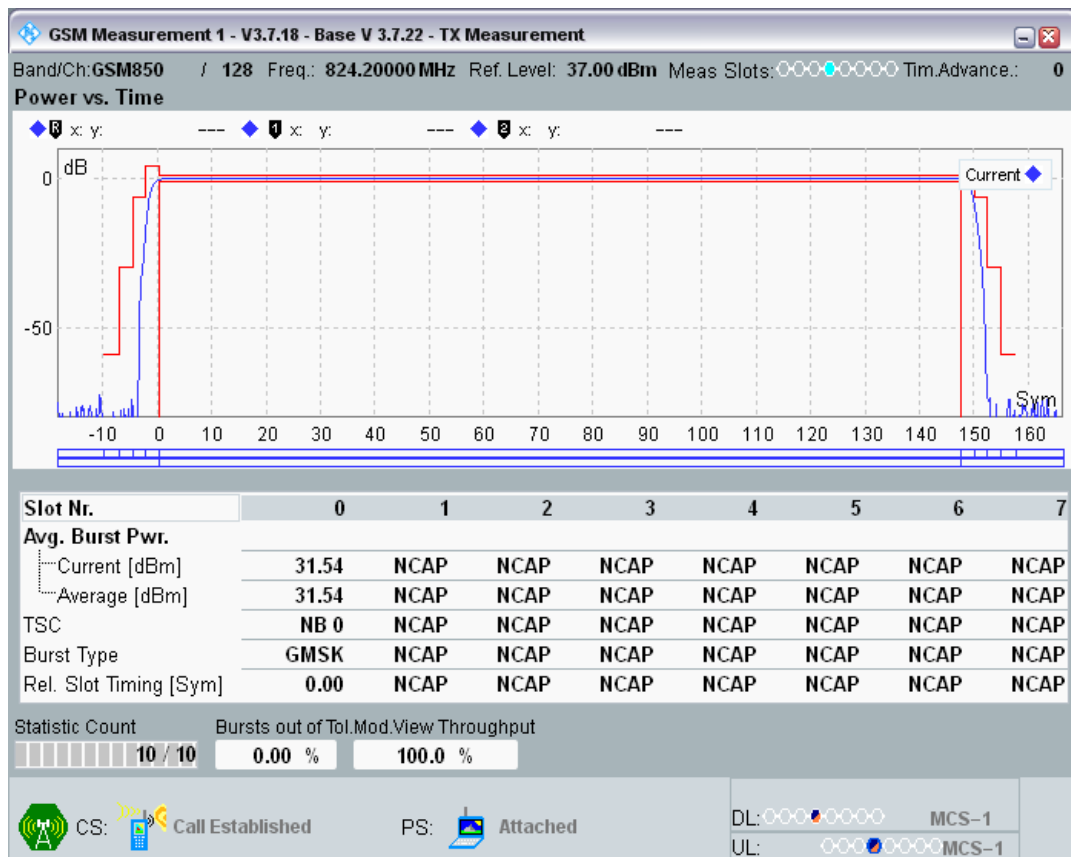


GSM850 Channel=128 PCL=7

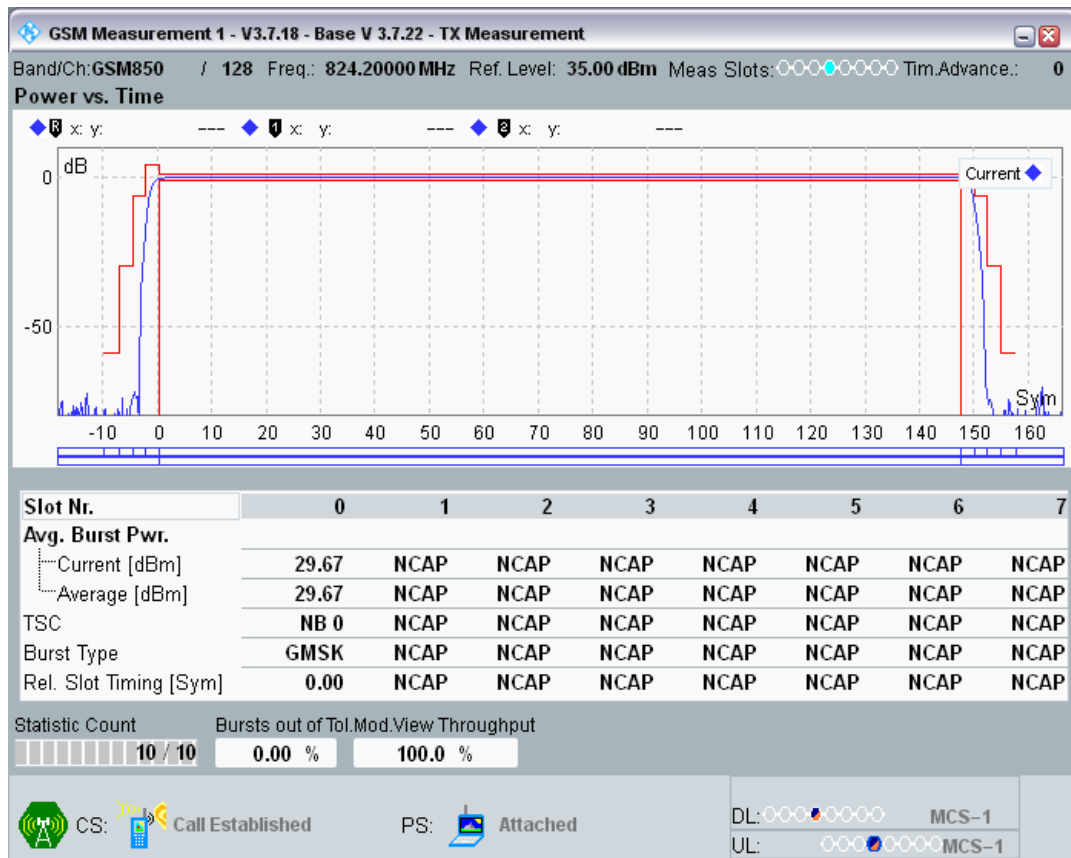

GSM850 Channel=128 PCL=8

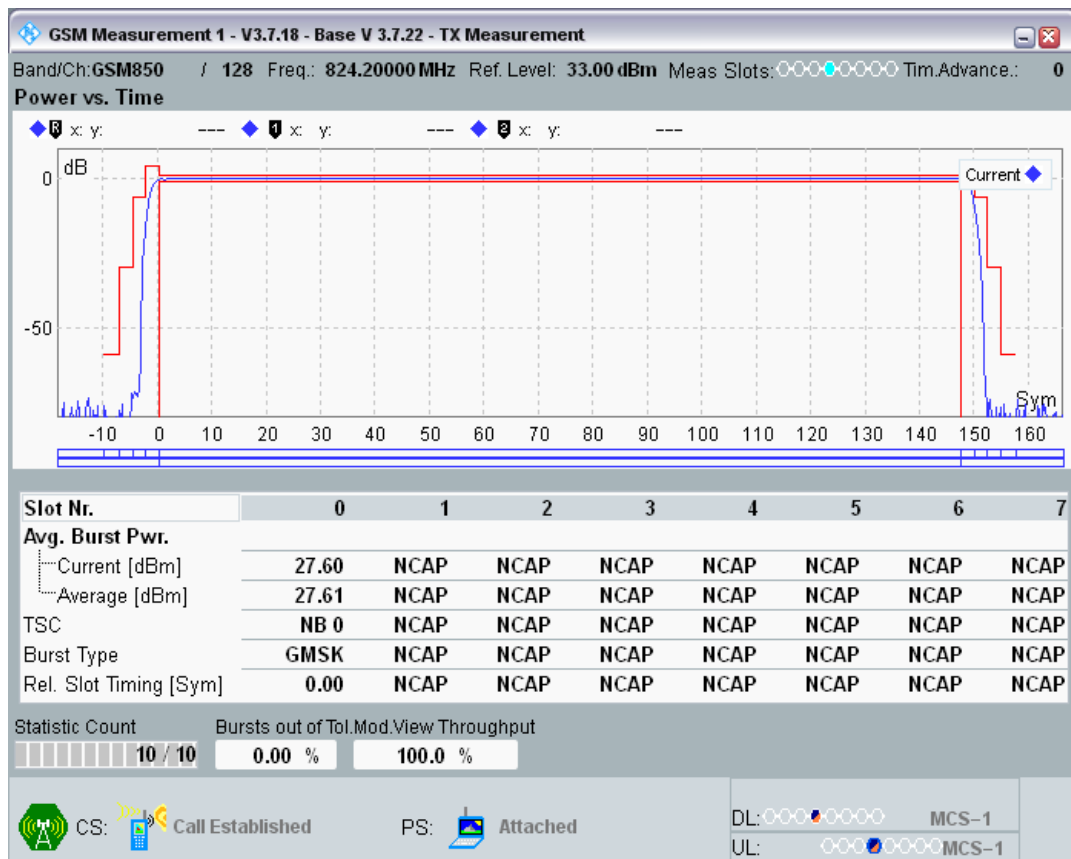


GSM850 Channel=128 PCL=9

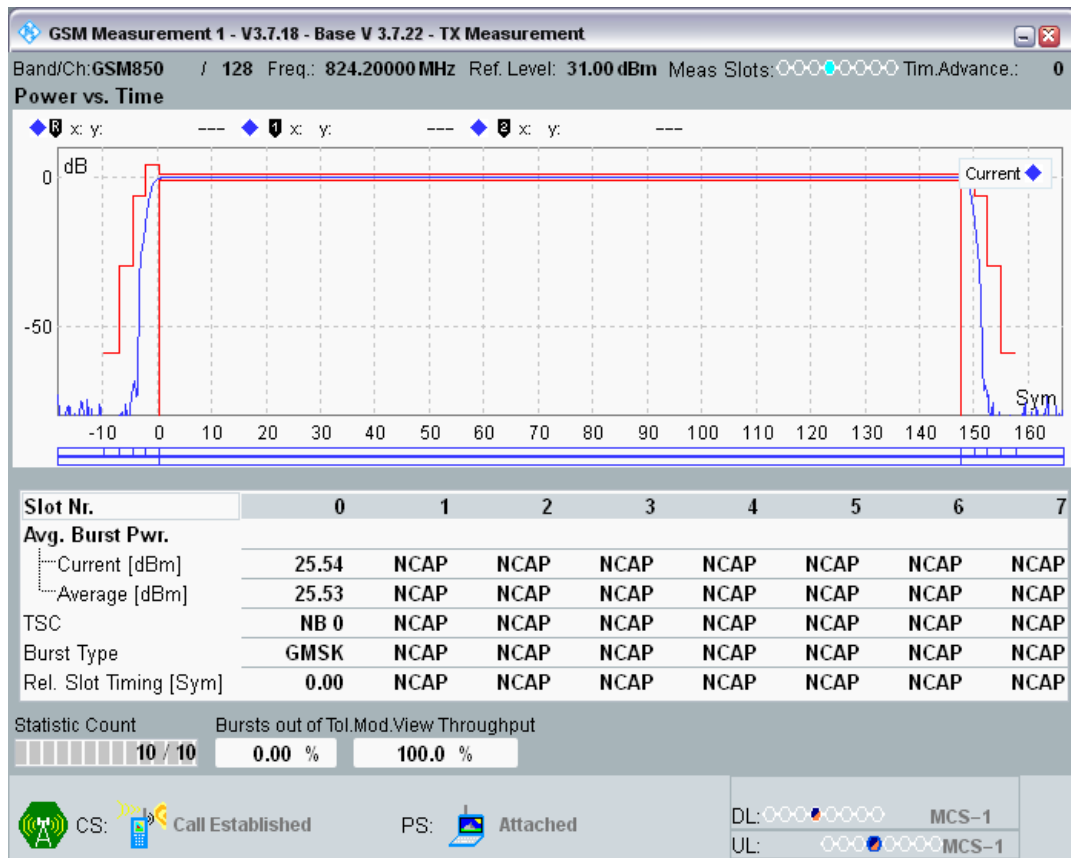


GSM850 Channel=128 PCL=10




GSM850 Channel=128 PCL=11

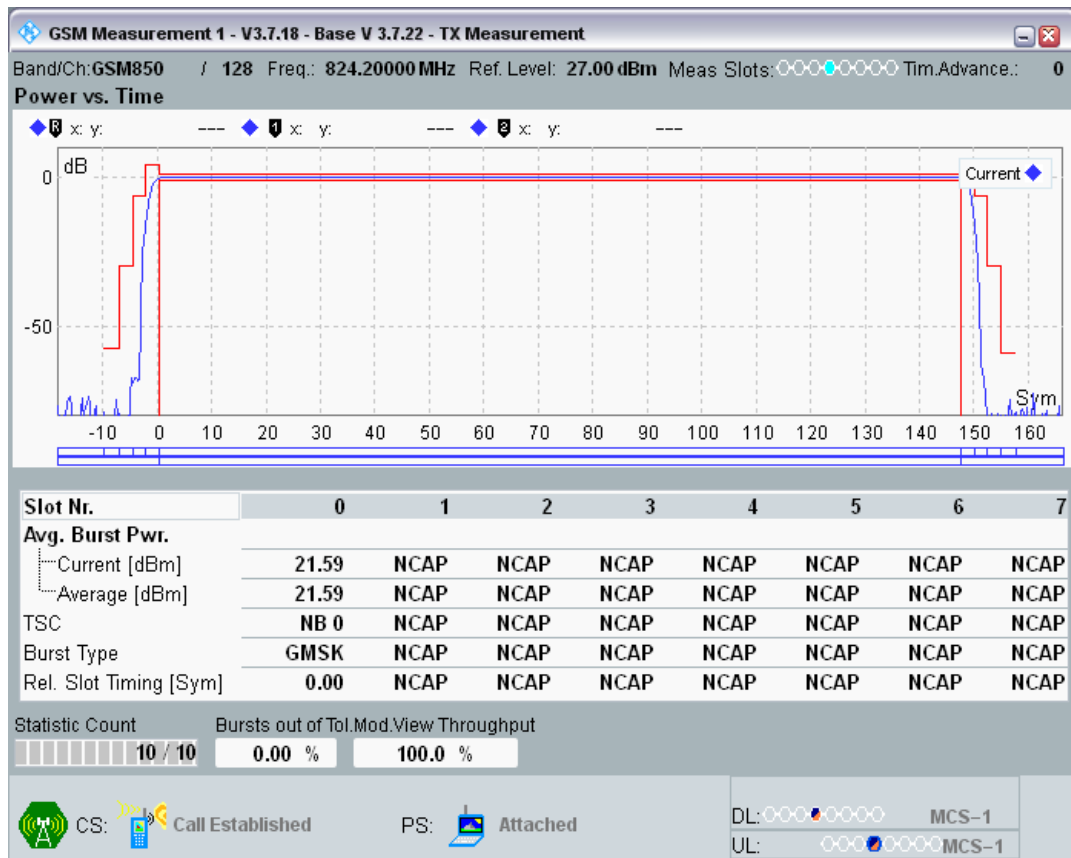


GSM850 Channel=128 PCL=12

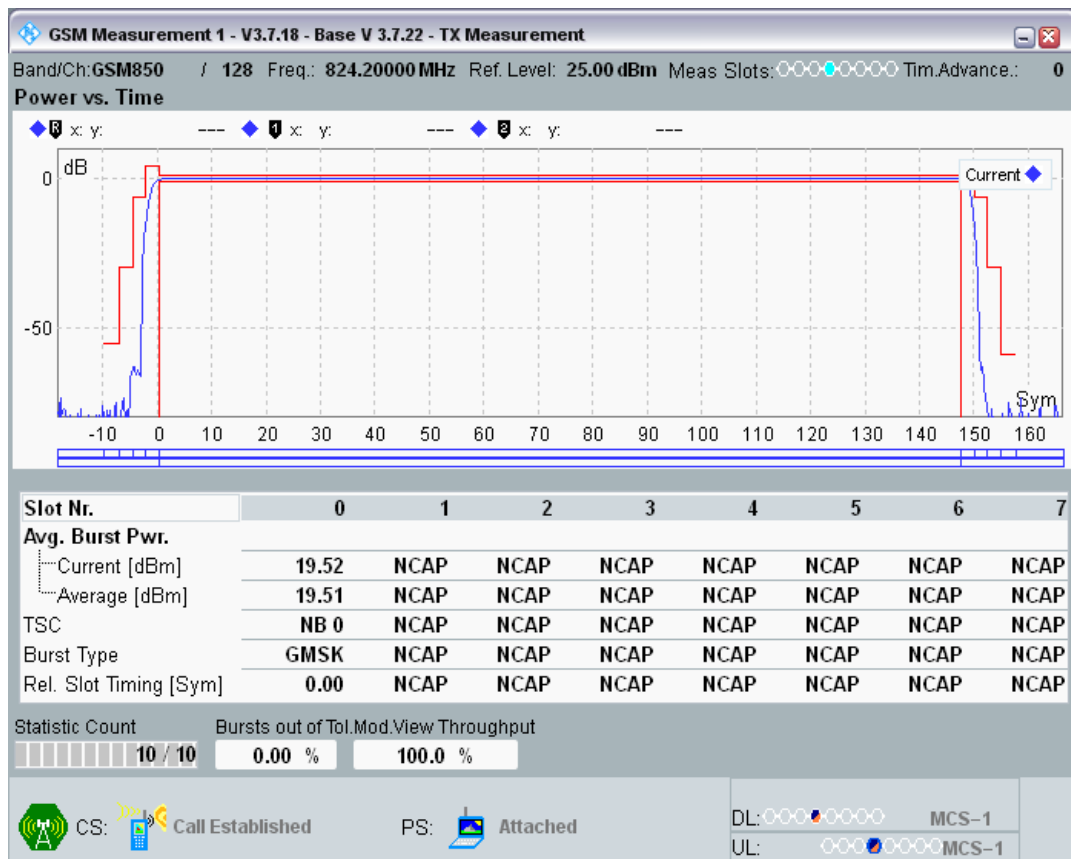


GSM850 Channel=128 PCL=13

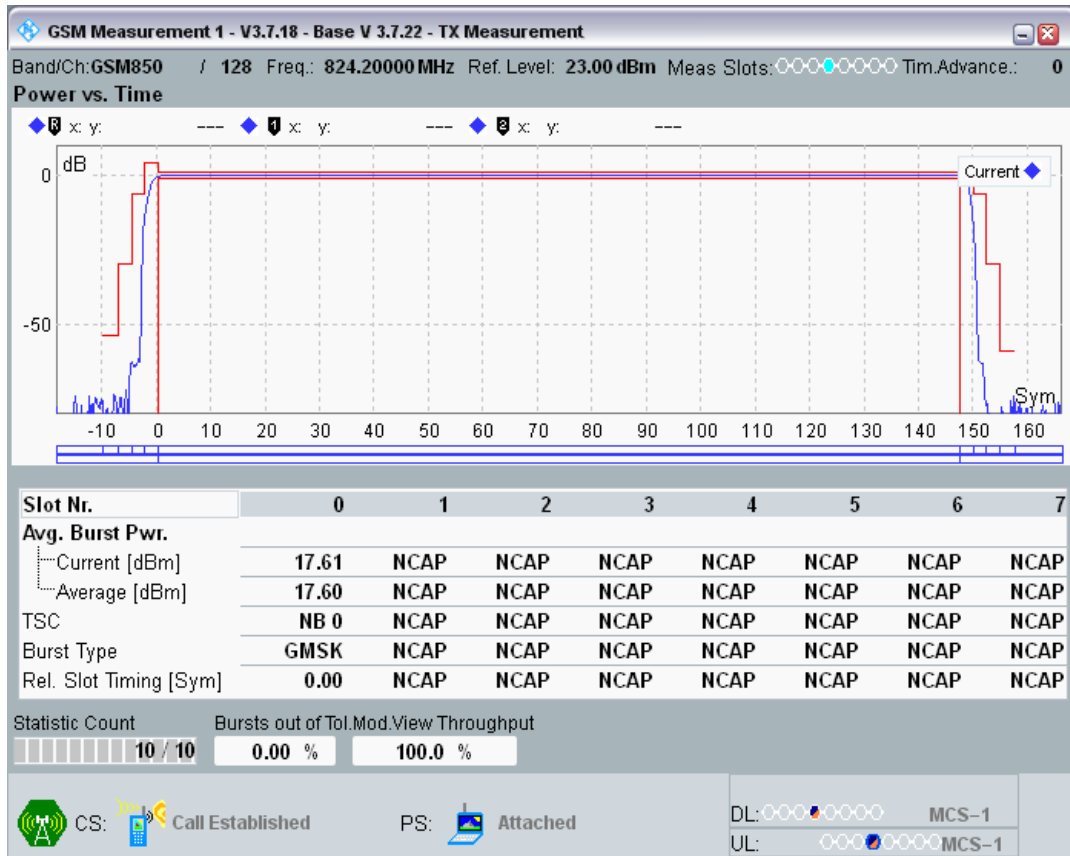


GSM850 Channel=128 PCL=14

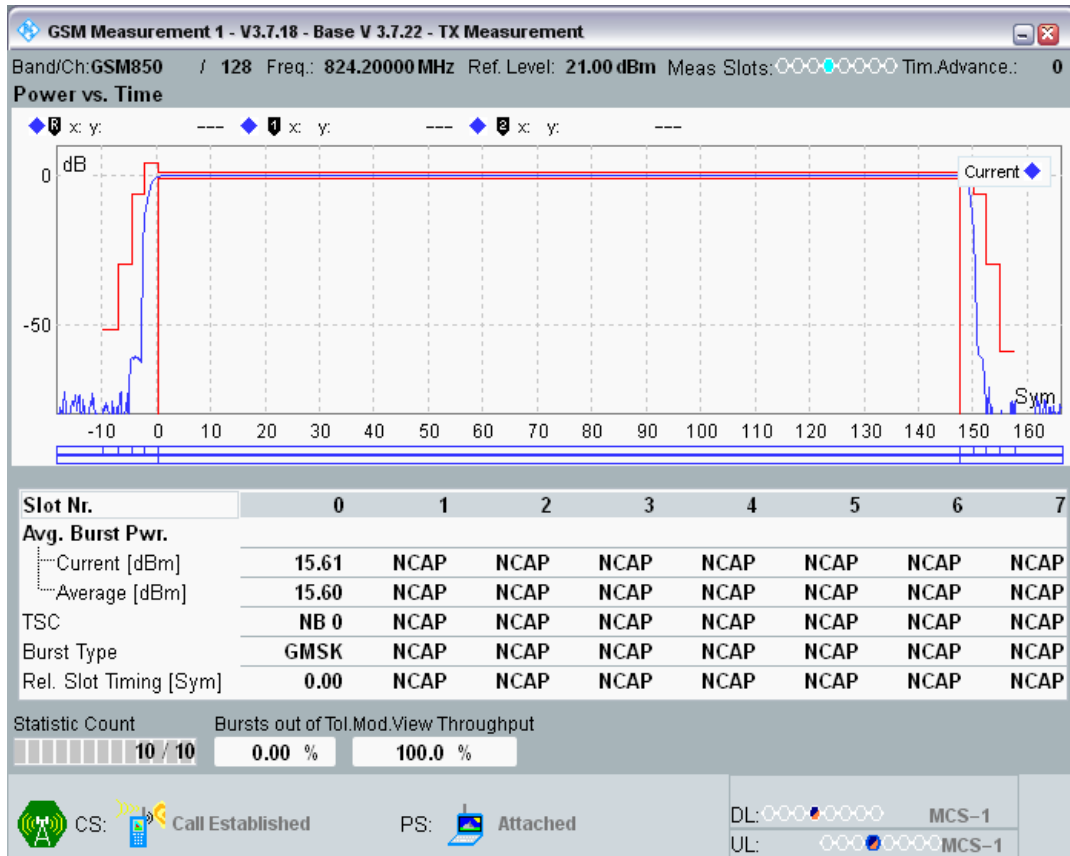


GSM850 Channel=128 PCL=15

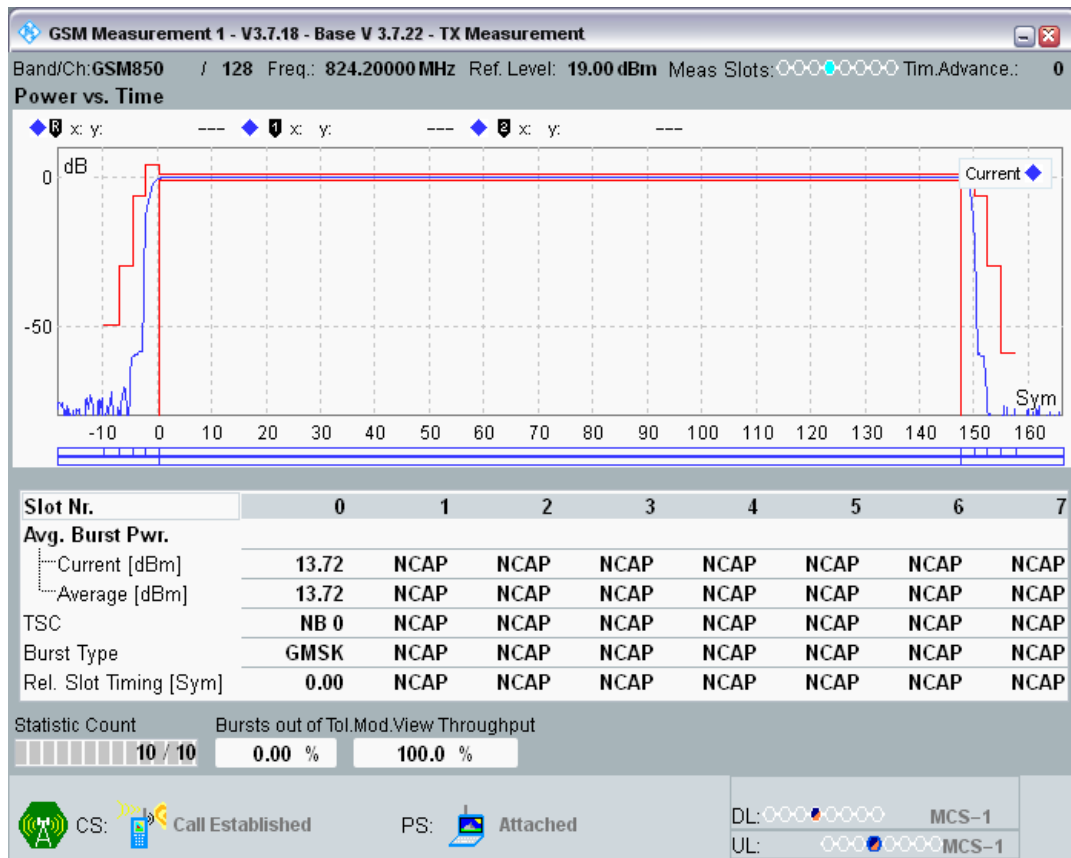


GSM850 Channel=128 PCL=16

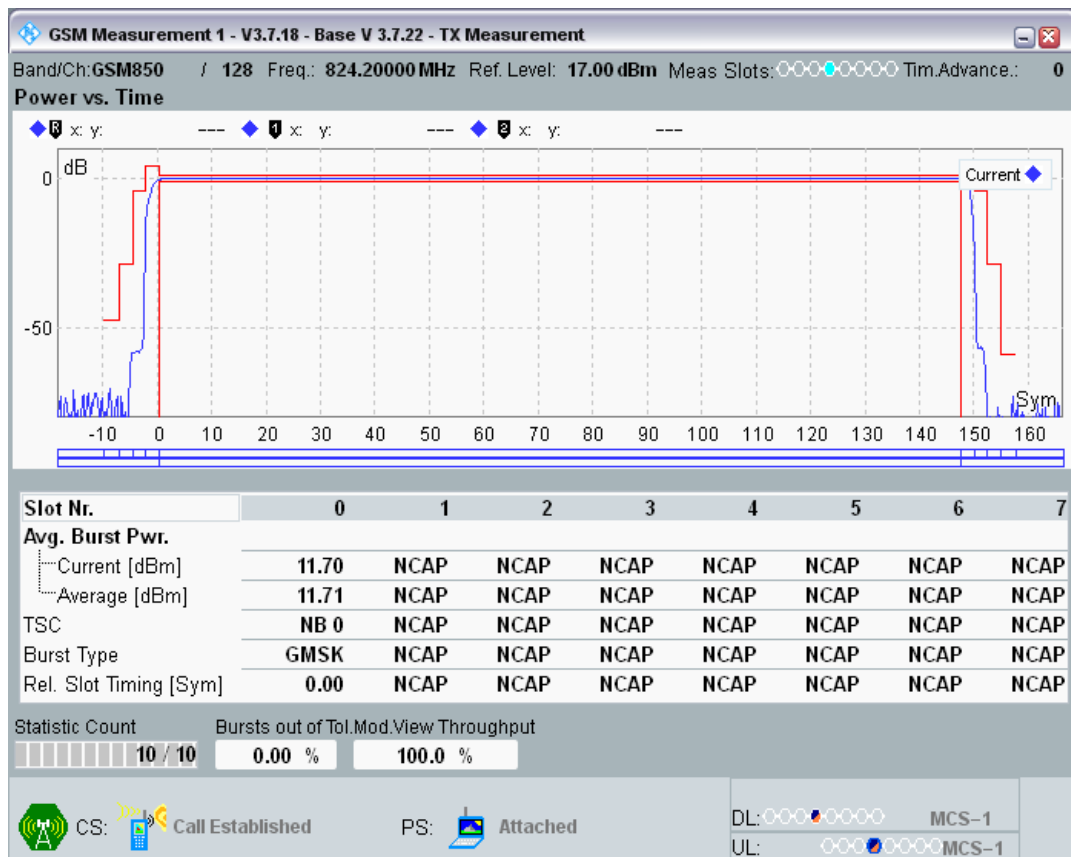


GSM850 Channel=128 PCL=17

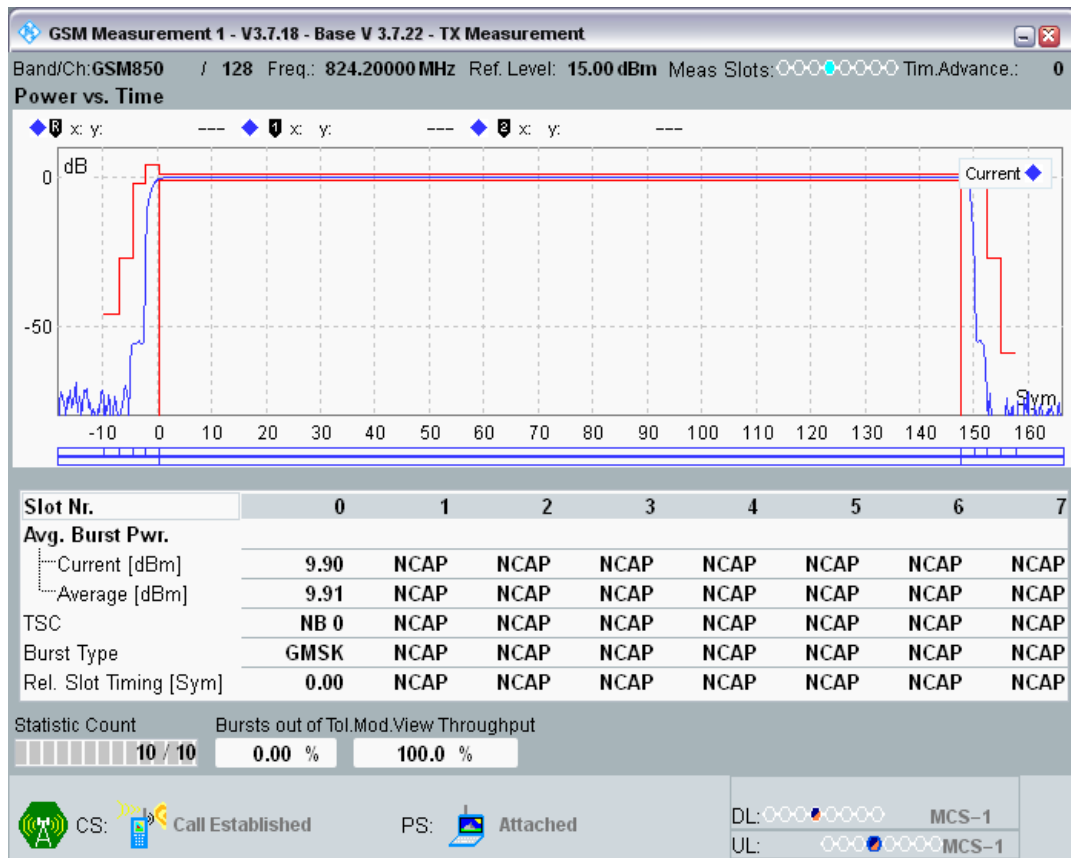


GSM850 Channel=128 PCL=18

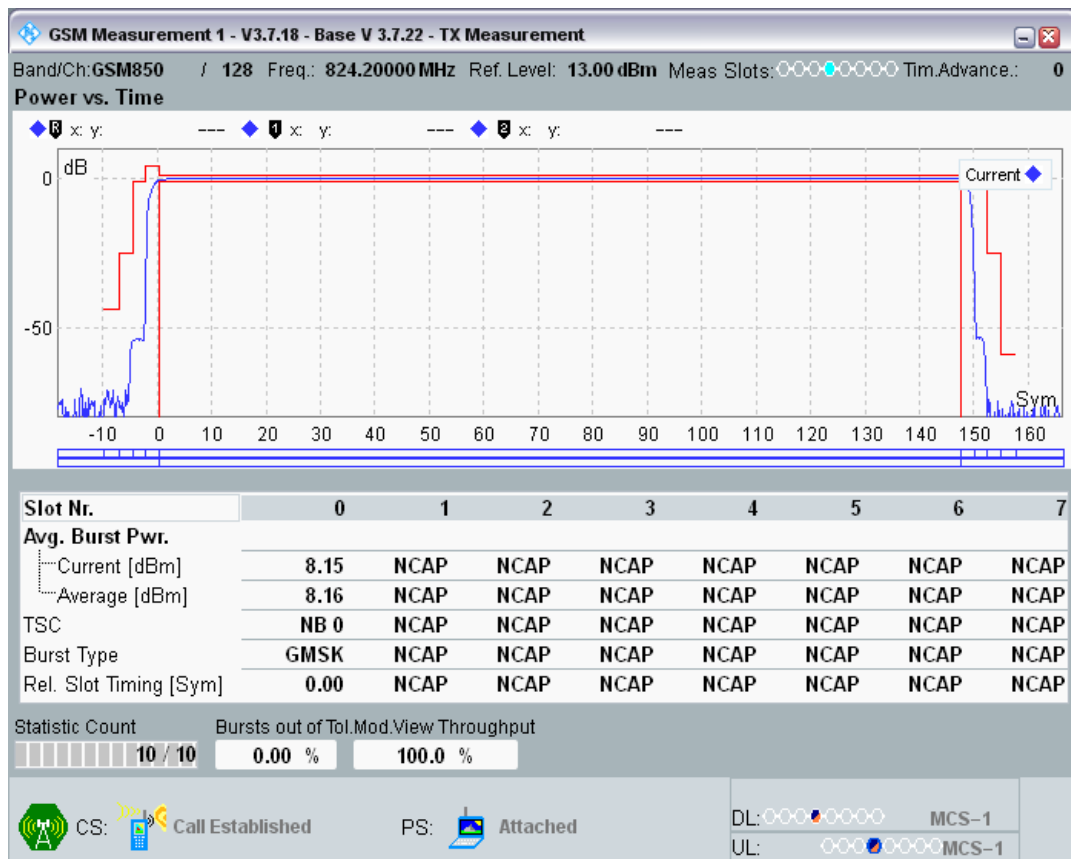


GSM850 Channel=128 PCL=19

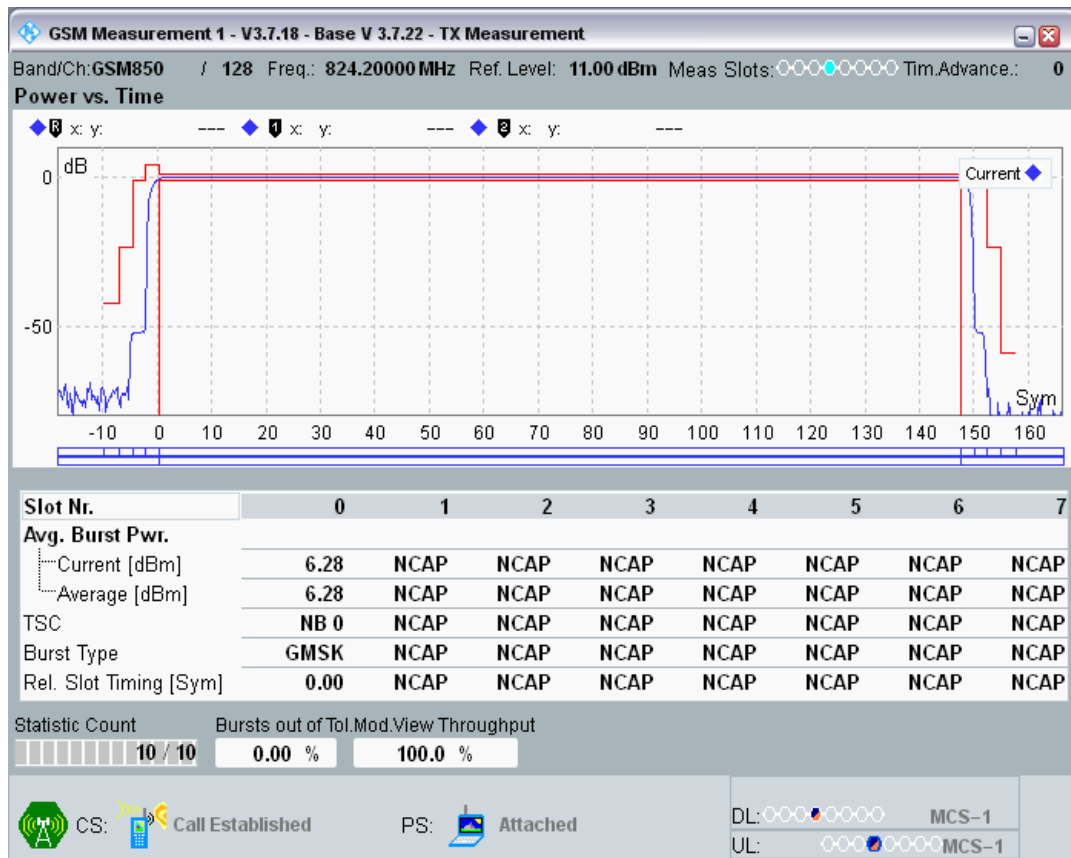


GSM850 Channel=190 PCL=5

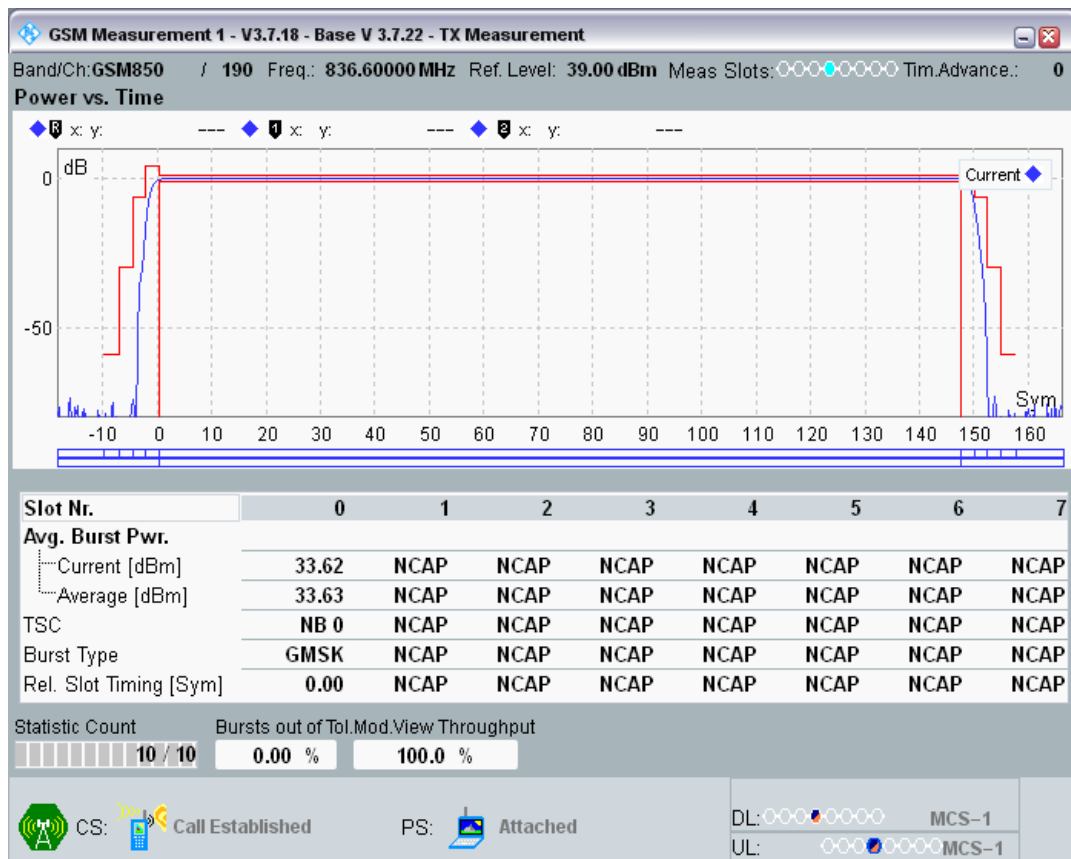


GSM850 Channel=190 PCL=6

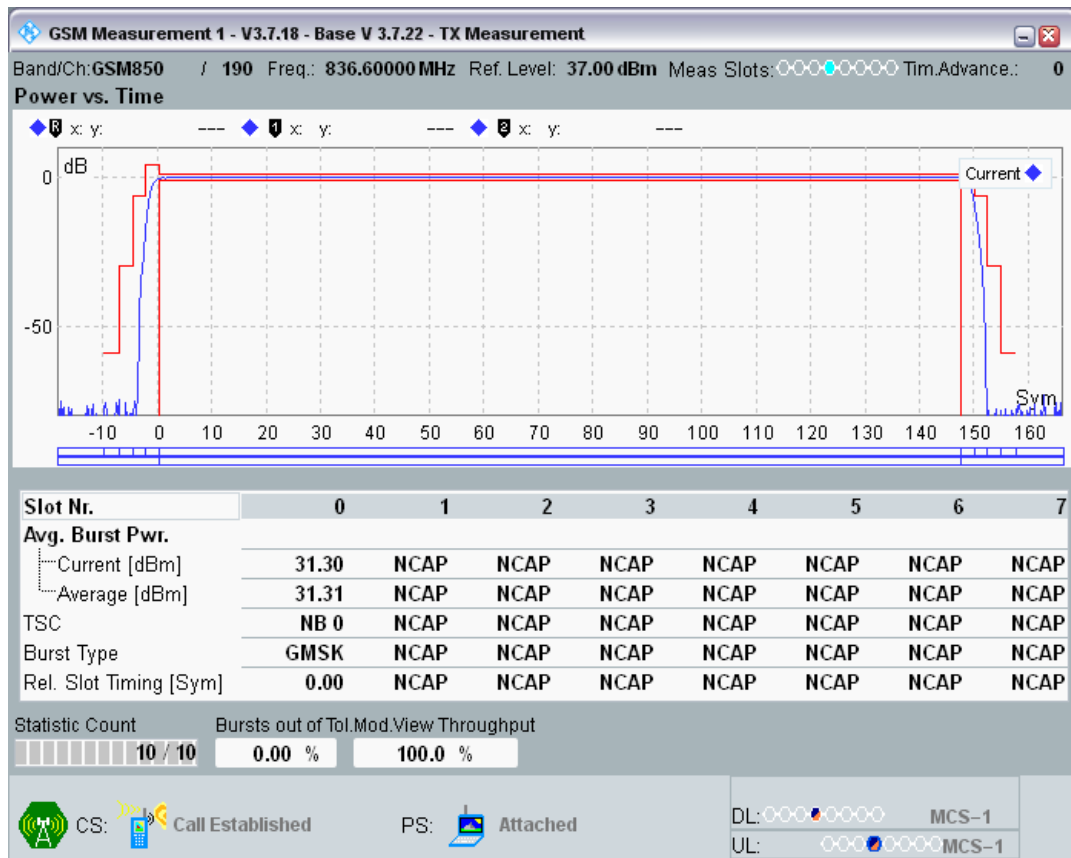


GSM850 Channel=190 PCL=7

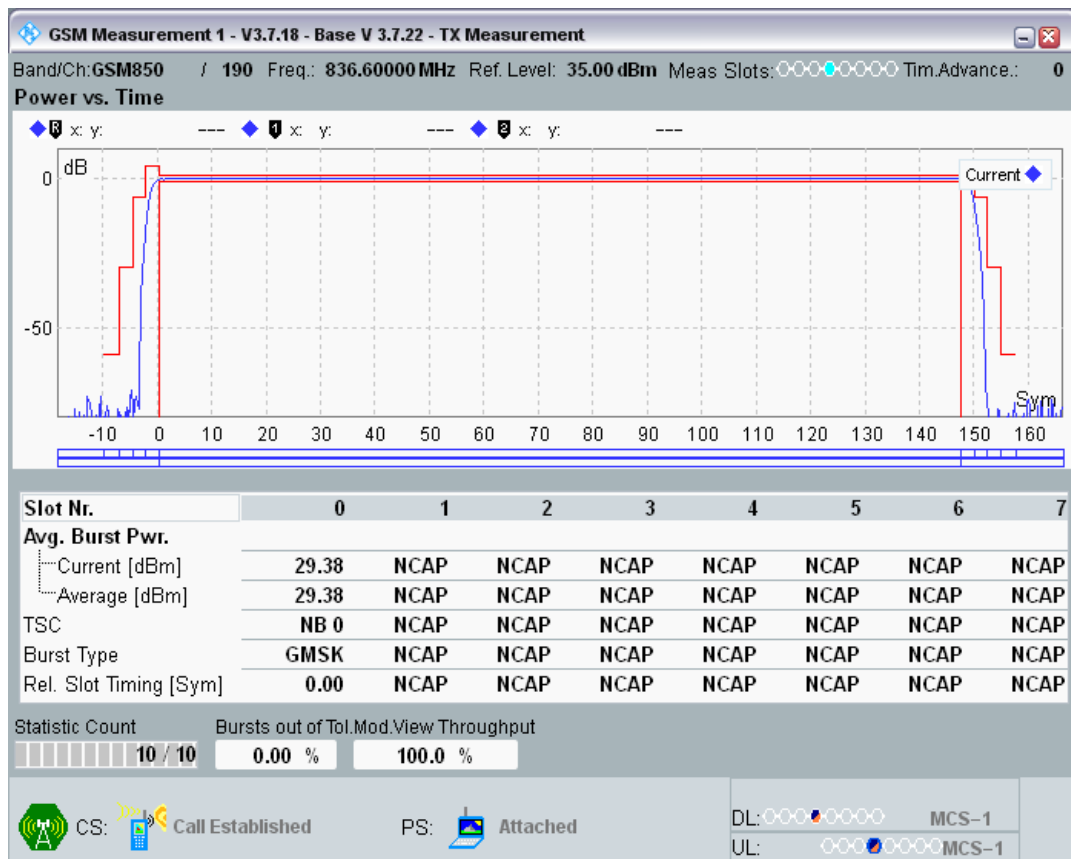


GSM850 Channel=190 PCL=8

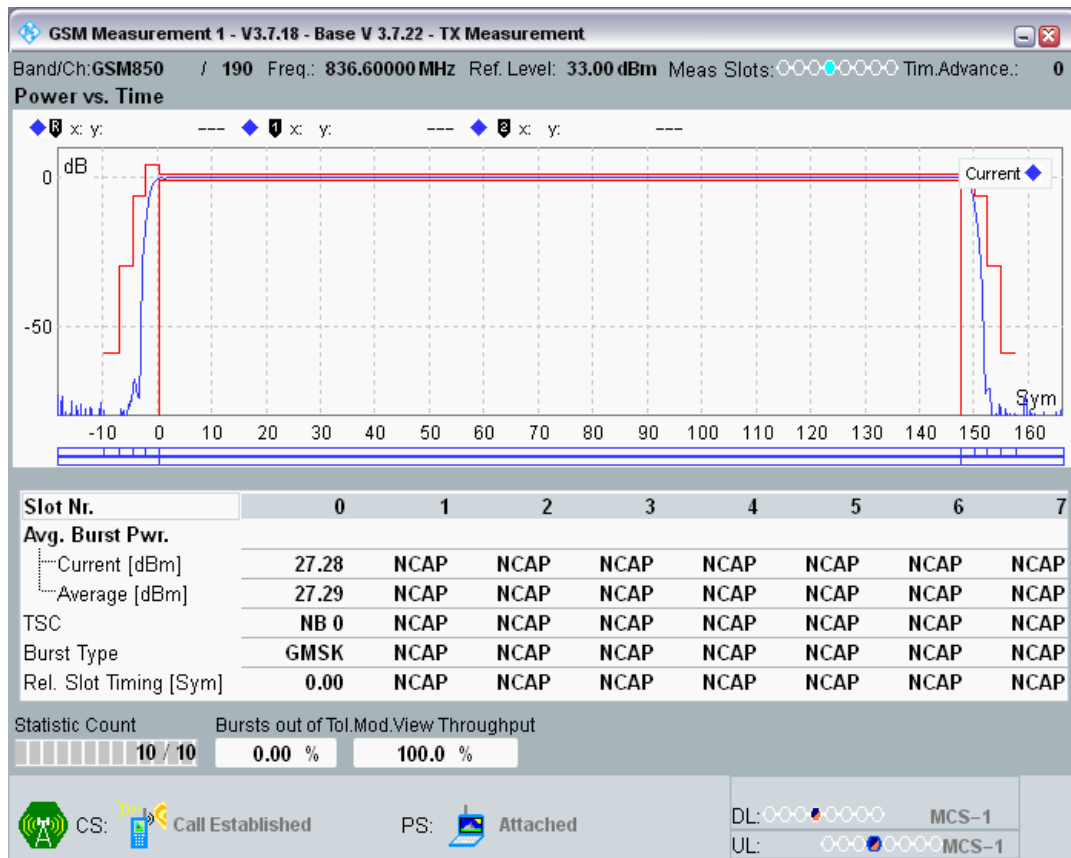


GSM850 Channel=190 PCL=9

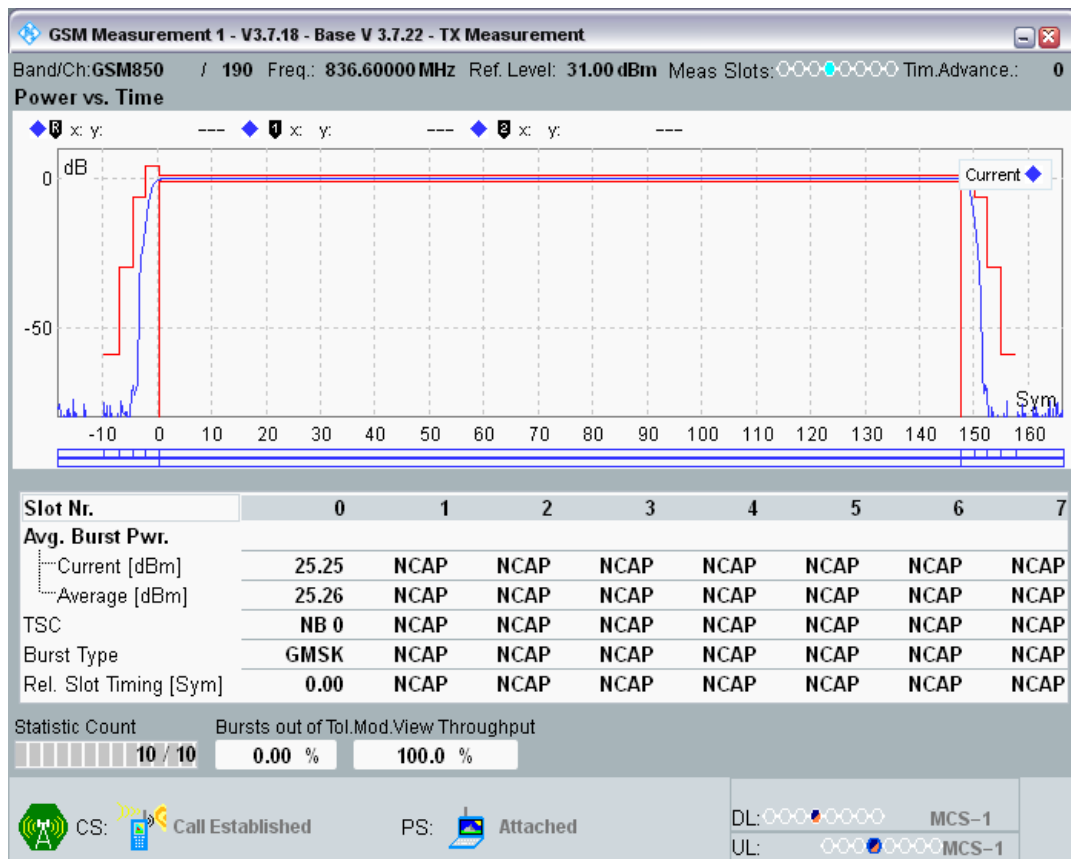


GSM850 Channel=190 PCL=10

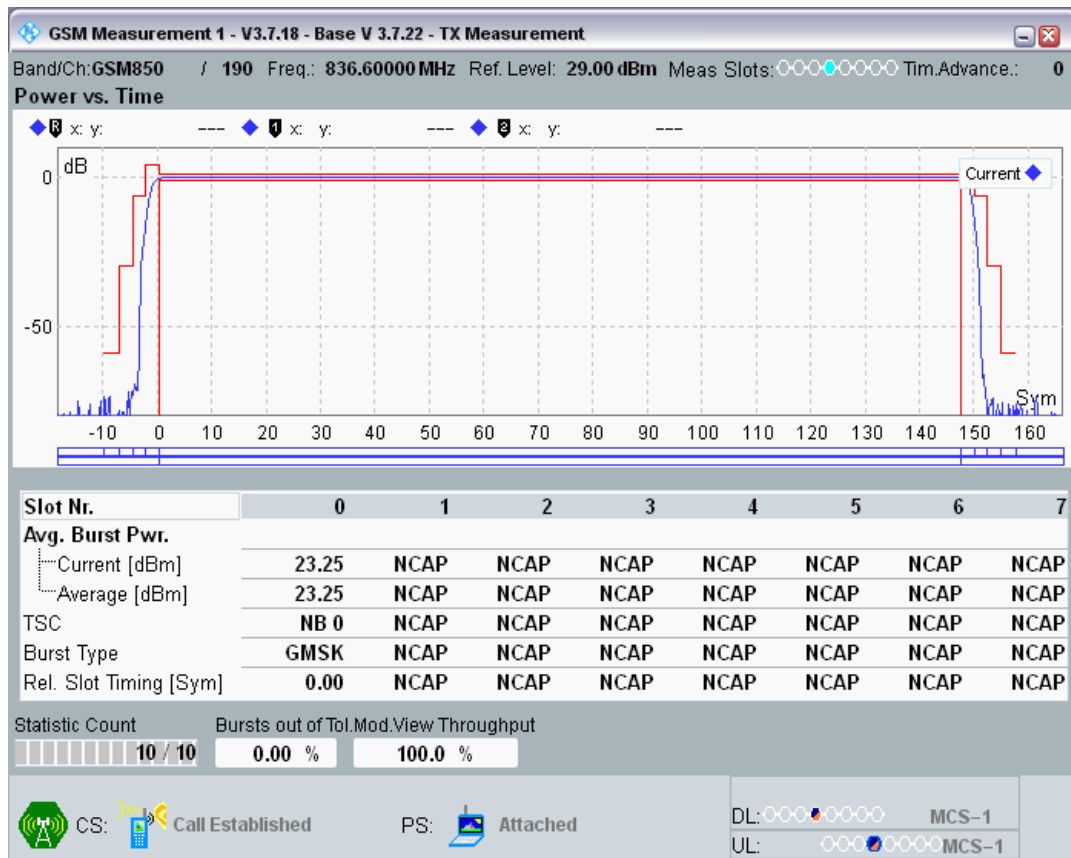


GSM850 Channel=190 PCL=11

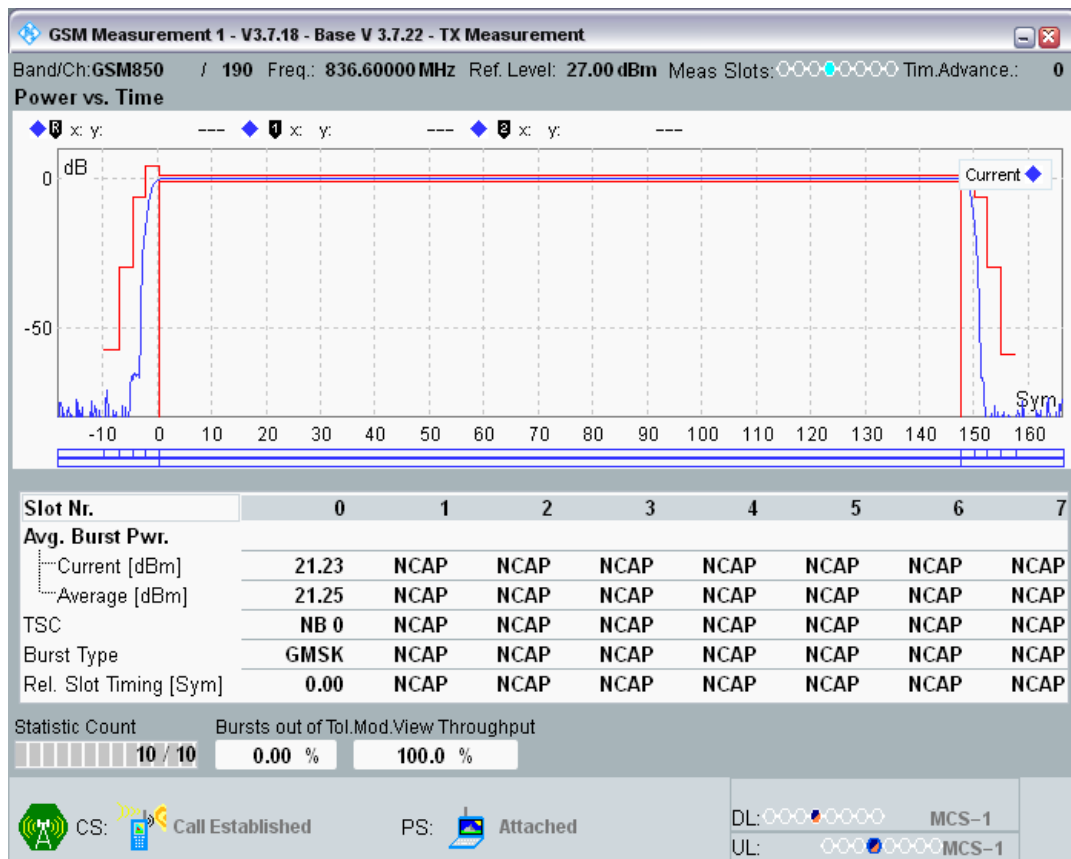


GSM850 Channel=190 PCL=12

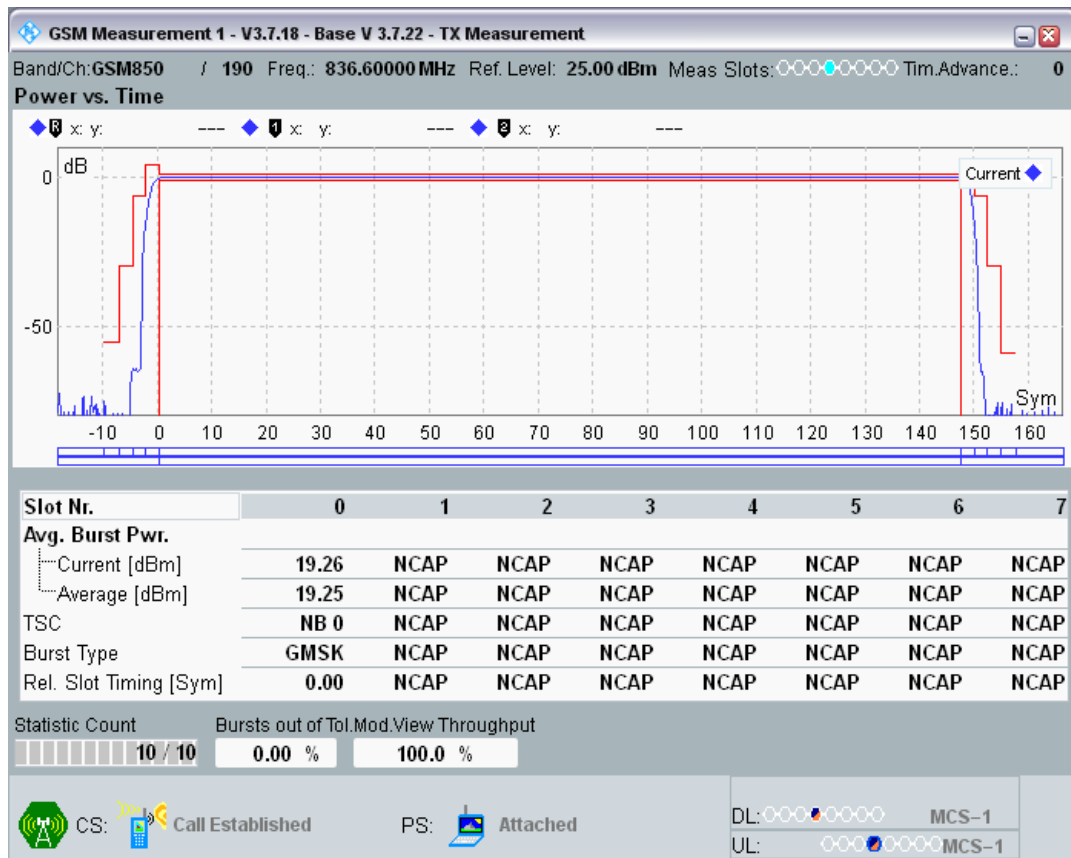


GSM850 Channel=190 PCL=13

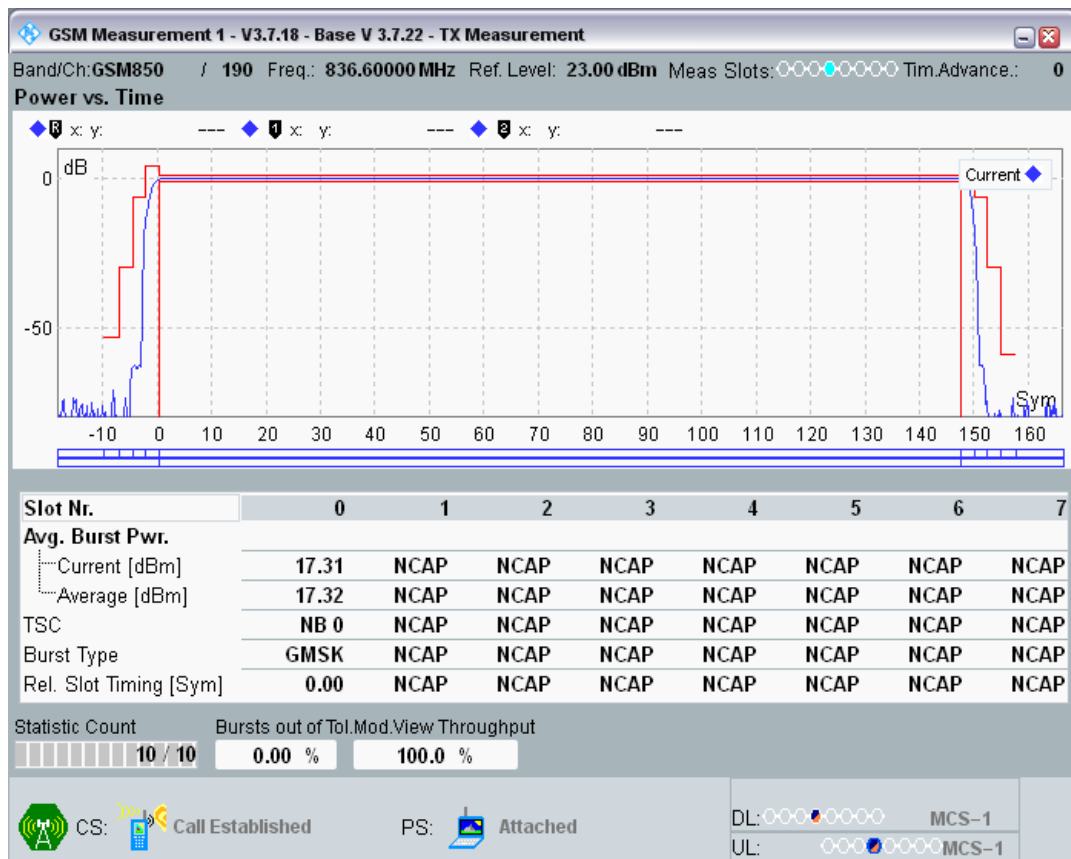


GSM850 Channel=190 PCL=14

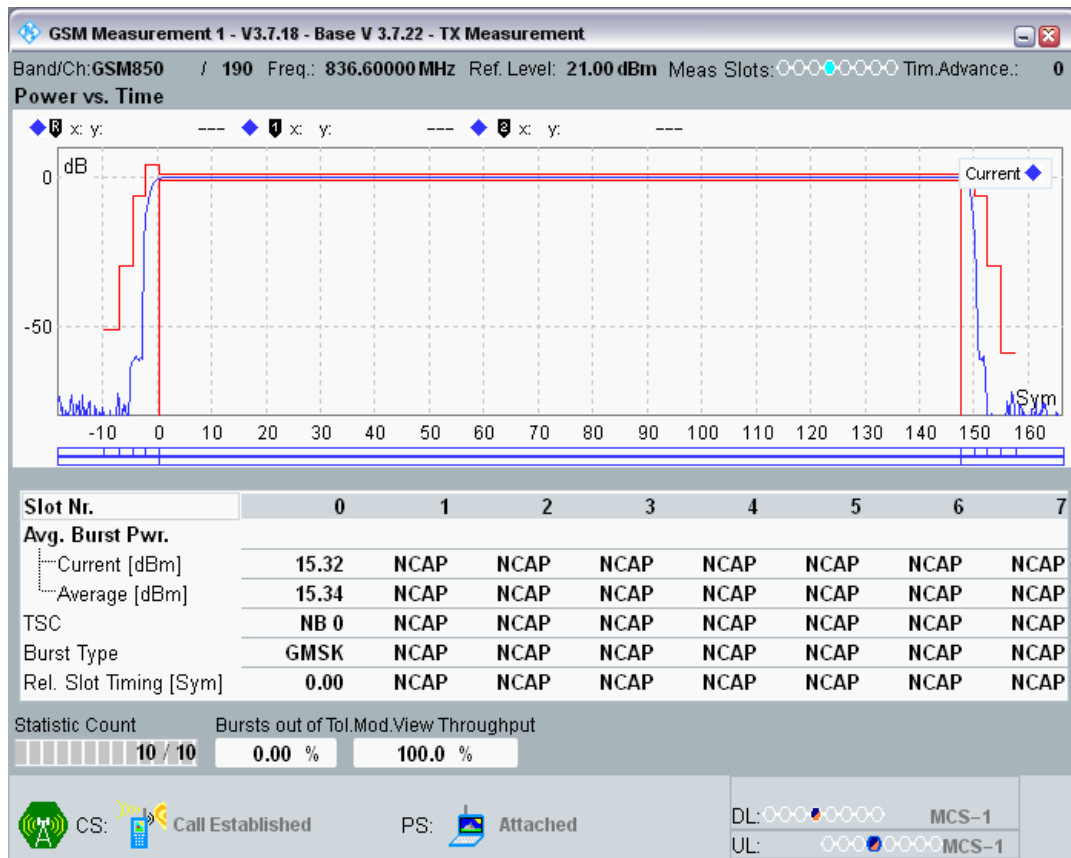


GSM850 Channel=190 PCL=15

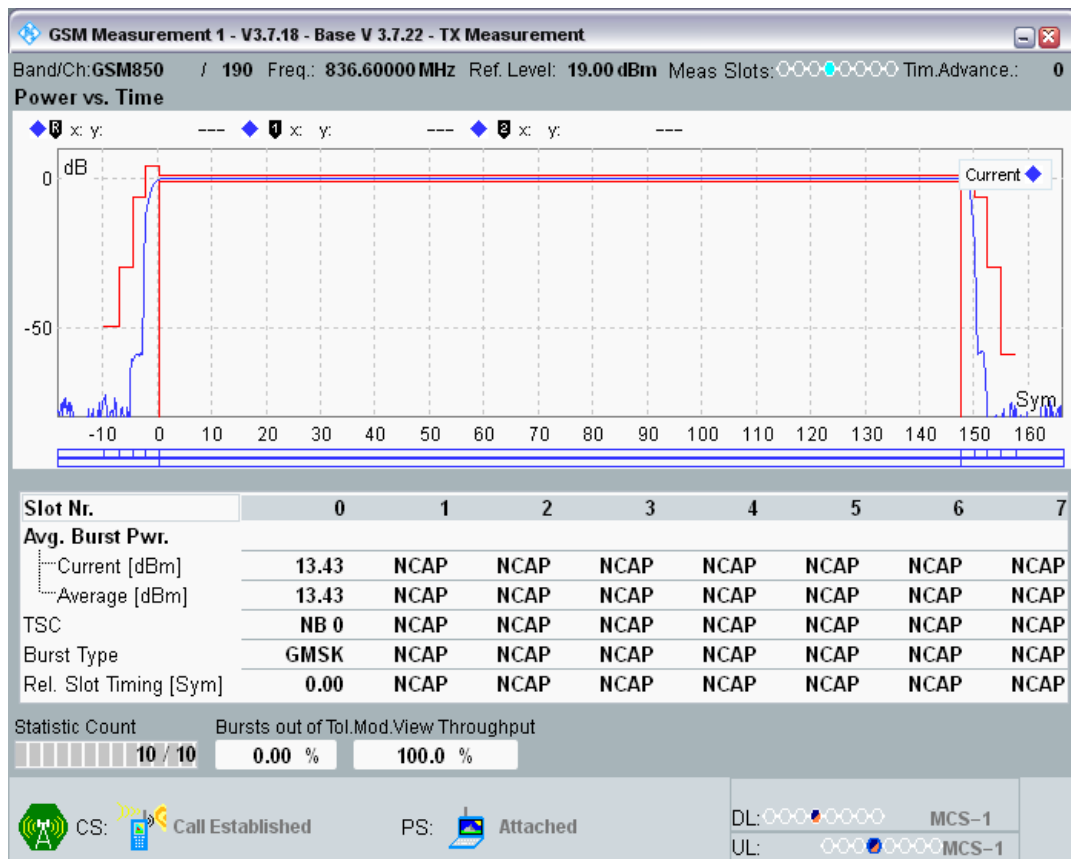


GSM850 Channel=190 PCL=16

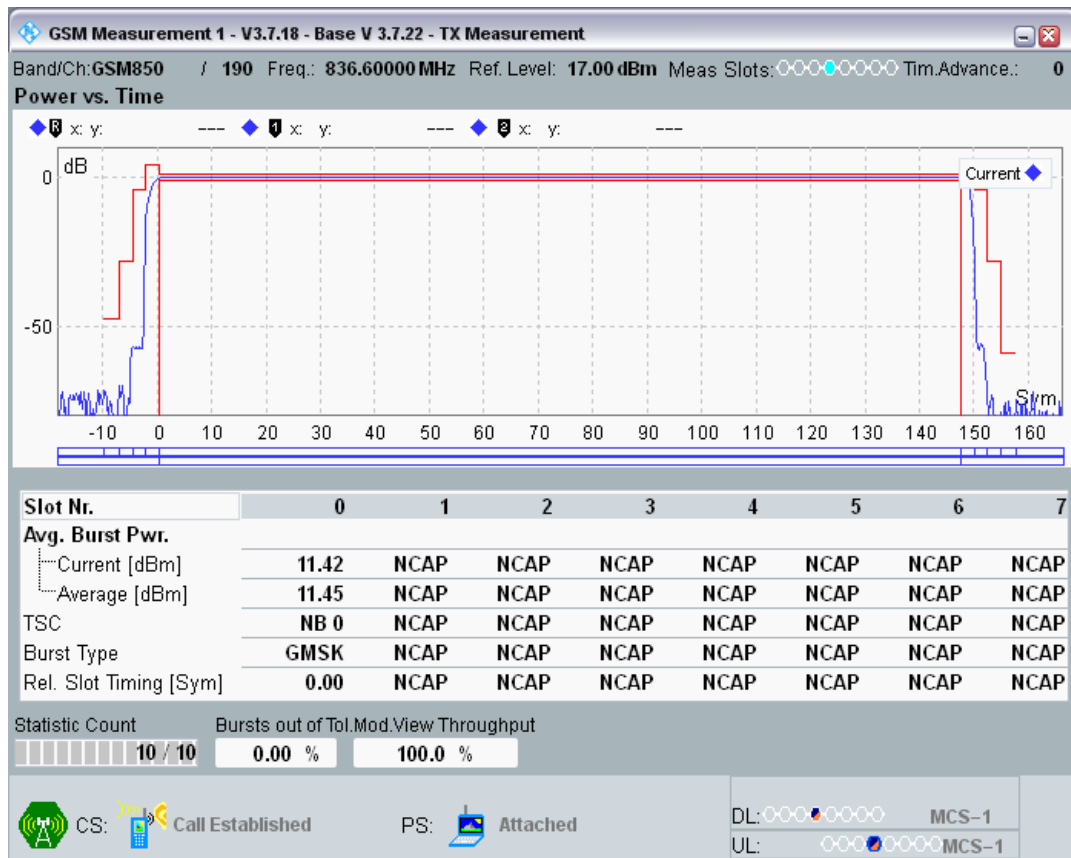

GSM850 Channel=190 PCL=17

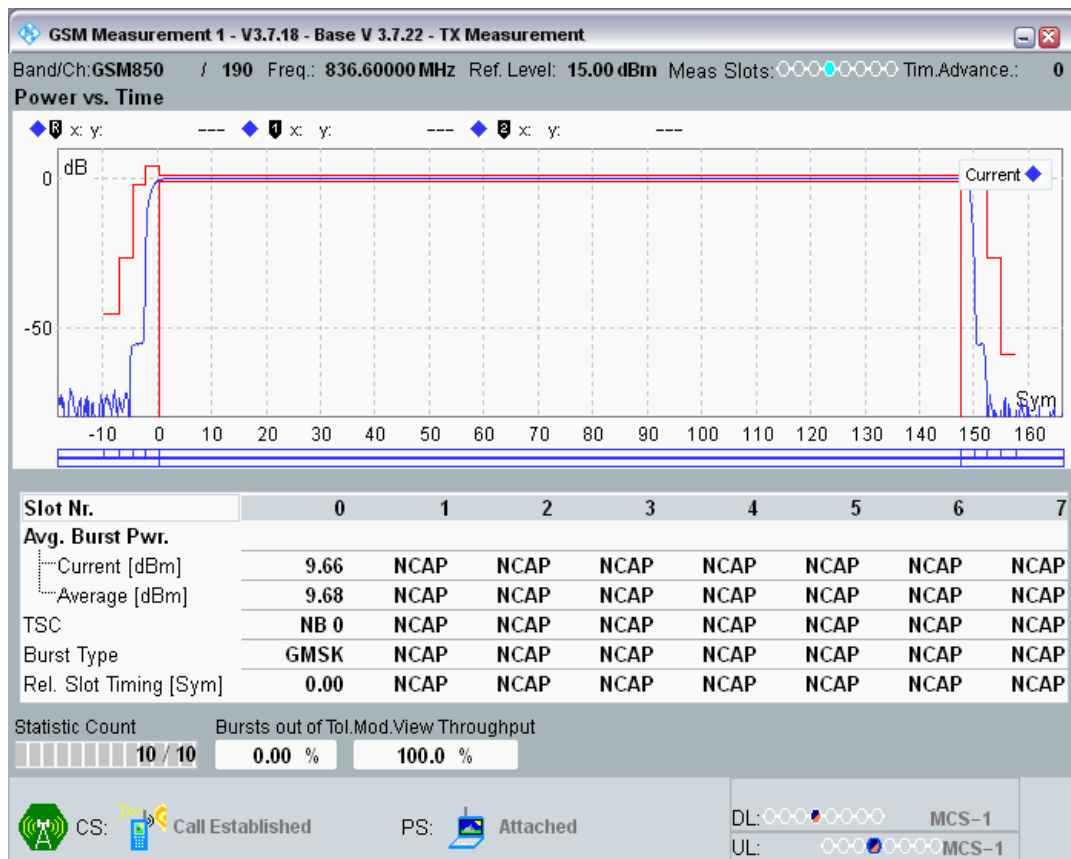


GSM850 Channel=190 PCL=18

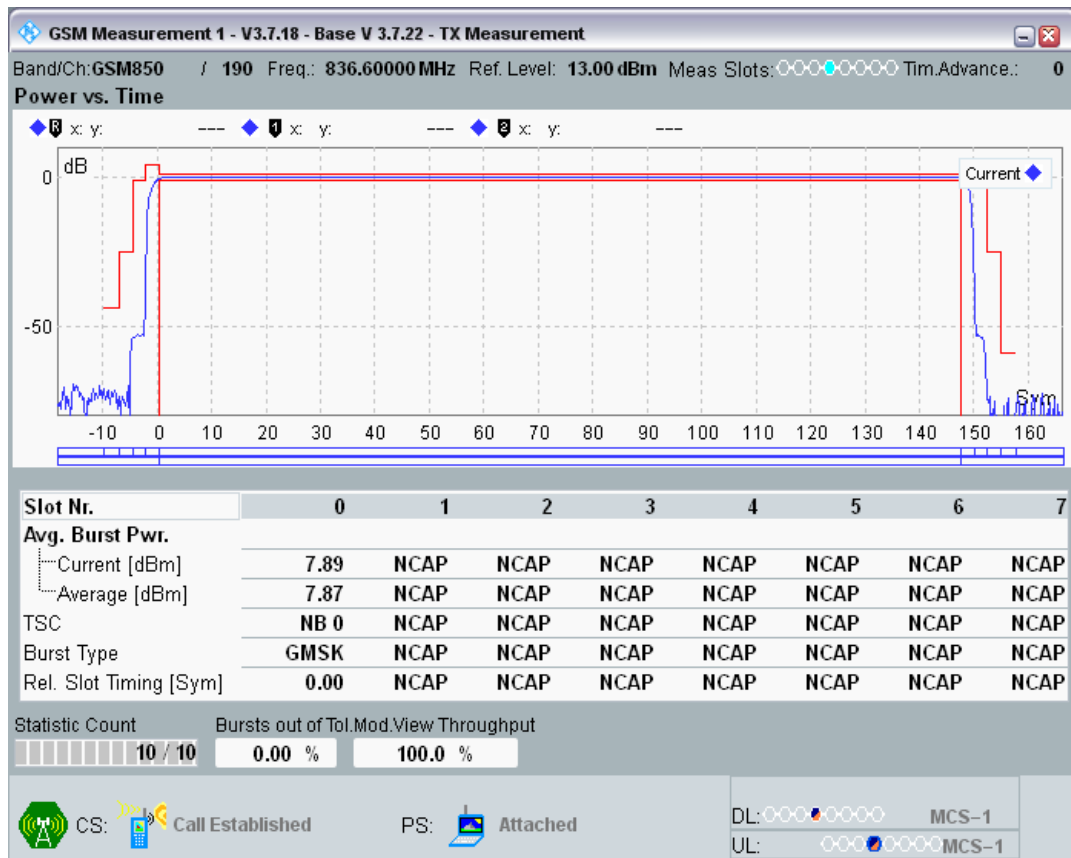


GSM850 Channel=190 PCL=19




GSM850 Channel=251 PCL=5

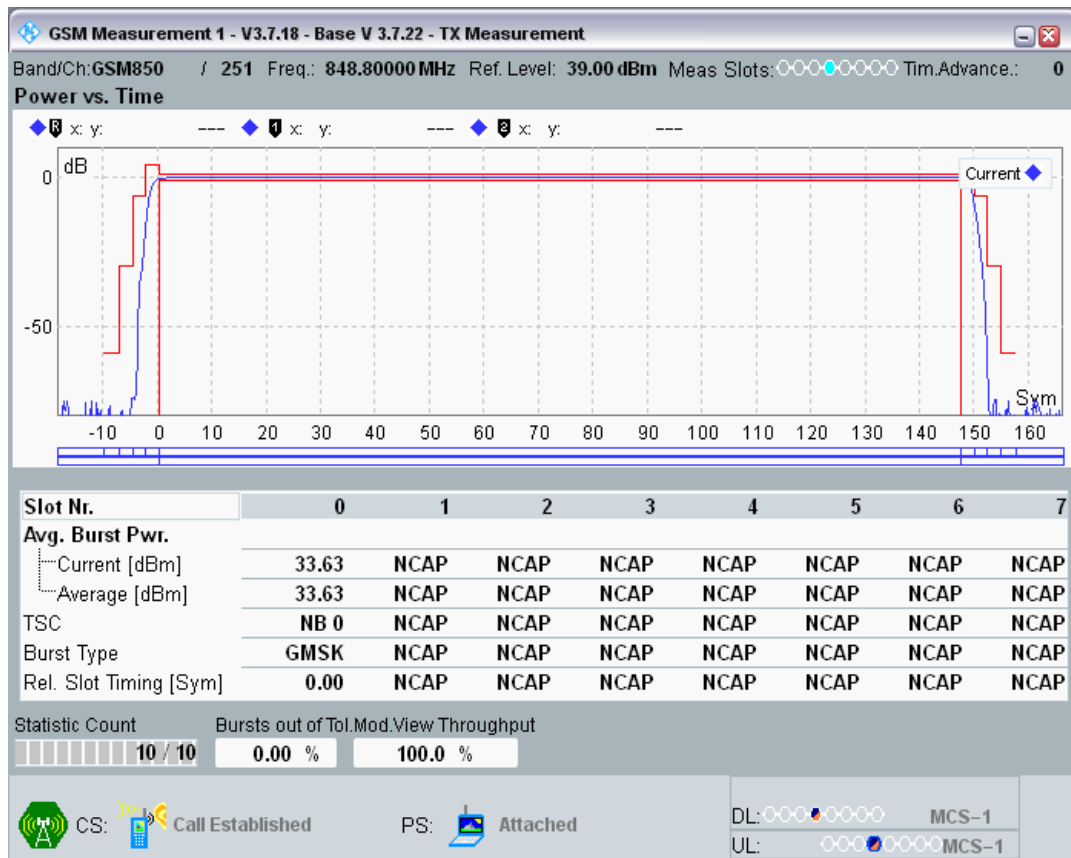


GSM850 Channel=251 PCL=6

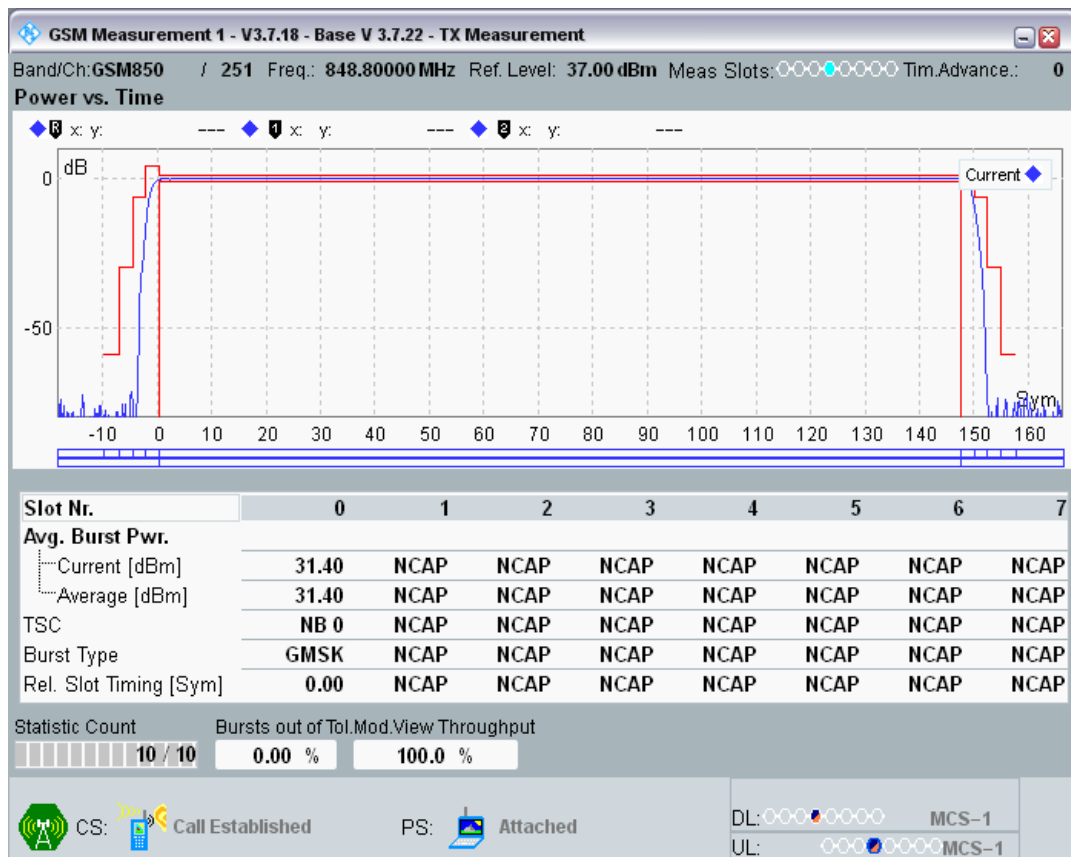


GSM850 Channel=251 PCL=7

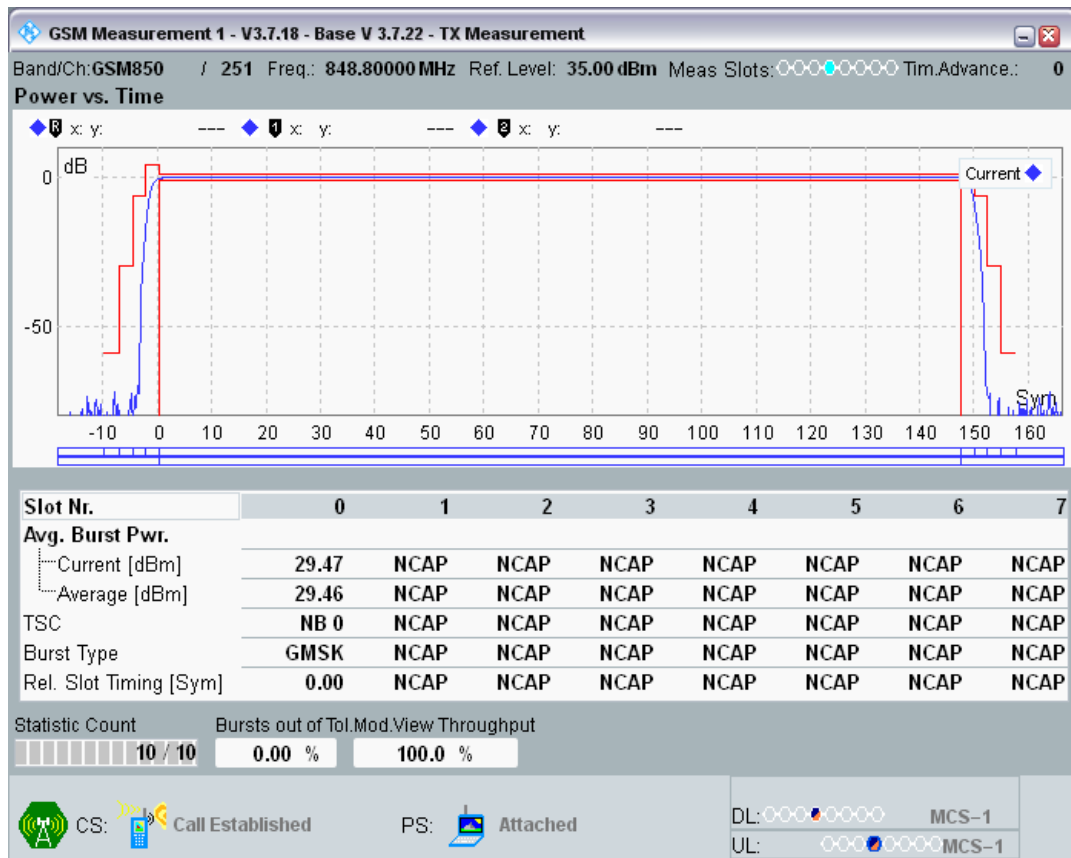


GSM850 Channel=251 PCL=8

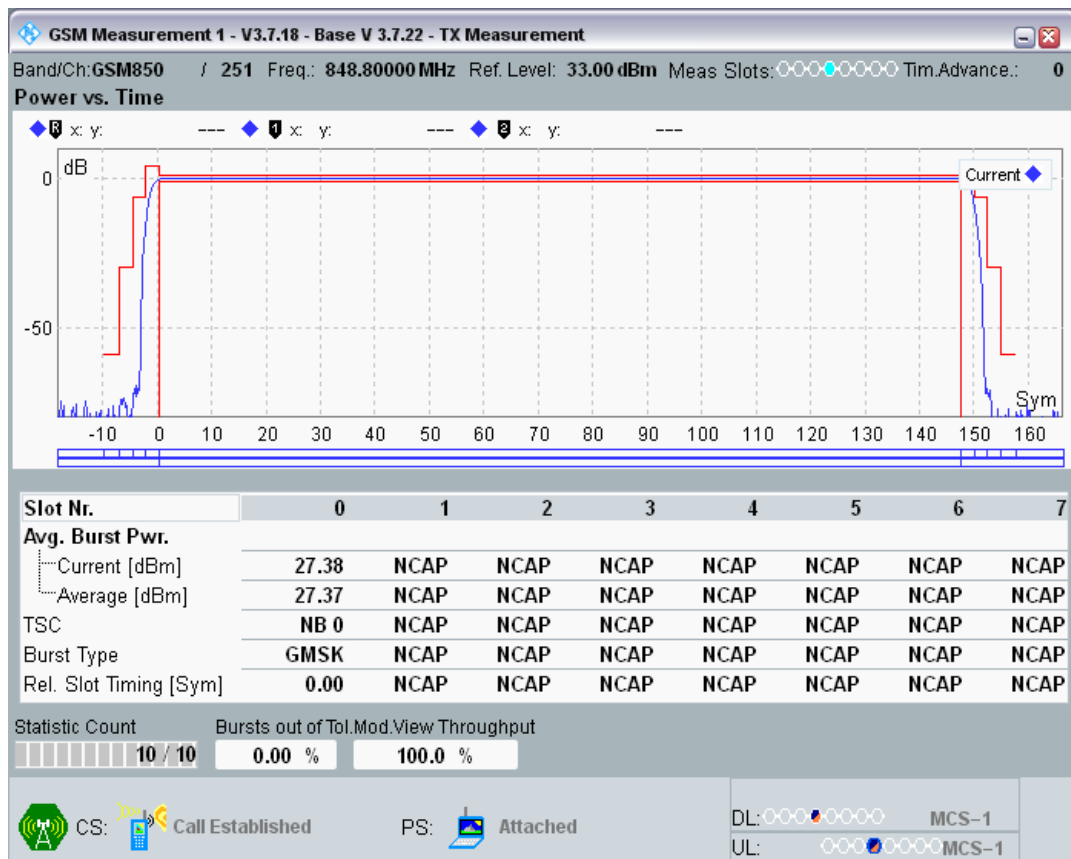


GSM850 Channel=251 PCL=9

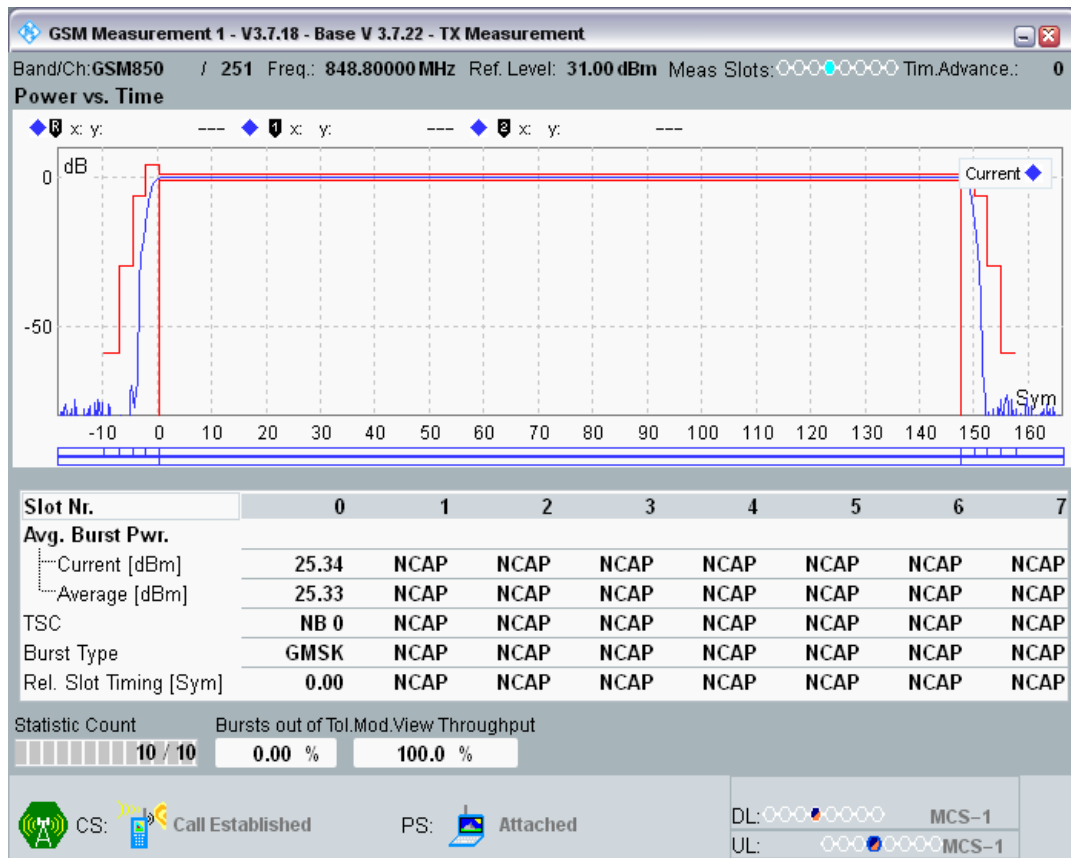


GSM850 Channel=251 PCL=10

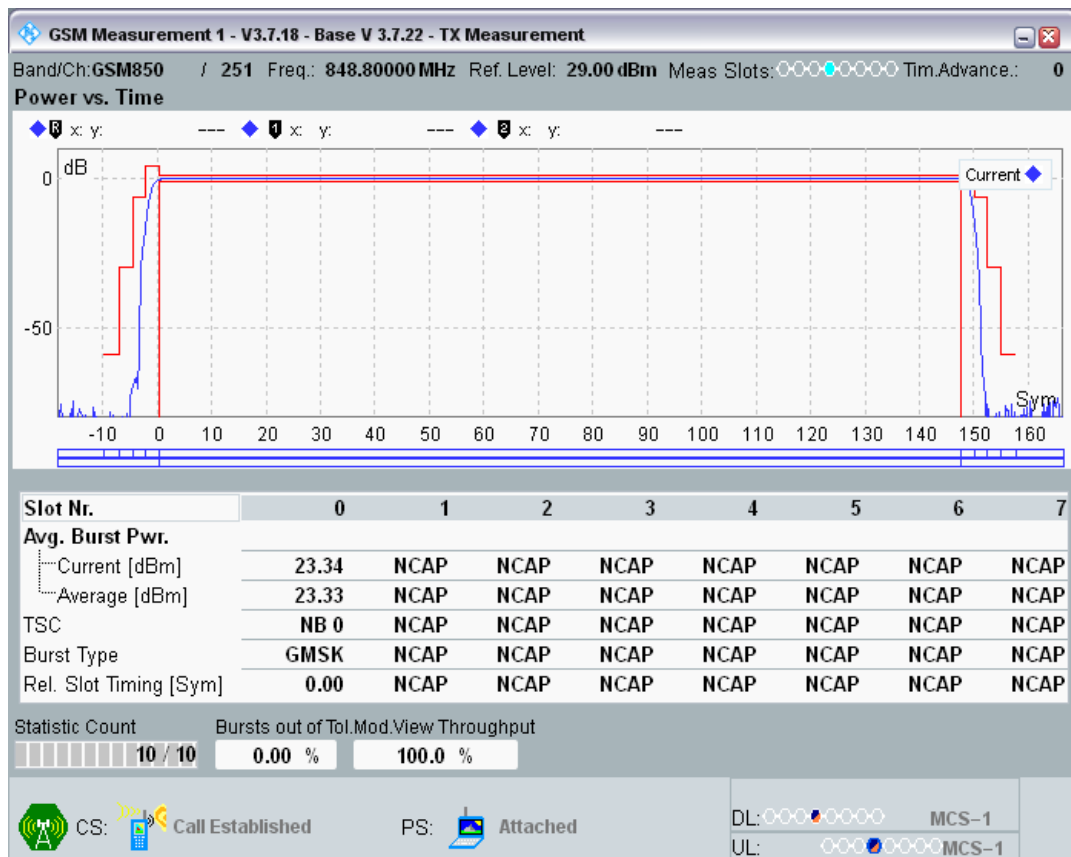


GSM850 Channel=251 PCL=11

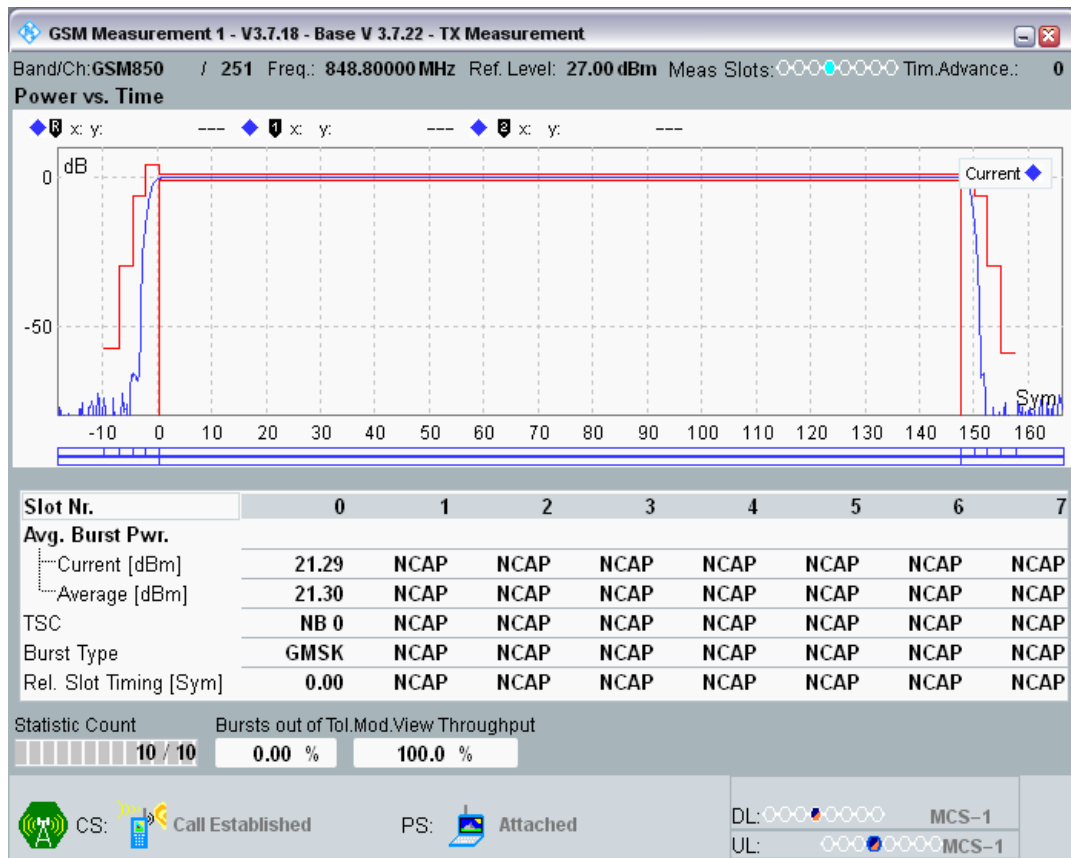


GSM850 Channel=251 PCL=12

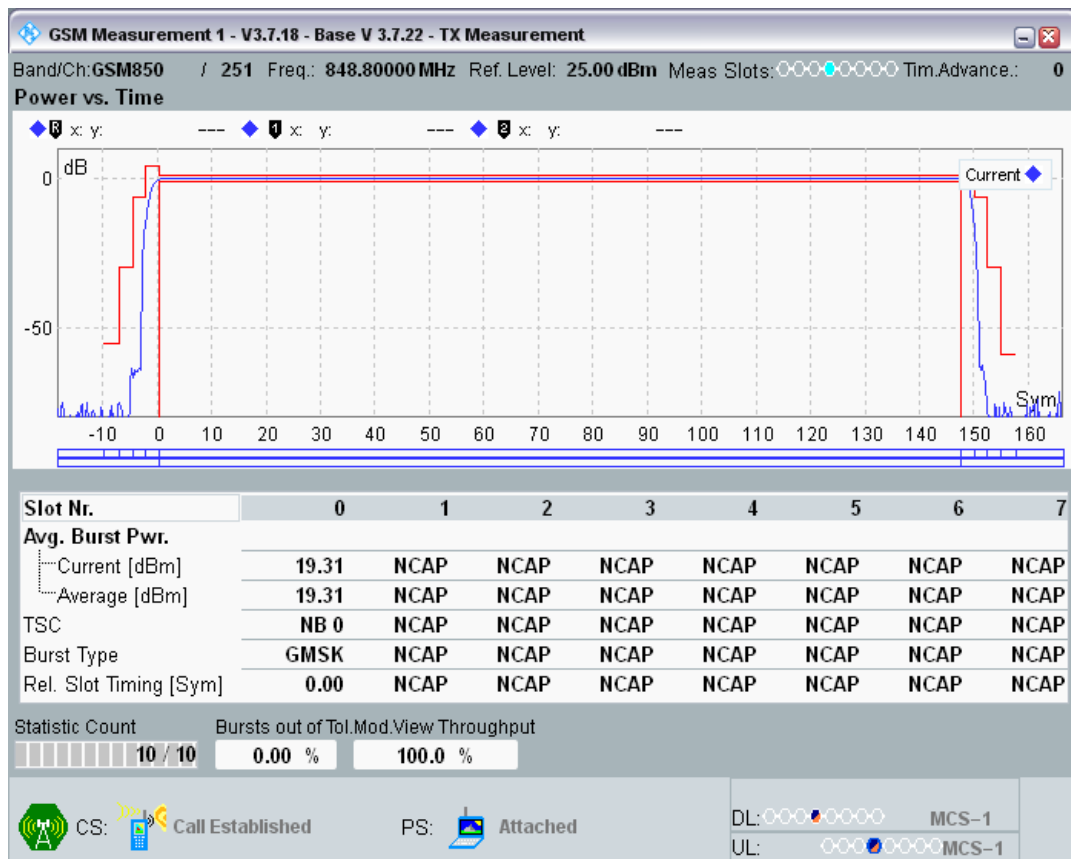

GSM850 Channel=251 PCL=13

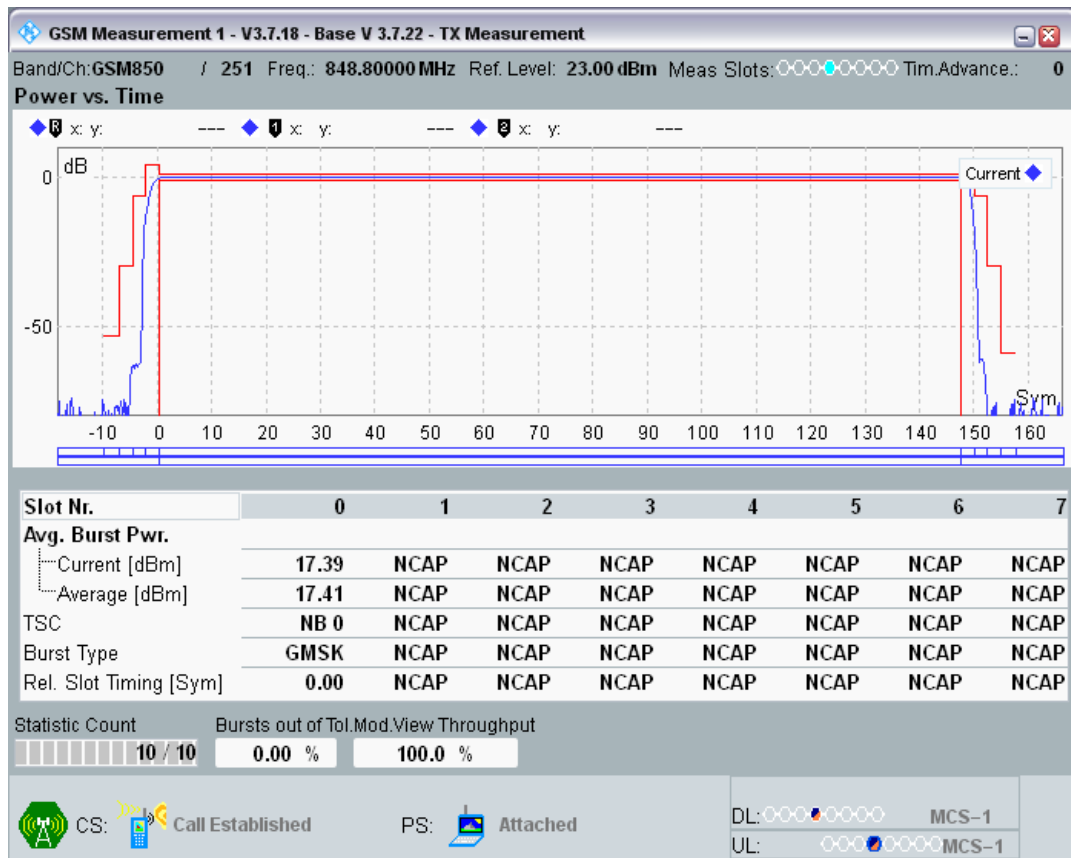


GSM850 Channel=251 PCL=14

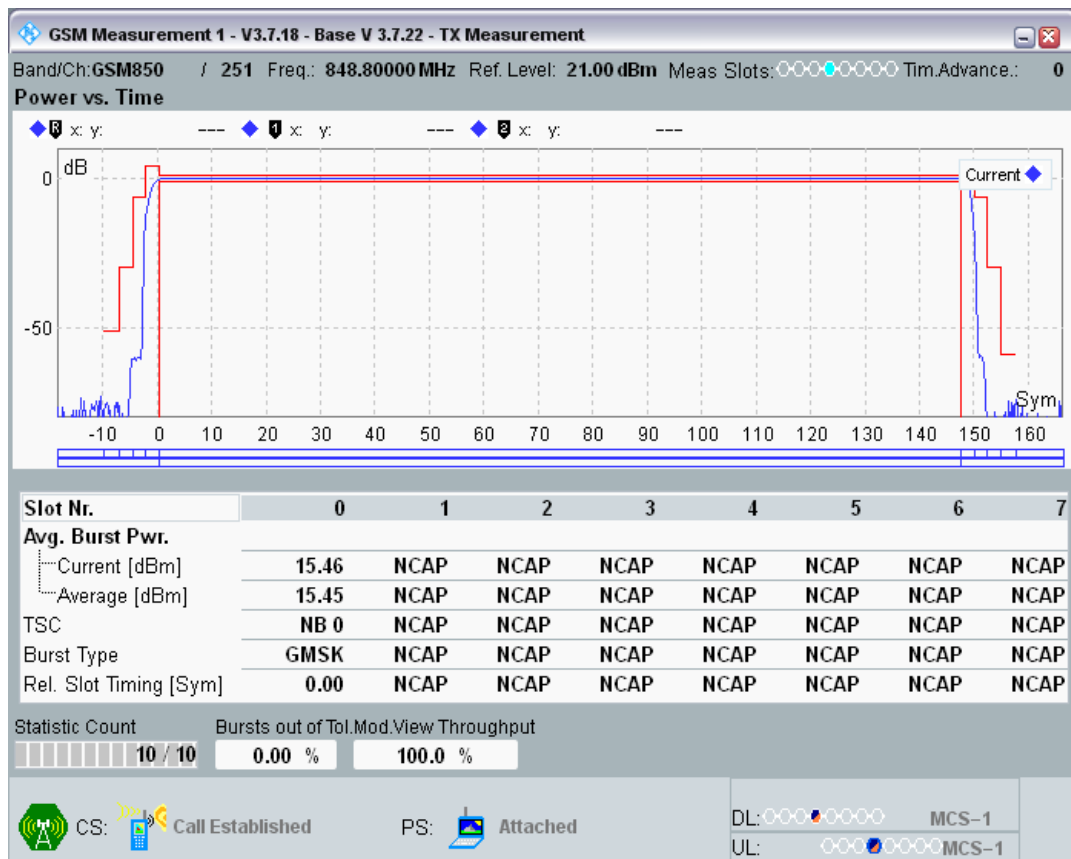


GSM850 Channel=251 PCL=15




GSM850 Channel=251 PCL=16

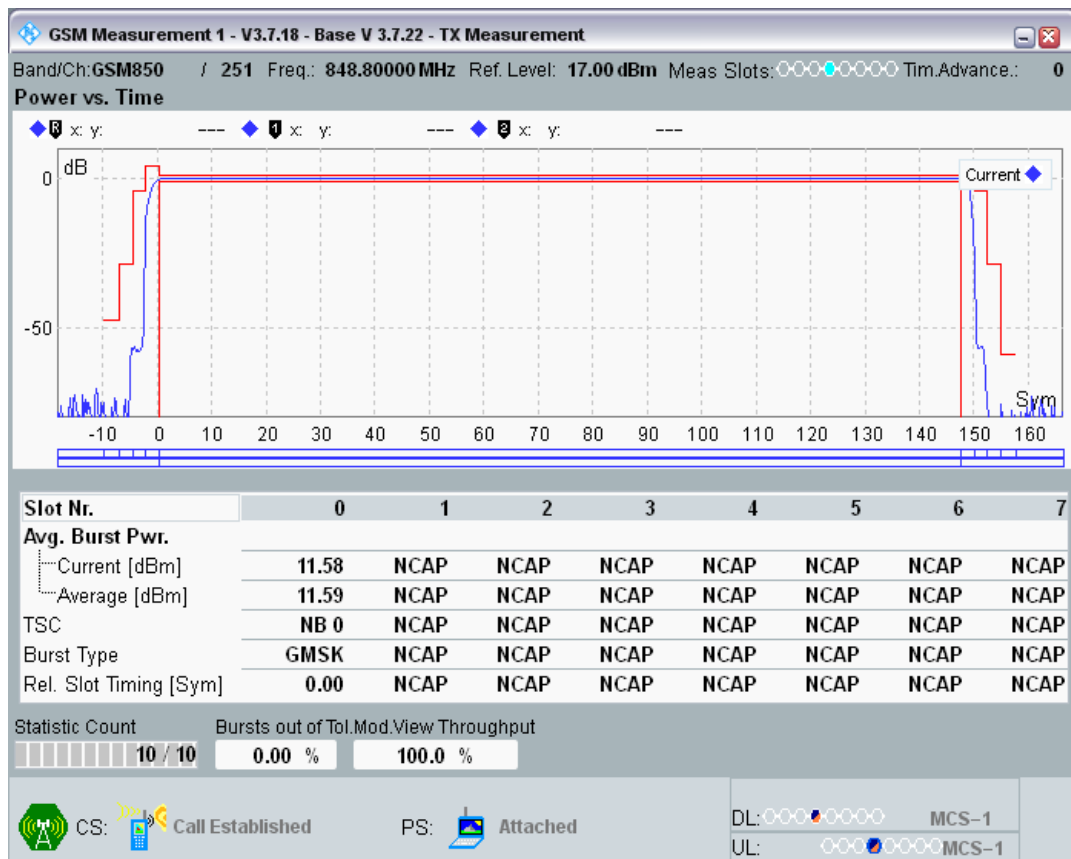


GSM850 Channel=251 PCL=17

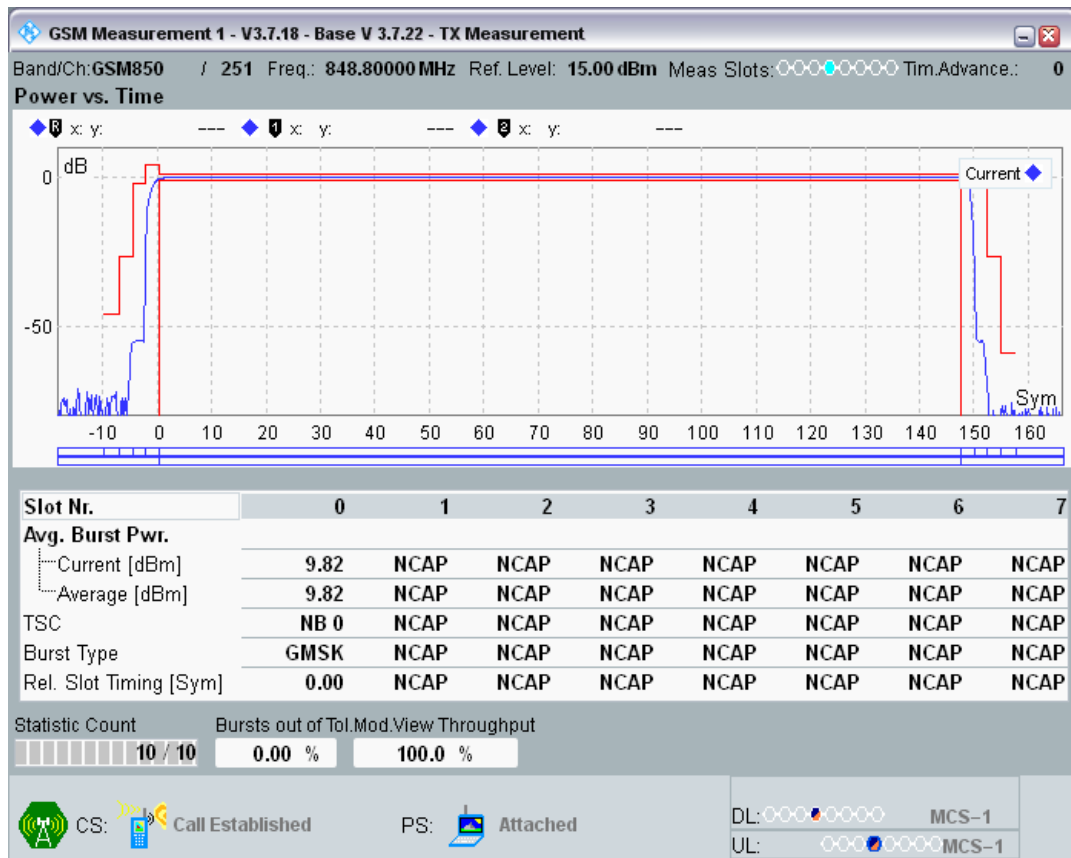


GSM850 Channel=251 PCL=18

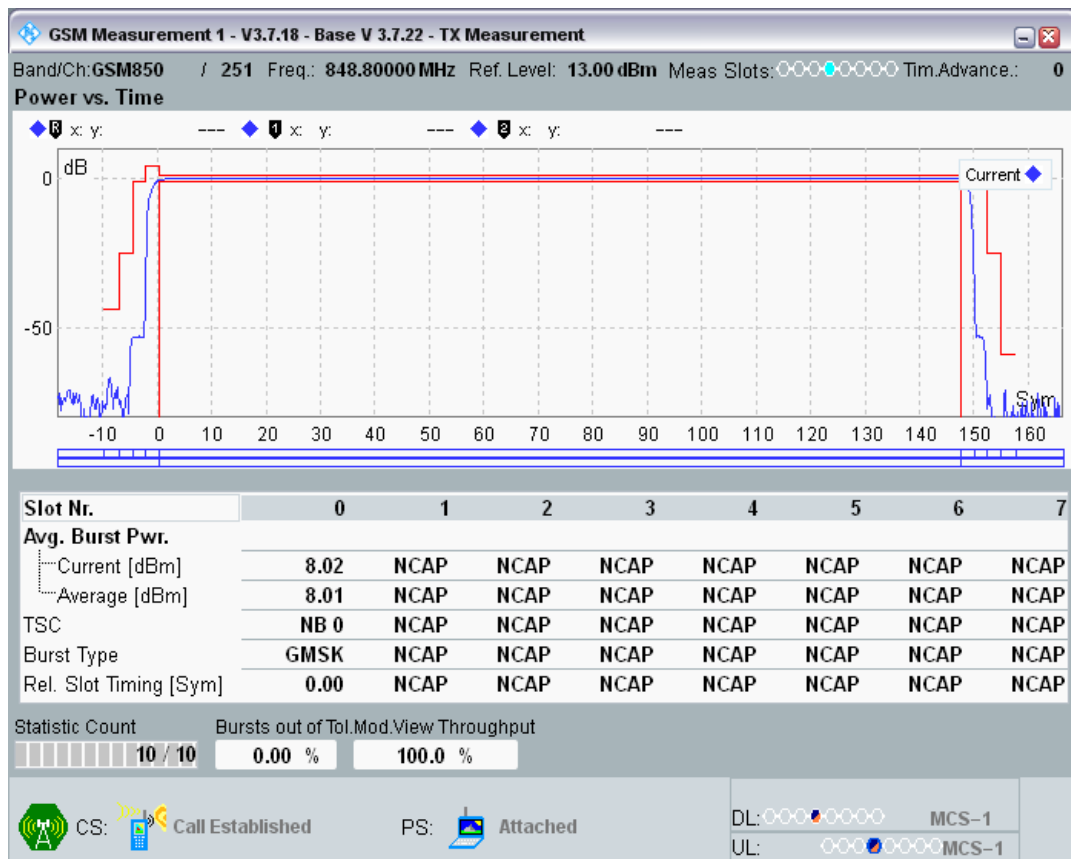


GSM850 Channel=251 PCL=19

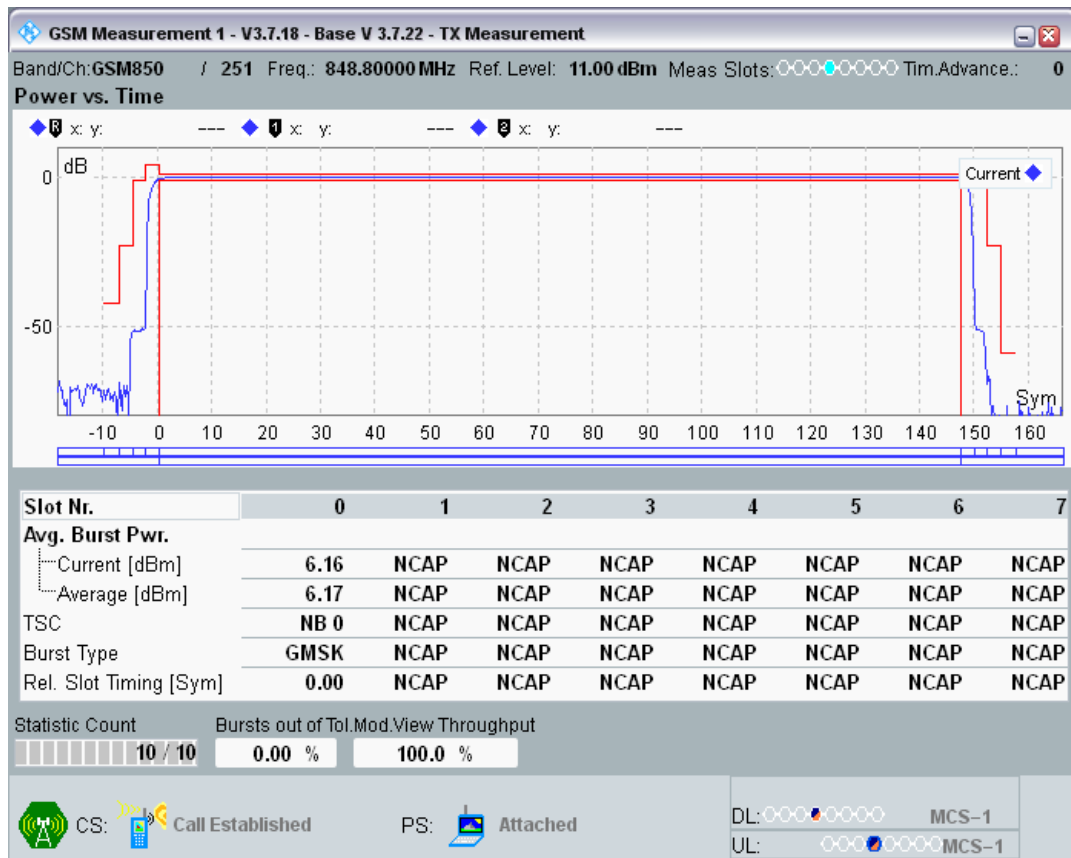


GSM900 Channel=975 PCL=5

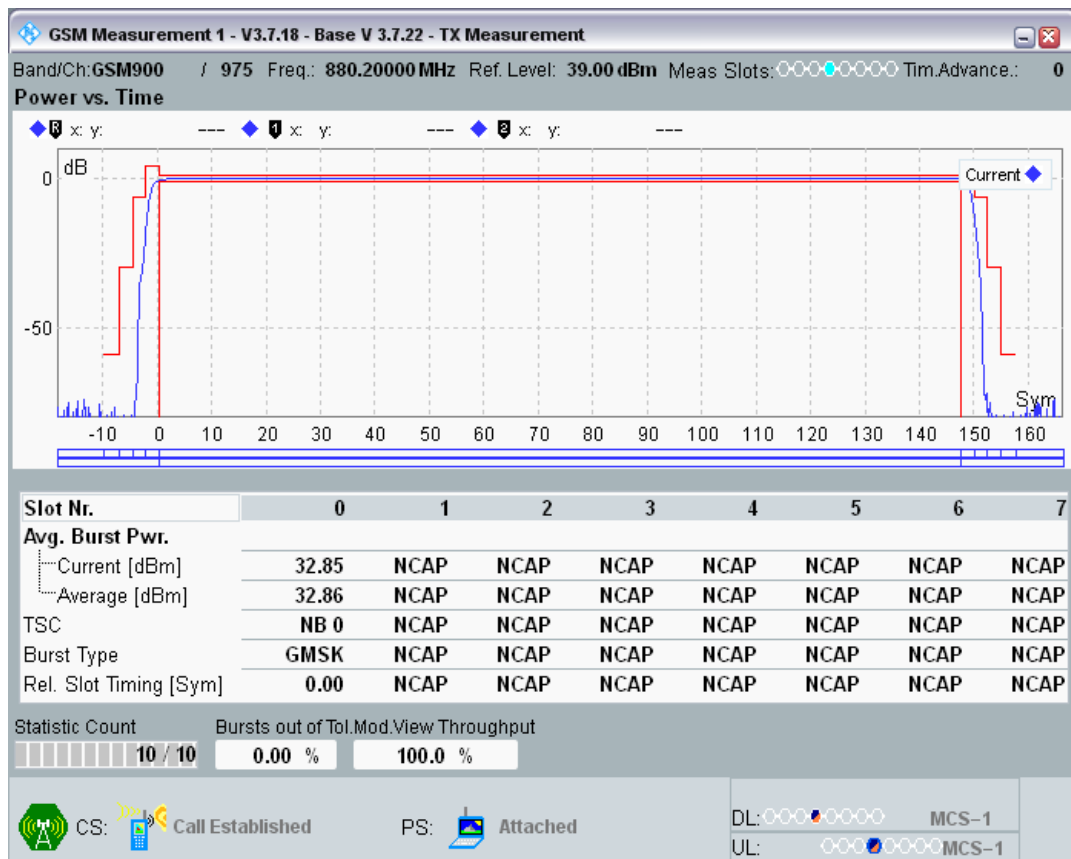


GSM900 Channel=975 PCL=6

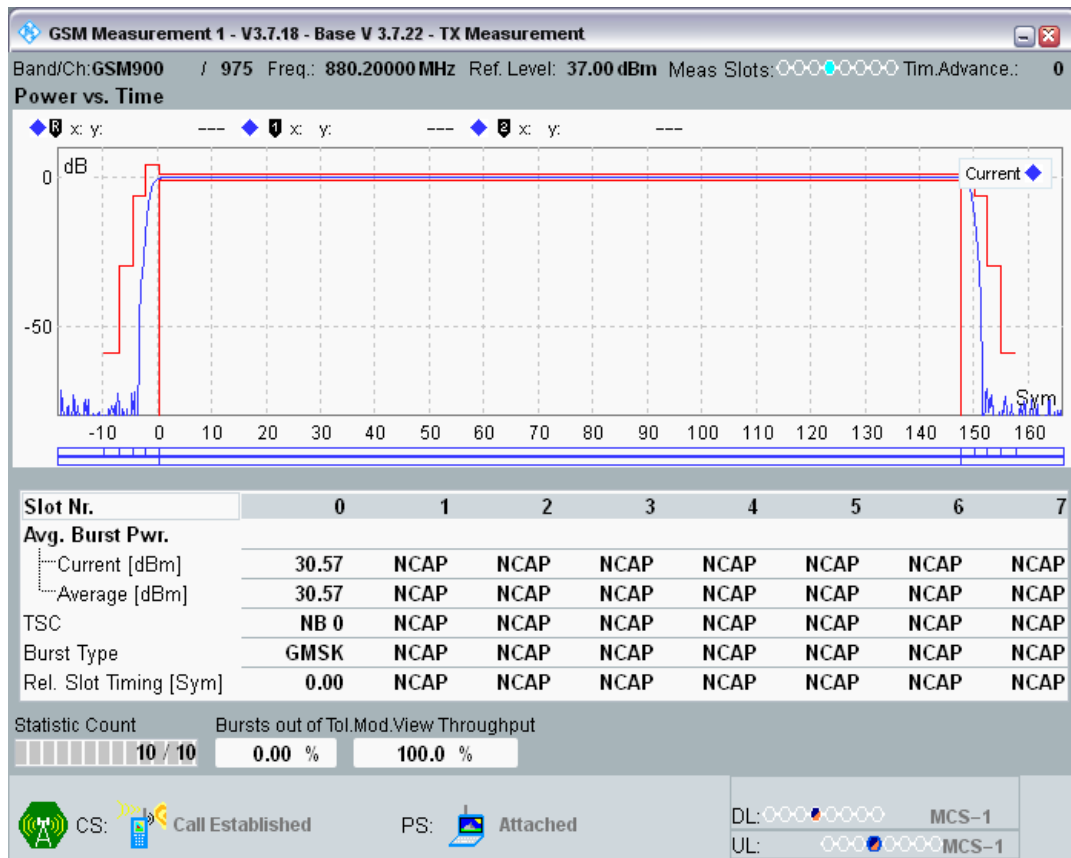


GSM900 Channel=975 PCL=7

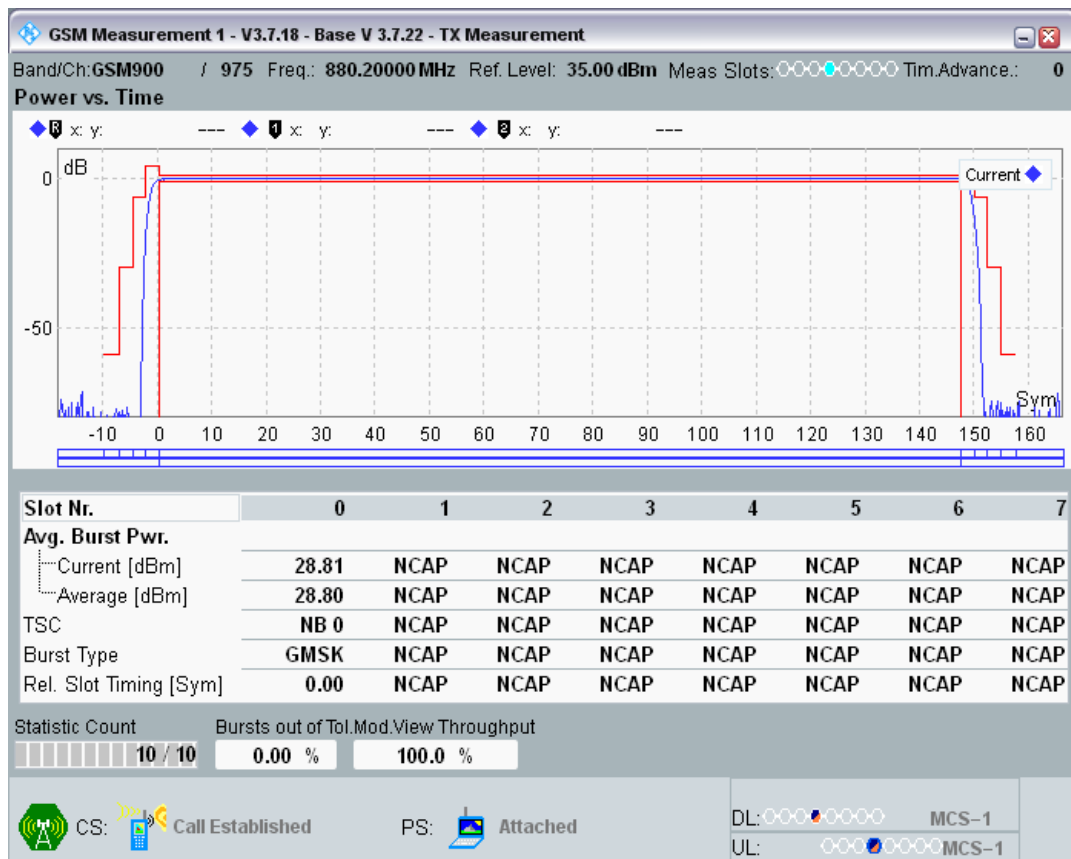


GSM900 Channel=975 PCL=8

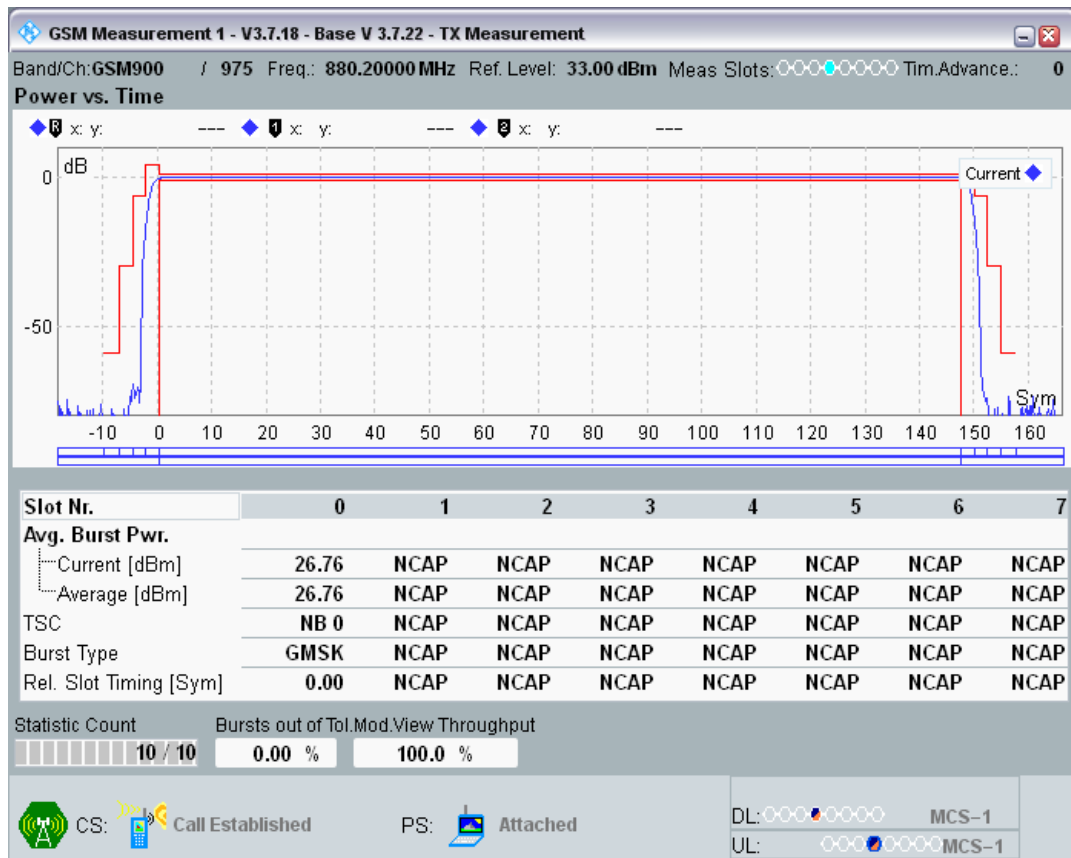


GSM900 Channel=975 PCL=9

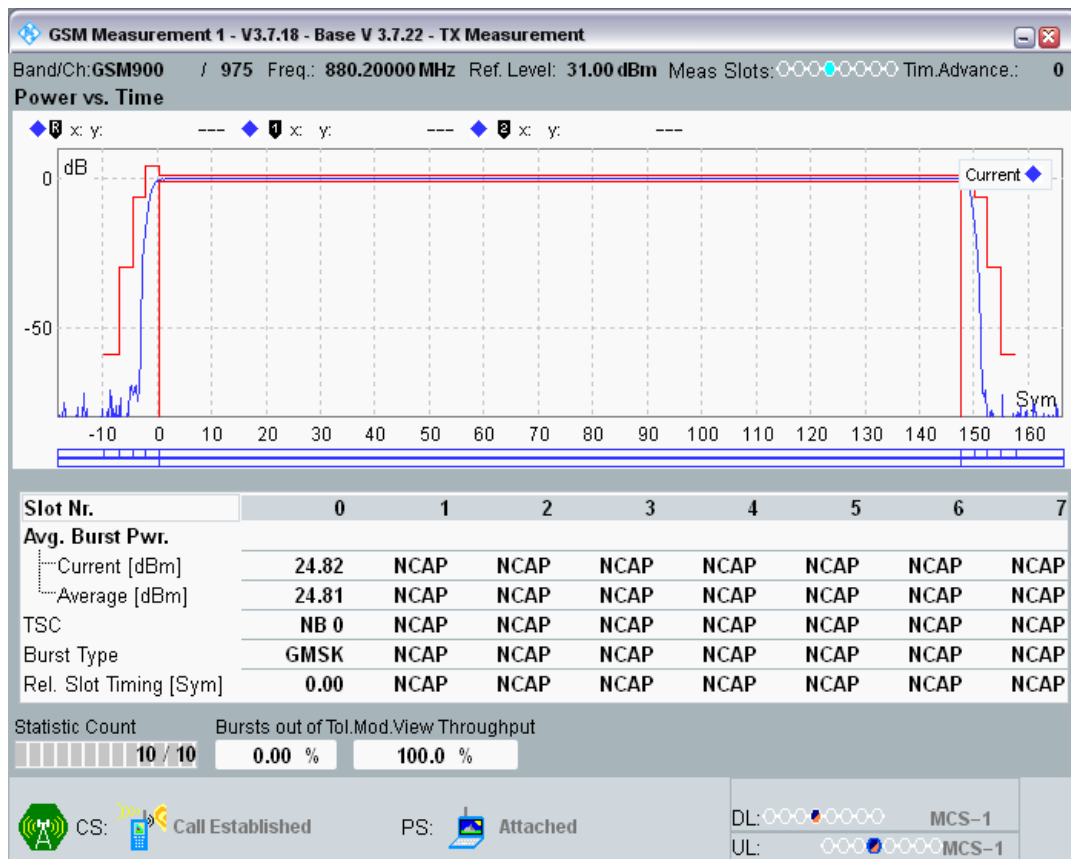


GSM900 Channel=975 PCL=10

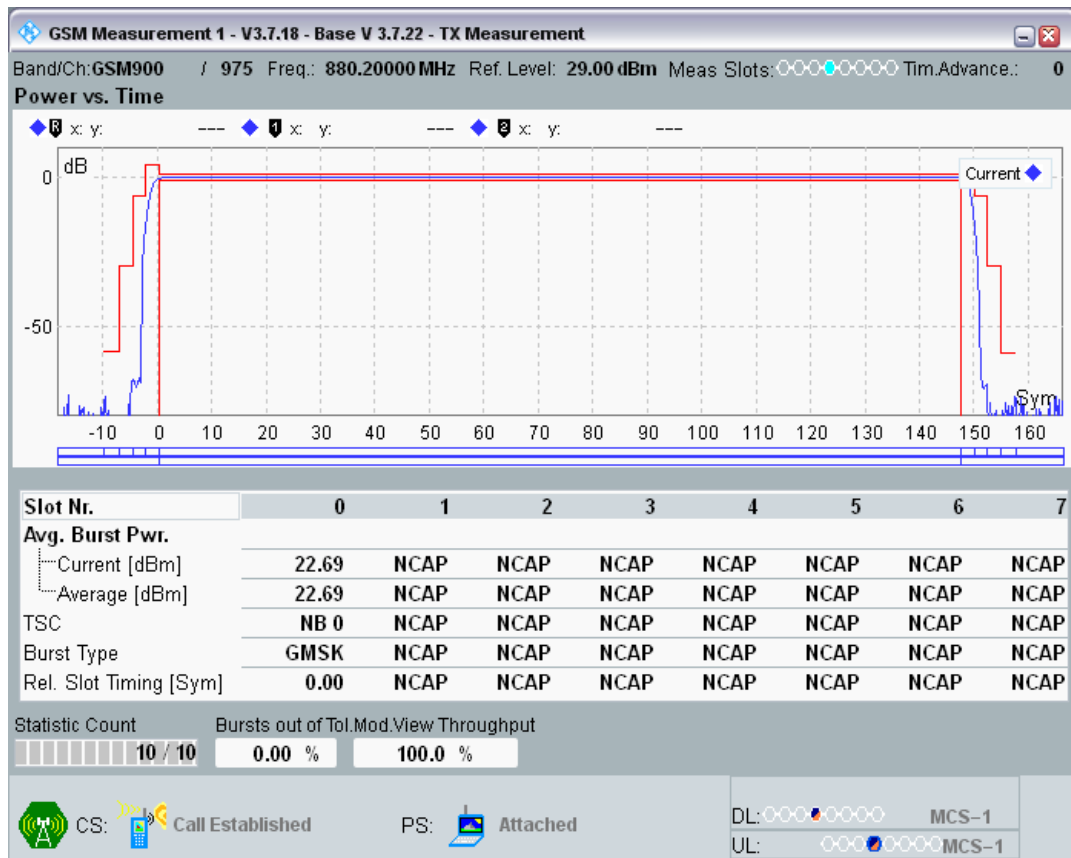


GSM900 Channel=975 PCL=11

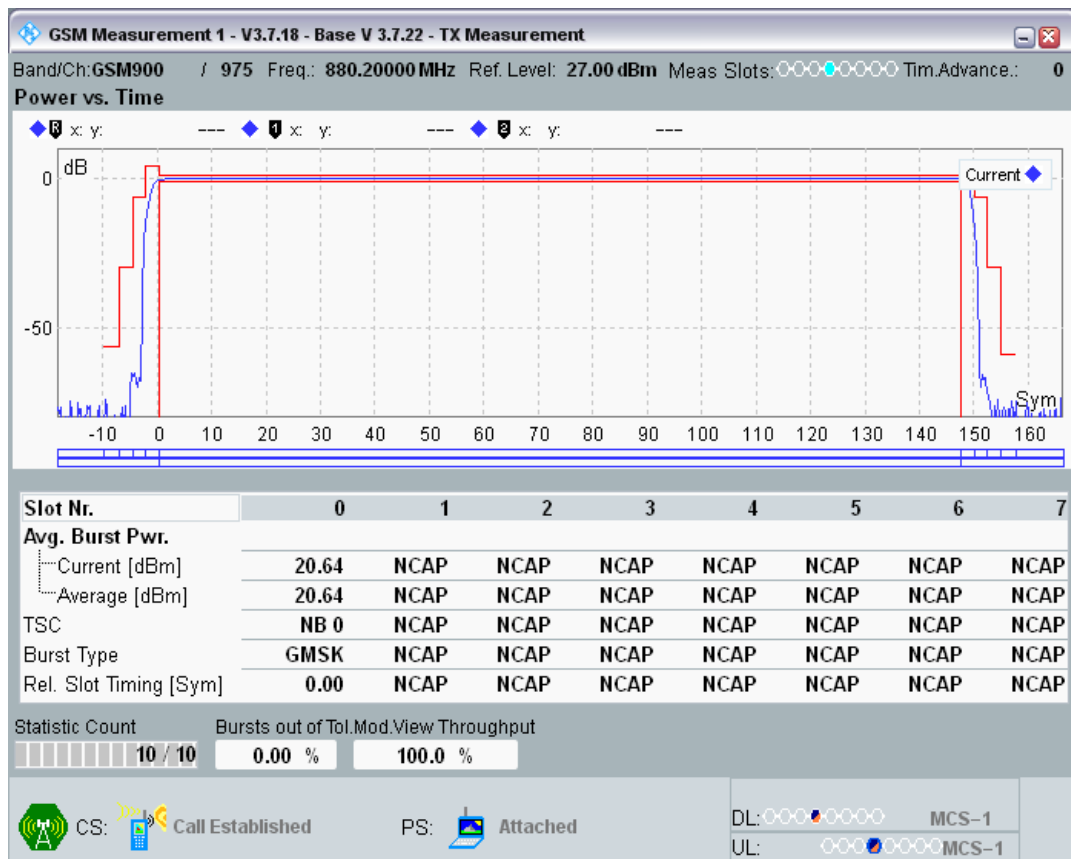


GSM900 Channel=975 PCL=12

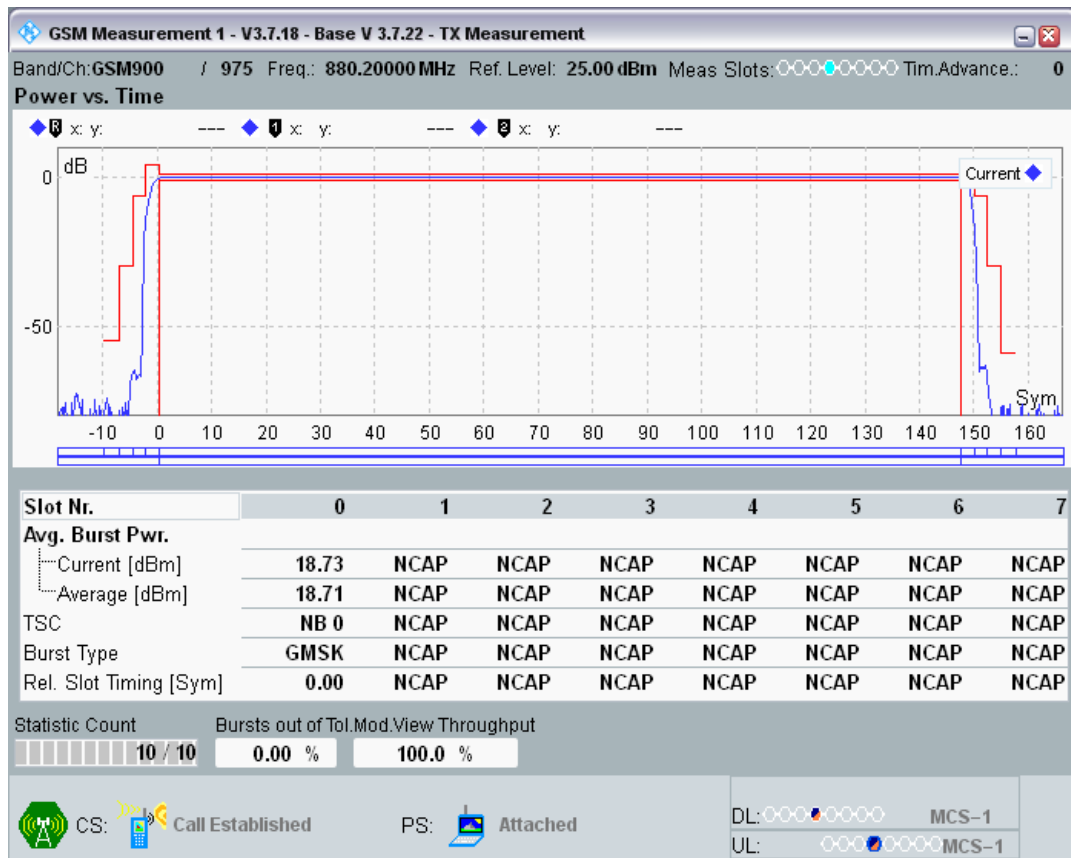


GSM900 Channel=975 PCL=13

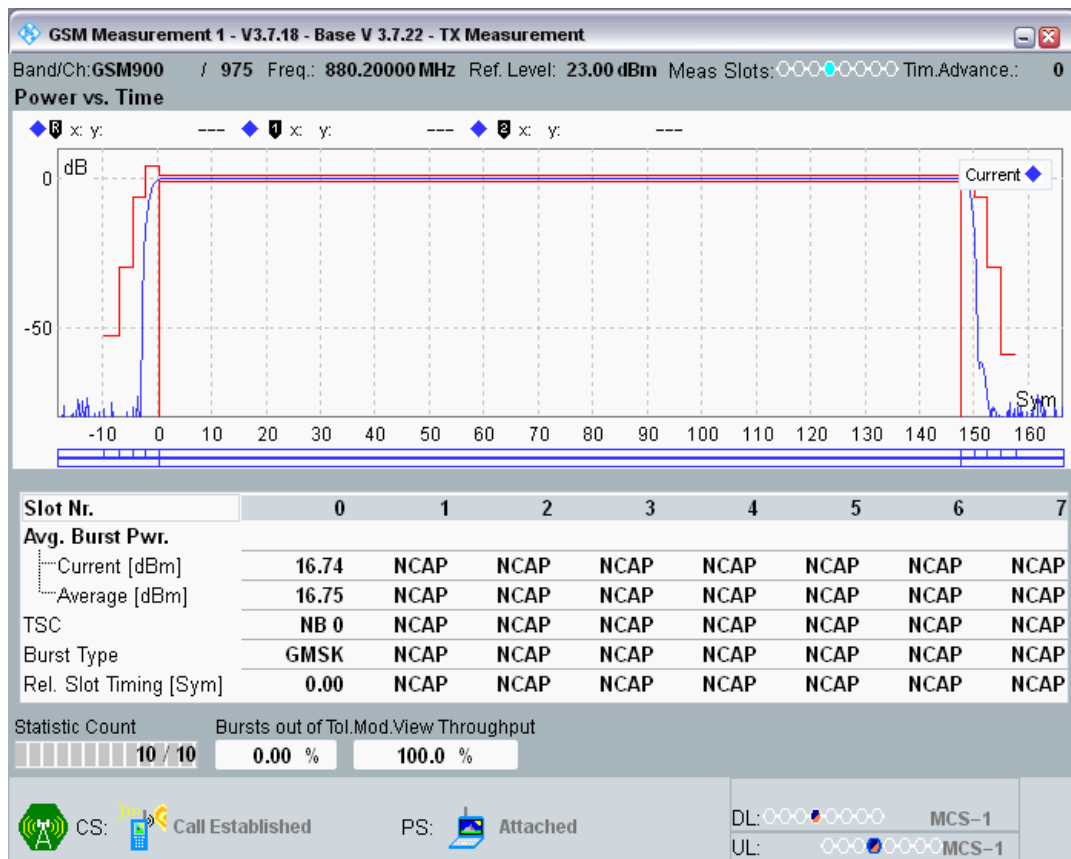

GSM900 Channel=975 PCL=14

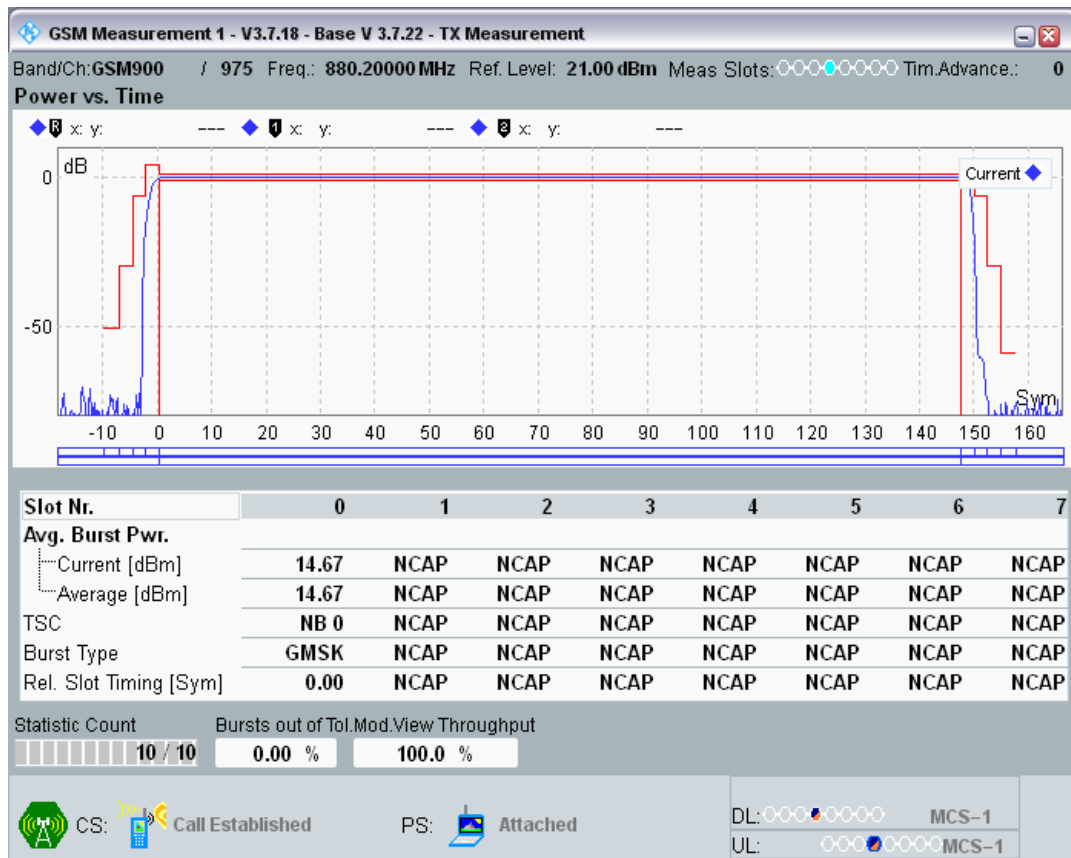


GSM900 Channel=975 PCL=15

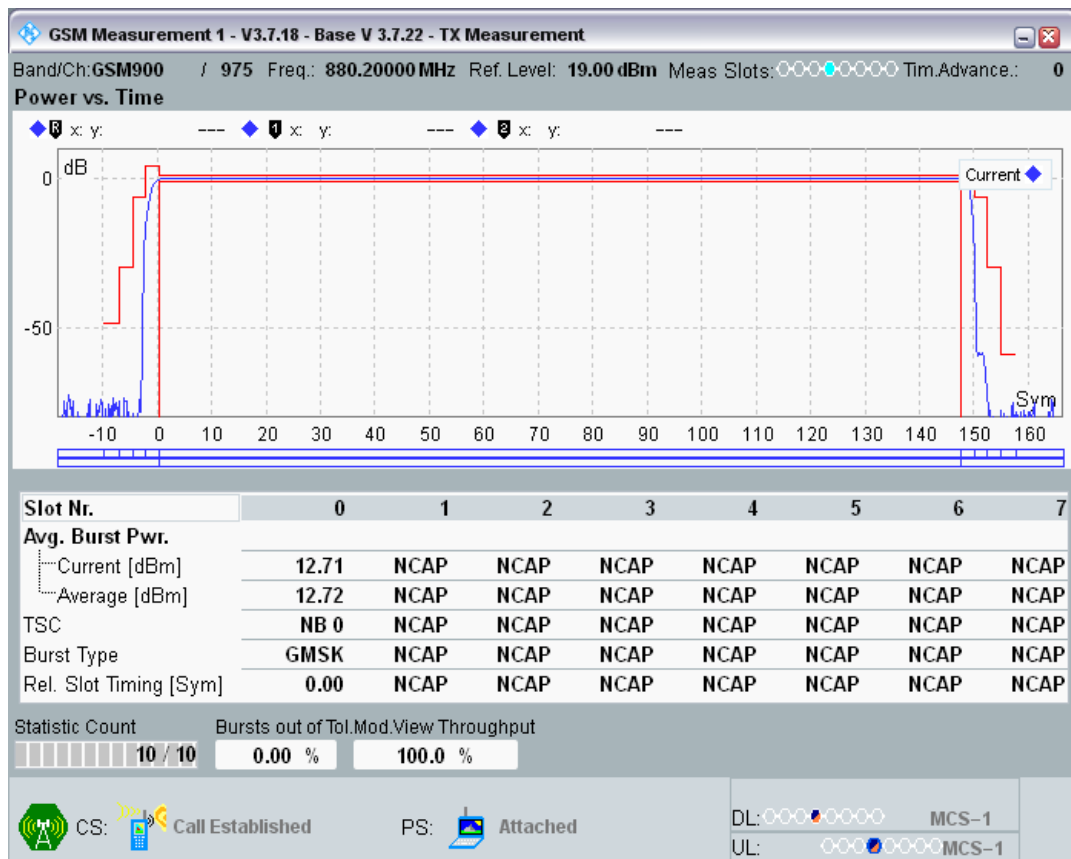


GSM900 Channel=975 PCL=16




GSM900 Channel=975 PCL=17

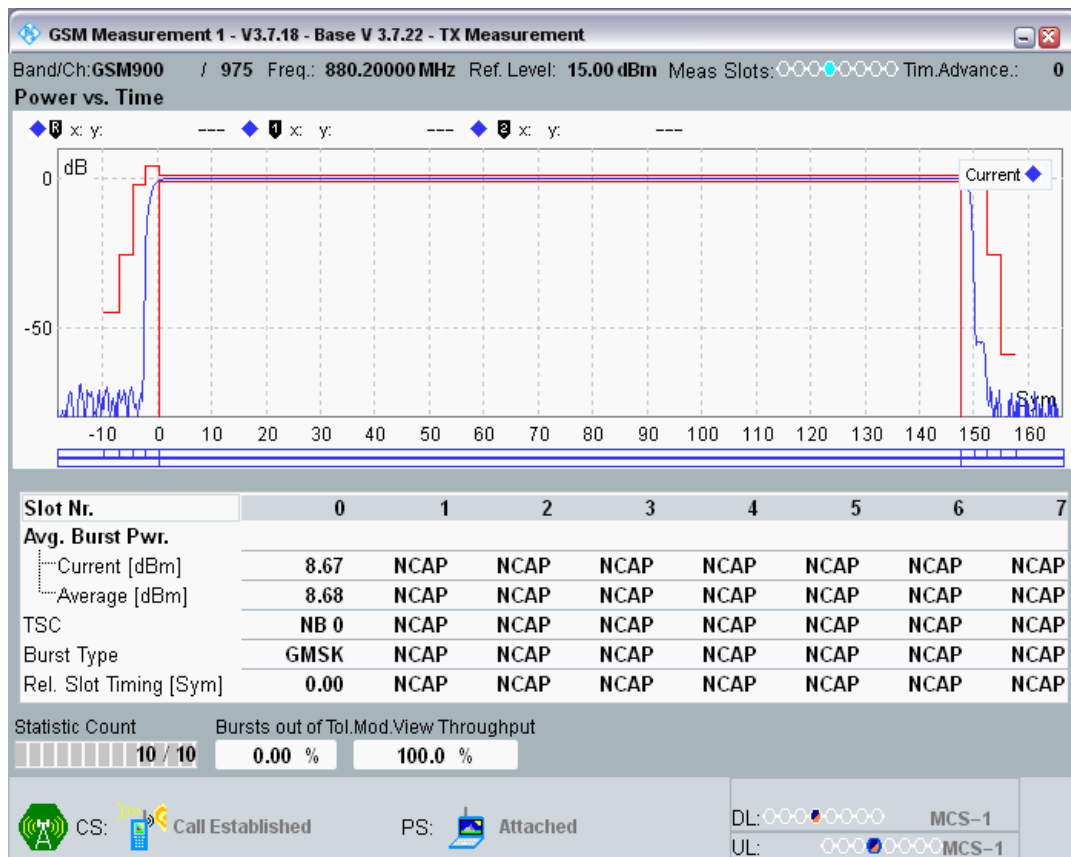


GSM900 Channel=975 PCL=18

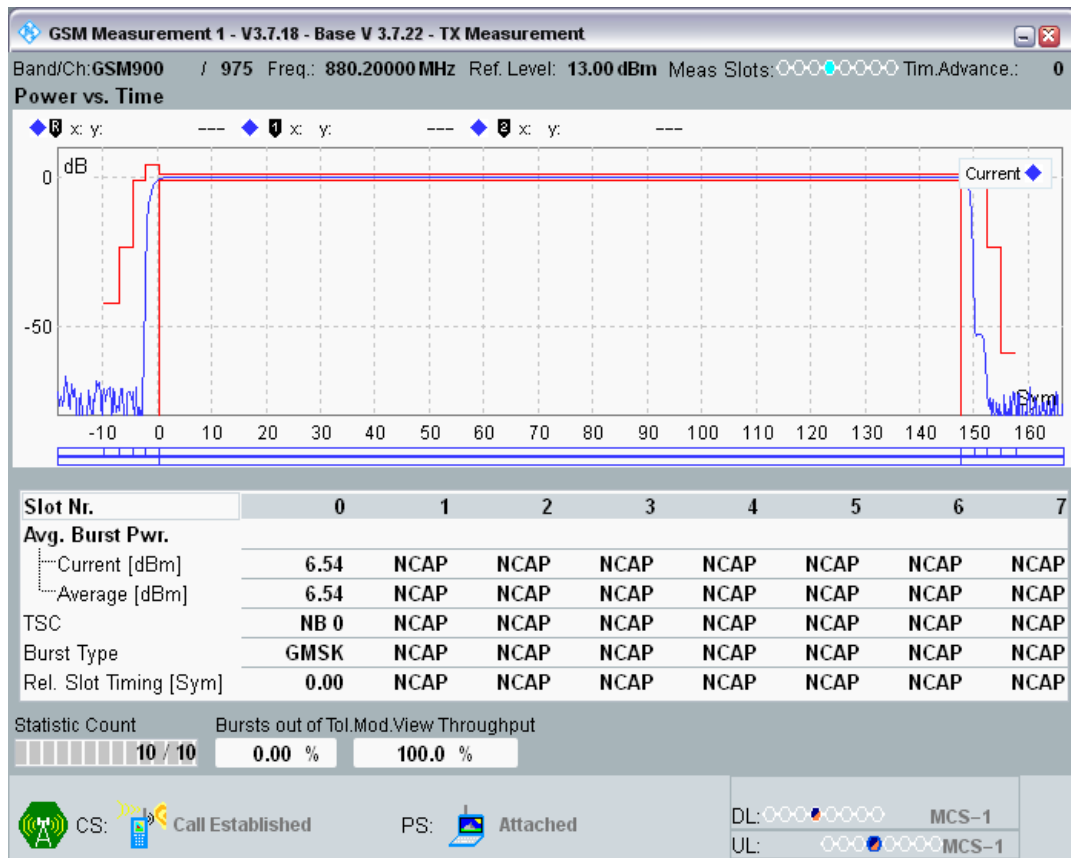


GSM900 Channel=975 PCL=19

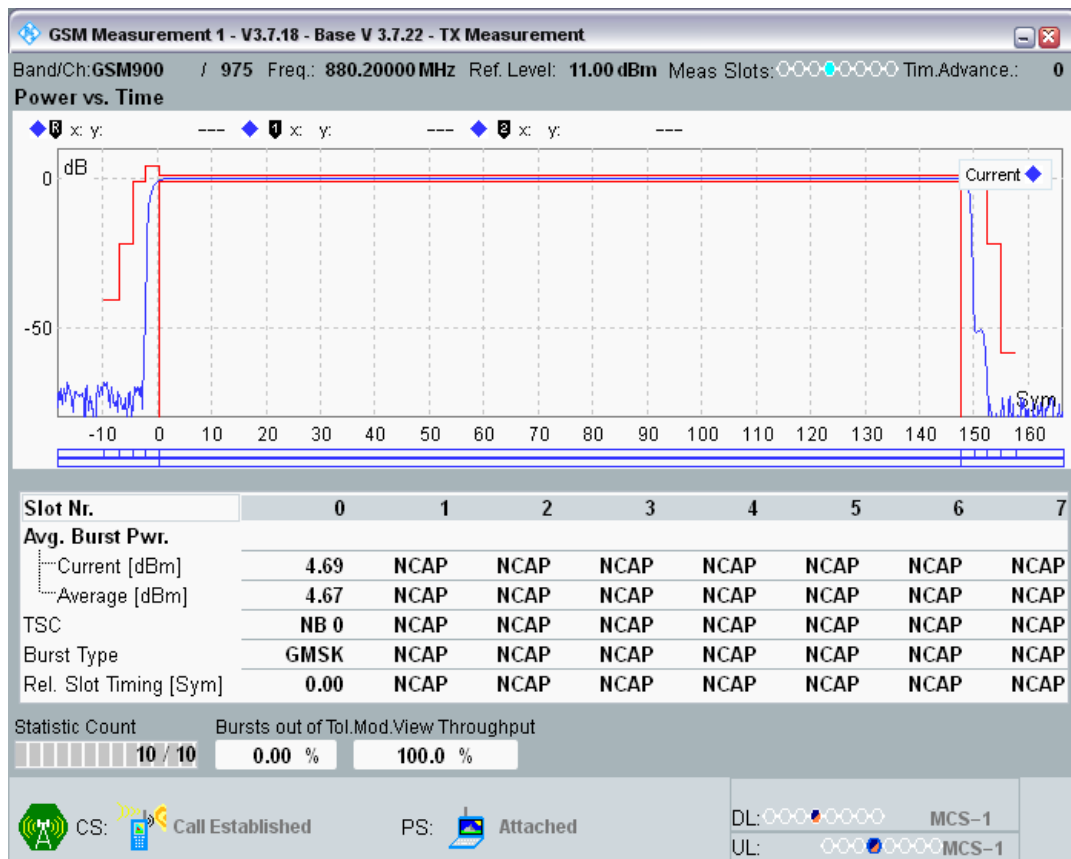


GSM900 Channel=38 PCL=5

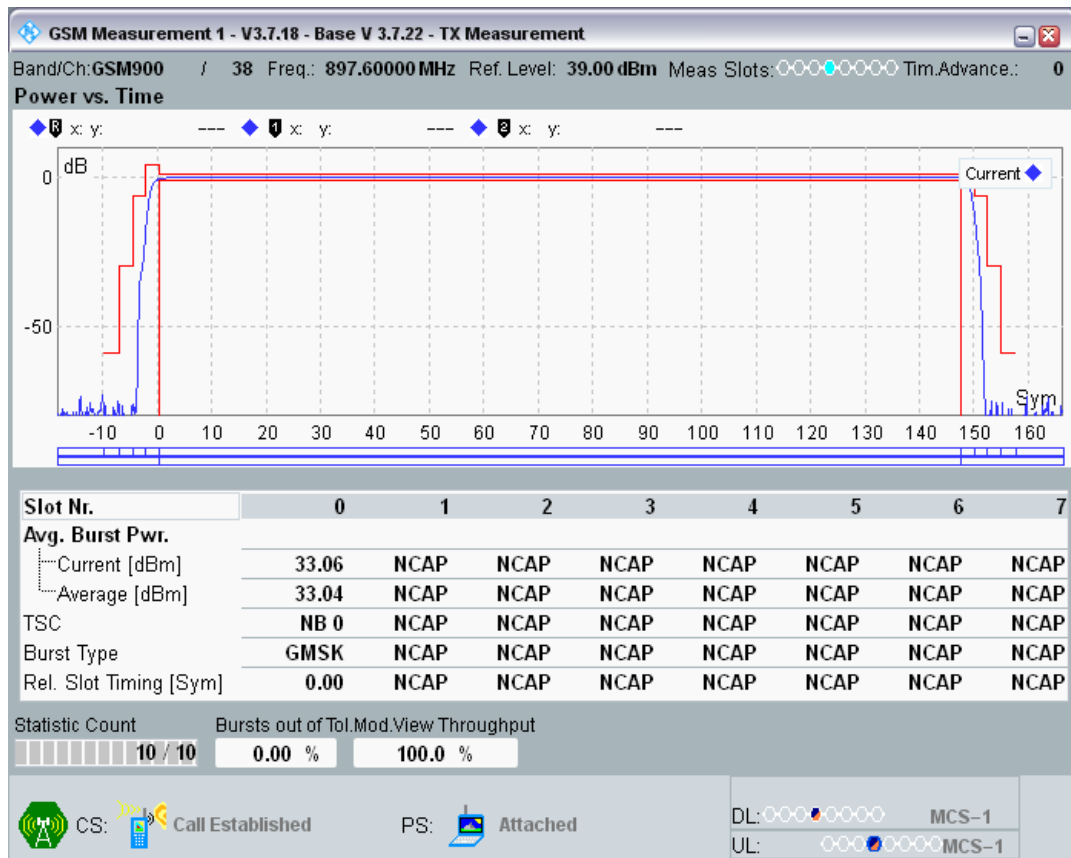


GSM900 Channel=38 PCL=6

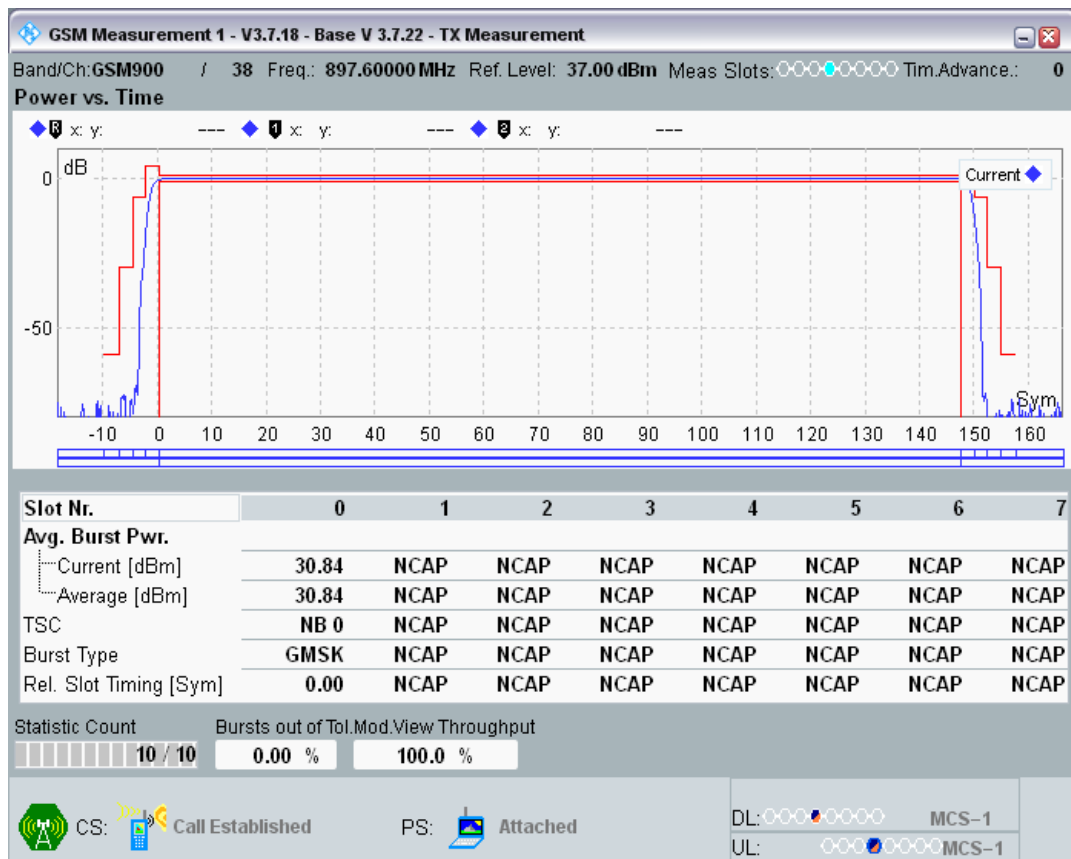


GSM900 Channel=38 PCL=7

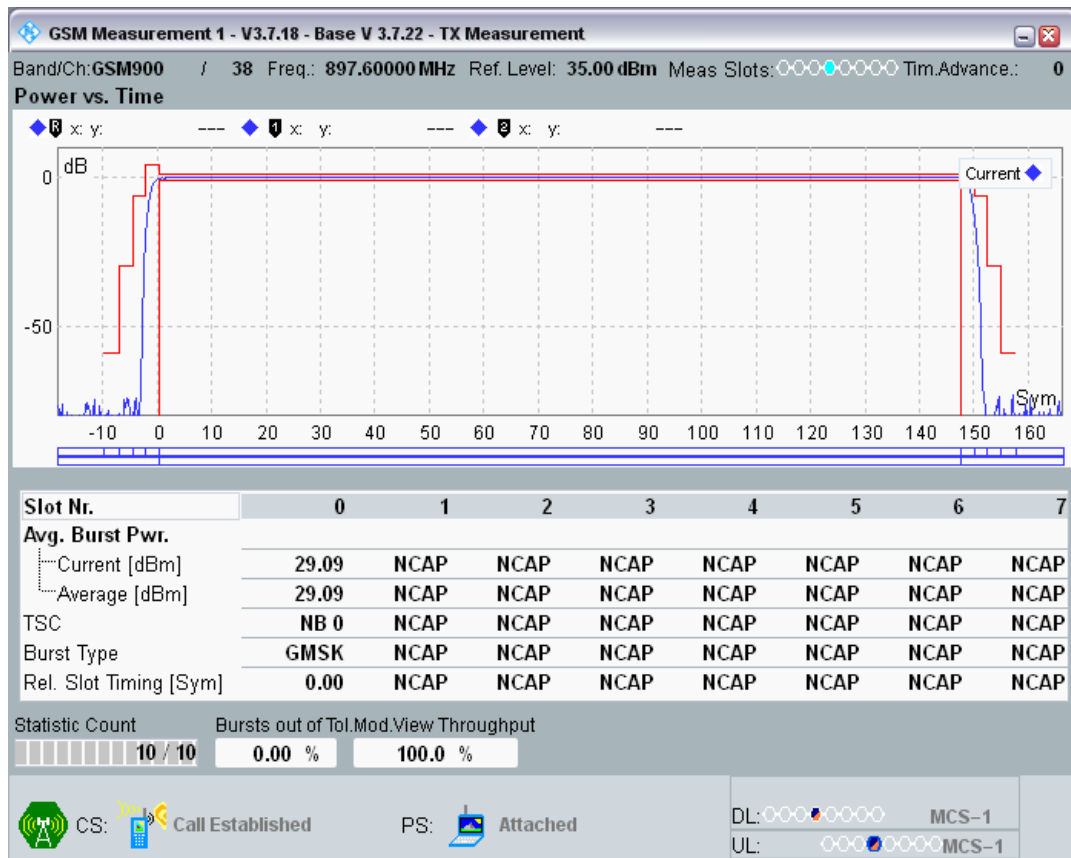


GSM900 Channel=38 PCL=8

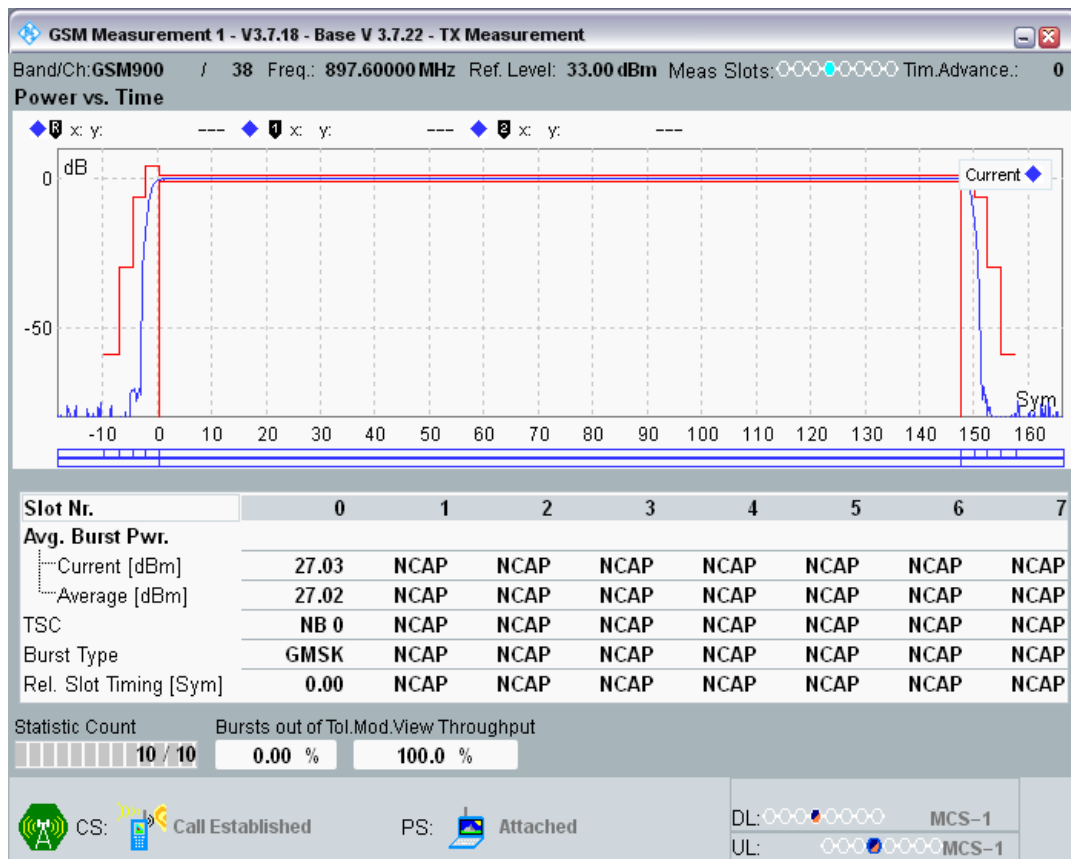


GSM900 Channel=38 PCL=9

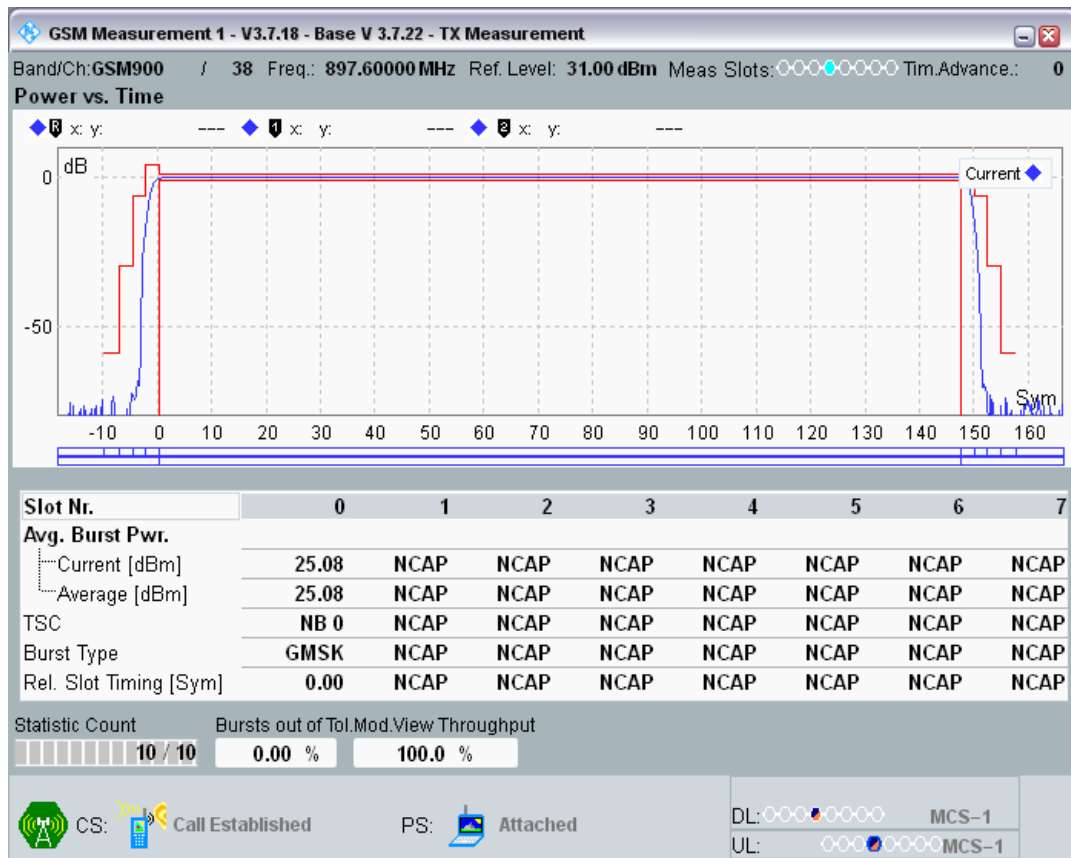


GSM900 Channel=38 PCL=10

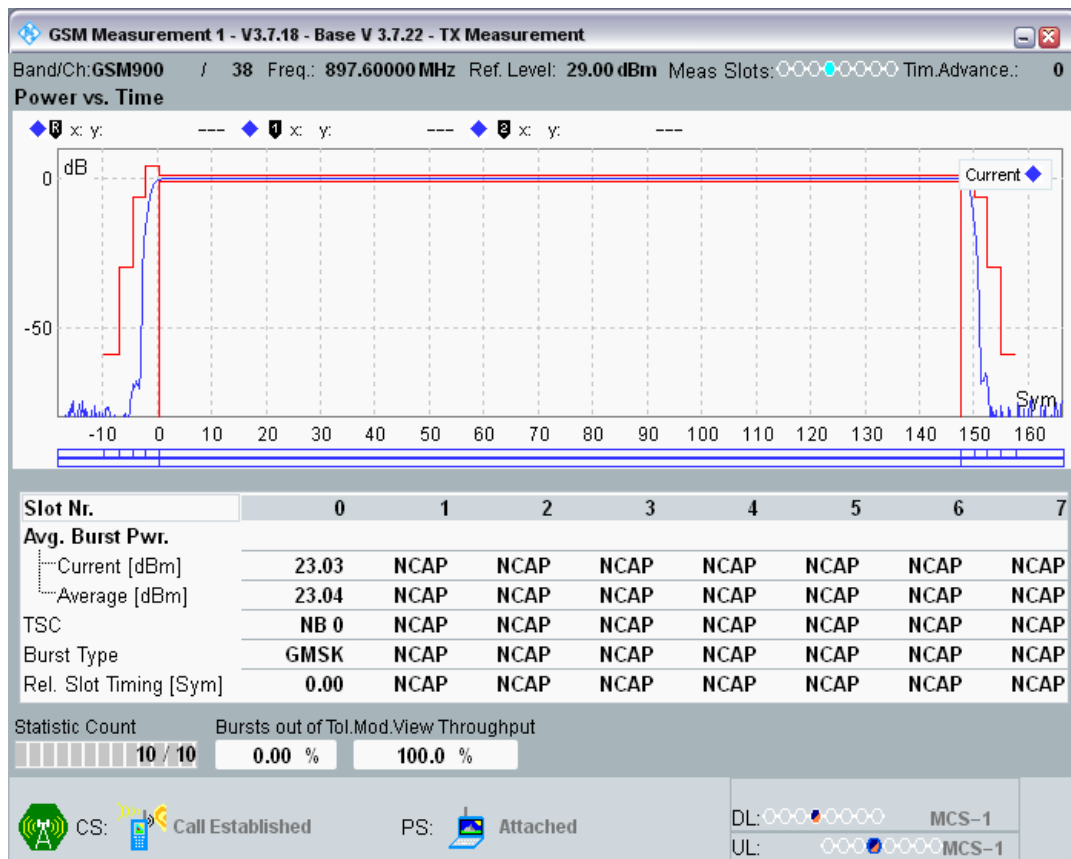


GSM900 Channel=38 PCL=11

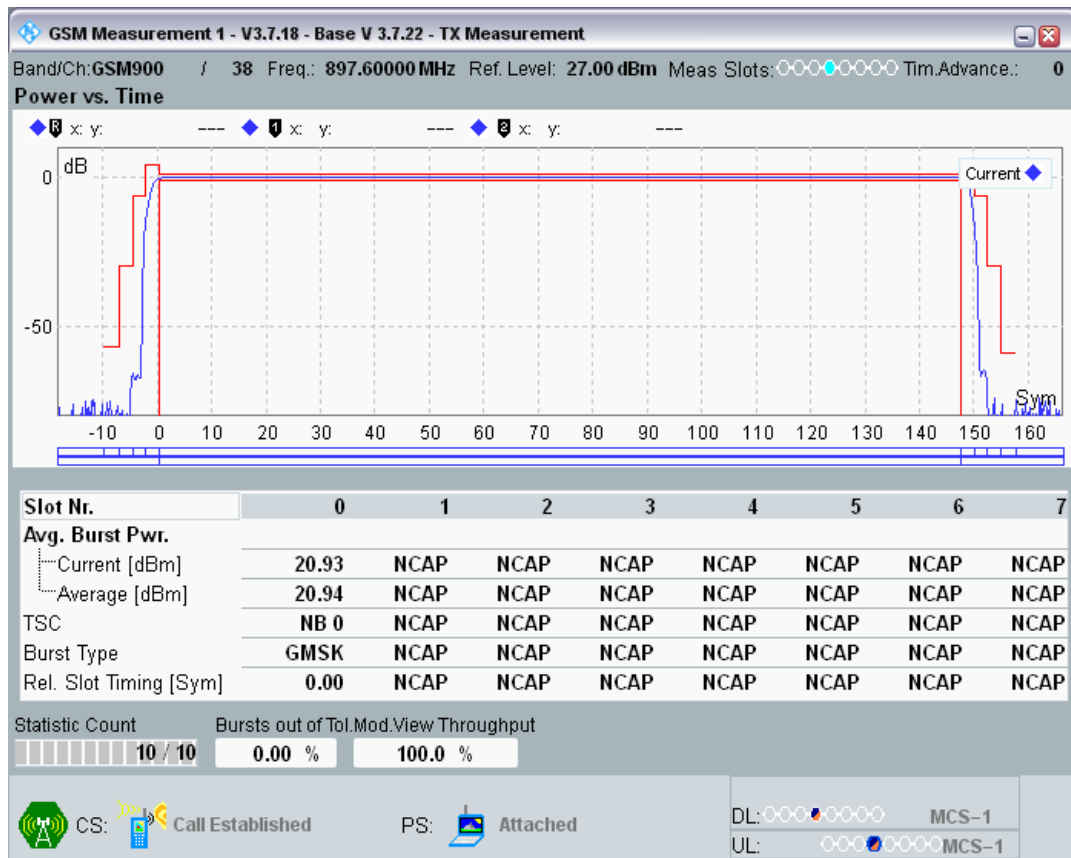


GSM900 Channel=38 PCL=12

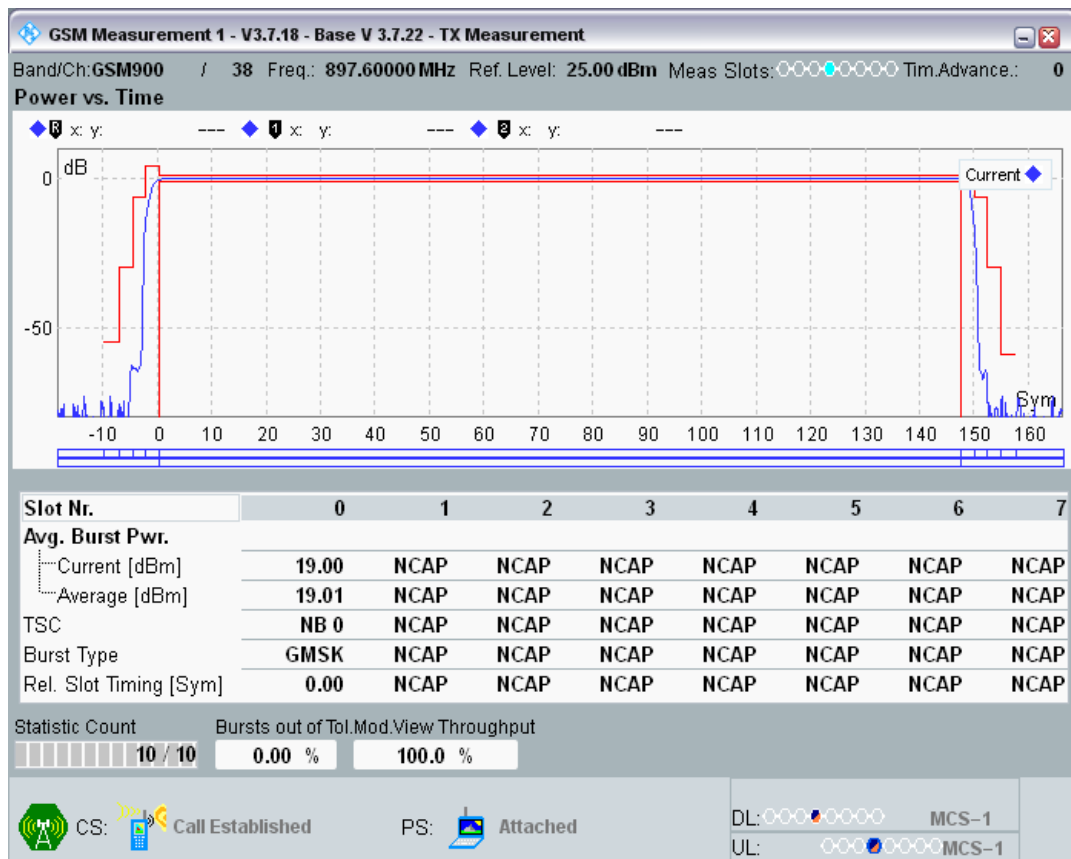


GSM900 Channel=38 PCL=13

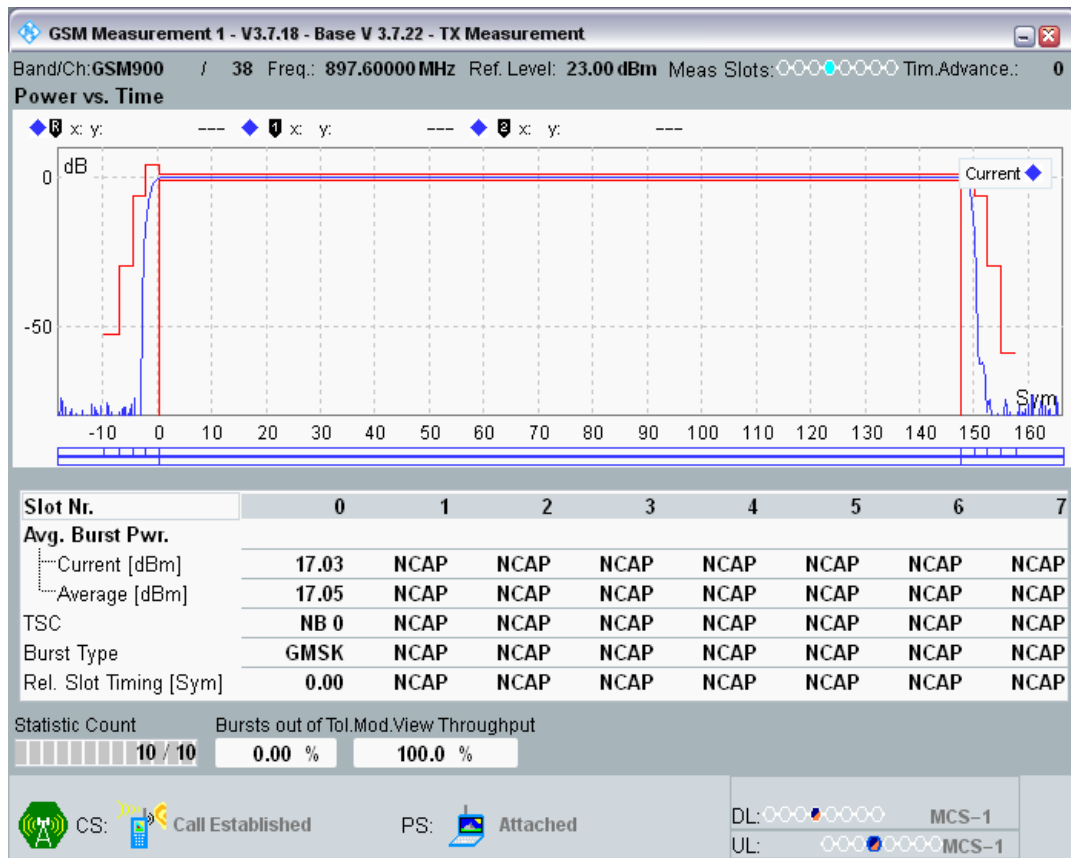


GSM900 Channel=38 PCL=14

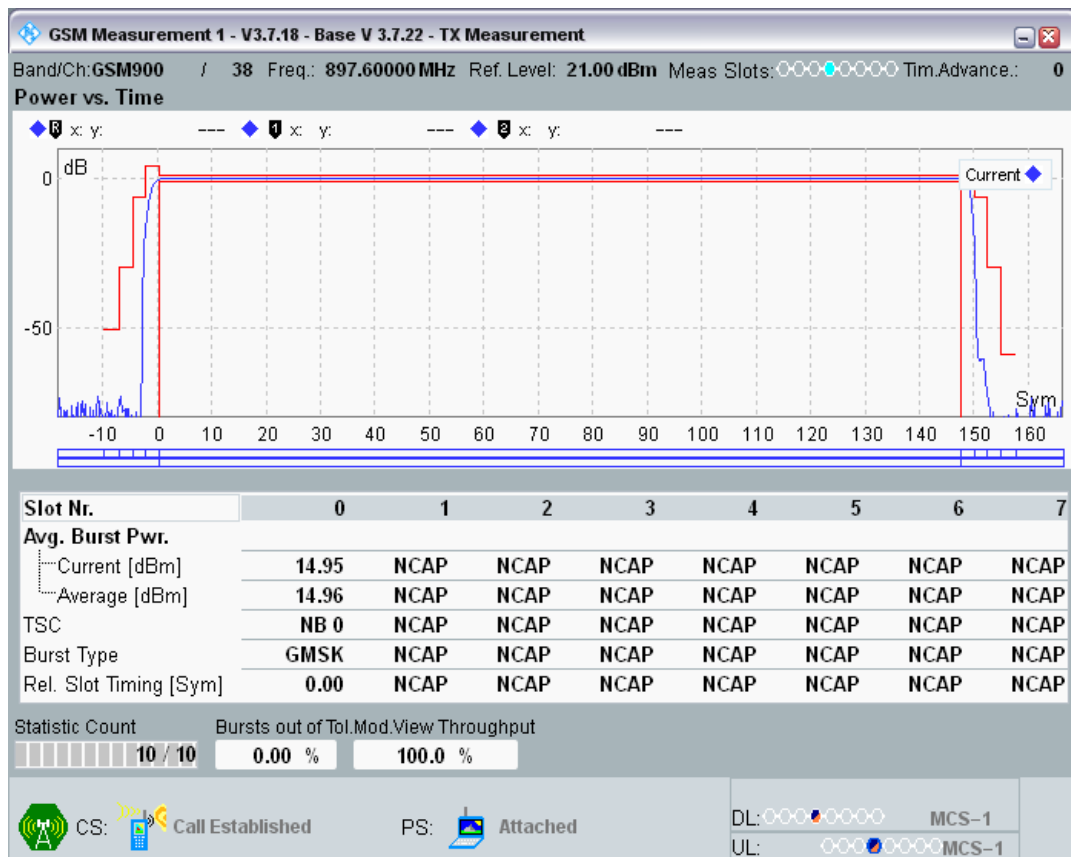


GSM900 Channel=38 PCL=15

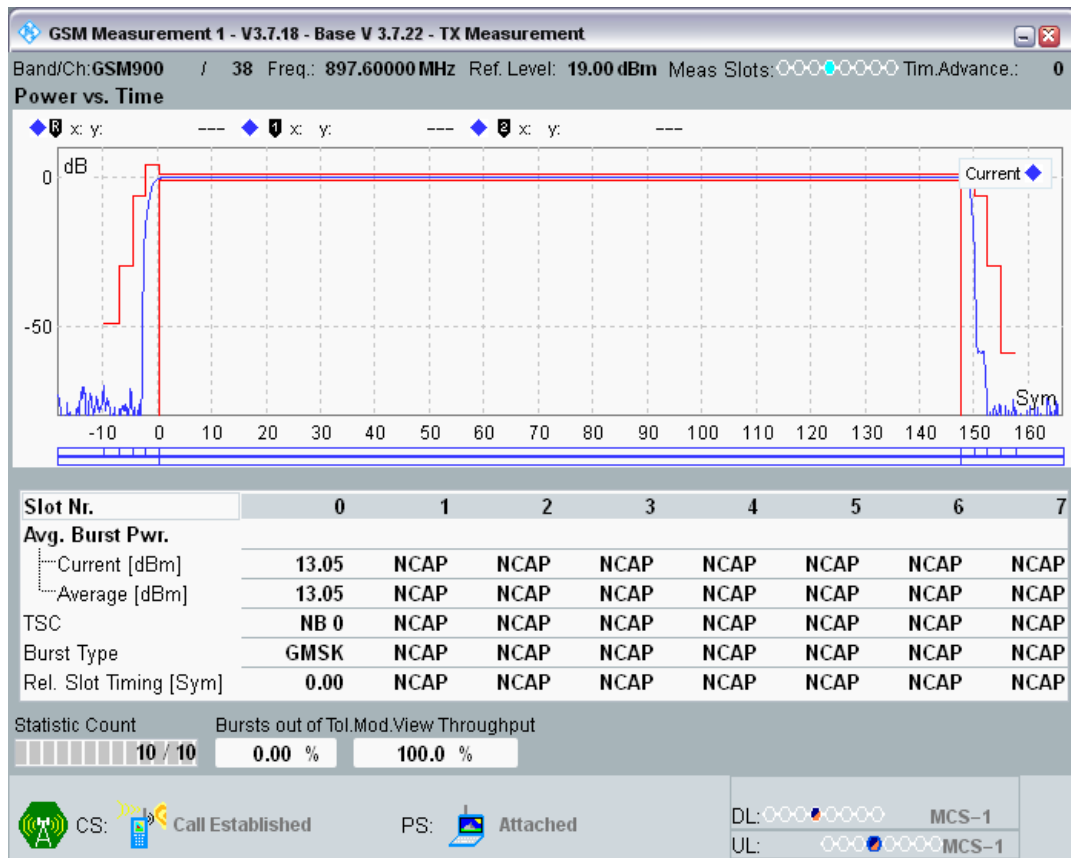


GSM900 Channel=38 PCL=16

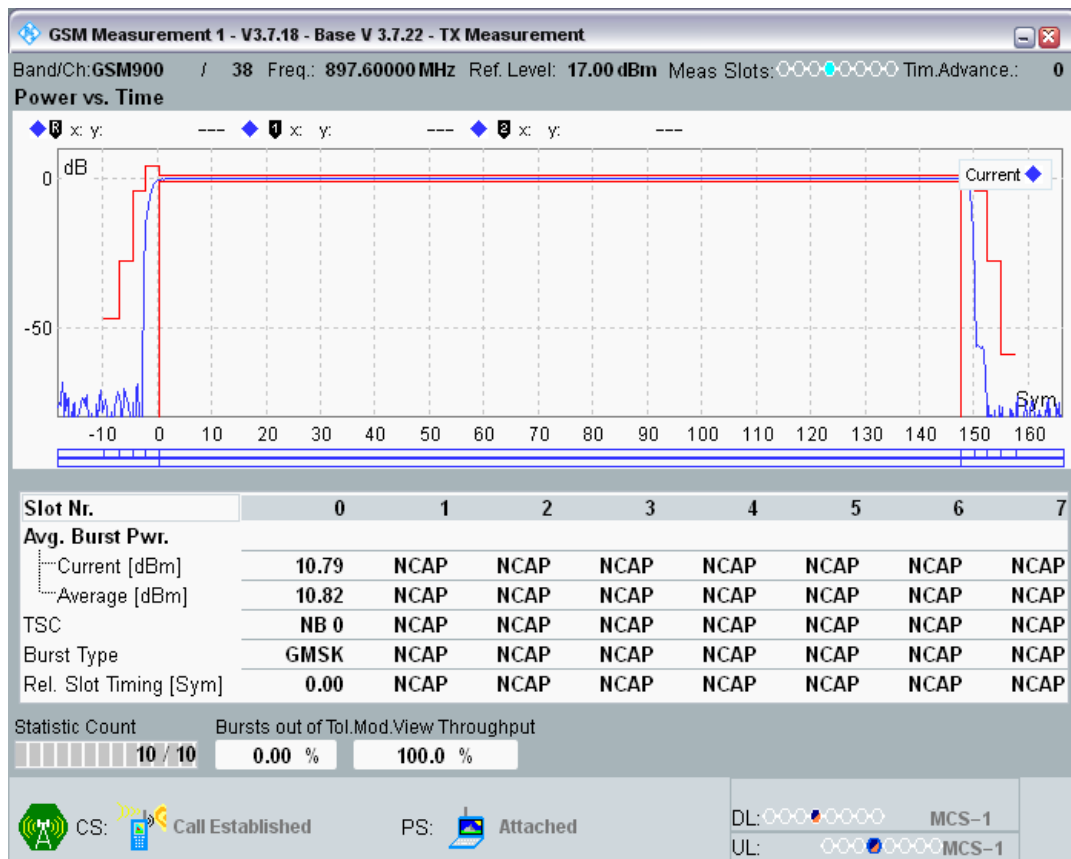


GSM900 Channel=38 PCL=17

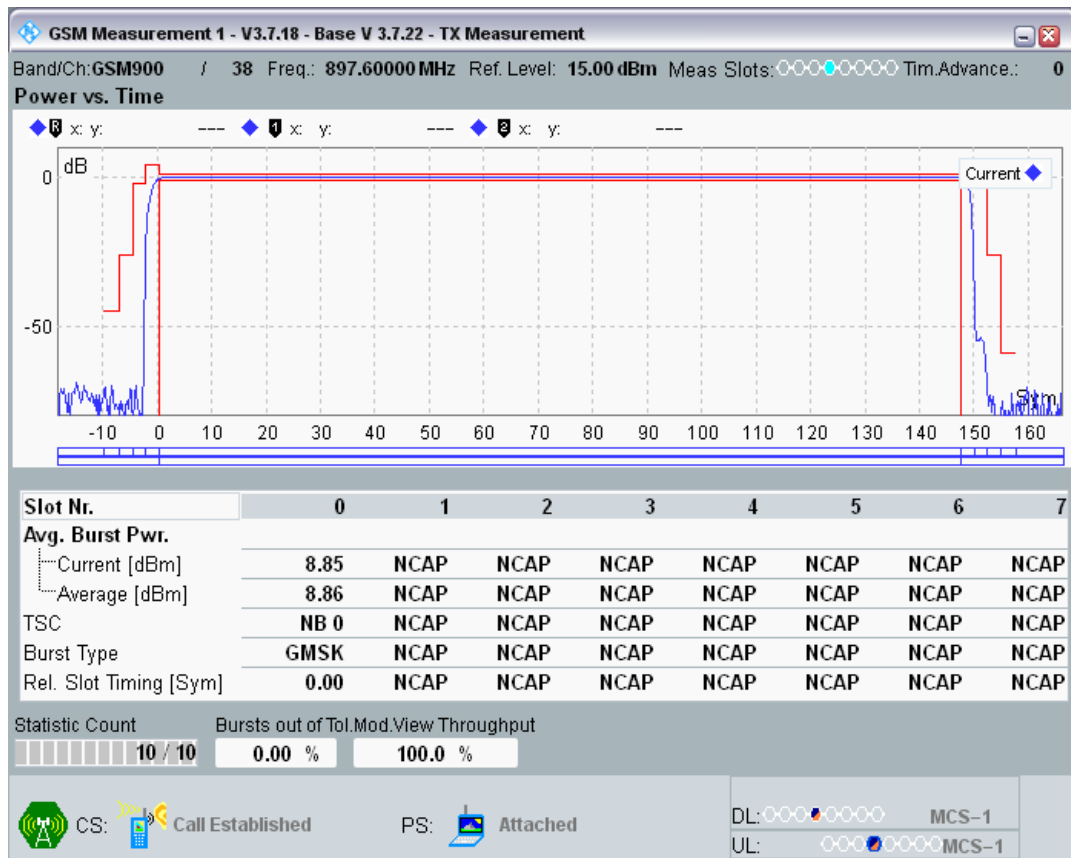


GSM900 Channel=38 PCL=18

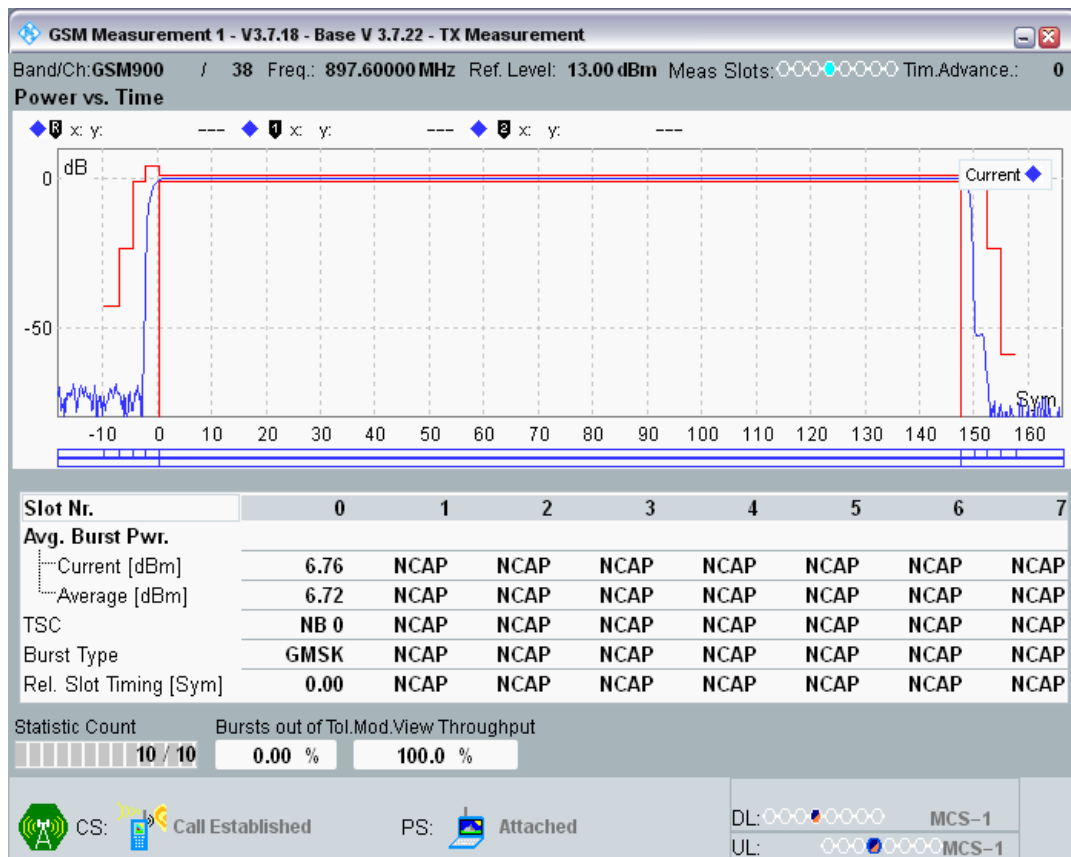


GSM900 Channel=38 PCL=19

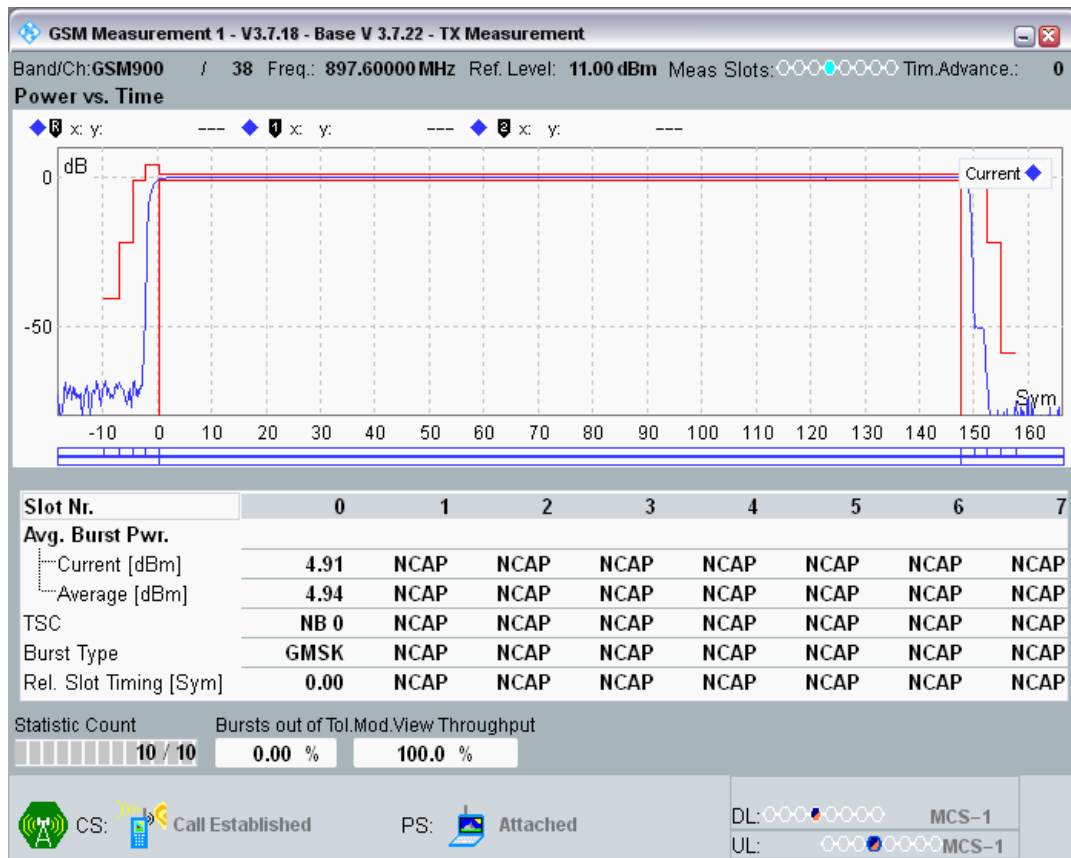


GSM900 Channel=124 PCL=5

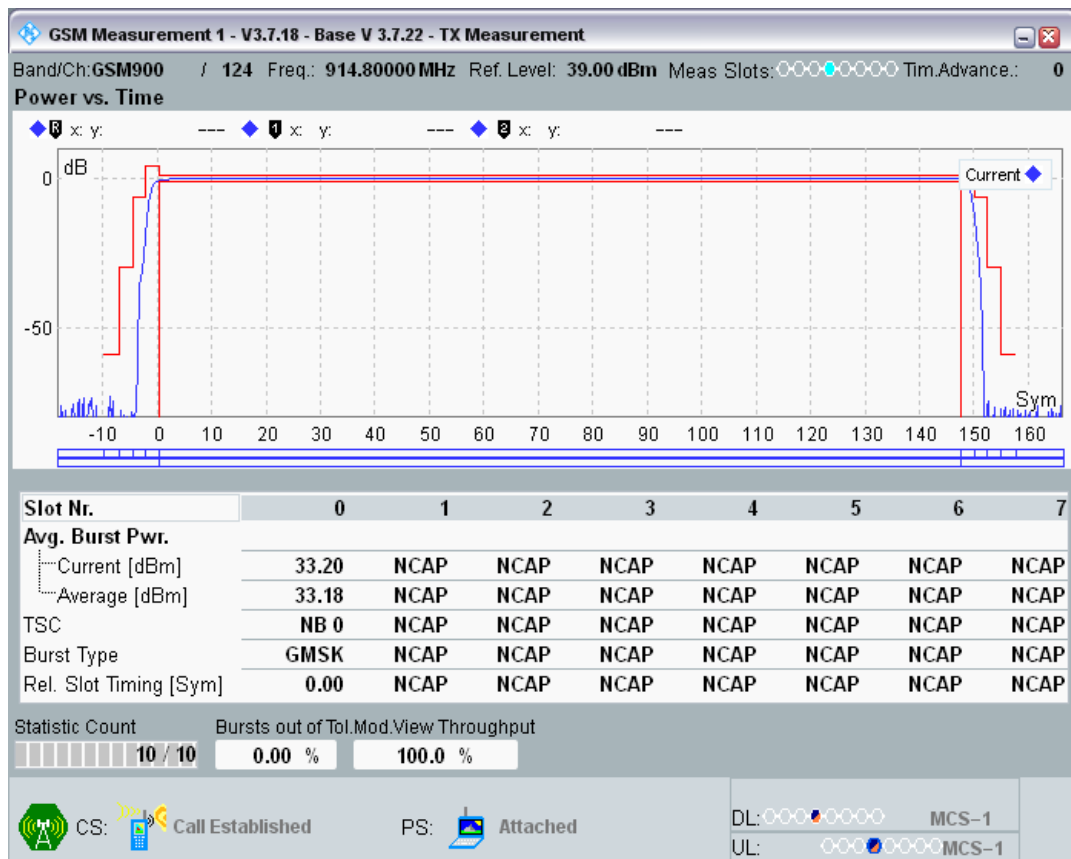

GSM900 Channel=124 PCL=6

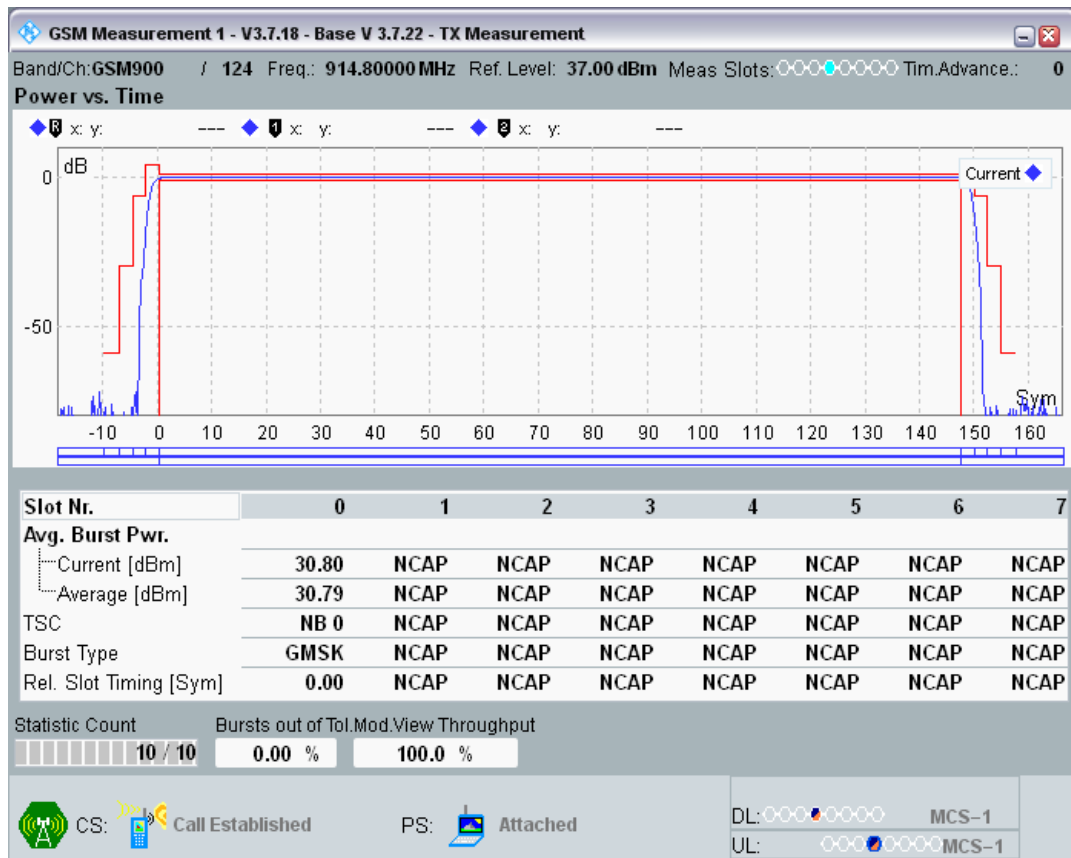


GSM900 Channel=124 PCL=7

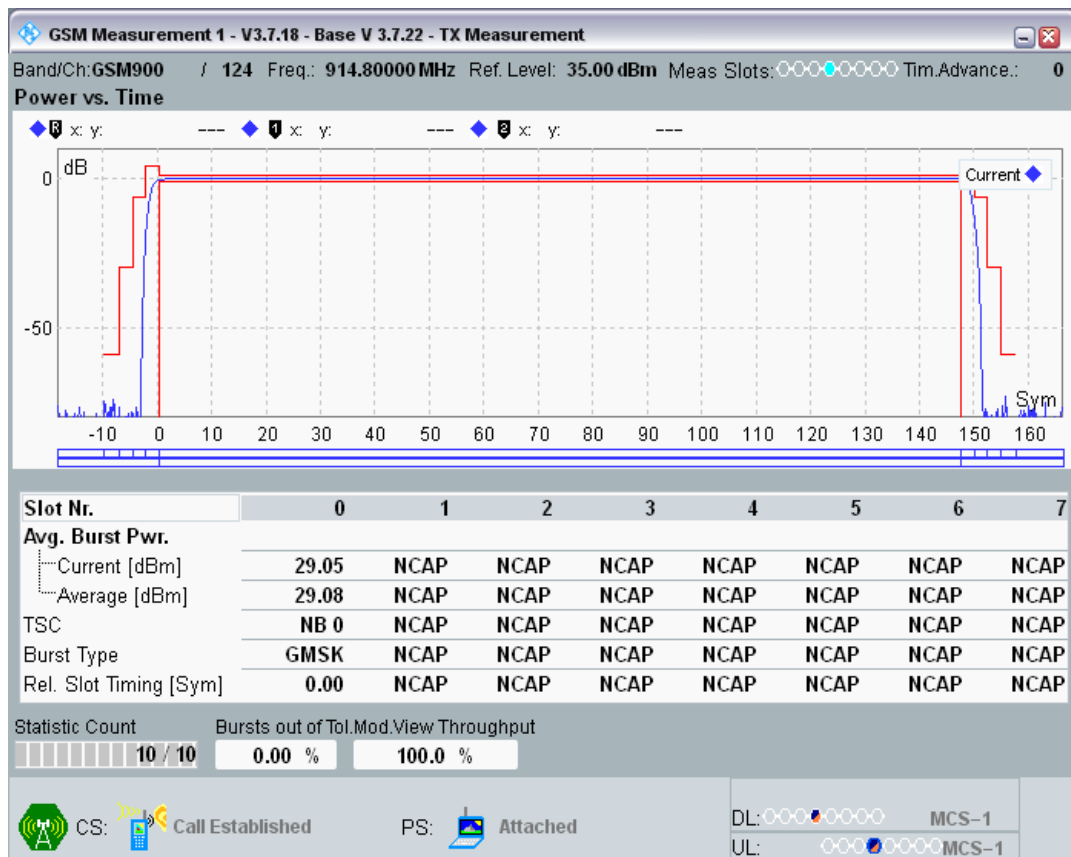


GSM900 Channel=124 PCL=8




GSM900 Channel=124 PCL=9

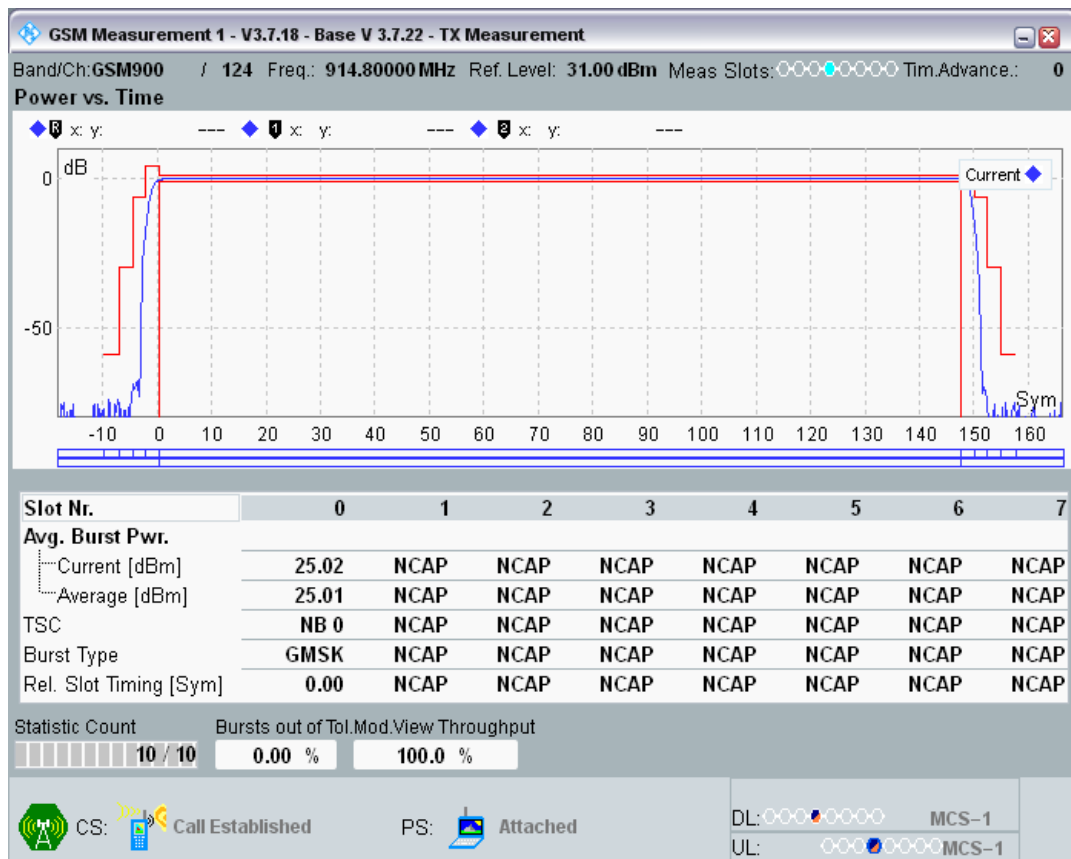


GSM900 Channel=124 PCL=10

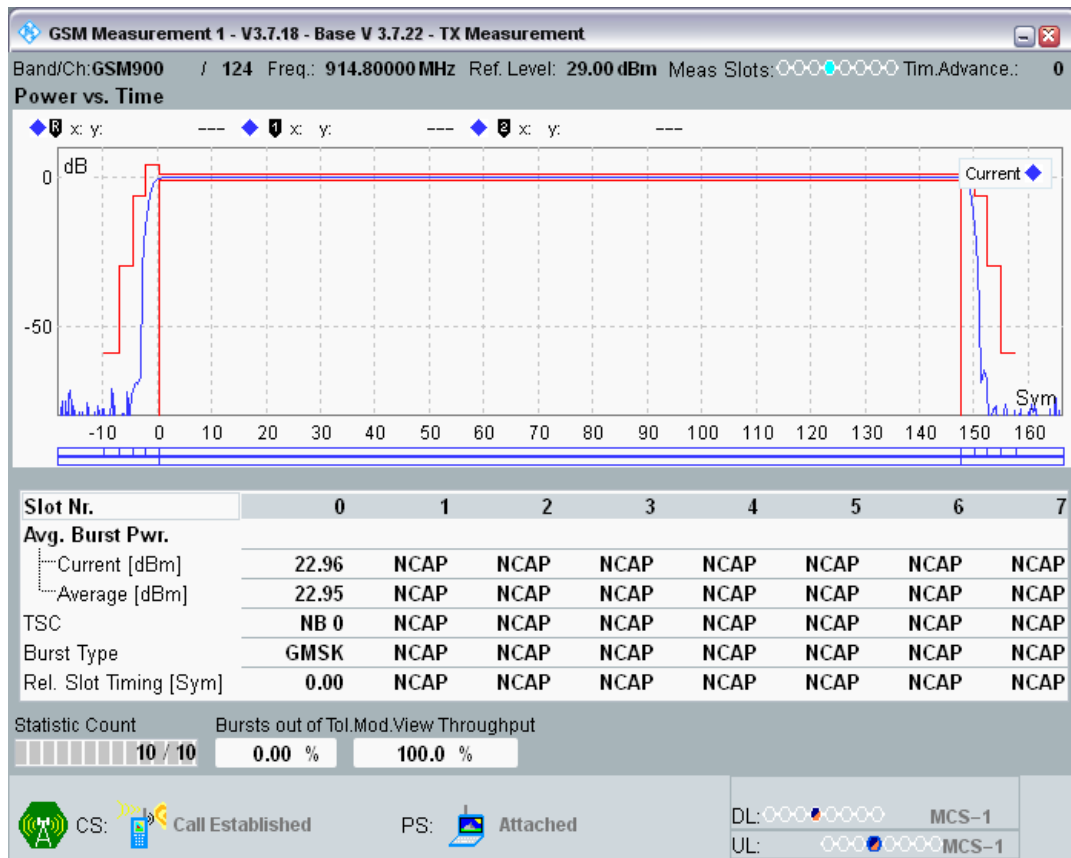


GSM900 Channel=124 PCL=11

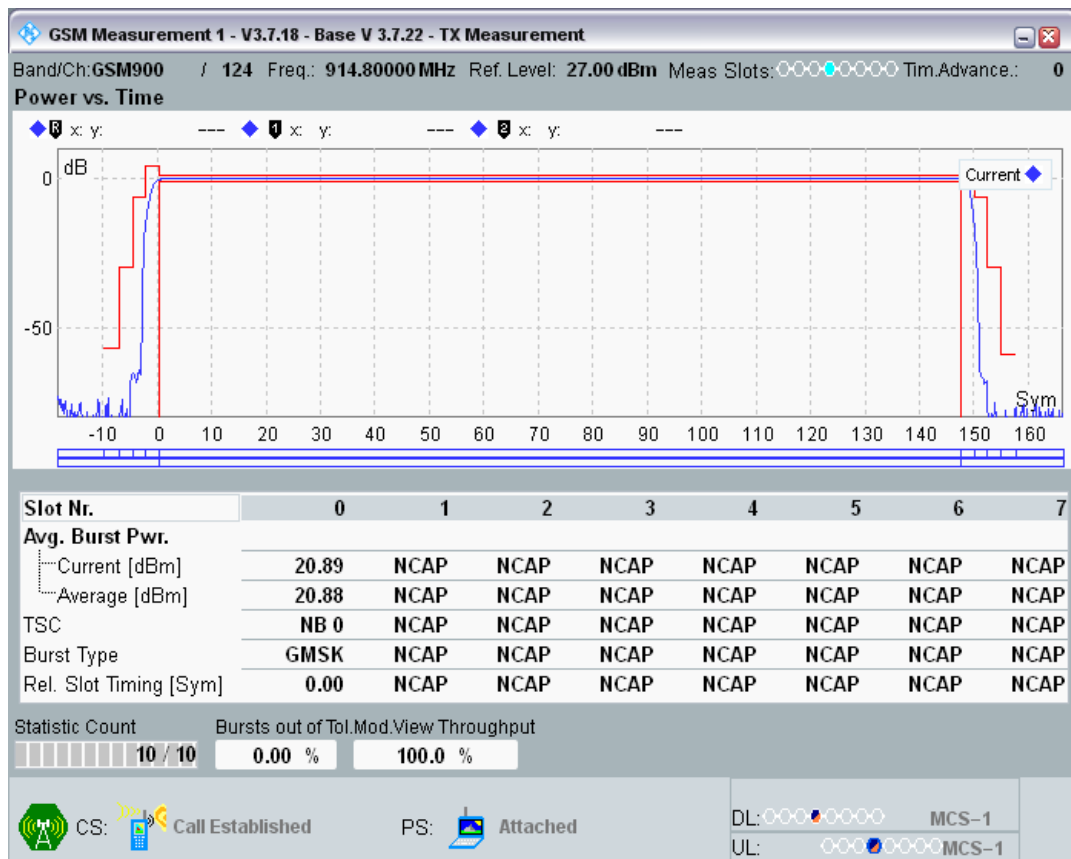


GSM900 Channel=124 PCL=12

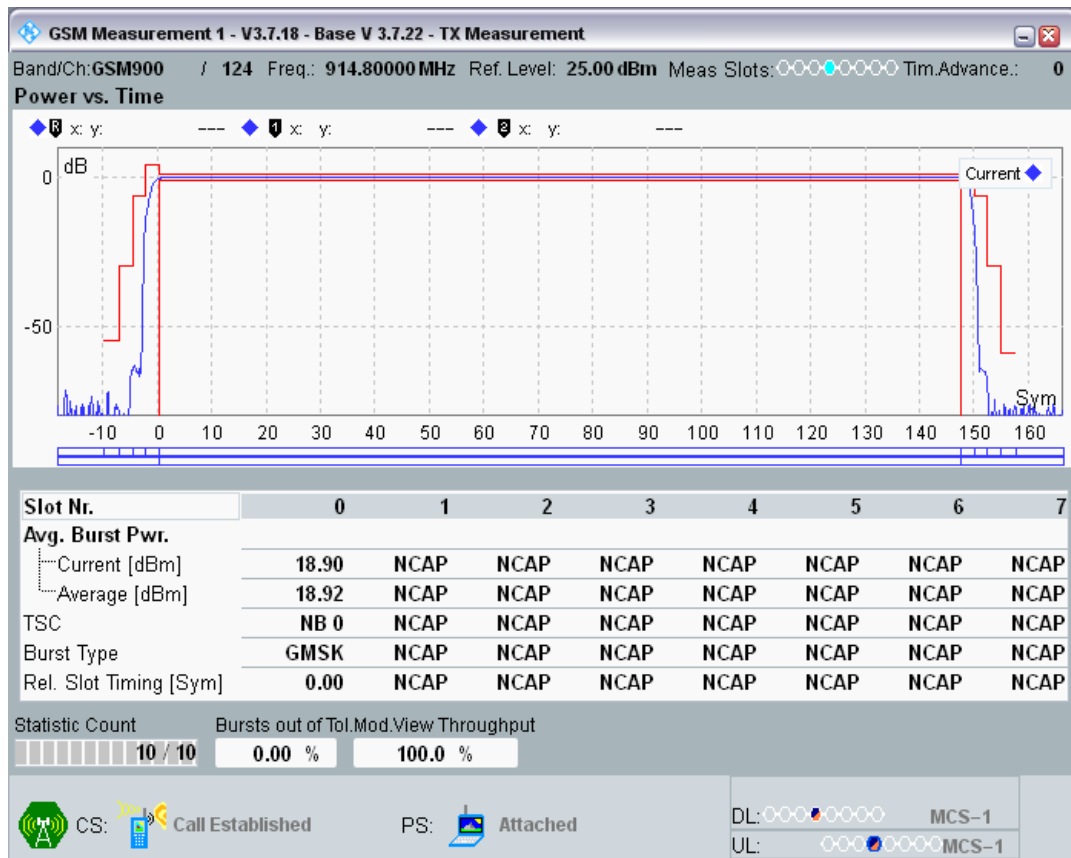


GSM900 Channel=124 PCL=13

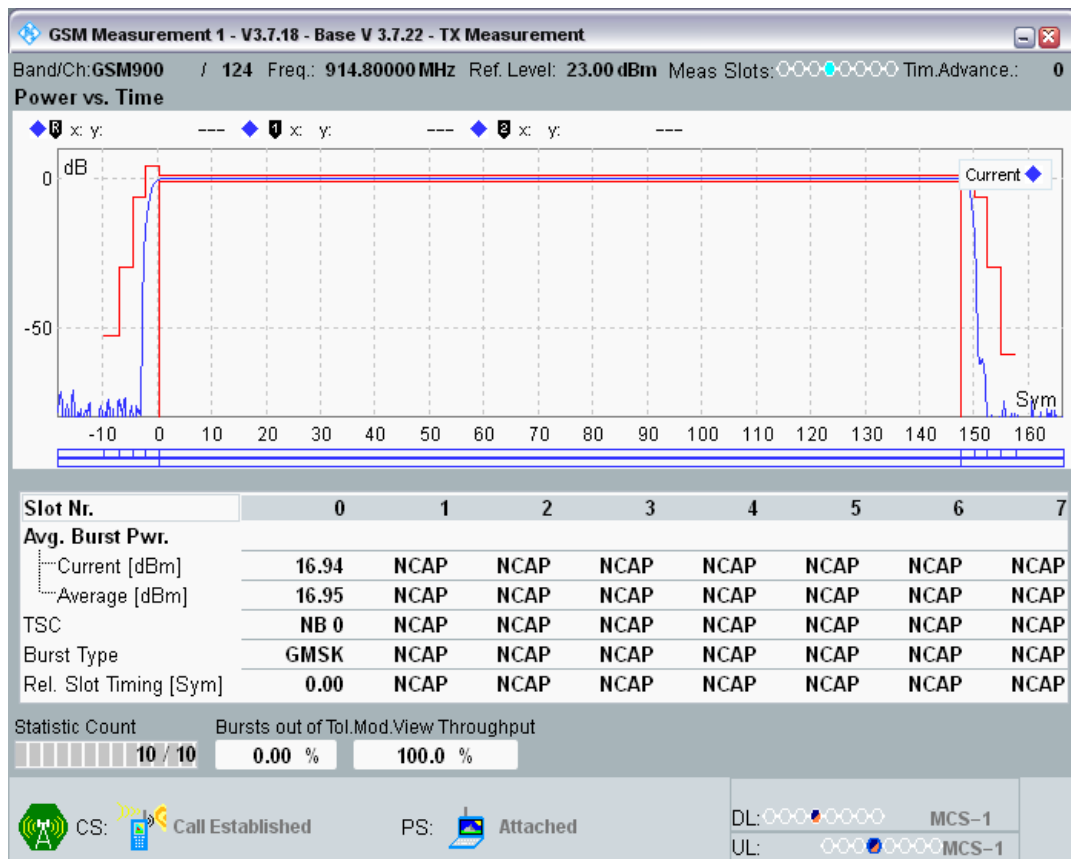


GSM900 Channel=124 PCL=14

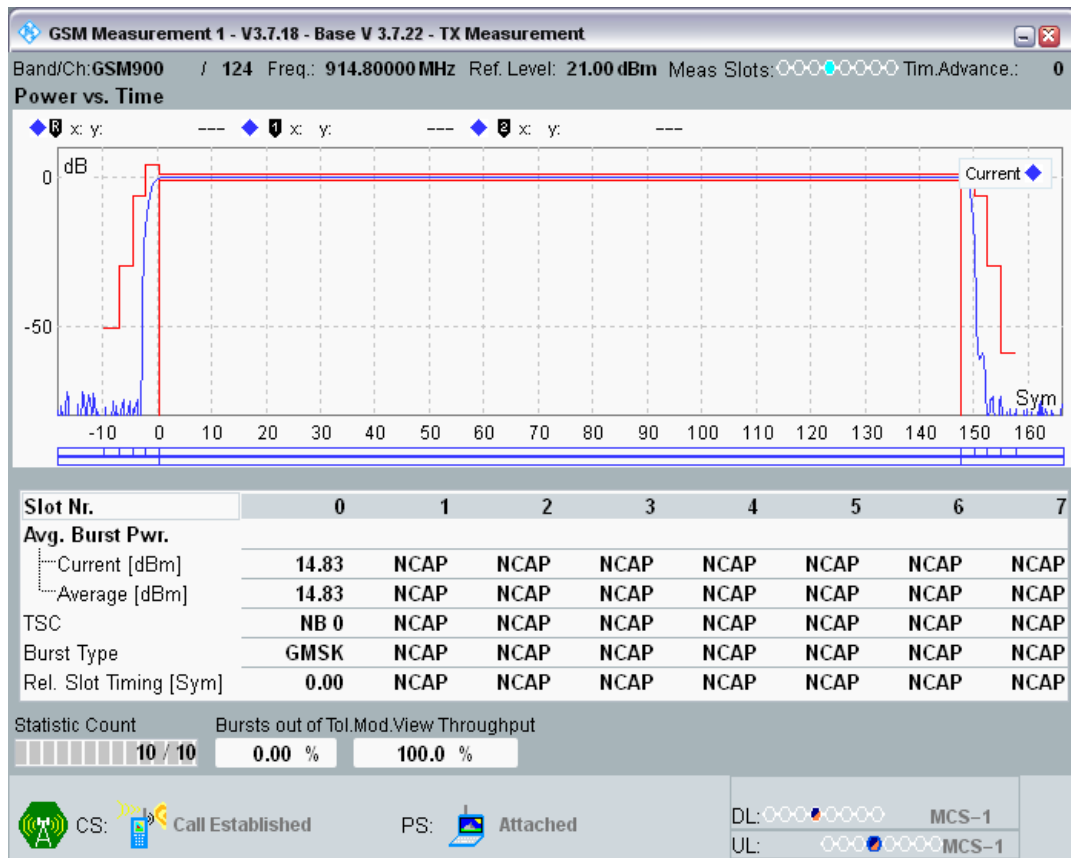


GSM900 Channel=124 PCL=15

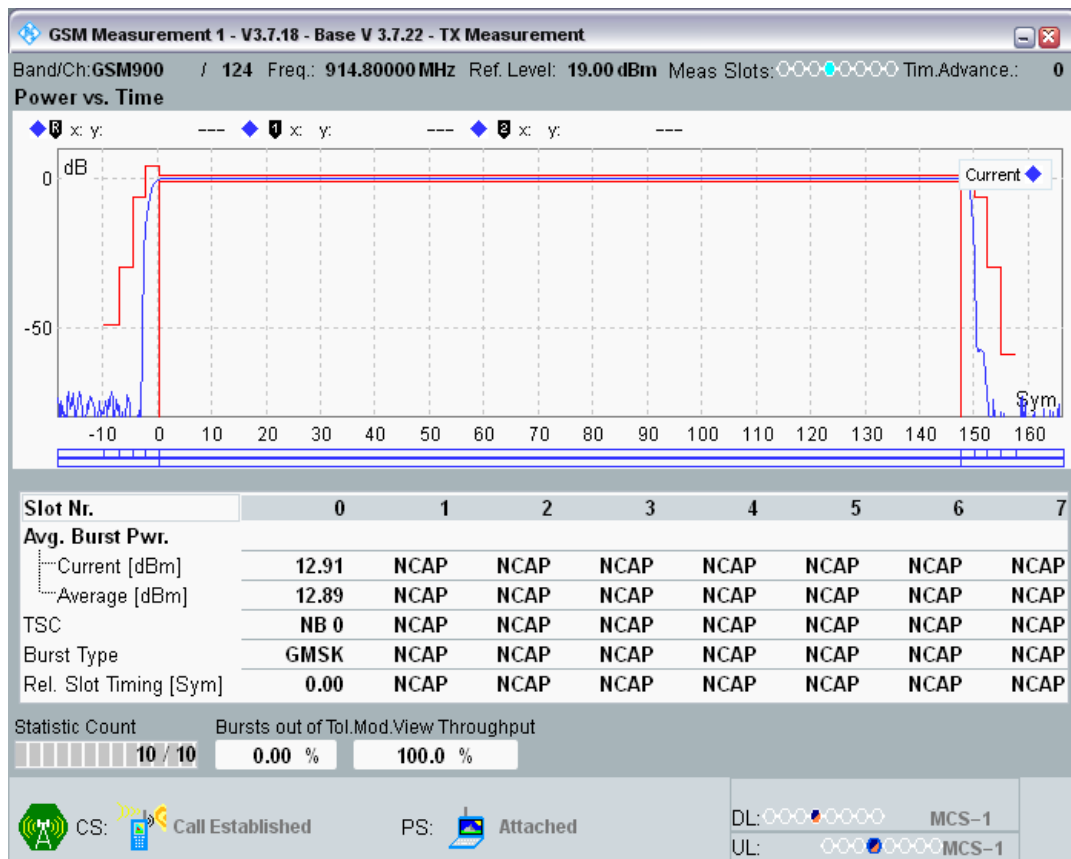


GSM900 Channel=124 PCL=16

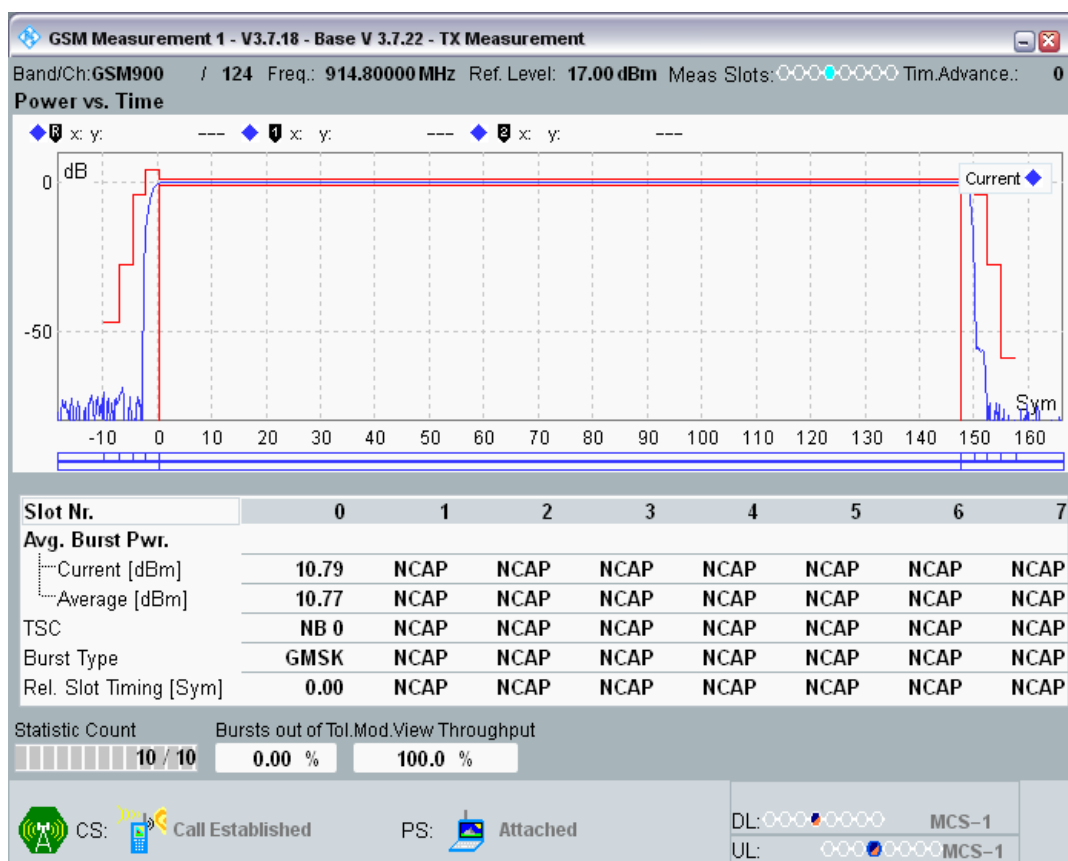


GSM900 Channel=124 PCL=17

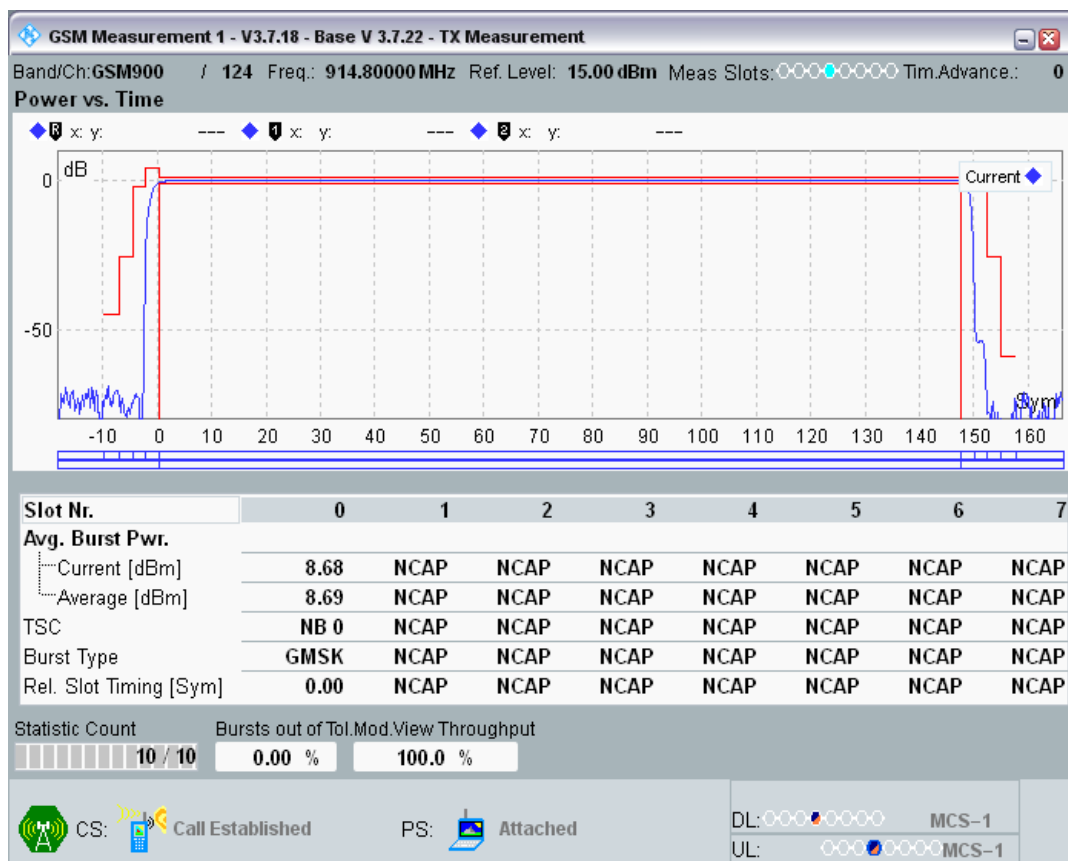

GSM900 Channel=124 PCL=18

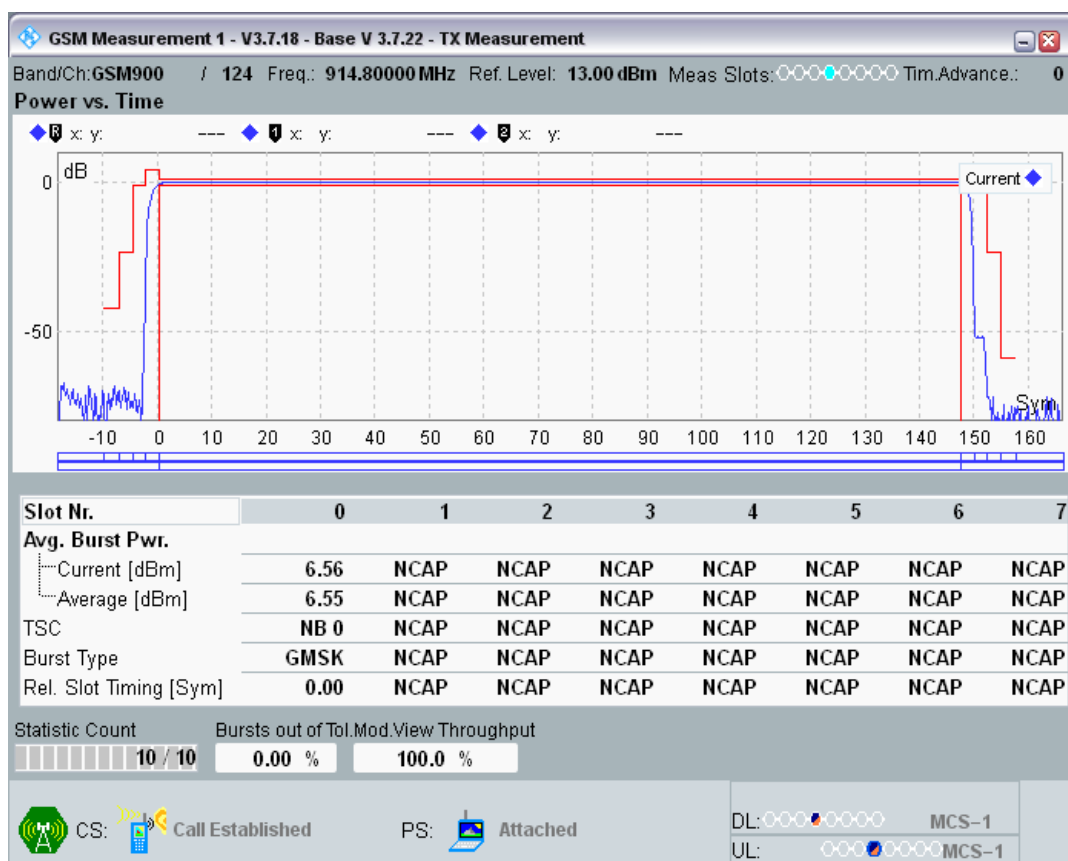

GSM900 Channel=124 PCL=19

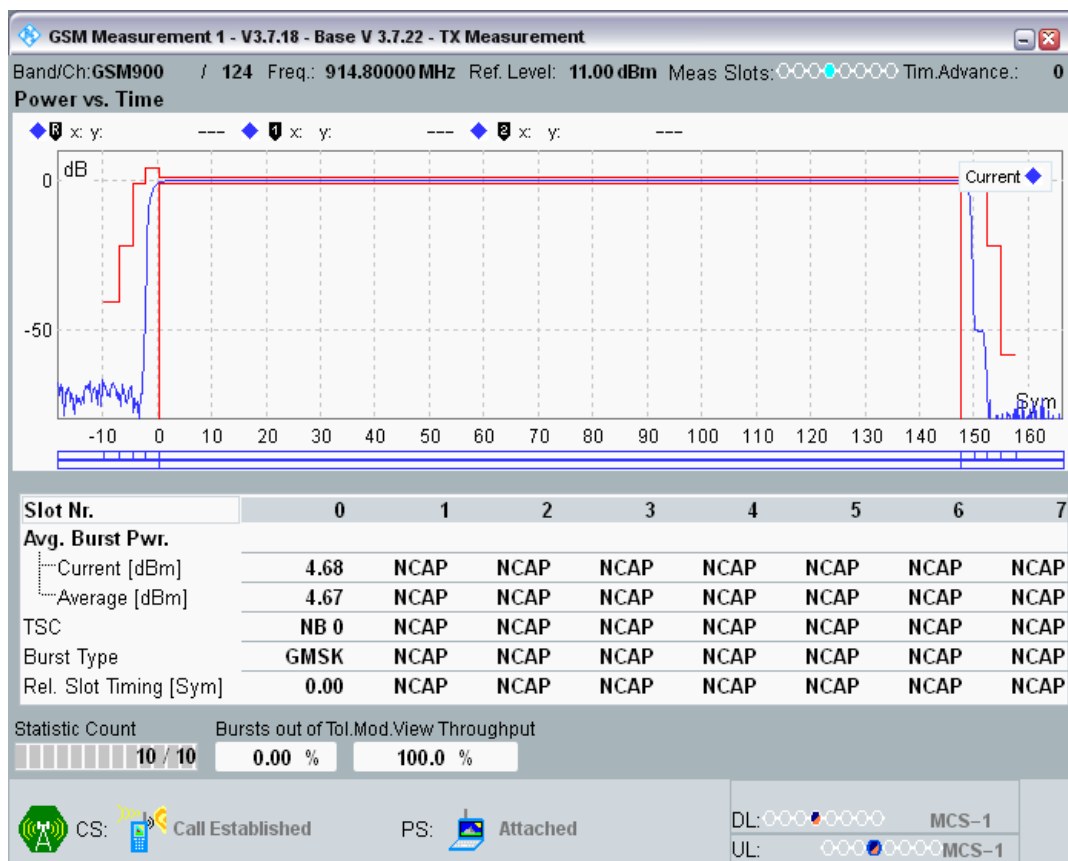

Clause 4.2.6 Transmitter-Modulation Spectrum

Band	Channel	Frequency (MHz)	PCL	Offset (kHz)	Relative Result (dB)	Relative Limit (dB)	Absolute Result (dBm)	Absolute Limit (dBm)	Verdict
GSM1800	512	1710.2	0	-1800	-76.80	-60	-54.49	-55	PASS
GSM1800	512	1710.2	0	-1600	-75.25	-60	-52.93	-55	PASS
GSM1800	512	1710.2	0	-1400	-73.47	-60	-51.16	-55	PASS
GSM1800	512	1710.2	0	-1200	-72.11	-60	-49.80	-55	PASS
GSM1800	512	1710.2	0	-1000	-71.18	-60	-48.87	-55	PASS
GSM1800	512	1710.2	0	-800	-70.22	-60	-47.90	-55	PASS
GSM1800	512	1710.2	0	-600	-68.20	-60	-45.89	-55	PASS
GSM1800	512	1710.2	0	-400	-61.75	-60	-39.43	-36	PASS
GSM1800	512	1710.2	0	-250	-40.03	-33	-17.71	-36	PASS
GSM1800	512	1710.2	0	-200	-36.66	-30	-14.34	-36	PASS
GSM1800	512	1710.2	0	-100	-7.93	0.5	14.39	-36	PASS
GSM1800	512	1710.2	0	100	-8.61	0.5	13.70	-36	PASS
GSM1800	512	1710.2	0	200	-36.65	-30	-14.33	-36	PASS
GSM1800	512	1710.2	0	250	-40.15	-33	-17.83	-36	PASS
GSM1800	512	1710.2	0	400	-61.24	-60	-38.92	-36	PASS
GSM1800	512	1710.2	0	600	-68.75	-60	-46.44	-55	PASS
GSM1800	512	1710.2	0	800	-69.49	-60	-47.18	-55	PASS
GSM1800	512	1710.2	0	1000	-71.27	-60	-48.95	-55	PASS
GSM1800	512	1710.2	0	1200	-72.63	-60	-50.32	-55	PASS
GSM1800	512	1710.2	0	1400	-72.68	-60	-50.36	-55	PASS
GSM1800	512	1710.2	0	1600	-74.76	-60	-52.44	-55	PASS
GSM1800	512	1710.2	0	1800	-76.77	-60	-54.45	-55	PASS
GSM1800	512	1710.2	15	-1800	-67.09	-60	-73.83	-55	PASS
GSM1800	512	1710.2	15	-1600	-65.52	-60	-72.25	-55	PASS
GSM1800	512	1710.2	15	-1400	-65.92	-60	-72.66	-55	PASS
GSM1800	512	1710.2	15	-1200	-65.94	-60	-72.67	-55	PASS
GSM1800	512	1710.2	15	-1000	-65.72	-60	-72.45	-55	PASS
GSM1800	512	1710.2	15	-800	-65.75	-60	-72.48	-55	PASS
GSM1800	512	1710.2	15	-600	-65.01	-60	-71.74	-55	PASS
GSM1800	512	1710.2	15	-400	-59.72	-60	-66.45	-36	PASS
GSM1800	512	1710.2	15	-250	-41.03	-33	-47.76	-36	PASS
GSM1800	512	1710.2	15	-200	-36.19	-30	-42.92	-36	PASS
GSM1800	512	1710.2	15	-100	-8.48	0.5	-15.21	-36	PASS
GSM1800	512	1710.2	15	100	-8.13	0.5	-14.86	-36	PASS
GSM1800	512	1710.2	15	200	-36.08	-30	-42.81	-36	PASS
GSM1800	512	1710.2	15	250	-39.58	-33	-46.31	-36	PASS
GSM1800	512	1710.2	15	400	-59.68	-60	-66.42	-36	PASS
GSM1800	512	1710.2	15	600	-65.20	-60	-71.93	-55	PASS
GSM1800	512	1710.2	15	800	-64.94	-60	-71.67	-55	PASS
GSM1800	512	1710.2	15	1000	-66.17	-60	-72.90	-55	PASS
GSM1800	512	1710.2	15	1200	-65.73	-60	-72.46	-55	PASS

GSM1800	512	1710.2	15	1400	-65.74	-60	-72.48	-55	PASS
GSM1800	512	1710.2	15	1600	-65.47	-60	-72.20	-55	PASS
GSM1800	512	1710.2	15	1800	-67.31	-60	-74.04	-55	PASS
GSM1800	698	1747.4	0	-1800	-78.19	-60	-55.17	-55	PASS
GSM1800	698	1747.4	0	-1600	-76.61	-60	-53.59	-55	PASS
GSM1800	698	1747.4	0	-1400	-73.95	-60	-50.93	-55	PASS
GSM1800	698	1747.4	0	-1200	-73.73	-60	-50.71	-55	PASS
GSM1800	698	1747.4	0	-1000	-71.89	-60	-48.87	-55	PASS
GSM1800	698	1747.4	0	-800	-71.65	-60	-48.63	-55	PASS
GSM1800	698	1747.4	0	-600	-69.90	-60	-46.88	-55	PASS
GSM1800	698	1747.4	0	-400	-62.47	-60	-39.45	-36	PASS
GSM1800	698	1747.4	0	-250	-41.42	-33	-18.40	-36	PASS
GSM1800	698	1747.4	0	-200	-36.73	-30	-13.71	-36	PASS
GSM1800	698	1747.4	0	-100	-8.75	0.5	14.27	-36	PASS
GSM1800	698	1747.4	0	100	-7.45	0.5	15.57	-36	PASS
GSM1800	698	1747.4	0	200	-36.07	-30	-13.05	-36	PASS
GSM1800	698	1747.4	0	250	-41.80	-33	-18.78	-36	PASS
GSM1800	698	1747.4	0	400	-63.63	-60	-40.61	-36	PASS
GSM1800	698	1747.4	0	600	-69.64	-60	-46.62	-55	PASS
GSM1800	698	1747.4	0	800	-71.13	-60	-48.11	-55	PASS
GSM1800	698	1747.4	0	1000	-71.12	-60	-48.10	-55	PASS
GSM1800	698	1747.4	0	1200	-72.08	-60	-49.06	-55	PASS
GSM1800	698	1747.4	0	1400	-73.43	-60	-50.41	-55	PASS
GSM1800	698	1747.4	0	1600	-76.90	-60	-53.88	-55	PASS
GSM1800	698	1747.4	0	1800	-77.81	-60	-54.79	-55	PASS
GSM1800	698	1747.4	15	-1800	-67.86	-60	-74.08	-55	PASS
GSM1800	698	1747.4	15	-1600	-67.02	-60	-73.24	-55	PASS
GSM1800	698	1747.4	15	-1400	-66.93	-60	-73.16	-55	PASS
GSM1800	698	1747.4	15	-1200	-66.12	-60	-72.34	-55	PASS
GSM1800	698	1747.4	15	-1000	-67.89	-60	-74.11	-55	PASS
GSM1800	698	1747.4	15	-800	-65.69	-60	-71.91	-55	PASS
GSM1800	698	1747.4	15	-600	-66.03	-60	-72.26	-55	PASS
GSM1800	698	1747.4	15	-400	-60.33	-60	-66.55	-36	PASS
GSM1800	698	1747.4	15	-250	-40.55	-33	-46.78	-36	PASS
GSM1800	698	1747.4	15	-200	-36.63	-30	-42.86	-36	PASS
GSM1800	698	1747.4	15	-100	-9.10	0.5	-15.32	-36	PASS
GSM1800	698	1747.4	15	100	-9.09	0.5	-15.31	-36	PASS
GSM1800	698	1747.4	15	200	-37.09	-30	-43.31	-36	PASS
GSM1800	698	1747.4	15	250	-40.54	-33	-46.77	-36	PASS
GSM1800	698	1747.4	15	400	-61.10	-60	-67.32	-36	PASS
GSM1800	698	1747.4	15	600	-66.40	-60	-72.62	-55	PASS
GSM1800	698	1747.4	15	800	-65.34	-60	-71.56	-55	PASS
GSM1800	698	1747.4	15	1000	-67.41	-60	-73.64	-55	PASS
GSM1800	698	1747.4	15	1200	-66.29	-60	-72.51	-55	PASS

GSM1800	698	1747.4	15	1400	-66.99	-60	-73.22	-55	PASS
GSM1800	698	1747.4	15	1600	-67.60	-60	-73.83	-55	PASS
GSM1800	698	1747.4	15	1800	-67.89	-60	-74.11	-55	PASS
GSM1800	885	1784.8	0	-1800	-78.32	-60	-55.10	-55	PASS
GSM1800	885	1784.8	0	-1600	-75.82	-60	-52.60	-55	PASS
GSM1800	885	1784.8	0	-1400	-73.99	-60	-50.78	-55	PASS
GSM1800	885	1784.8	0	-1200	-73.14	-60	-49.92	-55	PASS
GSM1800	885	1784.8	0	-1000	-71.41	-60	-48.20	-55	PASS
GSM1800	885	1784.8	0	-800	-71.75	-60	-48.53	-55	PASS
GSM1800	885	1784.8	0	-600	-69.81	-60	-46.59	-55	PASS
GSM1800	885	1784.8	0	-400	-63.33	-60	-40.11	-36	PASS
GSM1800	885	1784.8	0	-250	-39.95	-33	-16.74	-36	PASS
GSM1800	885	1784.8	0	-200	-36.83	-30	-13.61	-36	PASS
GSM1800	885	1784.8	0	-100	-8.64	0.5	14.58	-36	PASS
GSM1800	885	1784.8	0	100	-8.69	0.5	14.53	-36	PASS
GSM1800	885	1784.8	0	200	-36.67	-30	-13.46	-36	PASS
GSM1800	885	1784.8	0	250	-40.48	-33	-17.26	-36	PASS
GSM1800	885	1784.8	0	400	-63.35	-60	-40.14	-36	PASS
GSM1800	885	1784.8	0	600	-69.81	-60	-46.60	-55	PASS
GSM1800	885	1784.8	0	800	-70.68	-60	-47.46	-55	PASS
GSM1800	885	1784.8	0	1000	-69.69	-60	-46.47	-55	PASS
GSM1800	885	1784.8	0	1200	-73.30	-60	-50.09	-55	PASS
GSM1800	885	1784.8	0	1400	-73.54	-60	-50.32	-55	PASS
GSM1800	885	1784.8	0	1600	-76.23	-60	-53.01	-55	PASS
GSM1800	885	1784.8	0	1800	-77.34	-60	-54.13	-55	PASS
GSM1800	885	1784.8	15	-1800	-68.77	-60	-74.49	-55	PASS
GSM1800	885	1784.8	15	-1600	-66.41	-60	-72.13	-55	PASS
GSM1800	885	1784.8	15	-1400	-67.35	-60	-73.08	-55	PASS
GSM1800	885	1784.8	15	-1200	-66.24	-60	-71.96	-55	PASS
GSM1800	885	1784.8	15	-1000	-67.26	-60	-72.99	-55	PASS
GSM1800	885	1784.8	15	-800	-65.85	-60	-71.58	-55	PASS
GSM1800	885	1784.8	15	-600	-67.05	-60	-72.78	-55	PASS
GSM1800	885	1784.8	15	-400	-61.01	-60	-66.73	-36	PASS
GSM1800	885	1784.8	15	-250	-41.70	-33	-47.43	-36	PASS
GSM1800	885	1784.8	15	-200	-37.04	-30	-42.77	-36	PASS
GSM1800	885	1784.8	15	-100	-9.21	0.5	-14.94	-36	PASS
GSM1800	885	1784.8	15	100	-10.22	0.5	-15.94	-36	PASS
GSM1800	885	1784.8	15	200	-37.40	-30	-43.13	-36	PASS
GSM1800	885	1784.8	15	250	-41.53	-33	-47.25	-36	PASS
GSM1800	885	1784.8	15	400	-62.26	-60	-67.99	-36	PASS
GSM1800	885	1784.8	15	600	-66.91	-60	-72.63	-55	PASS
GSM1800	885	1784.8	15	800	-65.40	-60	-71.12	-55	PASS
GSM1800	885	1784.8	15	1000	-66.94	-60	-72.67	-55	PASS
GSM1800	885	1784.8	15	1200	-66.34	-60	-72.07	-55	PASS

GSM1800	885	1784.8	15	1400	-67.01	-60	-72.73	-55	PASS
GSM1800	885	1784.8	15	1600	-67.39	-60	-73.11	-55	PASS
GSM1800	885	1784.8	15	1800	-68.72	-60	-74.44	-55	PASS
GSM1900	512	1850.2	0	-1800	-79.42	-60	-56.11	-55	PASS
GSM1900	512	1850.2	0	-1600	-77.66	-60	-54.35	-55	PASS
GSM1900	512	1850.2	0	-1400	-76.56	-60	-53.25	-55	PASS
GSM1900	512	1850.2	0	-1200	-74.62	-60	-51.31	-55	PASS
GSM1900	512	1850.2	0	-1000	-75.13	-60	-51.82	-55	PASS
GSM1900	512	1850.2	0	-800	-72.97	-60	-49.66	-55	PASS
GSM1900	512	1850.2	0	-600	-71.46	-60	-48.15	-55	PASS
GSM1900	512	1850.2	0	-400	-64.51	-60	-41.20	-36	PASS
GSM1900	512	1850.2	0	-250	-40.83	-33	-17.52	-36	PASS
GSM1900	512	1850.2	0	-200	-37.47	-30	-14.16	-36	PASS
GSM1900	512	1850.2	0	-100	-8.90	0.5	14.41	-36	PASS
GSM1900	512	1850.2	0	100	-10.30	0.5	13.01	-36	PASS
GSM1900	512	1850.2	0	200	-37.29	-30	-13.98	-36	PASS
GSM1900	512	1850.2	0	250	-40.98	-33	-17.67	-36	PASS
GSM1900	512	1850.2	0	400	-64.52	-60	-41.21	-36	PASS
GSM1900	512	1850.2	0	600	-71.45	-60	-48.14	-55	PASS
GSM1900	512	1850.2	0	800	-72.14	-60	-48.83	-55	PASS
GSM1900	512	1850.2	0	1000	-74.95	-60	-51.64	-55	PASS
GSM1900	512	1850.2	0	1200	-74.74	-60	-51.43	-55	PASS
GSM1900	512	1850.2	0	1400	-76.95	-60	-53.64	-55	PASS
GSM1900	512	1850.2	0	1600	-77.51	-60	-54.20	-55	PASS
GSM1900	512	1850.2	0	1800	-79.74	-60	-56.43	-55	PASS
GSM1900	512	1850.2	15	-1800	-67.08	-60	-74.40	-55	PASS
GSM1900	512	1850.2	15	-1600	-66.69	-60	-74.01	-55	PASS
GSM1900	512	1850.2	15	-1400	-66.09	-60	-73.41	-55	PASS
GSM1900	512	1850.2	15	-1200	-66.26	-60	-73.58	-55	PASS
GSM1900	512	1850.2	15	-1000	-67.68	-60	-75.00	-55	PASS
GSM1900	512	1850.2	15	-800	-65.82	-60	-73.14	-55	PASS
GSM1900	512	1850.2	15	-600	-67.01	-60	-74.32	-55	PASS
GSM1900	512	1850.2	15	-400	-60.20	-60	-67.52	-36	PASS
GSM1900	512	1850.2	15	-250	-40.78	-33	-48.09	-36	PASS
GSM1900	512	1850.2	15	-200	-37.09	-30	-44.41	-36	PASS
GSM1900	512	1850.2	15	-100	-9.30	0.5	-16.62	-36	PASS
GSM1900	512	1850.2	15	100	-9.09	0.5	-16.41	-36	PASS
GSM1900	512	1850.2	15	200	-36.72	-30	-44.04	-36	PASS
GSM1900	512	1850.2	15	250	-40.85	-33	-48.17	-36	PASS
GSM1900	512	1850.2	15	400	-61.76	-60	-69.08	-36	PASS
GSM1900	512	1850.2	15	600	-66.42	-60	-73.74	-55	PASS
GSM1900	512	1850.2	15	800	-66.53	-60	-73.85	-55	PASS
GSM1900	512	1850.2	15	1000	-67.51	-60	-74.83	-55	PASS
GSM1900	512	1850.2	15	1200	-66.23	-60	-73.55	-55	PASS

GSM1900	512	1850.2	15	1400	-66.79	-60	-74.11	-55	PASS
GSM1900	512	1850.2	15	1600	-67.24	-60	-74.55	-55	PASS
GSM1900	512	1850.2	15	1800	-67.09	-60	-74.41	-55	PASS
GSM1900	661	1880	0	-1800	-78.08	-60	-55.09	-55	PASS
GSM1900	661	1880	0	-1600	-77.43	-60	-54.44	-55	PASS
GSM1900	661	1880	0	-1400	-76.69	-60	-53.71	-55	PASS
GSM1900	661	1880	0	-1200	-74.99	-60	-52.00	-55	PASS
GSM1900	661	1880	0	-1000	-74.46	-60	-51.47	-55	PASS
GSM1900	661	1880	0	-800	-72.30	-60	-49.31	-55	PASS
GSM1900	661	1880	0	-600	-70.79	-60	-47.80	-55	PASS
GSM1900	661	1880	0	-400	-63.78	-60	-40.79	-36	PASS
GSM1900	661	1880	0	-250	-40.63	-33	-17.64	-36	PASS
GSM1900	661	1880	0	-200	-36.91	-30	-13.92	-36	PASS
GSM1900	661	1880	0	-100	-9.27	0.5	13.72	-36	PASS
GSM1900	661	1880	0	100	-9.60	0.5	13.39	-36	PASS
GSM1900	661	1880	0	200	-36.50	-30	-13.51	-36	PASS
GSM1900	661	1880	0	250	-41.43	-33	-18.45	-36	PASS
GSM1900	661	1880	0	400	-63.88	-60	-40.89	-36	PASS
GSM1900	661	1880	0	600	-70.40	-60	-47.41	-55	PASS
GSM1900	661	1880	0	800	-70.88	-60	-47.89	-55	PASS
GSM1900	661	1880	0	1000	-74.19	-60	-51.21	-55	PASS
GSM1900	661	1880	0	1200	-73.96	-60	-50.97	-55	PASS
GSM1900	661	1880	0	1400	-76.09	-60	-53.11	-55	PASS
GSM1900	661	1880	0	1600	-77.09	-60	-54.10	-55	PASS
GSM1900	661	1880	0	1800	-78.53	-60	-55.54	-55	PASS
GSM1900	661	1880	15	-1800	-68.09	-60	-75.33	-55	PASS
GSM1900	661	1880	15	-1600	-68.18	-60	-75.42	-55	PASS
GSM1900	661	1880	15	-1400	-65.87	-60	-73.11	-55	PASS
GSM1900	661	1880	15	-1200	-66.92	-60	-74.16	-55	PASS
GSM1900	661	1880	15	-1000	-66.57	-60	-73.81	-55	PASS
GSM1900	661	1880	15	-800	-66.68	-60	-73.93	-55	PASS
GSM1900	661	1880	15	-600	-66.85	-60	-74.09	-55	PASS
GSM1900	661	1880	15	-400	-60.36	-60	-67.60	-36	PASS
GSM1900	661	1880	15	-250	-41.08	-33	-48.32	-36	PASS
GSM1900	661	1880	15	-200	-36.68	-30	-43.92	-36	PASS
GSM1900	661	1880	15	-100	-8.70	0.5	-15.94	-36	PASS
GSM1900	661	1880	15	100	-8.70	0.5	-15.94	-36	PASS
GSM1900	661	1880	15	200	-36.45	-30	-43.69	-36	PASS
GSM1900	661	1880	15	250	-40.77	-33	-48.01	-36	PASS
GSM1900	661	1880	15	400	-62.40	-60	-69.65	-36	PASS
GSM1900	661	1880	15	600	-66.99	-60	-74.23	-55	PASS
GSM1900	661	1880	15	800	-66.59	-60	-73.83	-55	PASS
GSM1900	661	1880	15	1000	-66.28	-60	-73.53	-55	PASS
GSM1900	661	1880	15	1200	-66.86	-60	-74.10	-55	PASS

GSM1900	661	1880	15	1400	-65.46	-60	-72.70	-55	PASS
GSM1900	661	1880	15	1600	-67.63	-60	-74.87	-55	PASS
GSM1900	661	1880	15	1800	-66.91	-60	-74.15	-55	PASS
GSM1900	810	1909.8	0	-1800	-78.22	-60	-55.58	-55	PASS
GSM1900	810	1909.8	0	-1600	-76.98	-60	-54.34	-55	PASS
GSM1900	810	1909.8	0	-1400	-75.66	-60	-53.02	-55	PASS
GSM1900	810	1909.8	0	-1200	-73.72	-60	-51.08	-55	PASS
GSM1900	810	1909.8	0	-1000	-73.55	-60	-50.91	-55	PASS
GSM1900	810	1909.8	0	-800	-70.99	-60	-48.35	-55	PASS
GSM1900	810	1909.8	0	-600	-69.67	-60	-47.03	-55	PASS
GSM1900	810	1909.8	0	-400	-63.14	-60	-40.50	-36	PASS
GSM1900	810	1909.8	0	-250	-40.23	-33	-17.59	-36	PASS
GSM1900	810	1909.8	0	-200	-36.74	-30	-14.10	-36	PASS
GSM1900	810	1909.8	0	-100	-8.62	0.5	14.02	-36	PASS
GSM1900	810	1909.8	0	100	-8.95	0.5	13.69	-36	PASS
GSM1900	810	1909.8	0	200	-36.37	-30	-13.73	-36	PASS
GSM1900	810	1909.8	0	250	-40.73	-33	-18.09	-36	PASS
GSM1900	810	1909.8	0	400	-63.11	-60	-40.47	-36	PASS
GSM1900	810	1909.8	0	600	-69.47	-60	-46.83	-55	PASS
GSM1900	810	1909.8	0	800	-71.04	-60	-48.40	-55	PASS
GSM1900	810	1909.8	0	1000	-73.51	-60	-50.87	-55	PASS
GSM1900	810	1909.8	0	1200	-73.13	-60	-50.49	-55	PASS
GSM1900	810	1909.8	0	1400	-76.18	-60	-53.54	-55	PASS
GSM1900	810	1909.8	0	1600	-76.86	-60	-54.22	-55	PASS
GSM1900	810	1909.8	0	1800	-78.86	-60	-56.22	-55	PASS
GSM1900	810	1909.8	15	-1800	-66.40	-60	-73.97	-55	PASS
GSM1900	810	1909.8	15	-1600	-67.07	-60	-74.64	-55	PASS
GSM1900	810	1909.8	15	-1400	-65.66	-60	-73.23	-55	PASS
GSM1900	810	1909.8	15	-1200	-66.55	-60	-74.12	-55	PASS
GSM1900	810	1909.8	15	-1000	-66.71	-60	-74.28	-55	PASS
GSM1900	810	1909.8	15	-800	-65.58	-60	-73.14	-55	PASS
GSM1900	810	1909.8	15	-600	-66.49	-60	-74.06	-55	PASS
GSM1900	810	1909.8	15	-400	-60.43	-60	-68.00	-36	PASS
GSM1900	810	1909.8	15	-250	-41.16	-33	-48.73	-36	PASS
GSM1900	810	1909.8	15	-200	-36.31	-30	-43.87	-36	PASS
GSM1900	810	1909.8	15	-100	-8.77	0.5	-16.33	-36	PASS
GSM1900	810	1909.8	15	100	-8.02	0.5	-15.58	-36	PASS
GSM1900	810	1909.8	15	200	-36.34	-30	-43.90	-36	PASS
GSM1900	810	1909.8	15	250	-40.66	-33	-48.23	-36	PASS
GSM1900	810	1909.8	15	400	-61.62	-60	-69.18	-36	PASS
GSM1900	810	1909.8	15	600	-65.80	-60	-73.37	-55	PASS
GSM1900	810	1909.8	15	800	-65.95	-60	-73.51	-55	PASS
GSM1900	810	1909.8	15	1000	-66.72	-60	-74.29	-55	PASS
GSM1900	810	1909.8	15	1200	-66.53	-60	-74.10	-55	PASS

GSM1900	810	1909.8	15	1400	-65.30	-60	-72.87	-55	PASS
GSM1900	810	1909.8	15	1600	-66.89	-60	-74.46	-55	PASS
GSM1900	810	1909.8	15	1800	-66.94	-60	-74.51	-55	PASS
GSM850	128	824.2	5	-1800	-78.60	-60	-53.44	-51	PASS
GSM850	128	824.2	5	-1600	-77.38	-60	-52.22	-51	PASS
GSM850	128	824.2	5	-1400	-76.34	-60	-51.18	-51	PASS
GSM850	128	824.2	5	-1200	-74.94	-60	-49.78	-51	PASS
GSM850	128	824.2	5	-1000	-72.65	-60	-47.49	-51	PASS
GSM850	128	824.2	5	-800	-72.72	-60	-47.57	-51	PASS
GSM850	128	824.2	5	-600	-71.73	-60	-46.58	-51	PASS
GSM850	128	824.2	5	-400	-65.33	-60	-40.17	-36	PASS
GSM850	128	824.2	5	-250	-40.31	-33	-15.15	-36	PASS
GSM850	128	824.2	5	-200	-36.12	-30	-10.97	-36	PASS
GSM850	128	824.2	5	-100	-7.66	0.5	17.50	-36	PASS
GSM850	128	824.2	5	100	-7.68	0.5	17.48	-36	PASS
GSM850	128	824.2	5	200	-35.86	-30	-10.70	-36	PASS
GSM850	128	824.2	5	250	-41.75	-33	-16.60	-36	PASS
GSM850	128	824.2	5	400	-66.22	-60	-41.06	-36	PASS
GSM850	128	824.2	5	600	-71.79	-60	-46.64	-51	PASS
GSM850	128	824.2	5	800	-71.68	-60	-46.52	-51	PASS
GSM850	128	824.2	5	1000	-72.74	-60	-47.59	-51	PASS
GSM850	128	824.2	5	1200	-73.12	-60	-47.96	-51	PASS
GSM850	128	824.2	5	1400	-74.86	-60	-49.70	-51	PASS
GSM850	128	824.2	5	1600	-77.64	-60	-52.48	-51	PASS
GSM850	128	824.2	5	1800	-79.16	-60	-54.00	-51	PASS
GSM850	128	824.2	19	-1800	-67.70	-60	-69.67	-51	PASS
GSM850	128	824.2	19	-1600	-65.71	-60	-67.68	-51	PASS
GSM850	128	824.2	19	-1400	-62.36	-60	-64.33	-51	PASS
GSM850	128	824.2	19	-1200	-65.49	-60	-67.46	-51	PASS
GSM850	128	824.2	19	-1000	-60.74	-60	-62.71	-51	PASS
GSM850	128	824.2	19	-800	-62.99	-60	-64.96	-51	PASS
GSM850	128	824.2	19	-600	-63.57	-60	-65.54	-51	PASS
GSM850	128	824.2	19	-400	-54.61	-60	-56.58	-36	PASS
GSM850	128	824.2	19	-250	-40.40	-33	-42.37	-36	PASS
GSM850	128	824.2	19	-200	-36.98	-30	-38.95	-36	PASS
GSM850	128	824.2	19	-100	-8.19	0.5	-10.16	-36	PASS
GSM850	128	824.2	19	100	-8.09	0.5	-10.07	-36	PASS
GSM850	128	824.2	19	200	-36.88	-30	-38.86	-36	PASS
GSM850	128	824.2	19	250	-41.75	-33	-43.72	-36	PASS
GSM850	128	824.2	19	400	-54.70	-60	-56.67	-36	PASS
GSM850	128	824.2	19	600	-63.37	-60	-65.34	-51	PASS
GSM850	128	824.2	19	800	-62.96	-60	-64.94	-51	PASS
GSM850	128	824.2	19	1000	-60.49	-60	-62.47	-51	PASS
GSM850	128	824.2	19	1200	-65.91	-60	-67.88	-51	PASS

GSM850	128	824.2	19	1400	-62.20	-60	-64.17	-51	PASS
GSM850	128	824.2	19	1600	-65.52	-60	-67.49	-51	PASS
GSM850	128	824.2	19	1800	-67.52	-60	-69.49	-51	PASS
GSM850	190	836.6	5	-1800	-80.01	-60	-54.56	-51	PASS
GSM850	190	836.6	5	-1600	-79.19	-60	-53.73	-51	PASS
GSM850	190	836.6	5	-1400	-76.60	-60	-51.15	-51	PASS
GSM850	190	836.6	5	-1200	-76.20	-60	-50.75	-51	PASS
GSM850	190	836.6	5	-1000	-74.51	-60	-49.06	-51	PASS
GSM850	190	836.6	5	-800	-73.38	-60	-47.93	-51	PASS
GSM850	190	836.6	5	-600	-72.33	-60	-46.88	-51	PASS
GSM850	190	836.6	5	-400	-66.51	-60	-41.05	-36	PASS
GSM850	190	836.6	5	-250	-41.13	-33	-15.68	-36	PASS
GSM850	190	836.6	5	-200	-36.54	-30	-11.08	-36	PASS
GSM850	190	836.6	5	-100	-8.33	0.5	17.12	-36	PASS
GSM850	190	836.6	5	100	-7.84	0.5	17.61	-36	PASS
GSM850	190	836.6	5	200	-36.86	-30	-11.41	-36	PASS
GSM850	190	836.6	5	250	-41.21	-33	-15.76	-36	PASS
GSM850	190	836.6	5	400	-66.86	-60	-41.40	-36	PASS
GSM850	190	836.6	5	600	-73.34	-60	-47.89	-51	PASS
GSM850	190	836.6	5	800	-71.79	-60	-46.34	-51	PASS
GSM850	190	836.6	5	1000	-73.89	-60	-48.43	-51	PASS
GSM850	190	836.6	5	1200	-74.88	-60	-49.42	-51	PASS
GSM850	190	836.6	5	1400	-75.73	-60	-50.28	-51	PASS
GSM850	190	836.6	5	1600	-78.72	-60	-53.26	-51	PASS
GSM850	190	836.6	5	1800	-79.45	-60	-53.99	-51	PASS
GSM850	190	836.6	19	-1800	-67.89	-60	-70.39	-51	PASS
GSM850	190	836.6	19	-1600	-65.97	-60	-68.47	-51	PASS
GSM850	190	836.6	19	-1400	-61.97	-60	-64.47	-51	PASS
GSM850	190	836.6	19	-1200	-64.44	-60	-66.94	-51	PASS
GSM850	190	836.6	19	-1000	-60.87	-60	-63.37	-51	PASS
GSM850	190	836.6	19	-800	-61.63	-60	-64.13	-51	PASS
GSM850	190	836.6	19	-600	-62.15	-60	-64.65	-51	PASS
GSM850	190	836.6	19	-400	-53.92	-60	-56.42	-36	PASS
GSM850	190	836.6	19	-250	-40.91	-33	-43.41	-36	PASS
GSM850	190	836.6	19	-200	-36.30	-30	-38.80	-36	PASS
GSM850	190	836.6	19	-100	-8.84	0.5	-11.34	-36	PASS
GSM850	190	836.6	19	100	-7.48	0.5	-9.98	-36	PASS
GSM850	190	836.6	19	200	-36.89	-30	-39.40	-36	PASS
GSM850	190	836.6	19	250	-40.29	-33	-42.79	-36	PASS
GSM850	190	836.6	19	400	-54.88	-60	-57.38	-36	PASS
GSM850	190	836.6	19	600	-62.41	-60	-64.91	-51	PASS
GSM850	190	836.6	19	800	-62.35	-60	-64.85	-51	PASS
GSM850	190	836.6	19	1000	-60.54	-60	-63.05	-51	PASS
GSM850	190	836.6	19	1200	-65.17	-60	-67.67	-51	PASS

GSM850	190	836.6	19	1400	-61.95	-60	-64.45	-51	PASS
GSM850	190	836.6	19	1600	-65.97	-60	-68.47	-51	PASS
GSM850	190	836.6	19	1800	-66.78	-60	-69.28	-51	PASS
GSM850	251	848.8	5	-1800	-79.67	-60	-54.21	-51	PASS
GSM850	251	848.8	5	-1600	-78.46	-60	-53.00	-51	PASS
GSM850	251	848.8	5	-1400	-77.07	-60	-51.61	-51	PASS
GSM850	251	848.8	5	-1200	-74.99	-60	-49.53	-51	PASS
GSM850	251	848.8	5	-1000	-75.12	-60	-49.66	-51	PASS
GSM850	251	848.8	5	-800	-74.68	-60	-49.22	-51	PASS
GSM850	251	848.8	5	-600	-73.14	-60	-47.68	-51	PASS
GSM850	251	848.8	5	-400	-65.86	-60	-40.40	-36	PASS
GSM850	251	848.8	5	-250	-40.92	-33	-15.46	-36	PASS
GSM850	251	848.8	5	-200	-37.41	-30	-11.95	-36	PASS
GSM850	251	848.8	5	-100	-8.33	0.5	17.13	-36	PASS
GSM850	251	848.8	5	100	-8.46	0.5	17.00	-36	PASS
GSM850	251	848.8	5	200	-37.22	-30	-11.76	-36	PASS
GSM850	251	848.8	5	250	-40.89	-33	-15.43	-36	PASS
GSM850	251	848.8	5	400	-66.38	-60	-40.92	-36	PASS
GSM850	251	848.8	5	600	-72.82	-60	-47.36	-51	PASS
GSM850	251	848.8	5	800	-73.41	-60	-47.95	-51	PASS
GSM850	251	848.8	5	1000	-73.23	-60	-47.77	-51	PASS
GSM850	251	848.8	5	1200	-74.27	-60	-48.81	-51	PASS
GSM850	251	848.8	5	1400	-75.37	-60	-49.91	-51	PASS
GSM850	251	848.8	5	1600	-77.24	-60	-51.78	-51	PASS
GSM850	251	848.8	5	1800	-79.85	-60	-54.39	-51	PASS
GSM850	251	848.8	19	-1800	-69.59	-60	-70.86	-51	PASS
GSM850	251	848.8	19	-1600	-66.81	-60	-68.07	-51	PASS
GSM850	251	848.8	19	-1400	-63.14	-60	-64.41	-51	PASS
GSM850	251	848.8	19	-1200	-65.32	-60	-66.59	-51	PASS
GSM850	251	848.8	19	-1000	-62.29	-60	-63.55	-51	PASS
GSM850	251	848.8	19	-800	-62.57	-60	-63.84	-51	PASS
GSM850	251	848.8	19	-600	-64.06	-60	-65.32	-51	PASS
GSM850	251	848.8	19	-400	-55.52	-60	-56.79	-36	PASS
GSM850	251	848.8	19	-250	-42.83	-33	-44.10	-36	PASS
GSM850	251	848.8	19	-200	-37.00	-30	-38.27	-36	PASS
GSM850	251	848.8	19	-100	-9.29	0.5	-10.56	-36	PASS
GSM850	251	848.8	19	100	-9.12	0.5	-10.39	-36	PASS
GSM850	251	848.8	19	200	-37.54	-30	-38.81	-36	PASS
GSM850	251	848.8	19	250	-41.23	-33	-42.49	-36	PASS
GSM850	251	848.8	19	400	-56.36	-60	-57.62	-36	PASS
GSM850	251	848.8	19	600	-64.09	-60	-65.36	-51	PASS
GSM850	251	848.8	19	800	-62.71	-60	-63.98	-51	PASS
GSM850	251	848.8	19	1000	-61.42	-60	-62.69	-51	PASS
GSM850	251	848.8	19	1200	-65.88	-60	-67.14	-51	PASS


GSM850	251	848.8	19	1400	-63.21	-60	-64.48	-51	PASS
GSM850	251	848.8	19	1600	-66.59	-60	-67.85	-51	PASS
GSM850	251	848.8	19	1800	-69.45	-60	-70.72	-51	PASS
GSM900	975	880.2	5	-1800	-79.47	-60	-55.12	-51	PASS
GSM900	975	880.2	5	-1600	-80.33	-60	-55.98	-51	PASS
GSM900	975	880.2	5	-1400	-79.58	-60	-55.23	-51	PASS
GSM900	975	880.2	5	-1200	-78.73	-60	-54.39	-51	PASS
GSM900	975	880.2	5	-1000	-76.54	-60	-52.20	-51	PASS
GSM900	975	880.2	5	-800	-76.16	-60	-51.81	-51	PASS
GSM900	975	880.2	5	-600	-72.62	-60	-48.27	-51	PASS
GSM900	975	880.2	5	-400	-66.90	-60	-42.55	-36	PASS
GSM900	975	880.2	5	-250	-42.73	-33	-18.38	-36	PASS
GSM900	975	880.2	5	-200	-36.38	-30	-12.03	-36	PASS
GSM900	975	880.2	5	-100	-8.03	0.5	16.32	-36	PASS
GSM900	975	880.2	5	100	-8.07	0.5	16.28	-36	PASS
GSM900	975	880.2	5	200	-37.27	-30	-12.92	-36	PASS
GSM900	975	880.2	5	250	-41.86	-33	-17.51	-36	PASS
GSM900	975	880.2	5	400	-66.94	-60	-42.59	-36	PASS
GSM900	975	880.2	5	600	-72.65	-60	-48.30	-51	PASS
GSM900	975	880.2	5	800	-74.89	-60	-50.55	-51	PASS
GSM900	975	880.2	5	1000	-75.43	-60	-51.08	-51	PASS
GSM900	975	880.2	5	1200	-78.13	-60	-53.79	-51	PASS
GSM900	975	880.2	5	1400	-78.60	-60	-54.25	-51	PASS
GSM900	975	880.2	5	1600	-79.87	-60	-55.52	-51	PASS
GSM900	975	880.2	5	1800	-80.29	-60	-55.94	-51	PASS
GSM900	975	880.2	19	-1800	-72.99	-60	-76.71	-51	PASS
GSM900	975	880.2	19	-1600	-70.62	-60	-74.34	-51	PASS
GSM900	975	880.2	19	-1400	-69.00	-60	-72.72	-51	PASS
GSM900	975	880.2	19	-1200	-69.80	-60	-73.52	-51	PASS
GSM900	975	880.2	19	-1000	-65.95	-60	-69.67	-51	PASS
GSM900	975	880.2	19	-800	-67.71	-60	-71.43	-51	PASS
GSM900	975	880.2	19	-600	-68.74	-60	-72.46	-51	PASS
GSM900	975	880.2	19	-400	-65.42	-60	-69.14	-36	PASS
GSM900	975	880.2	19	-250	-41.55	-33	-45.27	-36	PASS
GSM900	975	880.2	19	-200	-37.19	-30	-40.91	-36	PASS
GSM900	975	880.2	19	-100	-8.66	0.5	-12.37	-36	PASS
GSM900	975	880.2	19	100	-8.12	0.5	-11.84	-36	PASS
GSM900	975	880.2	19	200	-36.64	-30	-40.36	-36	PASS
GSM900	975	880.2	19	250	-41.15	-33	-44.87	-36	PASS
GSM900	975	880.2	19	400	-65.22	-60	-68.94	-36	PASS
GSM900	975	880.2	19	600	-68.69	-60	-72.41	-51	PASS
GSM900	975	880.2	19	800	-67.56	-60	-71.28	-51	PASS
GSM900	975	880.2	19	1000	-64.97	-60	-68.69	-51	PASS
GSM900	975	880.2	19	1200	-69.58	-60	-73.30	-51	PASS

GSM900	975	880.2	19	1400	-69.48	-60	-73.19	-51	PASS
GSM900	975	880.2	19	1600	-70.03	-60	-73.75	-51	PASS
GSM900	975	880.2	19	1800	-71.93	-60	-75.65	-51	PASS
GSM900	38	897.6	5	-1800	-80.11	-60	-55.90	-51	PASS
GSM900	38	897.6	5	-1600	-79.75	-60	-55.54	-51	PASS
GSM900	38	897.6	5	-1400	-78.52	-60	-54.31	-51	PASS
GSM900	38	897.6	5	-1200	-77.75	-60	-53.55	-51	PASS
GSM900	38	897.6	5	-1000	-77.29	-60	-53.08	-51	PASS
GSM900	38	897.6	5	-800	-75.99	-60	-51.79	-51	PASS
GSM900	38	897.6	5	-600	-73.37	-60	-49.16	-51	PASS
GSM900	38	897.6	5	-400	-67.06	-60	-42.85	-36	PASS
GSM900	38	897.6	5	-250	-41.61	-33	-17.40	-36	PASS
GSM900	38	897.6	5	-200	-35.63	-30	-11.43	-36	PASS
GSM900	38	897.6	5	-100	-8.62	0.5	15.58	-36	PASS
GSM900	38	897.6	5	100	-6.92	0.5	17.29	-36	PASS
GSM900	38	897.6	5	200	-37.05	-30	-12.84	-36	PASS
GSM900	38	897.6	5	250	-40.52	-33	-16.31	-36	PASS
GSM900	38	897.6	5	400	-66.22	-60	-42.01	-36	PASS
GSM900	38	897.6	5	600	-72.97	-60	-48.76	-51	PASS
GSM900	38	897.6	5	800	-74.93	-60	-50.73	-51	PASS
GSM900	38	897.6	5	1000	-75.13	-60	-50.93	-51	PASS
GSM900	38	897.6	5	1200	-78.10	-60	-53.89	-51	PASS
GSM900	38	897.6	5	1400	-78.15	-60	-53.94	-51	PASS
GSM900	38	897.6	5	1600	-80.36	-60	-56.15	-51	PASS
GSM900	38	897.6	5	1800	-80.30	-60	-56.09	-51	PASS
GSM900	38	897.6	19	-1800	-72.86	-60	-76.06	-51	PASS
GSM900	38	897.6	19	-1600	-70.50	-60	-73.69	-51	PASS
GSM900	38	897.6	19	-1400	-69.07	-60	-72.26	-51	PASS
GSM900	38	897.6	19	-1200	-69.90	-60	-73.09	-51	PASS
GSM900	38	897.6	19	-1000	-65.42	-60	-68.62	-51	PASS
GSM900	38	897.6	19	-800	-67.93	-60	-71.12	-51	PASS
GSM900	38	897.6	19	-600	-68.41	-60	-71.60	-51	PASS
GSM900	38	897.6	19	-400	-64.79	-60	-67.98	-36	PASS
GSM900	38	897.6	19	-250	-41.13	-33	-44.33	-36	PASS
GSM900	38	897.6	19	-200	-37.04	-30	-40.23	-36	PASS
GSM900	38	897.6	19	-100	-8.40	0.5	-11.60	-36	PASS
GSM900	38	897.6	19	100	-9.08	0.5	-12.27	-36	PASS
GSM900	38	897.6	19	200	-37.41	-30	-40.61	-36	PASS
GSM900	38	897.6	19	250	-41.41	-33	-44.61	-36	PASS
GSM900	38	897.6	19	400	-65.89	-60	-69.08	-36	PASS
GSM900	38	897.6	19	600	-68.51	-60	-71.70	-51	PASS
GSM900	38	897.6	19	800	-67.48	-60	-70.67	-51	PASS
GSM900	38	897.6	19	1000	-65.95	-60	-69.14	-51	PASS
GSM900	38	897.6	19	1200	-70.19	-60	-73.38	-51	PASS


GSM900	38	897.6	19	1400	-69.19	-60	-72.39	-51	PASS
GSM900	38	897.6	19	1600	-70.72	-60	-73.91	-51	PASS
GSM900	38	897.6	19	1800	-72.29	-60	-75.49	-51	PASS
GSM900	124	914.8	5	-1800	-80.08	-60	-54.80	-51	PASS
GSM900	124	914.8	5	-1600	-81.22	-60	-55.94	-51	PASS
GSM900	124	914.8	5	-1400	-79.72	-60	-54.44	-51	PASS
GSM900	124	914.8	5	-1200	-79.18	-60	-53.90	-51	PASS
GSM900	124	914.8	5	-1000	-77.85	-60	-52.58	-51	PASS
GSM900	124	914.8	5	-800	-77.53	-60	-52.25	-51	PASS
GSM900	124	914.8	5	-600	-74.99	-60	-49.72	-51	PASS
GSM900	124	914.8	5	-400	-68.02	-60	-42.74	-36	PASS
GSM900	124	914.8	5	-250	-41.93	-33	-16.65	-36	PASS
GSM900	124	914.8	5	-200	-36.77	-30	-11.50	-36	PASS
GSM900	124	914.8	5	-100	-8.06	0.5	17.22	-36	PASS
GSM900	124	914.8	5	100	-9.29	0.5	15.99	-36	PASS
GSM900	124	914.8	5	200	-37.54	-30	-12.26	-36	PASS
GSM900	124	914.8	5	250	-40.54	-33	-15.26	-36	PASS
GSM900	124	914.8	5	400	-66.94	-60	-41.67	-36	PASS
GSM900	124	914.8	5	600	-74.56	-60	-49.29	-51	PASS
GSM900	124	914.8	5	800	-76.39	-60	-51.11	-51	PASS
GSM900	124	914.8	5	1000	-75.99	-60	-50.72	-51	PASS
GSM900	124	914.8	5	1200	-79.32	-60	-54.04	-51	PASS
GSM900	124	914.8	5	1400	-79.61	-60	-54.33	-51	PASS
GSM900	124	914.8	5	1600	-80.58	-60	-55.30	-51	PASS
GSM900	124	914.8	5	1800	-81.02	-60	-55.74	-51	PASS
GSM900	124	914.8	19	-1800	-71.49	-60	-75.02	-51	PASS
GSM900	124	914.8	19	-1600	-69.21	-60	-72.74	-51	PASS
GSM900	124	914.8	19	-1400	-68.68	-60	-72.20	-51	PASS
GSM900	124	914.8	19	-1200	-67.66	-60	-71.18	-51	PASS
GSM900	124	914.8	19	-1000	-65.51	-60	-69.04	-51	PASS
GSM900	124	914.8	19	-800	-67.91	-60	-71.43	-51	PASS
GSM900	124	914.8	19	-600	-67.94	-60	-71.46	-51	PASS
GSM900	124	914.8	19	-400	-64.98	-60	-68.51	-36	PASS
GSM900	124	914.8	19	-250	-41.00	-33	-44.52	-36	PASS
GSM900	124	914.8	19	-200	-36.79	-30	-40.32	-36	PASS
GSM900	124	914.8	19	-100	-9.50	0.5	-13.03	-36	PASS
GSM900	124	914.8	19	100	-7.81	0.5	-11.34	-36	PASS
GSM900	124	914.8	19	200	-37.11	-30	-40.63	-36	PASS
GSM900	124	914.8	19	250	-40.89	-33	-44.42	-36	PASS
GSM900	124	914.8	19	400	-65.39	-60	-68.92	-36	PASS
GSM900	124	914.8	19	600	-67.99	-60	-71.52	-51	PASS
GSM900	124	914.8	19	800	-67.77	-60	-71.30	-51	PASS
GSM900	124	914.8	19	1000	-64.18	-60	-67.71	-51	PASS
GSM900	124	914.8	19	1200	-68.46	-60	-71.99	-51	PASS

GSM900	124	914.8	19	1400	-68.55	-60	-72.08	-51	PASS
GSM900	124	914.8	19	1600	-69.00	-60	-72.53	-51	PASS
GSM900	124	914.8	19	1800	-71.31	-60	-74.83	-51	PASS


GSM1800 Channel=512 PCL=0

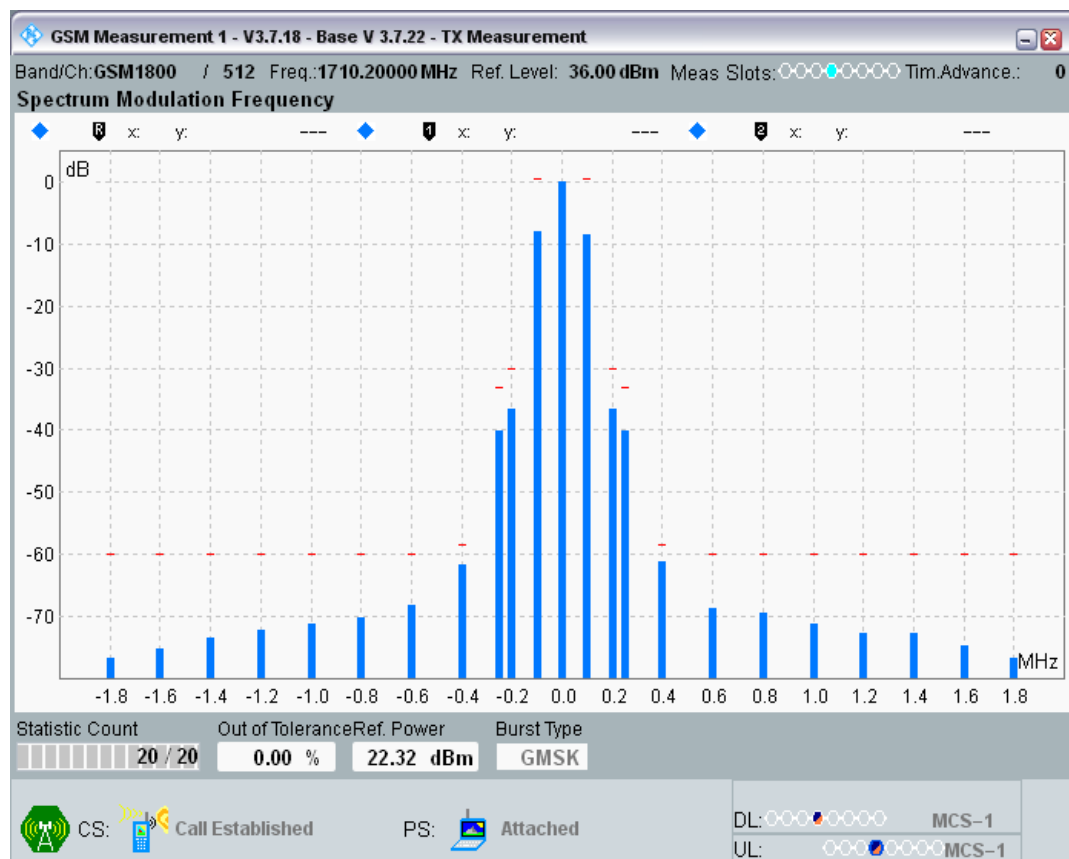


GSM1800 Channel=512 PCL=15

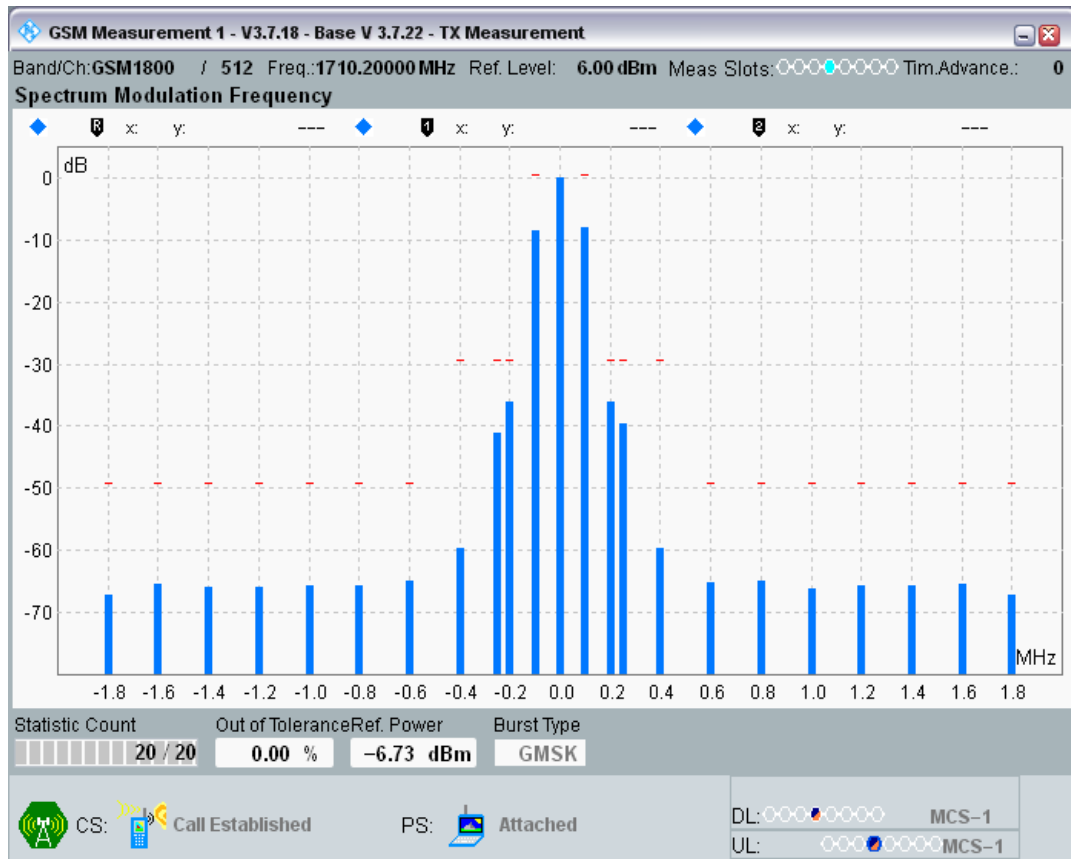


GSM1800 Channel=698 PCL=0

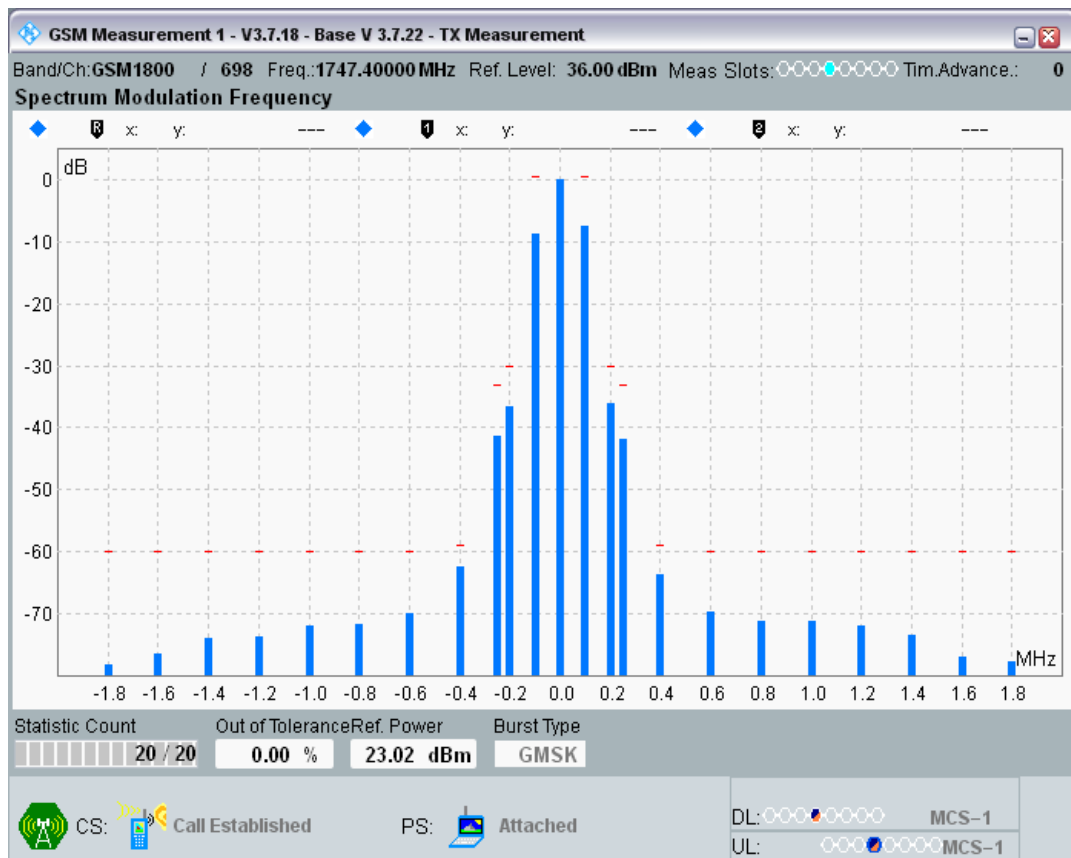


GSM1800 Channel=698 PCL=15

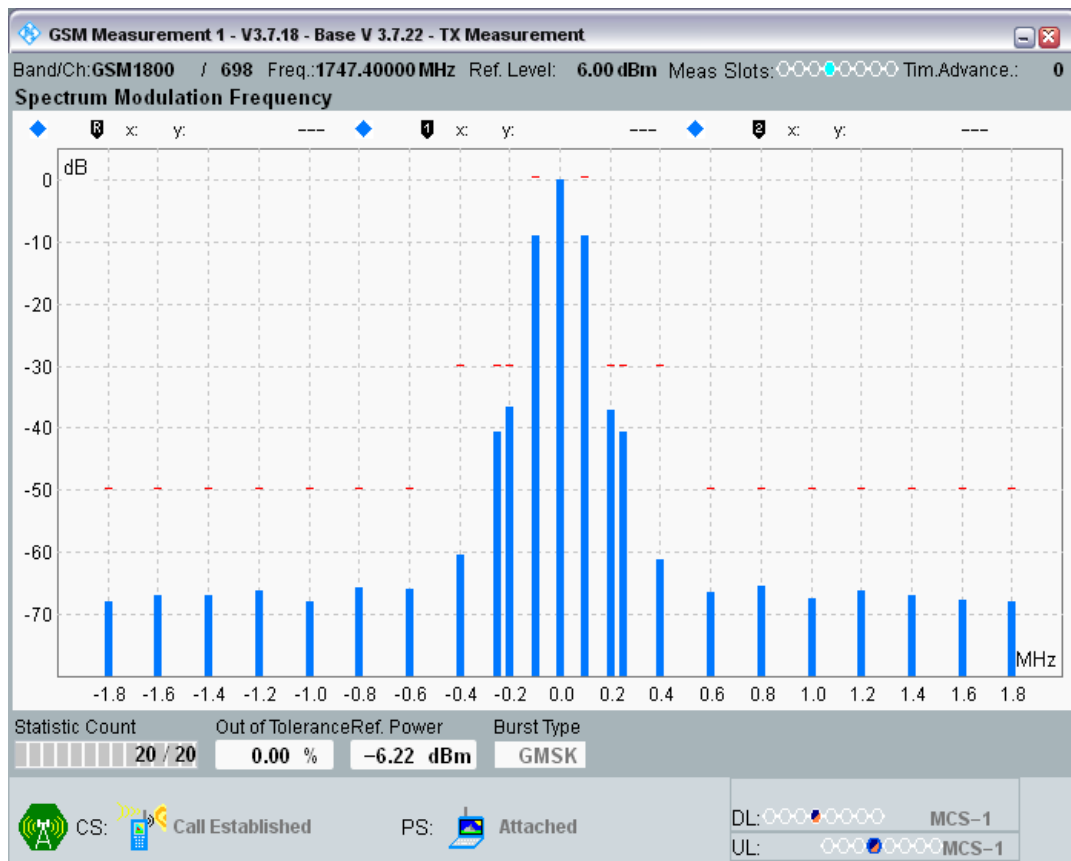


GSM1800 Channel=885 PCL=0

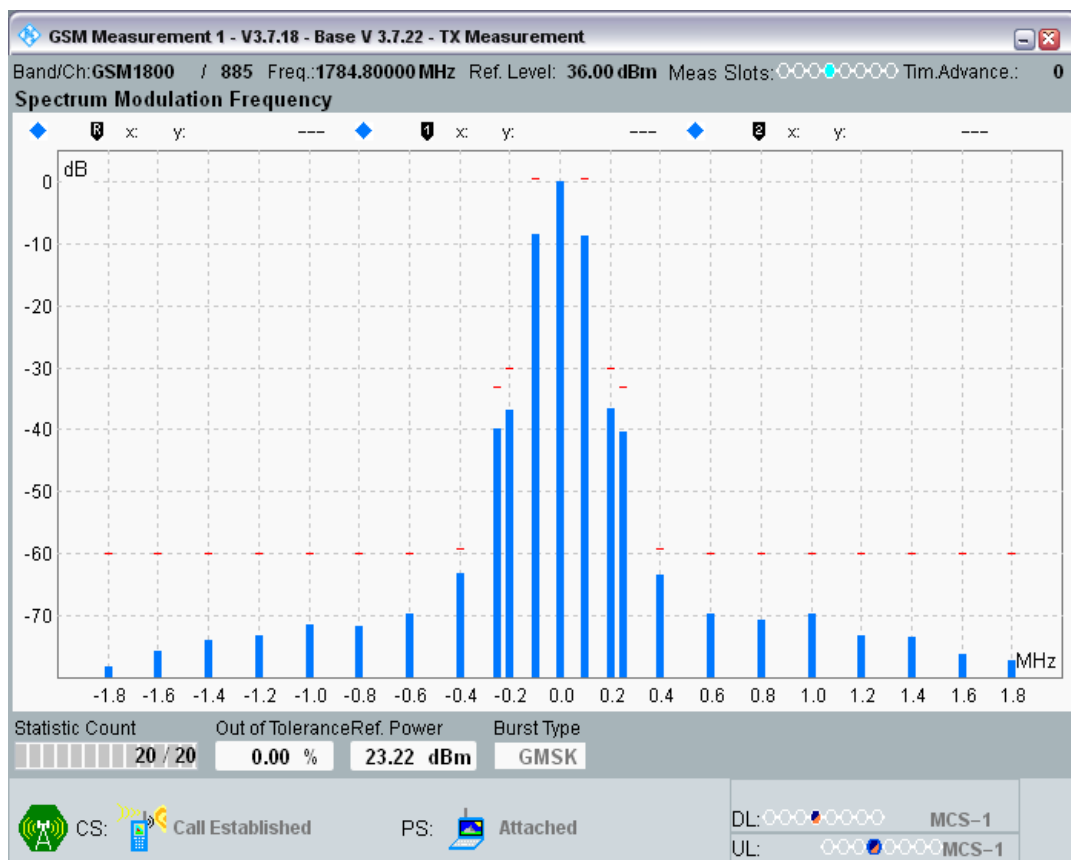


GSM1800 Channel=885 PCL=15

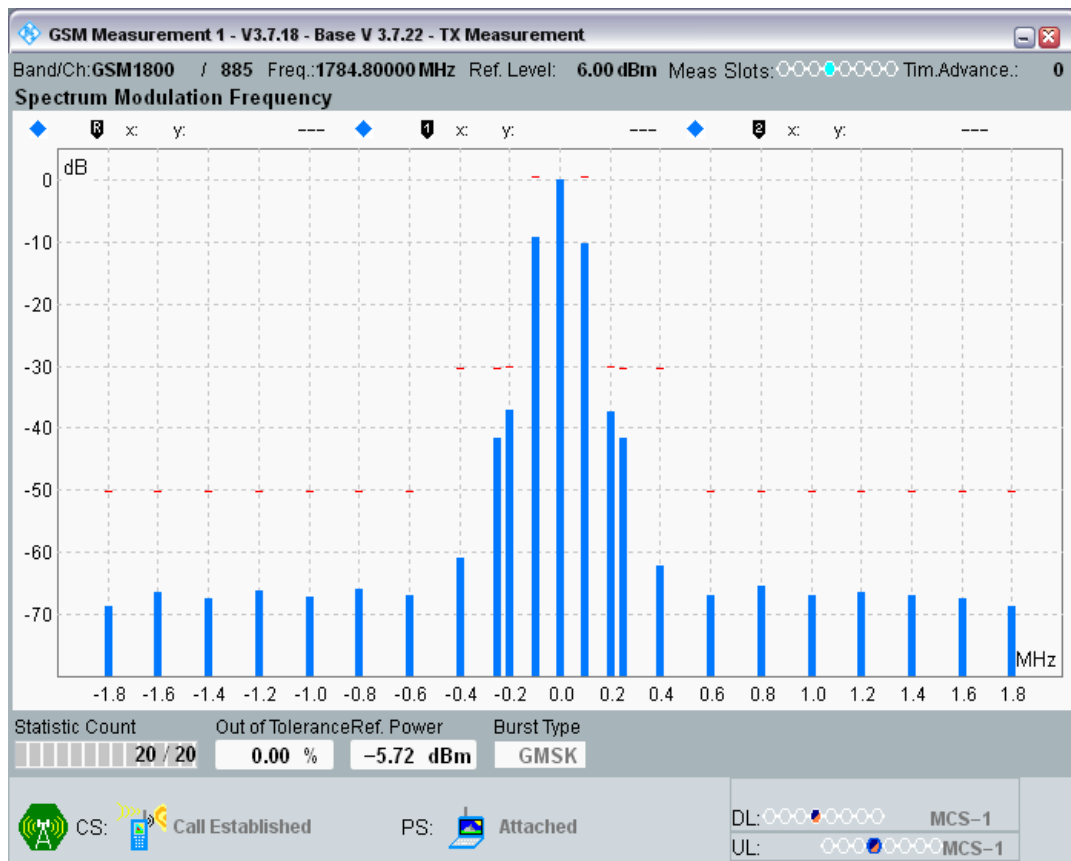


GSM1900 Channel=512 PCL=0

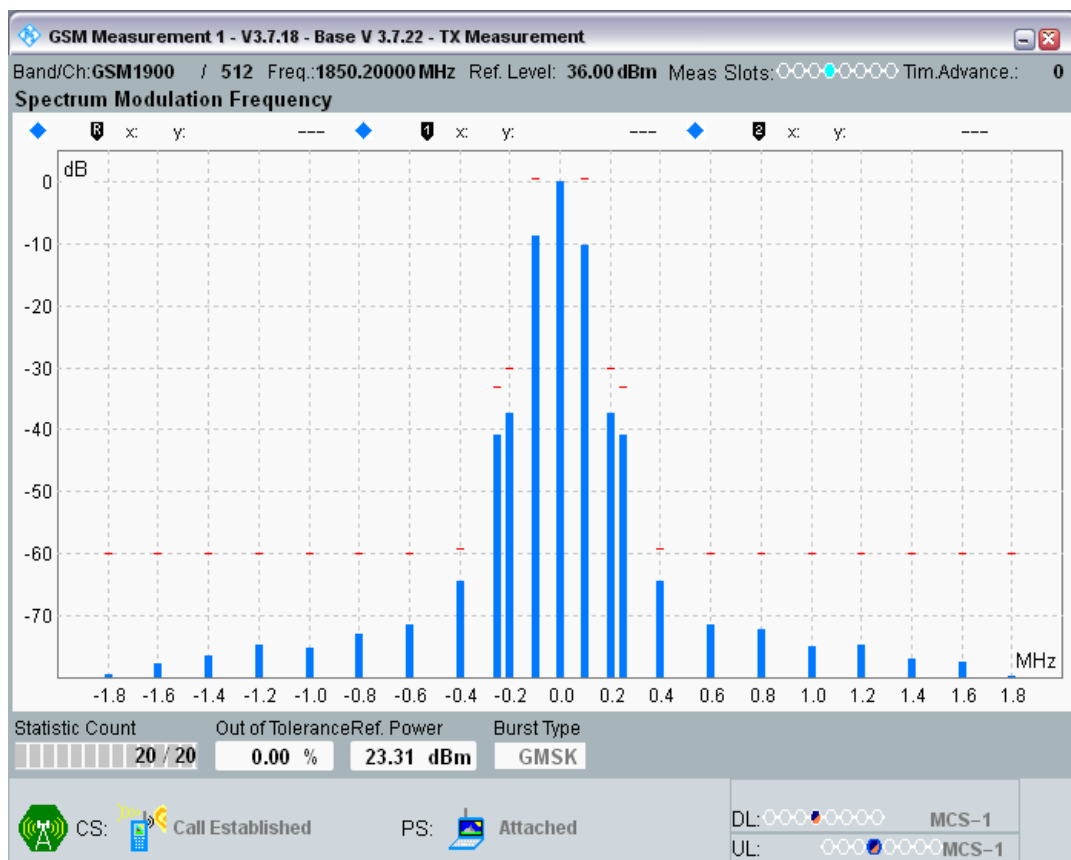


GSM1900 Channel=512 PCL=15

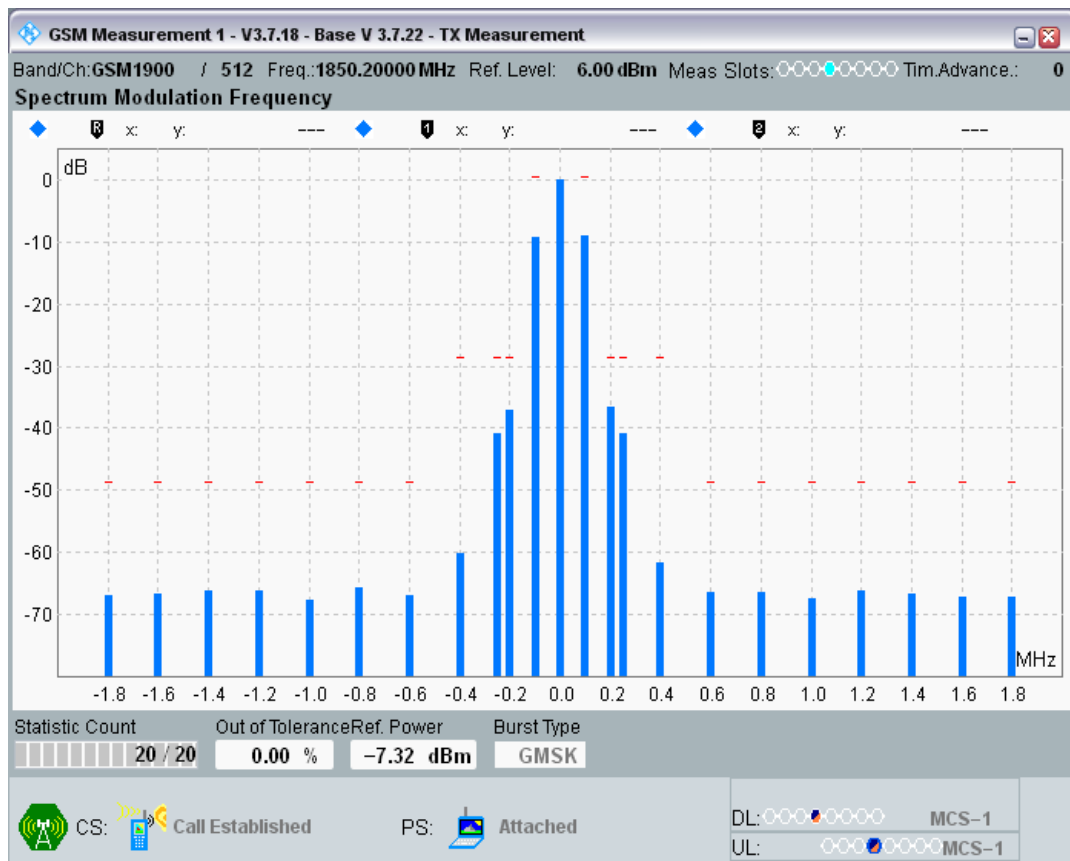


GSM1900 Channel=661 PCL=0

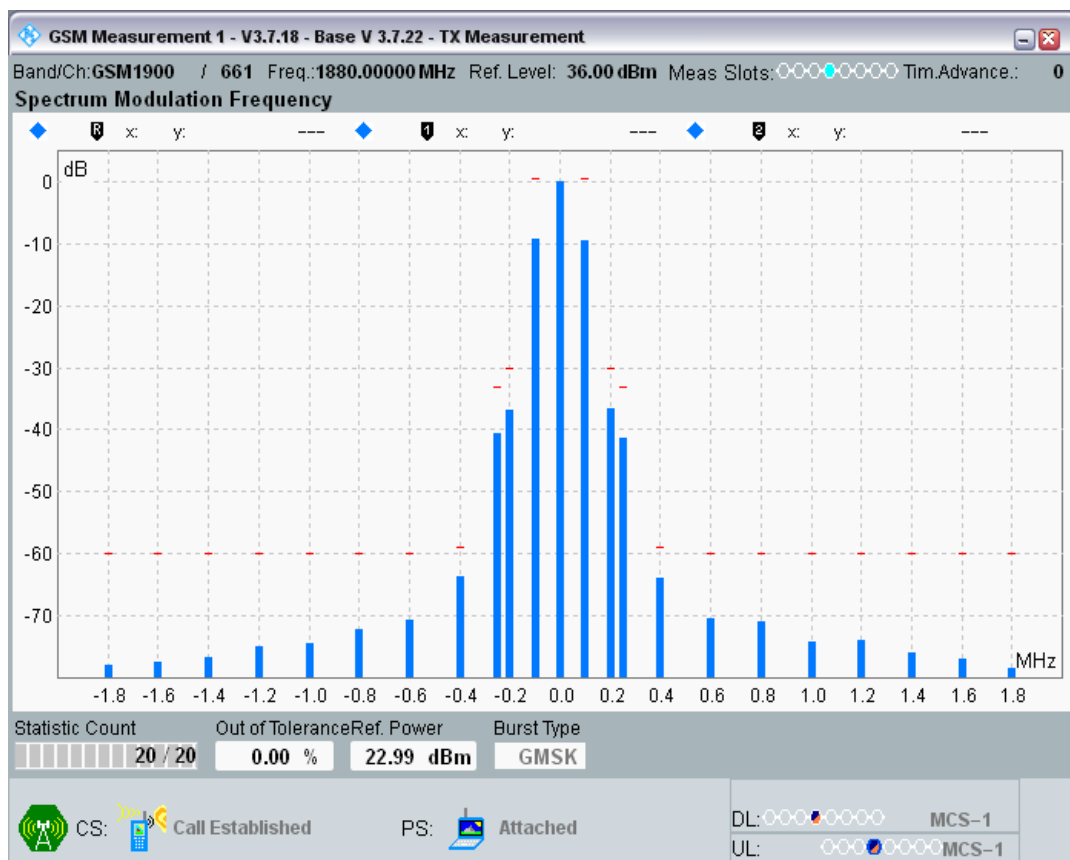


GSM1900 Channel=661 PCL=15

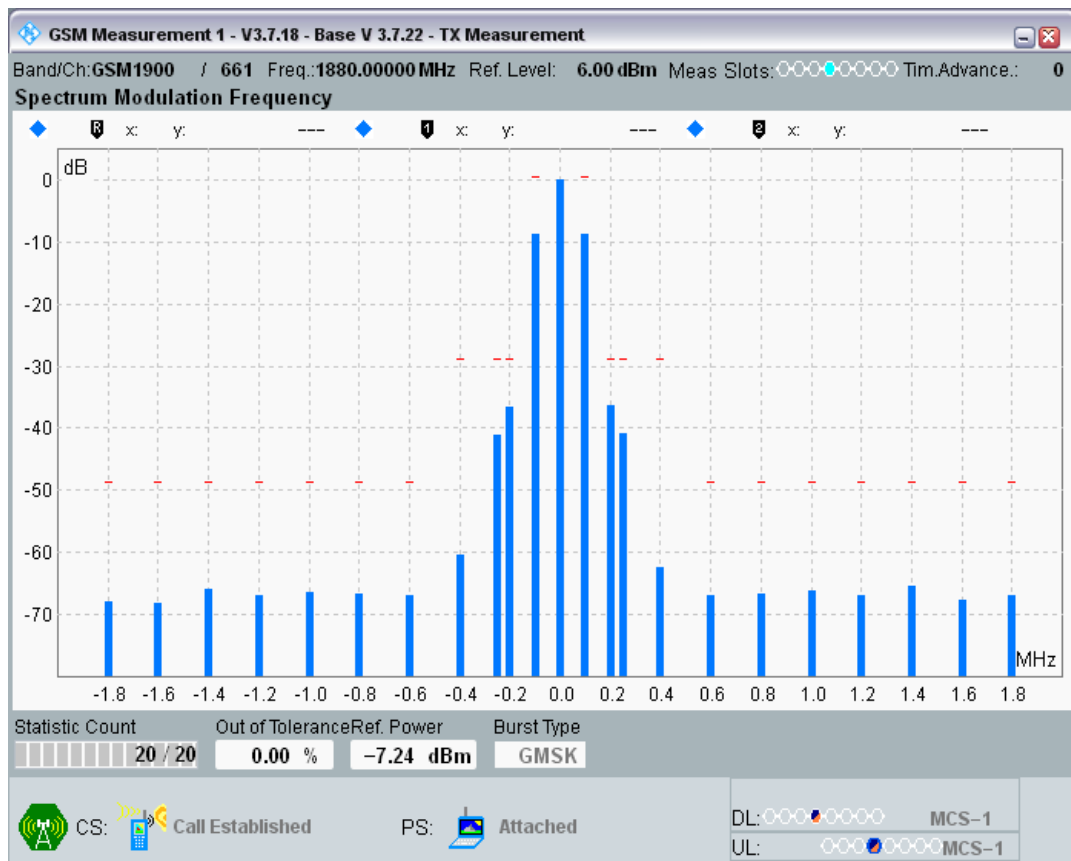


GSM1900 Channel=810 PCL=0

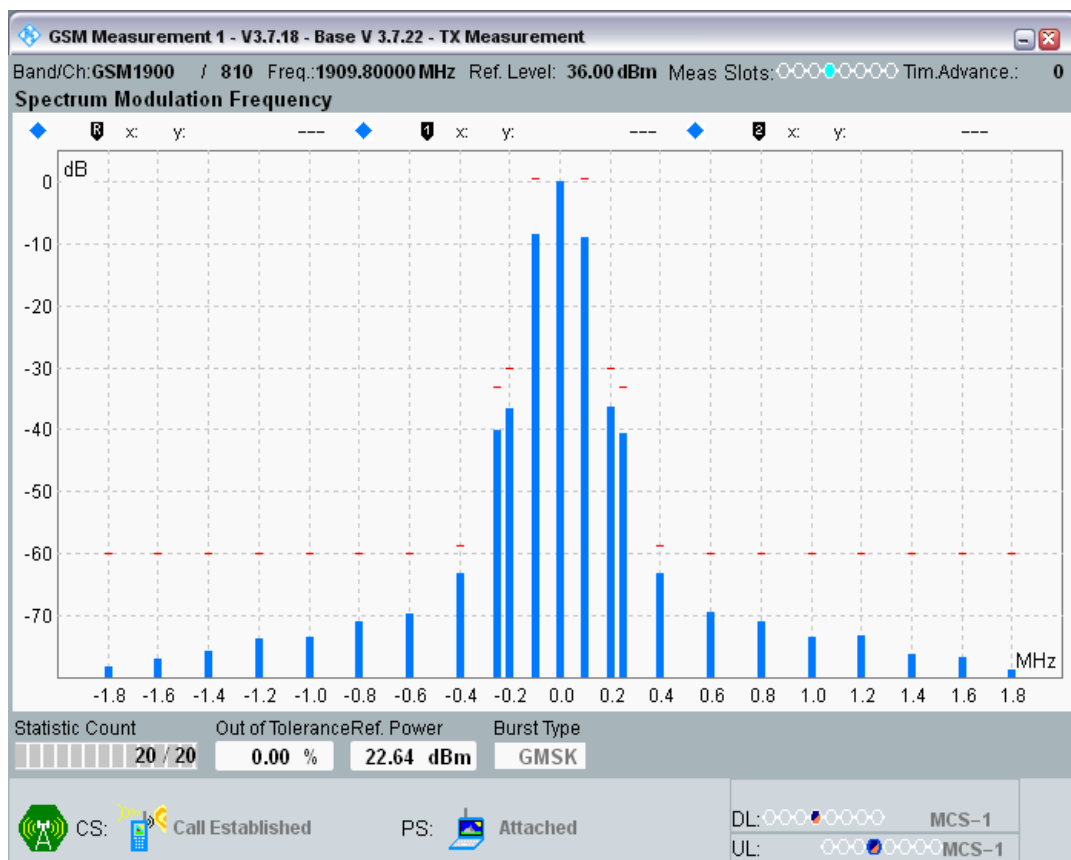


GSM1900 Channel=810 PCL=15

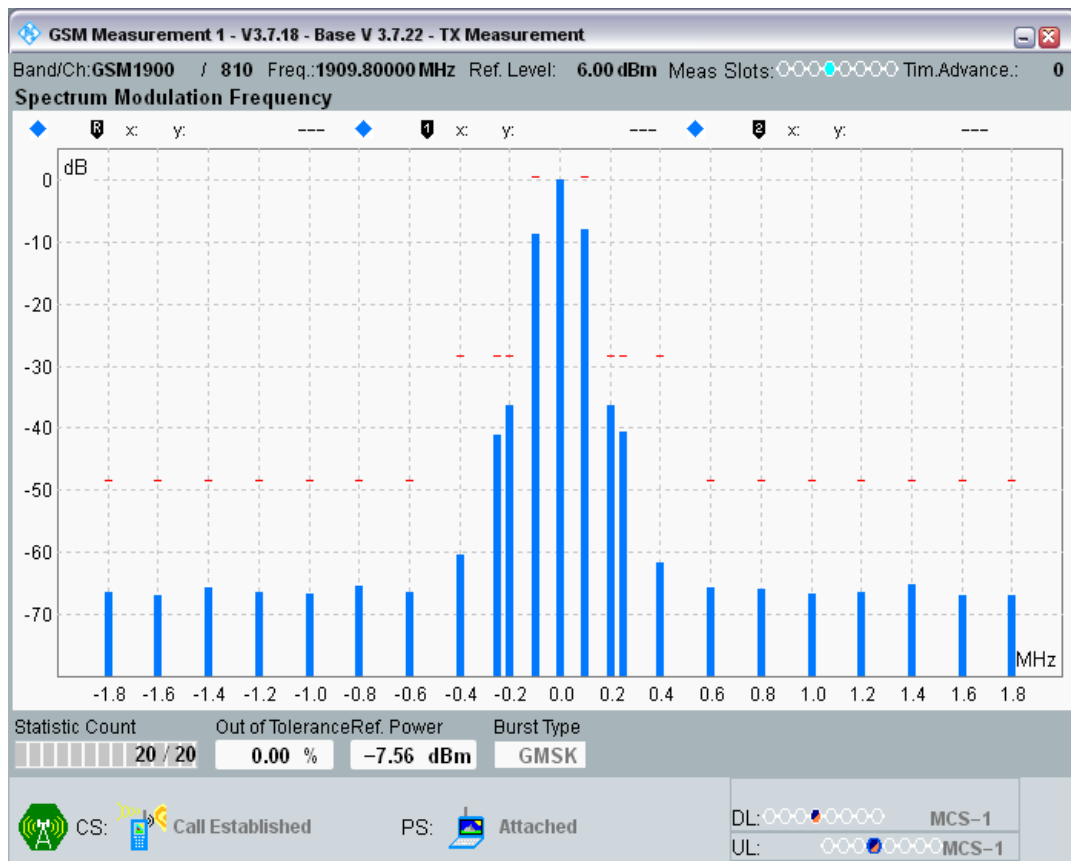


GSM850 Channel=128 PCL=5

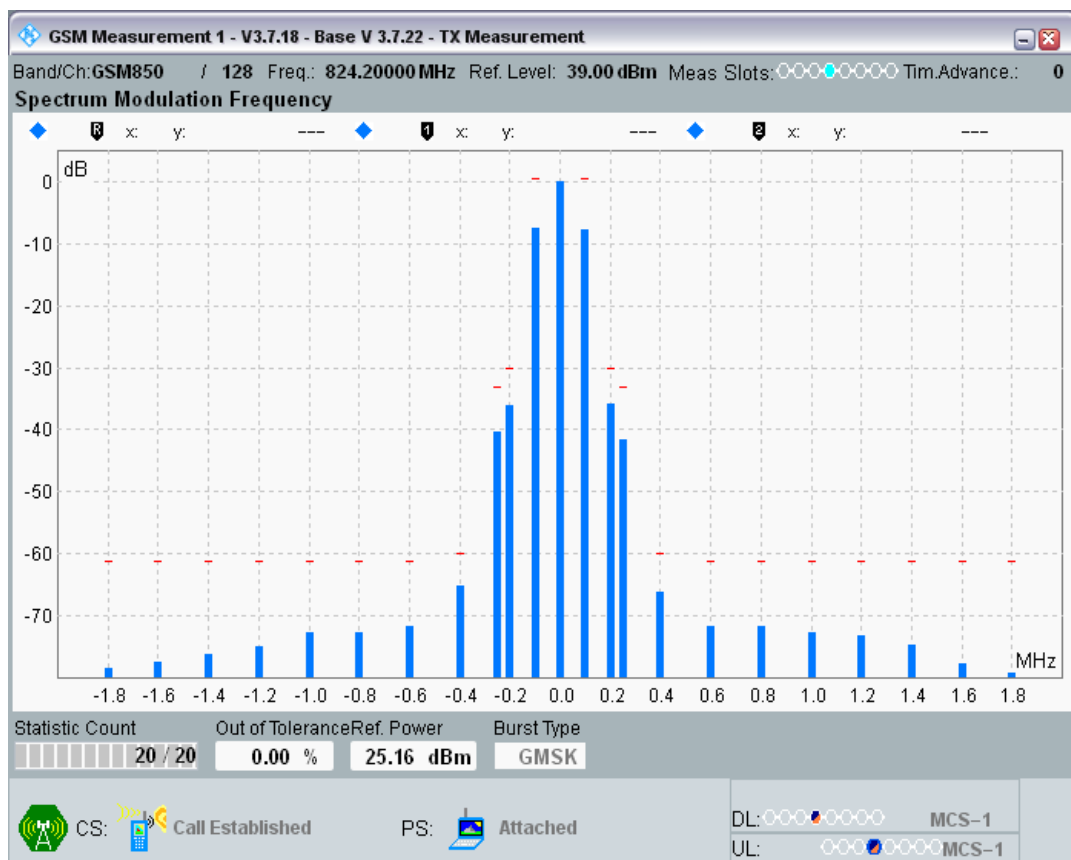


GSM850 Channel=128 PCL=19

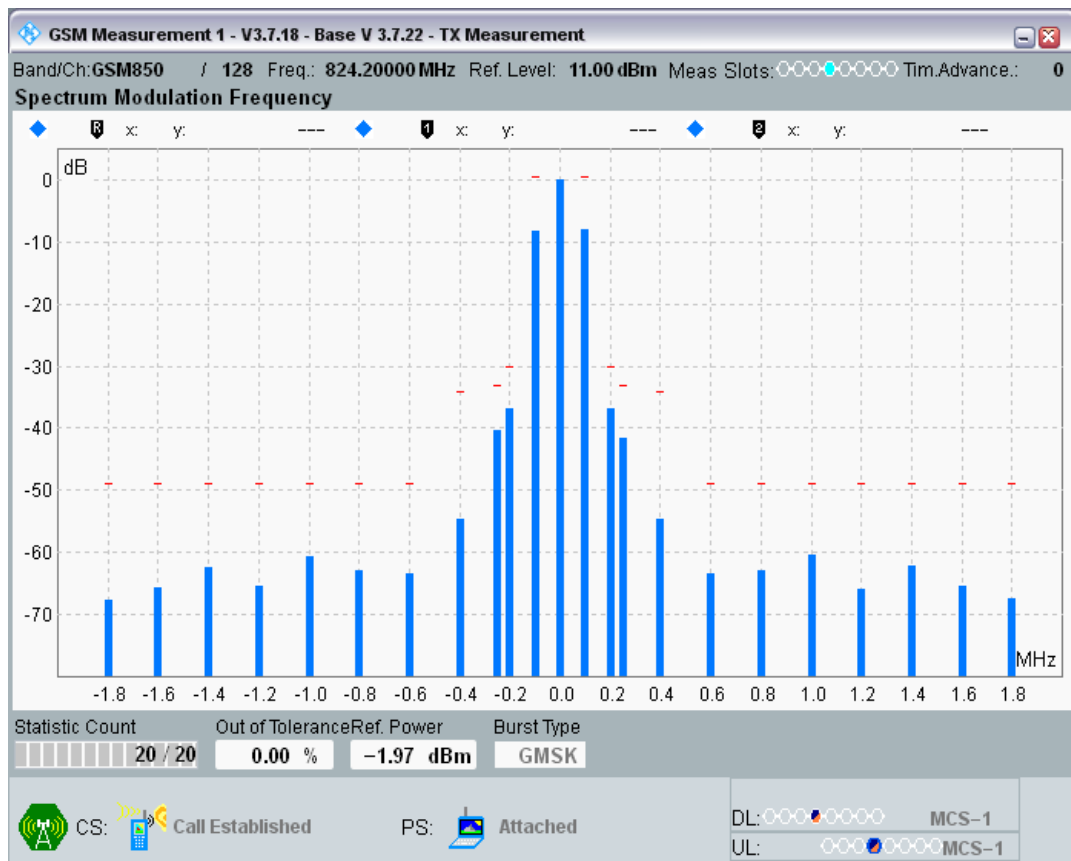


GSM850 Channel=190 PCL=5

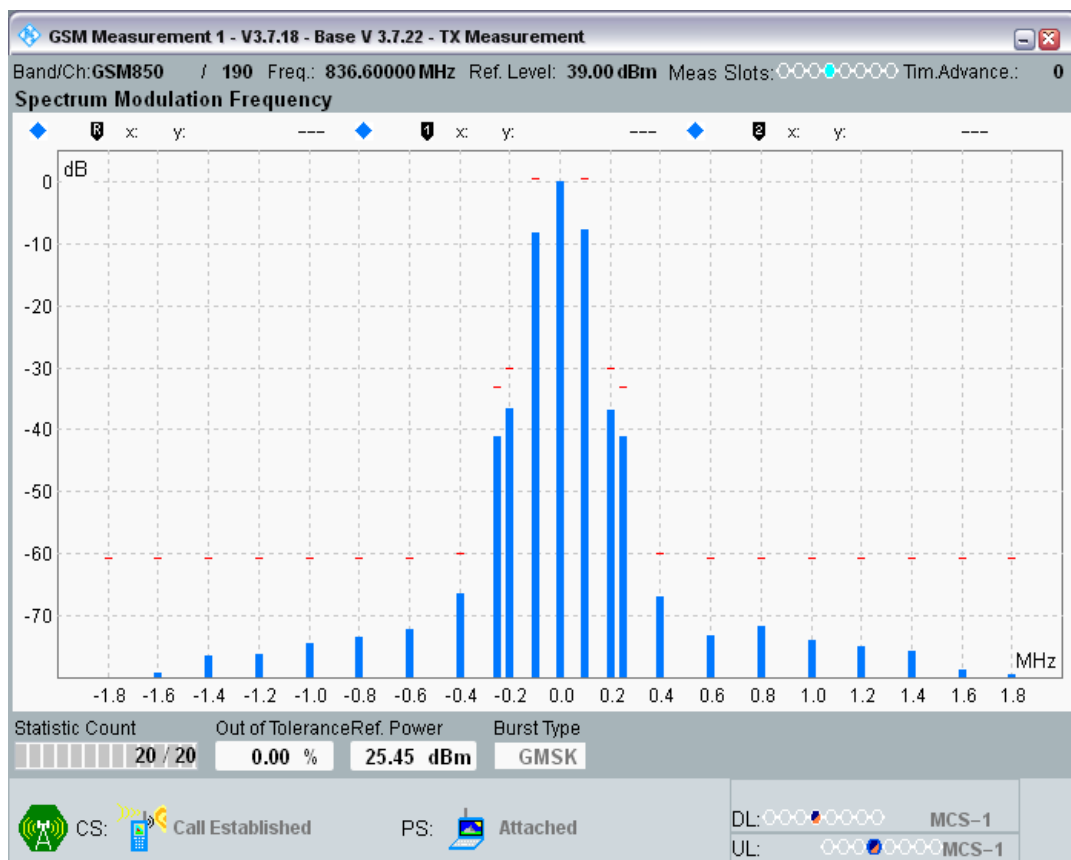


GSM850 Channel=190 PCL=19

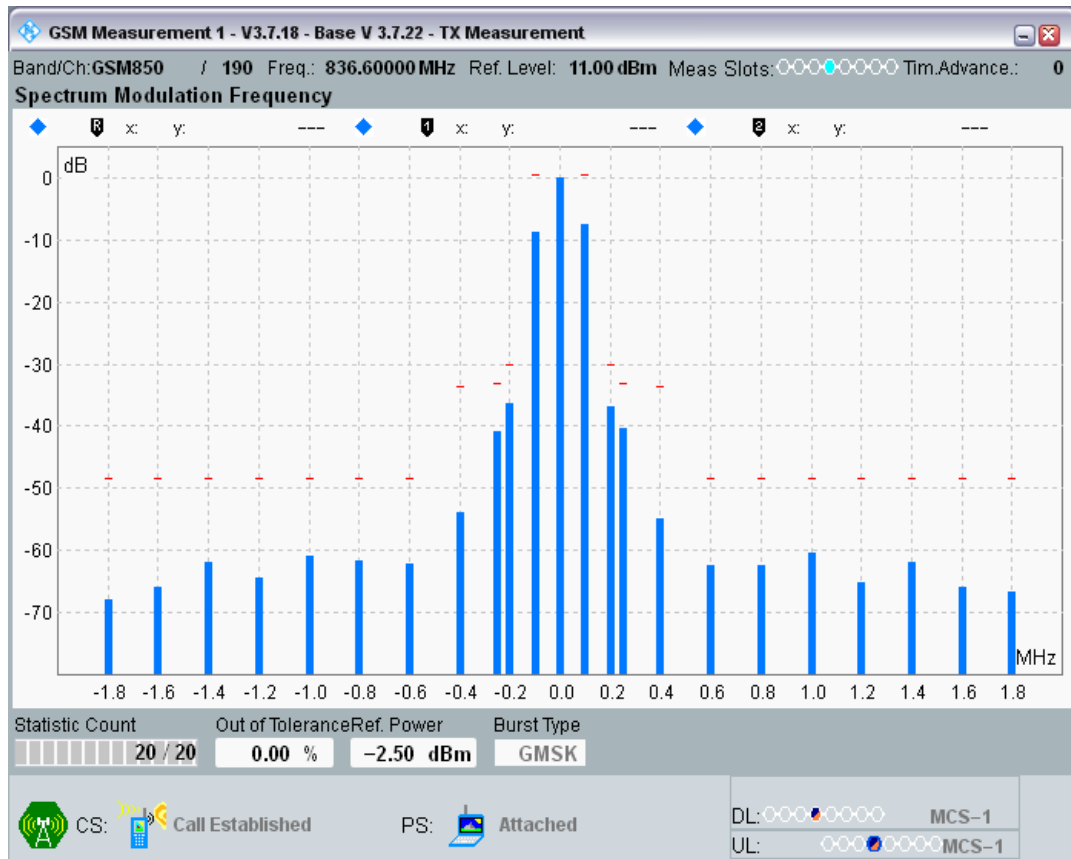


GSM850 Channel=251 PCL=5

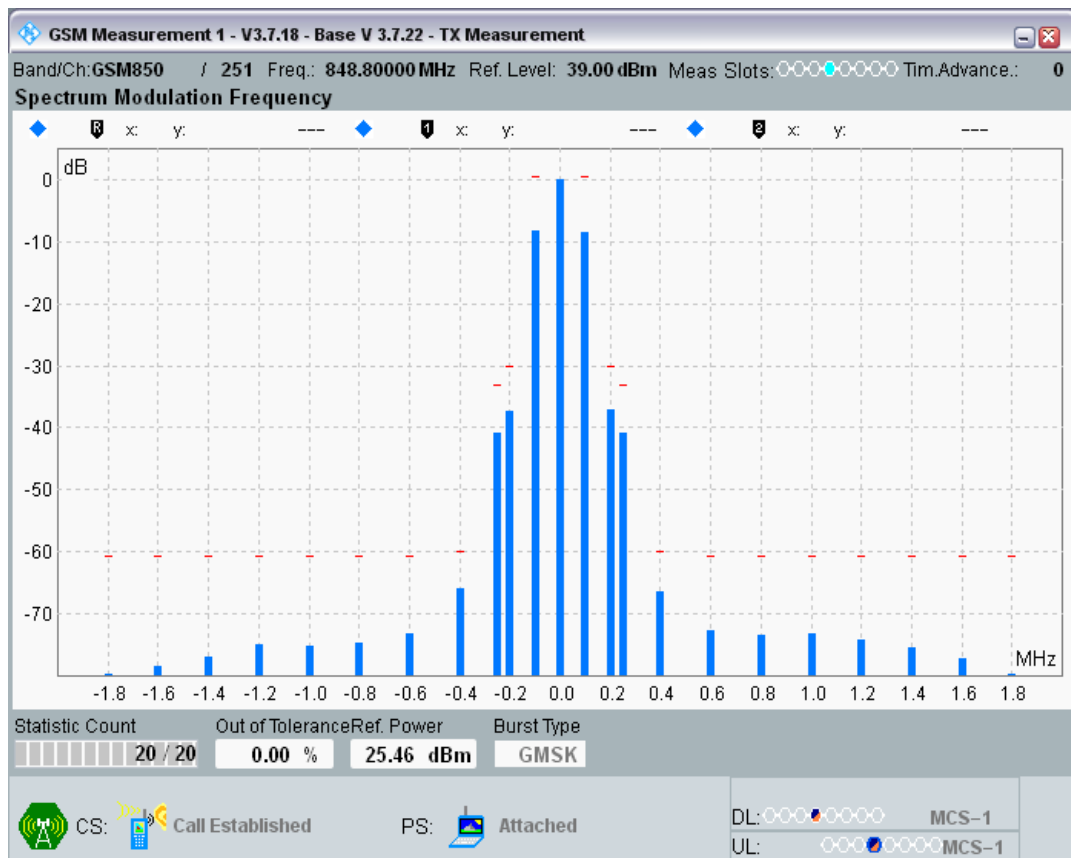


GSM850 Channel=251 PCL=19

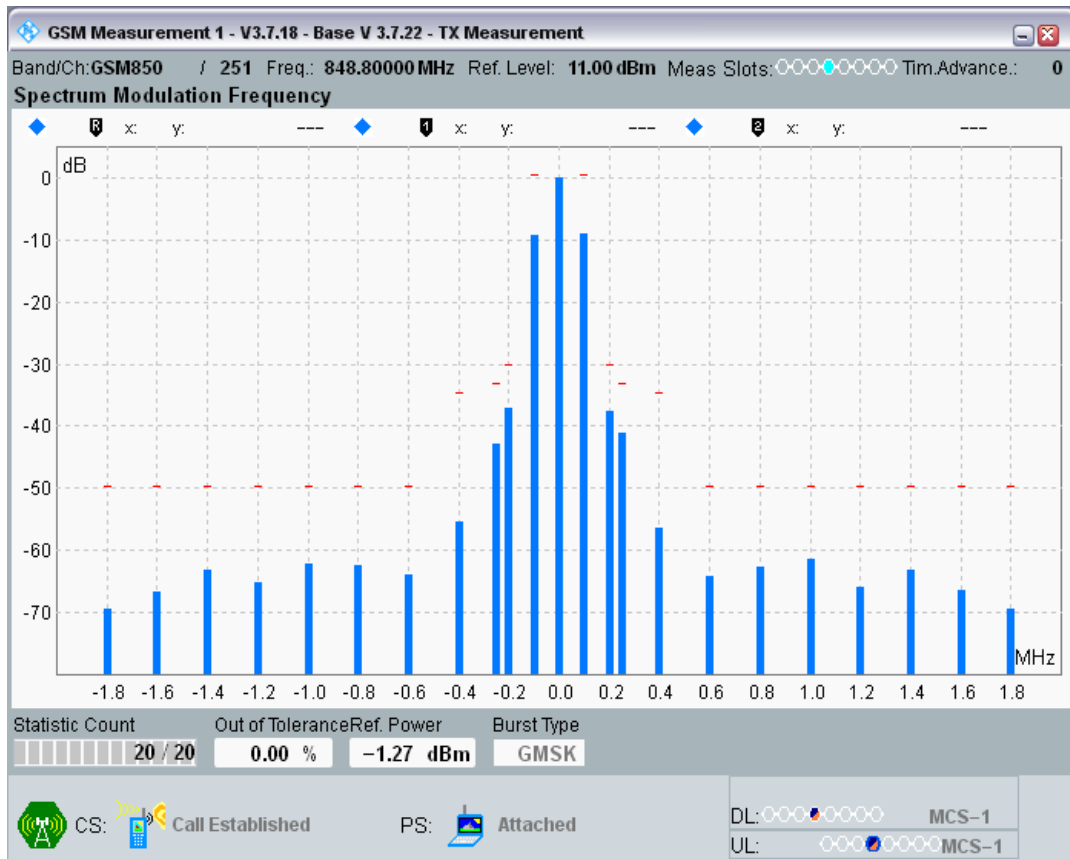


GSM900 Channel=975 PCL=5

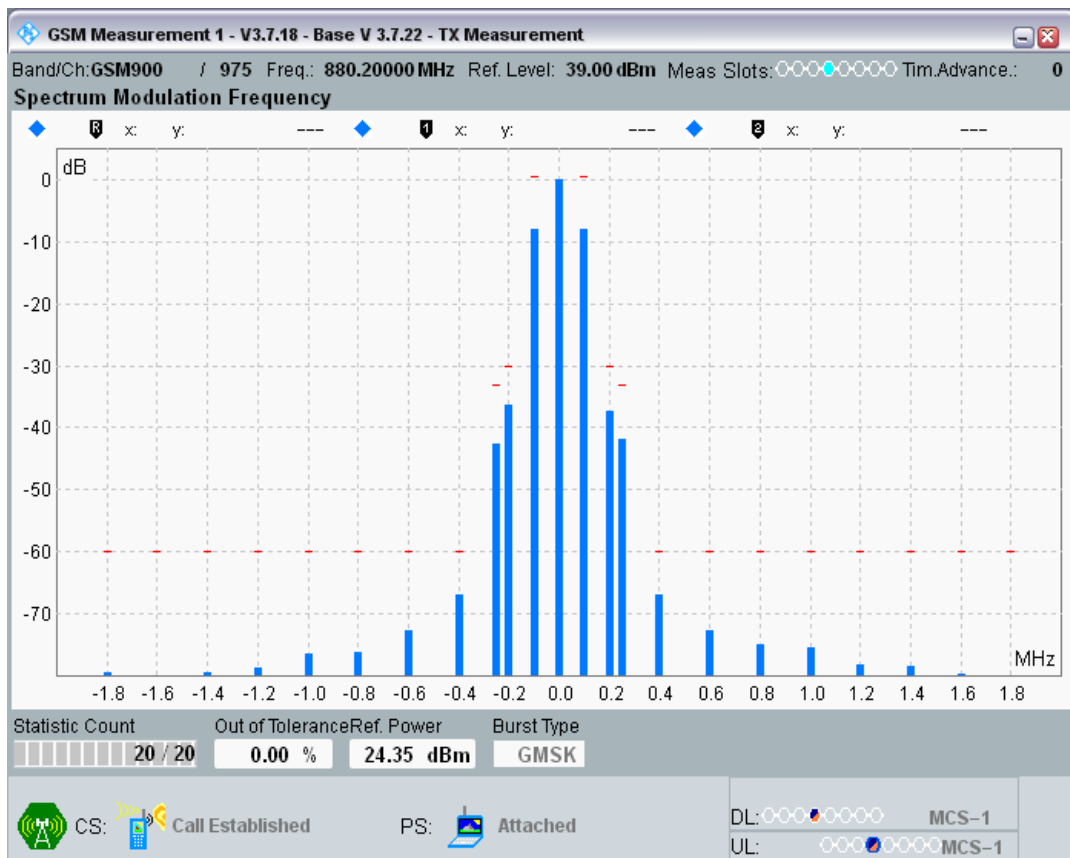


GSM900 Channel=975 PCL=19

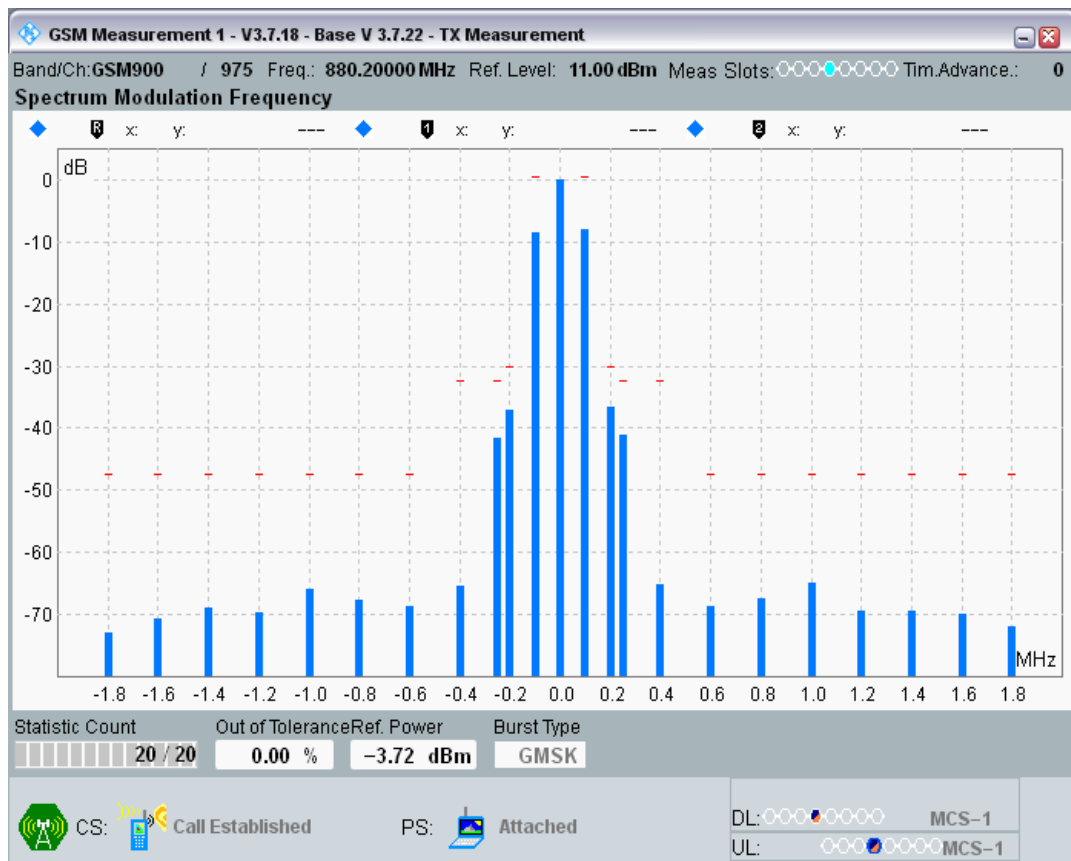


GSM900 Channel=38 PCL=5

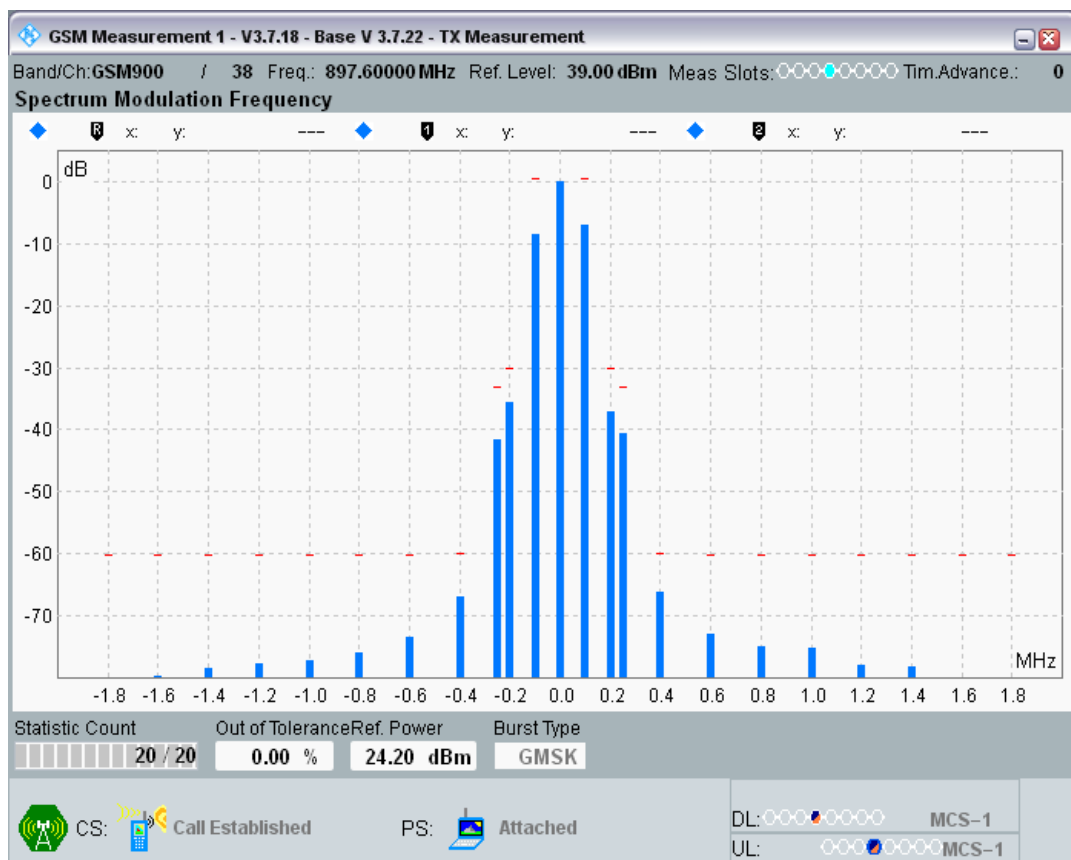


GSM900 Channel=38 PCL=19

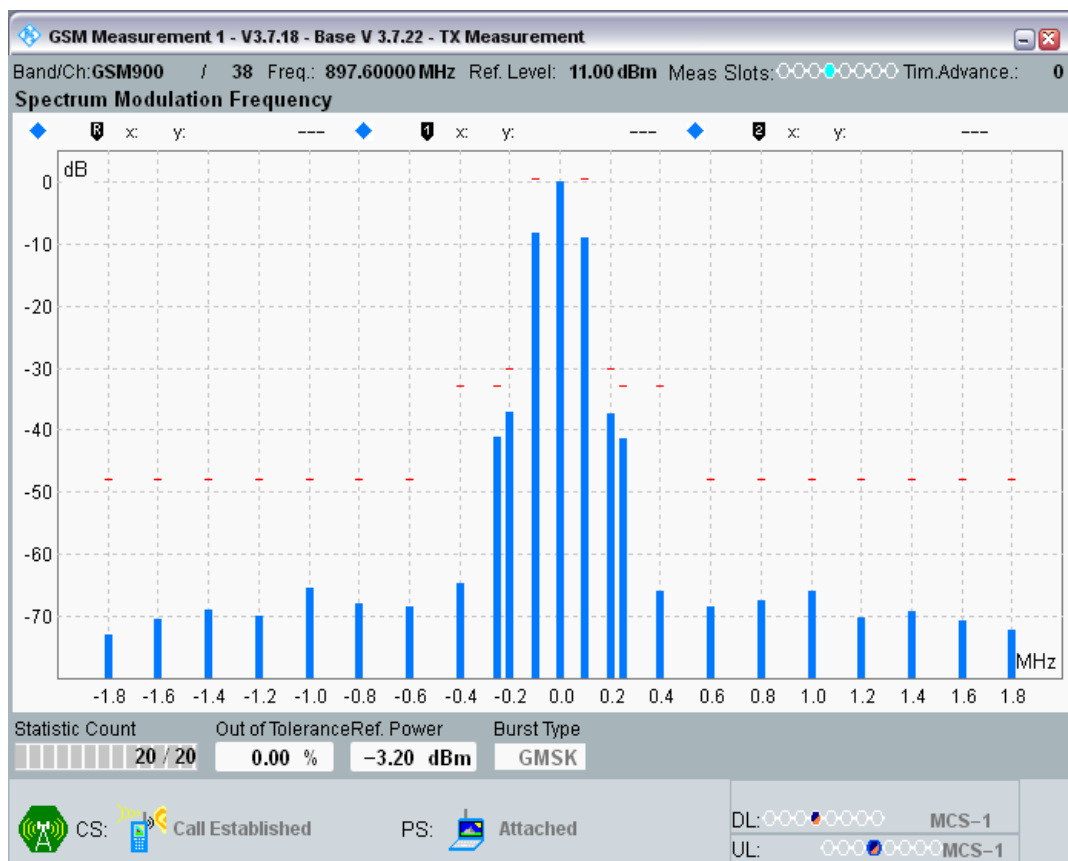

GSM900 Channel=124 PCL=5

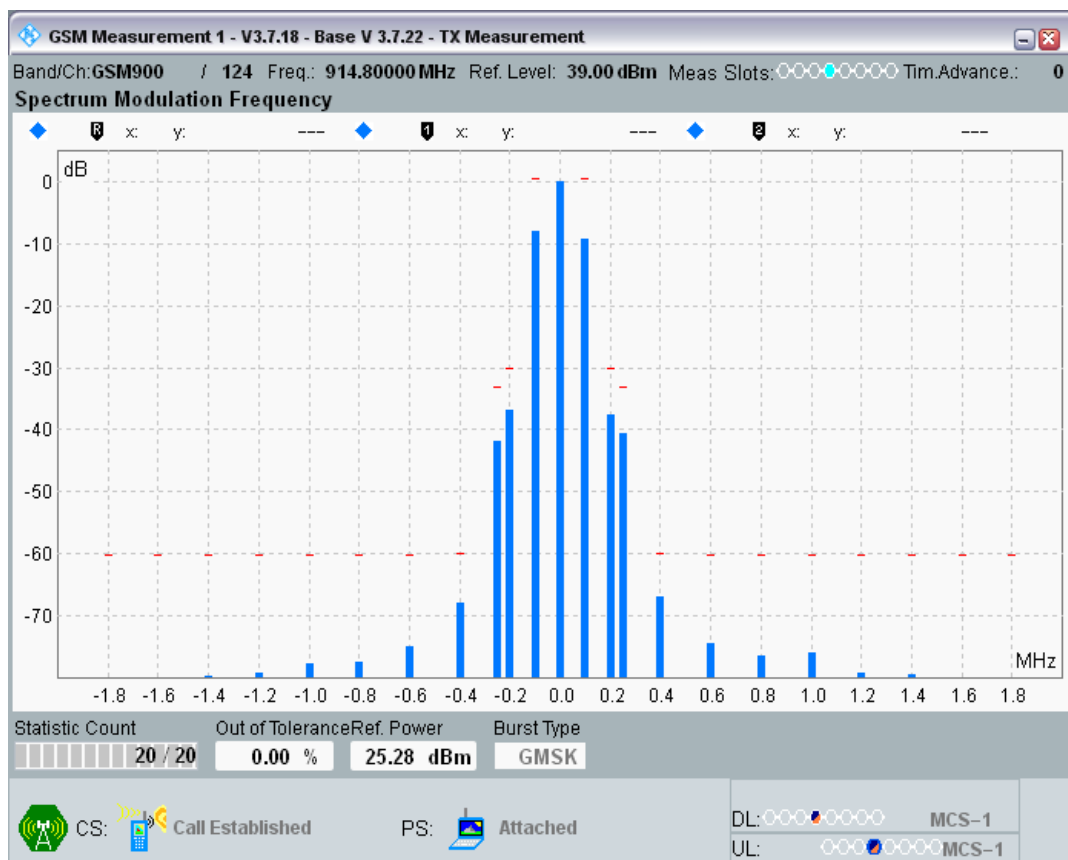

GSM900 Channel=124 PCL=19

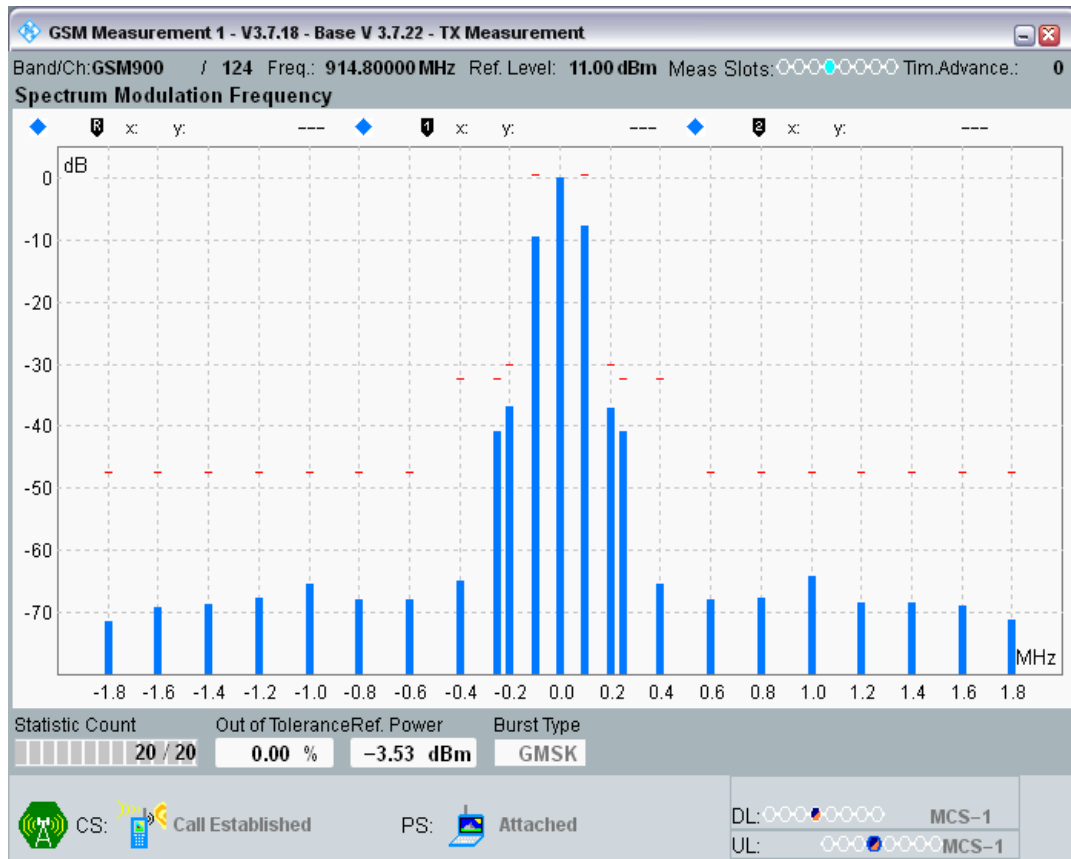

Clause 4.2.6 Transmitter-Switching Spectrum

Band	Channel	Frequency (MHz)	PCL	Offset (kHz)	Result (dBm)	Limit (dBm)	Verdict
GSM1800	512	1710.2	0	Ref Power	30.88		PASS
GSM1800	512	1710.2	0	-1800	-45.48	-26.12	PASS
GSM1800	512	1710.2	0	-1200	-39.40	-23.12	PASS
GSM1800	512	1710.2	0	-600	-35.56	-23.12	PASS
GSM1800	512	1710.2	0	-400	-28.64	-21.12	PASS
GSM1800	512	1710.2	0	400	-27.43	-21.12	PASS
GSM1800	512	1710.2	0	600	-34.86	-23.12	PASS
GSM1800	512	1710.2	0	1200	-38.81	-23.12	PASS
GSM1800	512	1710.2	0	1800	-41.93	-26.12	PASS
GSM1800	512	1710.2	15	Ref Power	1.70		PASS
GSM1800	512	1710.2	15	-1800	-62.51	-36	PASS
GSM1800	512	1710.2	15	-1200	-59.96	-32	PASS
GSM1800	512	1710.2	15	-600	-56.50	-26	PASS
GSM1800	512	1710.2	15	-400	-52.02	-23	PASS
GSM1800	512	1710.2	15	400	-50.75	-23	PASS
GSM1800	512	1710.2	15	600	-55.75	-26	PASS
GSM1800	512	1710.2	15	1200	-59.44	-32	PASS
GSM1800	512	1710.2	15	1800	-62.57	-36	PASS
GSM1800	698	1747.4	0	Ref Power	31.34		PASS
GSM1800	698	1747.4	0	-1800	-44.81	-25.66	PASS
GSM1800	698	1747.4	0	-1200	-40.23	-22.66	PASS

GSM1800	698	1747.4	0	-600	-37.09	-22.66	PASS
GSM1800	698	1747.4	0	-400	-27.00	-20.66	PASS
GSM1800	698	1747.4	0	400	-28.17	-20.66	PASS
GSM1800	698	1747.4	0	600	-36.87	-22.66	PASS
GSM1800	698	1747.4	0	1200	-38.46	-22.66	PASS
GSM1800	698	1747.4	0	1800	-43.29	-25.66	PASS
GSM1800	698	1747.4	15	Ref Power	1.53		PASS
GSM1800	698	1747.4	15	-1800	-62.47	-36	PASS
GSM1800	698	1747.4	15	-1200	-61.44	-32	PASS
GSM1800	698	1747.4	15	-600	-56.93	-26	PASS
GSM1800	698	1747.4	15	-400	-51.74	-23	PASS
GSM1800	698	1747.4	15	400	-51.03	-23	PASS
GSM1800	698	1747.4	15	600	-55.21	-26	PASS
GSM1800	698	1747.4	15	1200	-61.13	-32	PASS
GSM1800	698	1747.4	15	1800	-64.19	-36	PASS
GSM1800	885	1784.8	0	Ref Power	31.65		PASS
GSM1800	885	1784.8	0	-1800	-44.84	-25.35	PASS
GSM1800	885	1784.8	0	-1200	-39.16	-22.35	PASS
GSM1800	885	1784.8	0	-600	-34.83	-22.35	PASS
GSM1800	885	1784.8	0	-400	-27.57	-20.35	PASS
GSM1800	885	1784.8	0	400	-26.52	-20.35	PASS
GSM1800	885	1784.8	0	600	-36.20	-22.35	PASS
GSM1800	885	1784.8	0	1200	-39.78	-22.35	PASS
GSM1800	885	1784.8	0	1800	-44.19	-25.35	PASS
GSM1800	885	1784.8	15	Ref Power	1.66		PASS
GSM1800	885	1784.8	15	-1800	-63.07	-36	PASS
GSM1800	885	1784.8	15	-1200	-61.26	-32	PASS
GSM1800	885	1784.8	15	-600	-57.38	-26	PASS
GSM1800	885	1784.8	15	-400	-52.36	-23	PASS
GSM1800	885	1784.8	15	400	-50.53	-23	PASS
GSM1800	885	1784.8	15	600	-56.15	-26	PASS
GSM1800	885	1784.8	15	1200	-60.54	-32	PASS
GSM1800	885	1784.8	15	1800	-62.10	-36	PASS
GSM1900	512	1850.2	0	Ref Power	30.66		PASS
GSM1900	512	1850.2	0	-1800	-44.23	-26.34	PASS
GSM1900	512	1850.2	0	-1200	-41.72	-23.34	PASS
GSM1900	512	1850.2	0	-600	-37.39	-23.34	PASS
GSM1900	512	1850.2	0	-400	-27.20	-21.34	PASS
GSM1900	512	1850.2	0	400	-28.62	-21.34	PASS
GSM1900	512	1850.2	0	600	-36.49	-23.34	PASS
GSM1900	512	1850.2	0	1200	-40.73	-23.34	PASS
GSM1900	512	1850.2	0	1800	-44.53	-26.34	PASS
GSM1900	512	1850.2	15	Ref Power	0.63		PASS
GSM1900	512	1850.2	15	-1800	-59.24	-36	PASS


GSM1900	512	1850.2	15	-1200	-56.78	-32	PASS
GSM1900	512	1850.2	15	-600	-52.18	-26	PASS
GSM1900	512	1850.2	15	-400	-49.63	-23	PASS
GSM1900	512	1850.2	15	400	-46.75	-23	PASS
GSM1900	512	1850.2	15	600	-50.41	-26	PASS
GSM1900	512	1850.2	15	1200	-56.35	-32	PASS
GSM1900	512	1850.2	15	1800	-58.36	-36	PASS
GSM1900	661	1880	0	Ref Power	30.61		PASS
GSM1900	661	1880	0	-1800	-45.92	-26.39	PASS
GSM1900	661	1880	0	-1200	-41.74	-23.39	PASS
GSM1900	661	1880	0	-600	-35.36	-23.39	PASS
GSM1900	661	1880	0	-400	-28.95	-21.39	PASS
GSM1900	661	1880	0	400	-29.24	-21.39	PASS
GSM1900	661	1880	0	600	-37.53	-23.39	PASS
GSM1900	661	1880	0	1200	-40.03	-23.39	PASS
GSM1900	661	1880	0	1800	-43.65	-26.39	PASS
GSM1900	661	1880	15	Ref Power	0.71		PASS
GSM1900	661	1880	15	-1800	-59.02	-36	PASS
GSM1900	661	1880	15	-1200	-56.47	-32	PASS
GSM1900	661	1880	15	-600	-51.69	-26	PASS
GSM1900	661	1880	15	-400	-48.93	-23	PASS
GSM1900	661	1880	15	400	-47.19	-23	PASS
GSM1900	661	1880	15	600	-50.35	-26	PASS
GSM1900	661	1880	15	1200	-55.33	-32	PASS
GSM1900	661	1880	15	1800	-58.87	-36	PASS
GSM1900	810	1909.8	0	Ref Power	30.67		PASS
GSM1900	810	1909.8	0	-1800	-45.48	-26.33	PASS
GSM1900	810	1909.8	0	-1200	-41.22	-23.33	PASS
GSM1900	810	1909.8	0	-600	-35.03	-23.33	PASS
GSM1900	810	1909.8	0	-400	-28.28	-21.33	PASS
GSM1900	810	1909.8	0	400	-28.19	-21.33	PASS
GSM1900	810	1909.8	0	600	-35.90	-23.33	PASS
GSM1900	810	1909.8	0	1200	-40.81	-23.33	PASS
GSM1900	810	1909.8	0	1800	-45.14	-26.33	PASS
GSM1900	810	1909.8	15	Ref Power	0.84		PASS
GSM1900	810	1909.8	15	-1800	-59.11	-36	PASS
GSM1900	810	1909.8	15	-1200	-57.00	-32	PASS
GSM1900	810	1909.8	15	-600	-51.92	-26	PASS
GSM1900	810	1909.8	15	-400	-49.04	-23	PASS
GSM1900	810	1909.8	15	400	-46.86	-23	PASS
GSM1900	810	1909.8	15	600	-50.15	-26	PASS
GSM1900	810	1909.8	15	1200	-54.23	-32	PASS
GSM1900	810	1909.8	15	1800	-57.96	-36	PASS
GSM850	128	824.2	5	Ref Power	34.20		PASS

GSM850	128	824.2	5	-1800	-44.19	-24	PASS
GSM850	128	824.2	5	-1200	-39.26	-21	PASS
GSM850	128	824.2	5	-600	-36.29	-21	PASS
GSM850	128	824.2	5	-400	-28.59	-17.8	PASS
GSM850	128	824.2	5	400	-29.30	-17.8	PASS
GSM850	128	824.2	5	600	-35.20	-21	PASS
GSM850	128	824.2	5	1200	-37.67	-21	PASS
GSM850	128	824.2	5	1800	-42.47	-24	PASS
GSM850	128	824.2	19	Ref Power	6.40		PASS
GSM850	128	824.2	19	-1800	-46.25	-36	PASS
GSM850	128	824.2	19	-1200	-43.89	-32	PASS
GSM850	128	824.2	19	-600	-39.26	-26	PASS
GSM850	128	824.2	19	-400	-36.33	-23	PASS
GSM850	128	824.2	19	400	-33.58	-23	PASS
GSM850	128	824.2	19	600	-37.25	-26	PASS
GSM850	128	824.2	19	1200	-43.17	-32	PASS
GSM850	128	824.2	19	1800	-45.18	-36	PASS
GSM850	190	836.6	5	Ref Power	33.76		PASS
GSM850	190	836.6	5	-1800	-42.45	-24	PASS
GSM850	190	836.6	5	-1200	-39.51	-21	PASS
GSM850	190	836.6	5	-600	-36.78	-21	PASS
GSM850	190	836.6	5	-400	-28.29	-18.24	PASS
GSM850	190	836.6	5	400	-30.43	-18.24	PASS
GSM850	190	836.6	5	600	-38.07	-21	PASS
GSM850	190	836.6	5	1200	-38.30	-21	PASS
GSM850	190	836.6	5	1800	-43.84	-24	PASS
GSM850	190	836.6	19	Ref Power	6.11		PASS
GSM850	190	836.6	19	-1800	-46.38	-36	PASS
GSM850	190	836.6	19	-1200	-44.68	-32	PASS
GSM850	190	836.6	19	-600	-39.44	-26	PASS
GSM850	190	836.6	19	-400	-36.77	-23	PASS
GSM850	190	836.6	19	400	-34.07	-23	PASS
GSM850	190	836.6	19	600	-37.71	-26	PASS
GSM850	190	836.6	19	1200	-43.12	-32	PASS
GSM850	190	836.6	19	1800	-45.78	-36	PASS
GSM850	251	848.8	5	Ref Power	33.74		PASS
GSM850	251	848.8	5	-1800	-43.37	-24	PASS
GSM850	251	848.8	5	-1200	-39.11	-21	PASS
GSM850	251	848.8	5	-600	-37.28	-21	PASS
GSM850	251	848.8	5	-400	-30.10	-18.26	PASS
GSM850	251	848.8	5	400	-29.46	-18.26	PASS
GSM850	251	848.8	5	600	-36.21	-21	PASS
GSM850	251	848.8	5	1200	-38.74	-21	PASS
GSM850	251	848.8	5	1800	-42.79	-24	PASS


GSM850	251	848.8	19	Ref Power	6.25		PASS
GSM850	251	848.8	19	-1800	-46.55	-36	PASS
GSM850	251	848.8	19	-1200	-43.57	-32	PASS
GSM850	251	848.8	19	-600	-39.63	-26	PASS
GSM850	251	848.8	19	-400	-37.09	-23	PASS
GSM850	251	848.8	19	400	-33.86	-23	PASS
GSM850	251	848.8	19	600	-37.45	-26	PASS
GSM850	251	848.8	19	1200	-42.74	-32	PASS
GSM850	251	848.8	19	1800	-45.54	-36	PASS
GSM900	975	880.2	5	Ref Power	33.01		PASS
GSM900	975	880.2	5	-1800	-44.54	-24	PASS
GSM900	975	880.2	5	-1200	-42.77	-21	PASS
GSM900	975	880.2	5	-600	-37.75	-21	PASS
GSM900	975	880.2	5	-400	-31.28	-18.99	PASS
GSM900	975	880.2	5	400	-30.24	-18.99	PASS
GSM900	975	880.2	5	600	-36.20	-21	PASS
GSM900	975	880.2	5	1200	-40.37	-21	PASS
GSM900	975	880.2	5	1800	-42.74	-24	PASS
GSM900	975	880.2	19	Ref Power	4.75		PASS
GSM900	975	880.2	19	-1800	-50.69	-36	PASS
GSM900	975	880.2	19	-1200	-48.04	-32	PASS
GSM900	975	880.2	19	-600	-43.62	-26	PASS
GSM900	975	880.2	19	-400	-40.68	-23	PASS
GSM900	975	880.2	19	400	-37.71	-23	PASS
GSM900	975	880.2	19	600	-41.24	-26	PASS
GSM900	975	880.2	19	1200	-46.82	-32	PASS
GSM900	975	880.2	19	1800	-49.41	-36	PASS
GSM900	38	897.6	5	Ref Power	33.16		PASS
GSM900	38	897.6	5	-1800	-45.10	-24	PASS
GSM900	38	897.6	5	-1200	-42.94	-21	PASS
GSM900	38	897.6	5	-600	-37.73	-21	PASS
GSM900	38	897.6	5	-400	-31.48	-18.84	PASS
GSM900	38	897.6	5	400	-30.99	-18.84	PASS
GSM900	38	897.6	5	600	-36.44	-21	PASS
GSM900	38	897.6	5	1200	-40.56	-21	PASS
GSM900	38	897.6	5	1800	-41.91	-24	PASS
GSM900	38	897.6	19	Ref Power	5.00		PASS
GSM900	38	897.6	19	-1800	-49.91	-36	PASS
GSM900	38	897.6	19	-1200	-47.73	-32	PASS
GSM900	38	897.6	19	-600	-43.46	-26	PASS
GSM900	38	897.6	19	-400	-40.47	-23	PASS
GSM900	38	897.6	19	400	-37.48	-23	PASS
GSM900	38	897.6	19	600	-40.88	-26	PASS
GSM900	38	897.6	19	1200	-46.31	-32	PASS

GSM900	38	897.6	19	1800	-49.28	-36	PASS
GSM900	124	914.8	5	Ref Power	33.32		PASS
GSM900	124	914.8	5	-1800	-43.96	-24	PASS
GSM900	124	914.8	5	-1200	-42.32	-21	PASS
GSM900	124	914.8	5	-600	-37.15	-21	PASS
GSM900	124	914.8	5	-400	-31.26	-18.68	PASS
GSM900	124	914.8	5	400	-31.13	-18.68	PASS
GSM900	124	914.8	5	600	-35.94	-21	PASS
GSM900	124	914.8	5	1200	-39.72	-21	PASS
GSM900	124	914.8	5	1800	-42.53	-24	PASS
GSM900	124	914.8	19	Ref Power	4.75		PASS
GSM900	124	914.8	19	-1800	-50.68	-36	PASS
GSM900	124	914.8	19	-1200	-48.40	-32	PASS
GSM900	124	914.8	19	-600	-43.61	-26	PASS
GSM900	124	914.8	19	-400	-40.70	-23	PASS
GSM900	124	914.8	19	400	-37.81	-23	PASS
GSM900	124	914.8	19	600	-41.21	-26	PASS
GSM900	124	914.8	19	1200	-46.66	-32	PASS
GSM900	124	914.8	19	1800	-49.08	-36	PASS


GSM1800 Channel=512 PCL=0

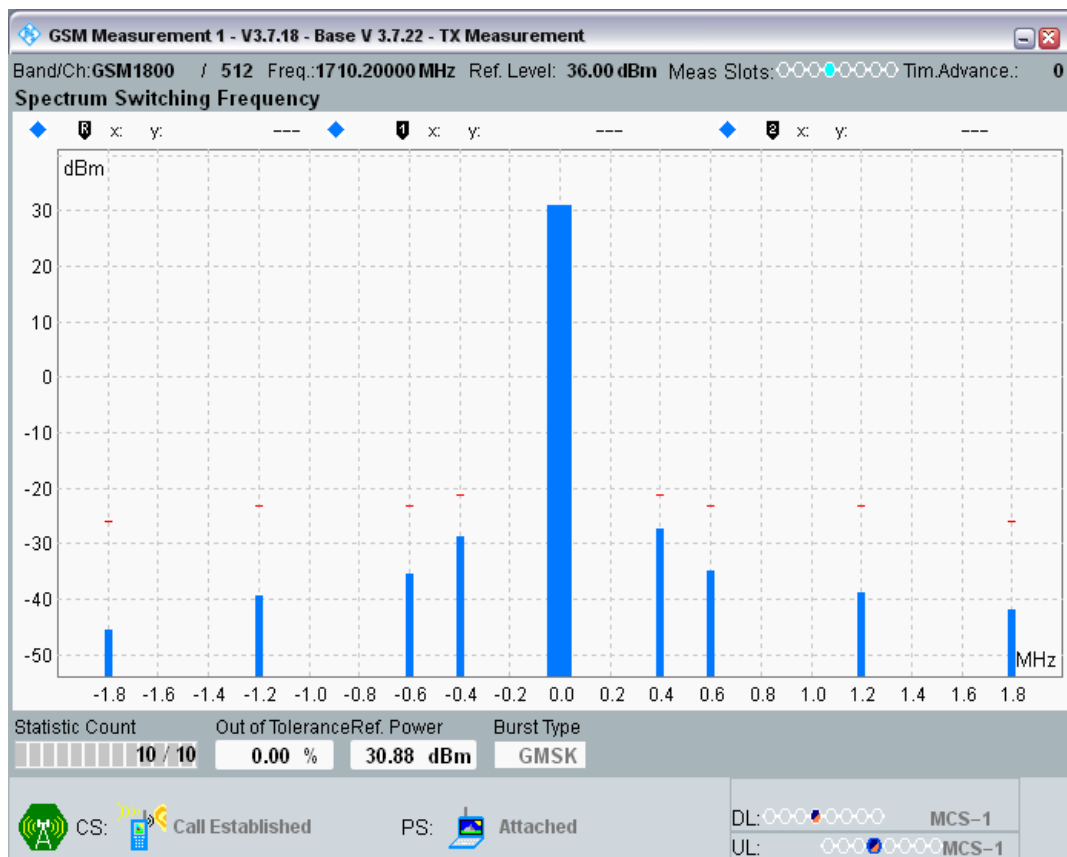


GSM1800 Channel=512 PCL=15

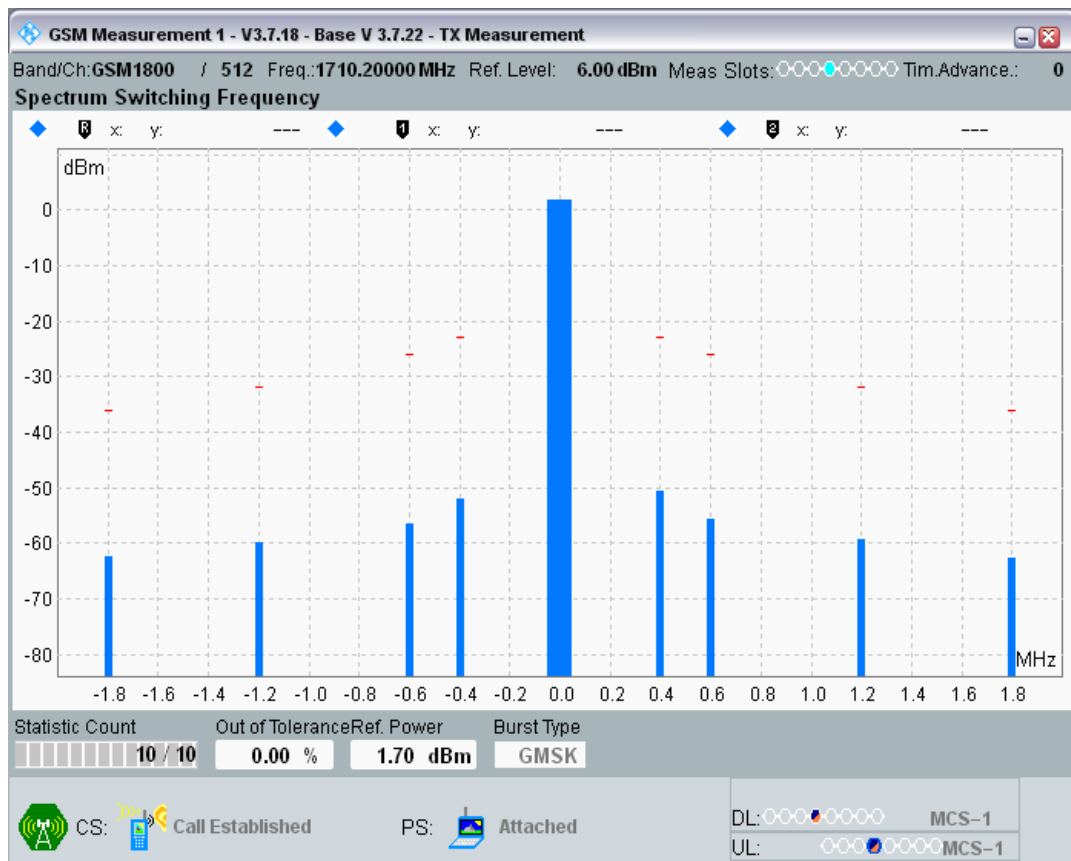


GSM1800 Channel=698 PCL=0

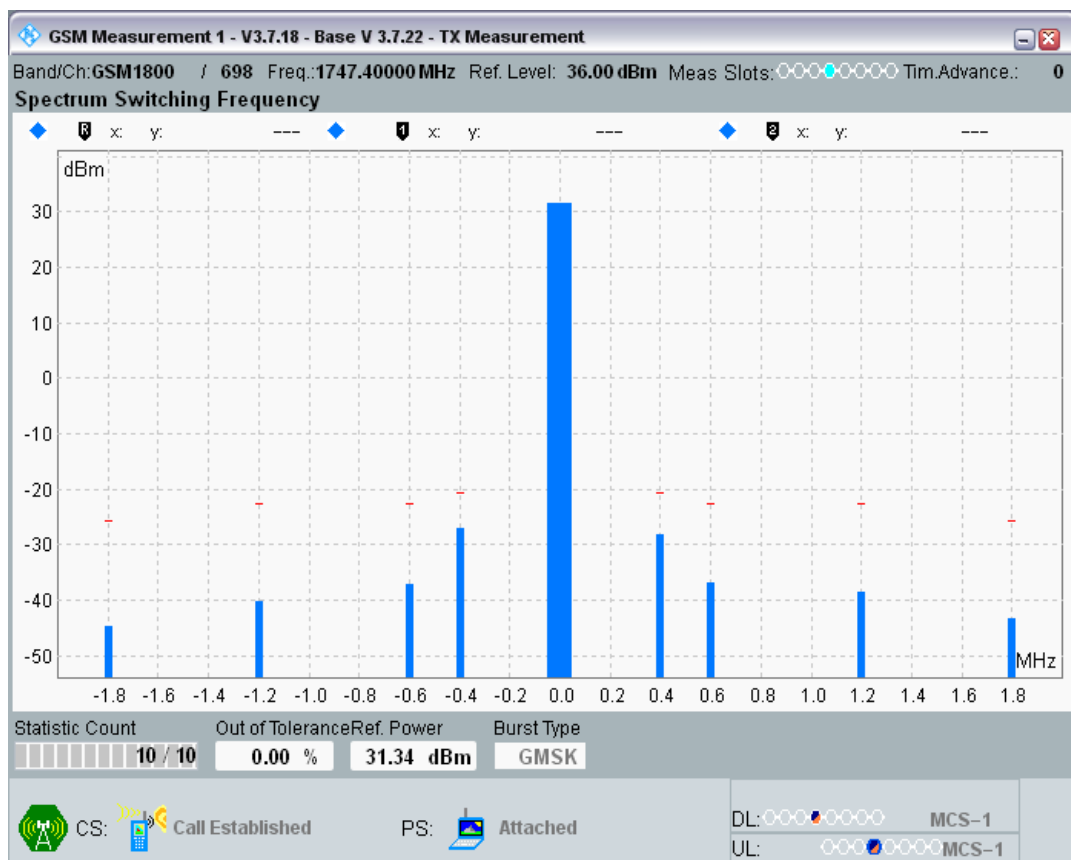


GSM1800 Channel=698 PCL=15

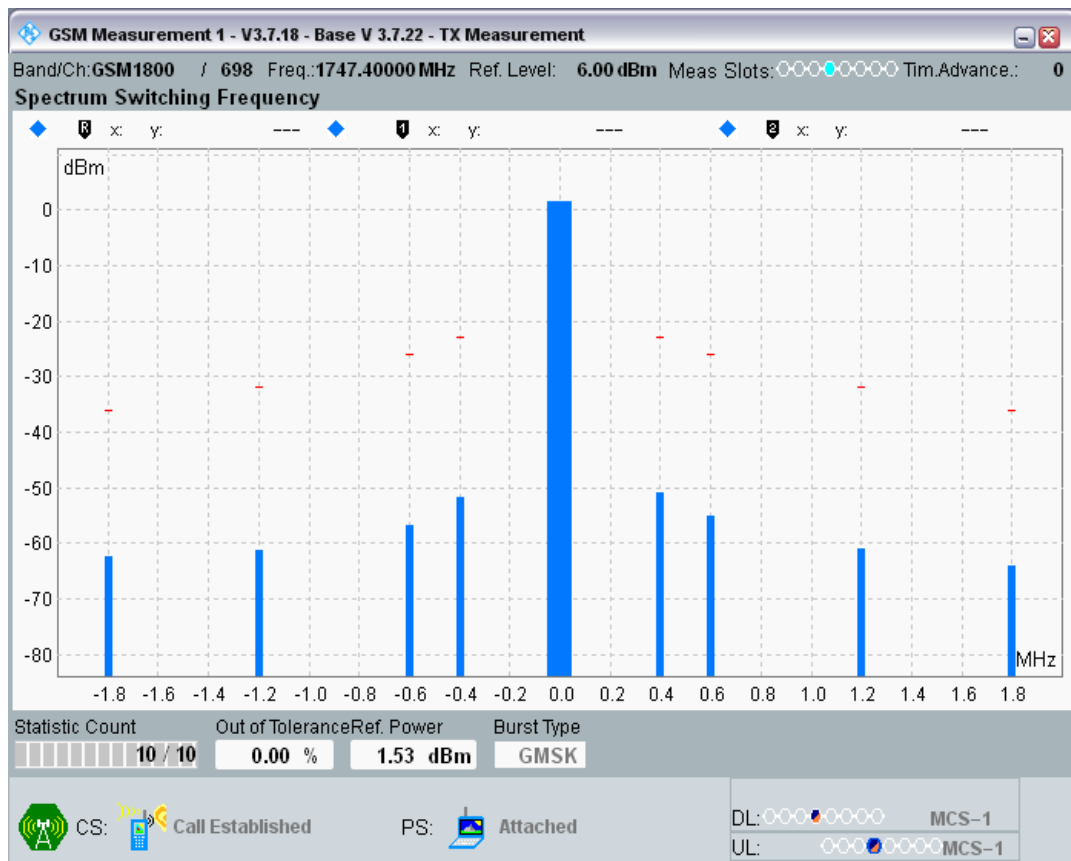


GSM1800 Channel=885 PCL=0

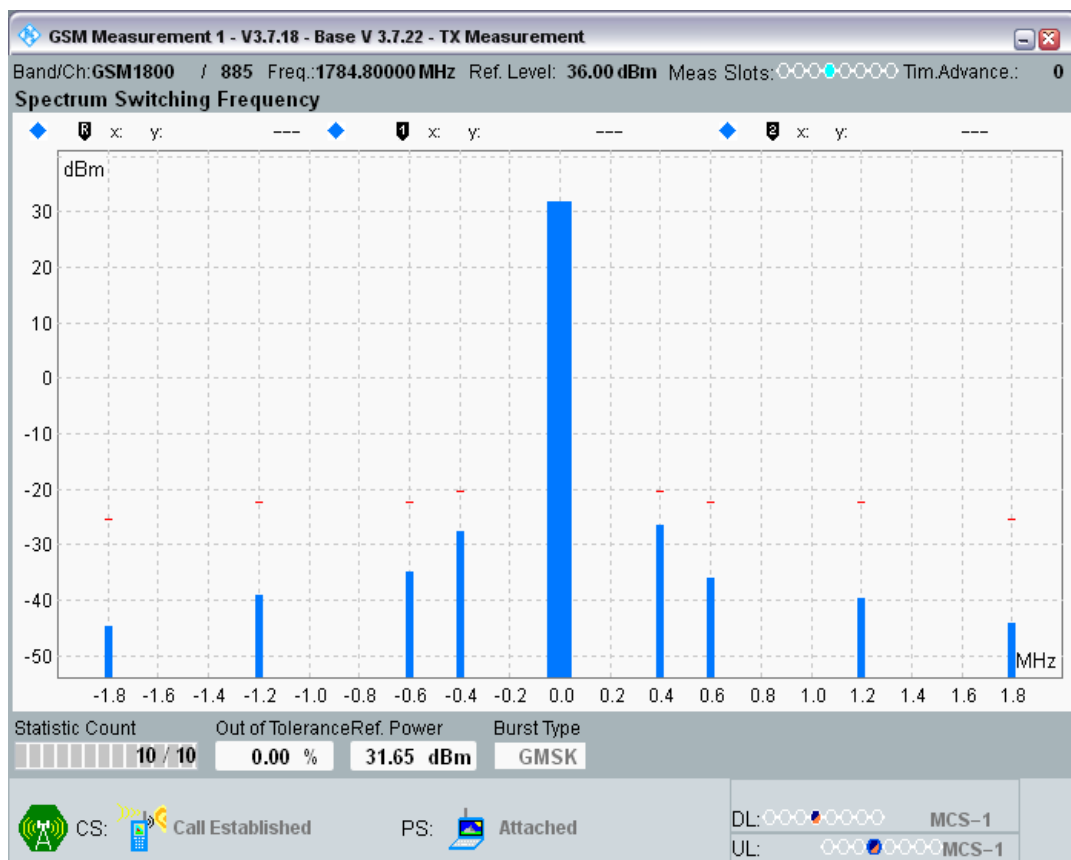


GSM1800 Channel=885 PCL=15

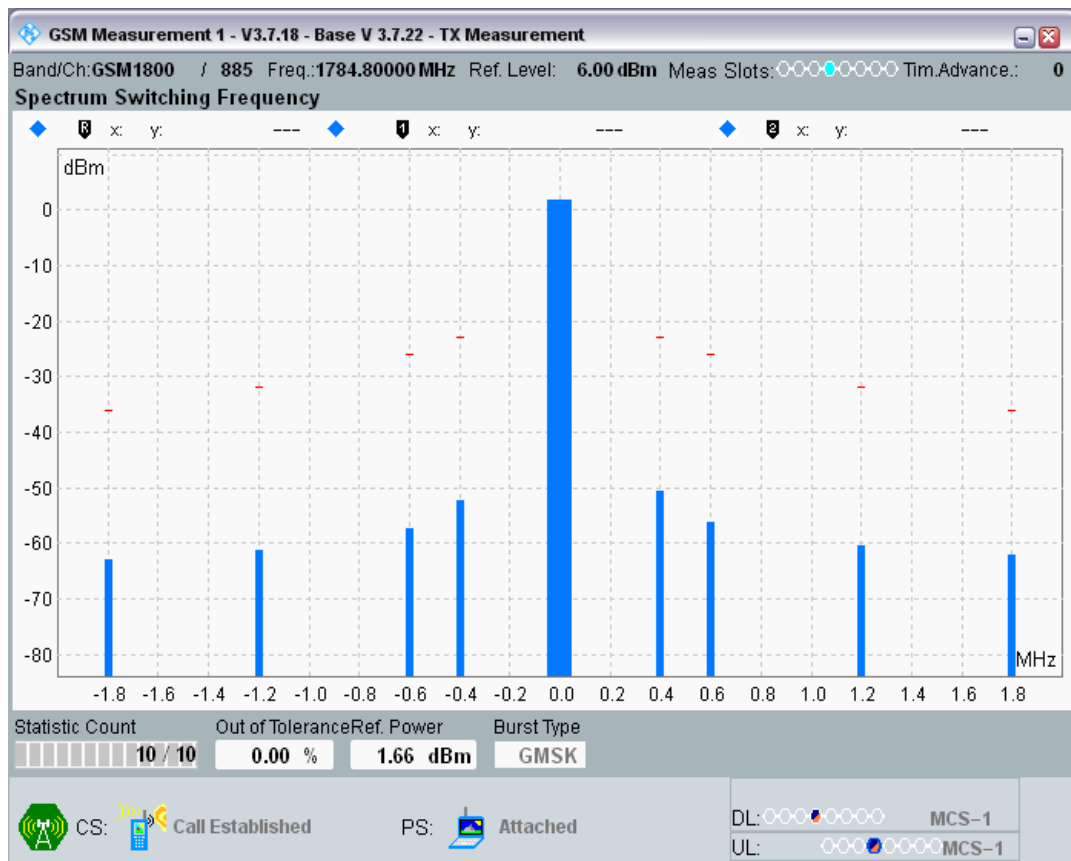


GSM1900 Channel=512 PCL=0

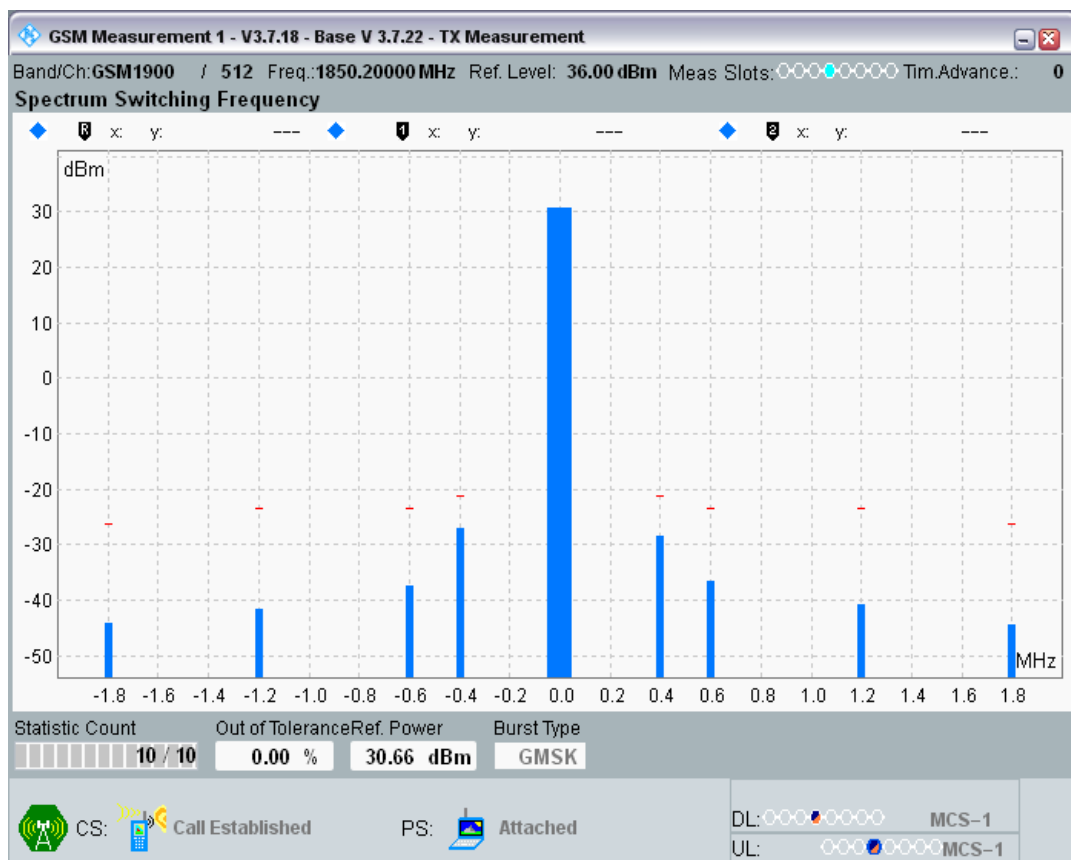


GSM1900 Channel=512 PCL=15

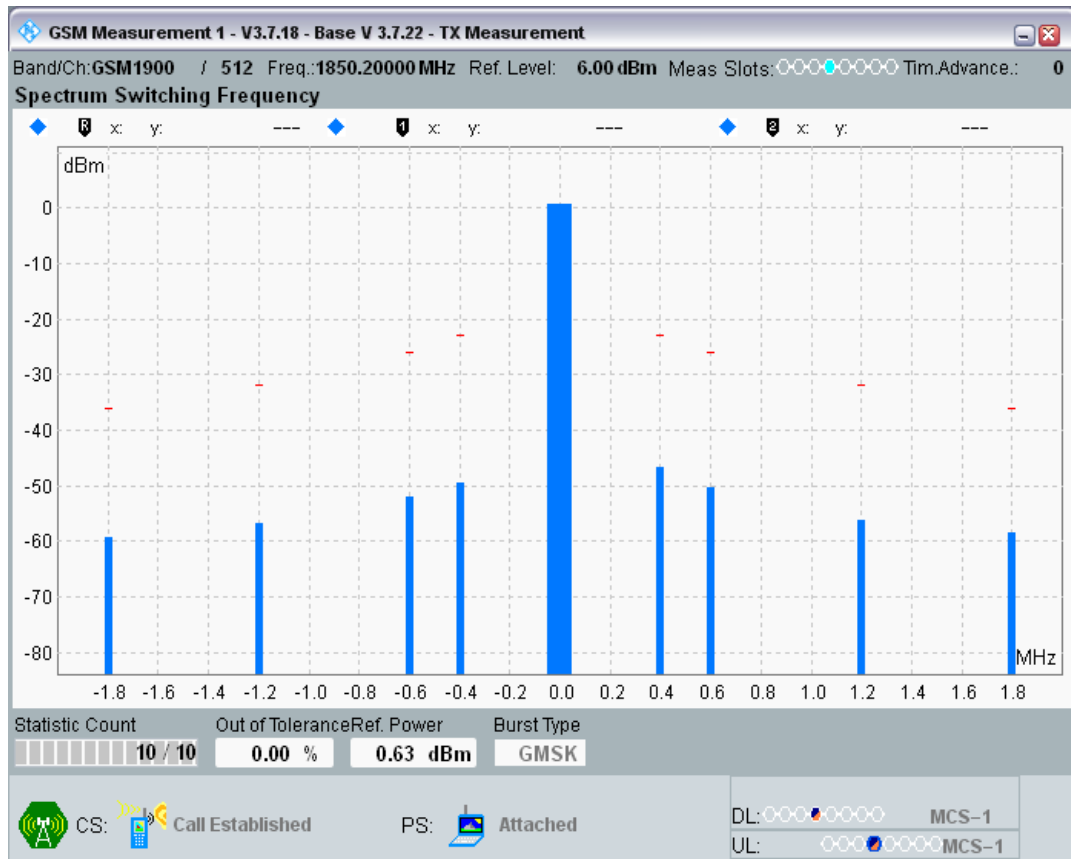


GSM1900 Channel=661 PCL=0

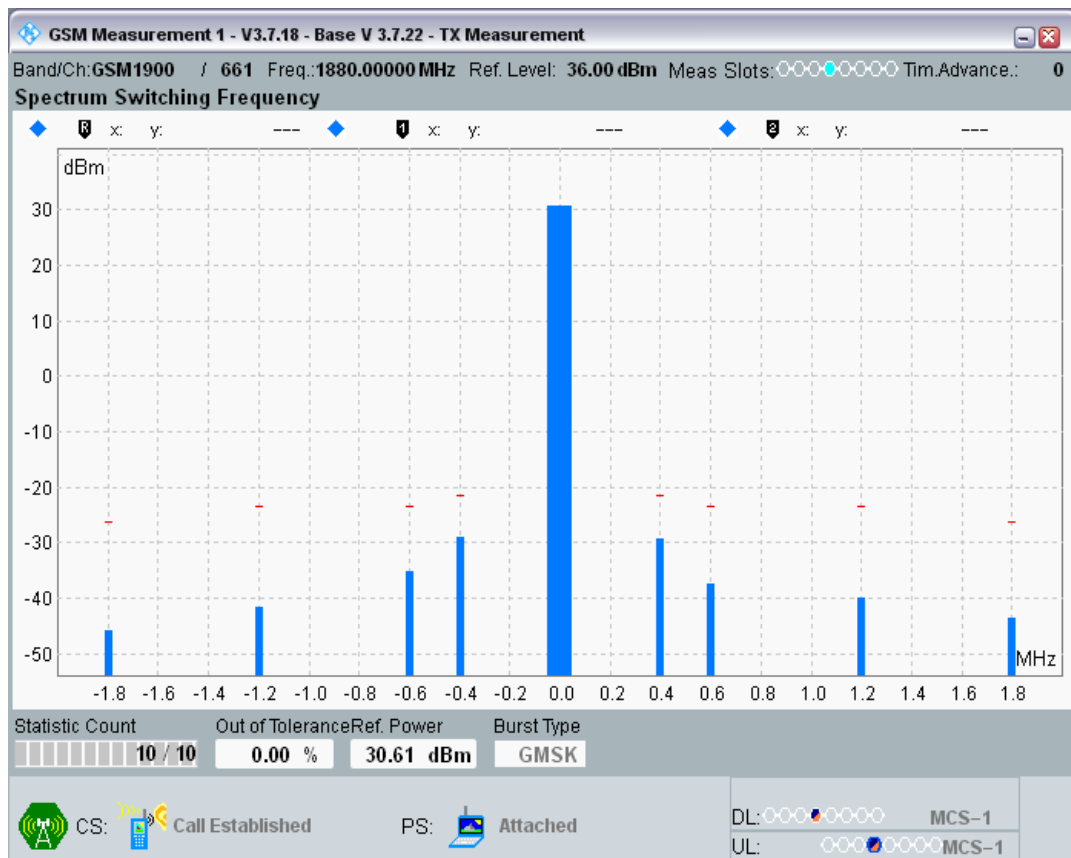


GSM1900 Channel=661 PCL=15

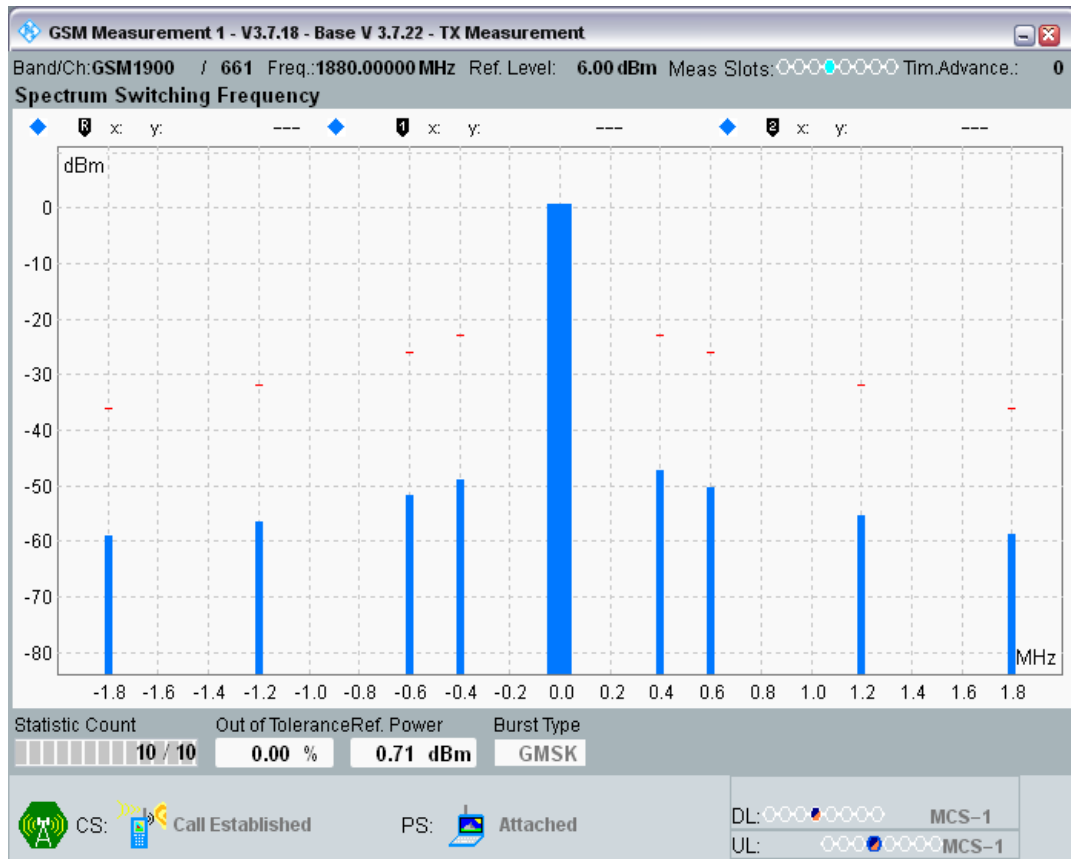


GSM1900 Channel=810 PCL=0

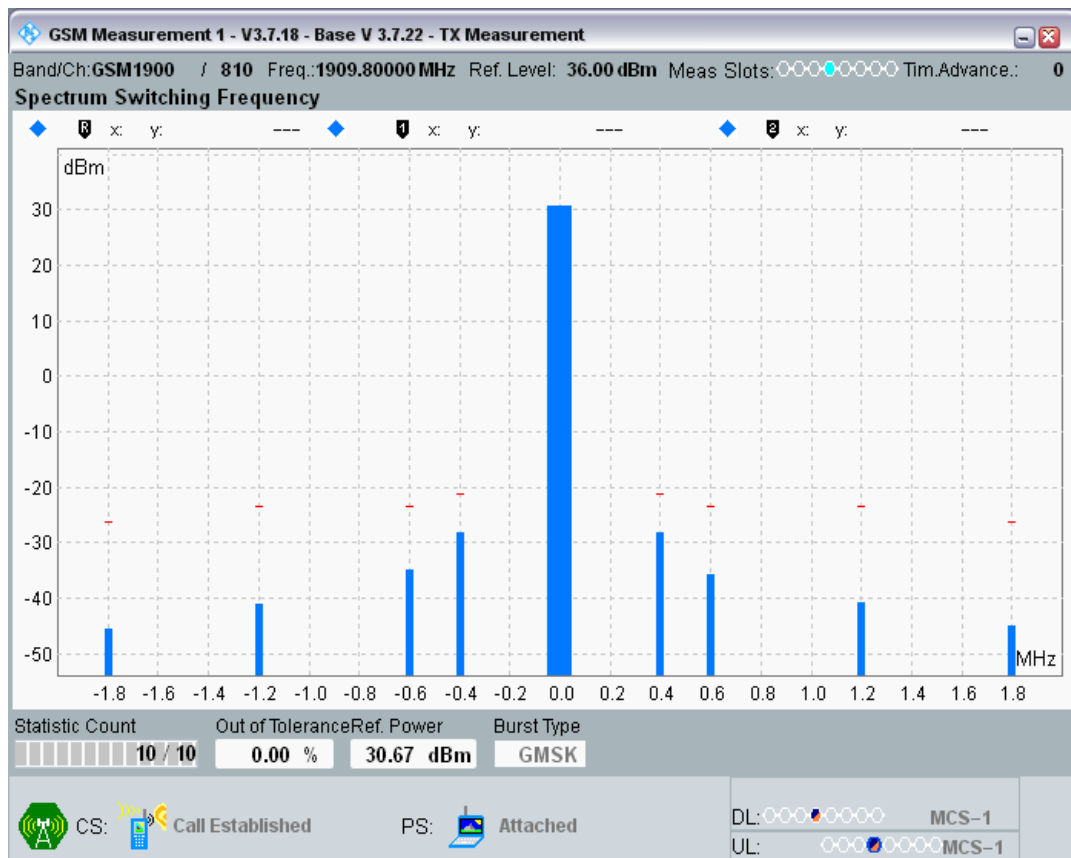

GSM1900 Channel=810 PCL=15

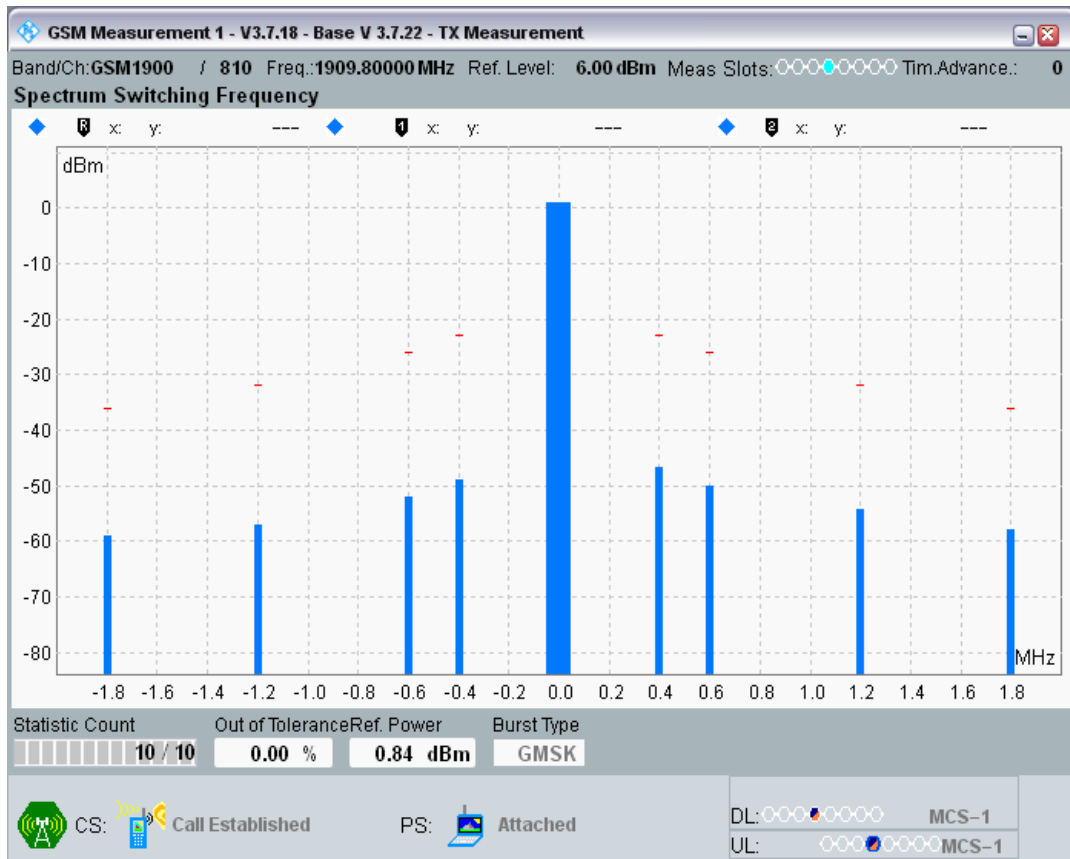


GSM850 Channel=128 PCL=5

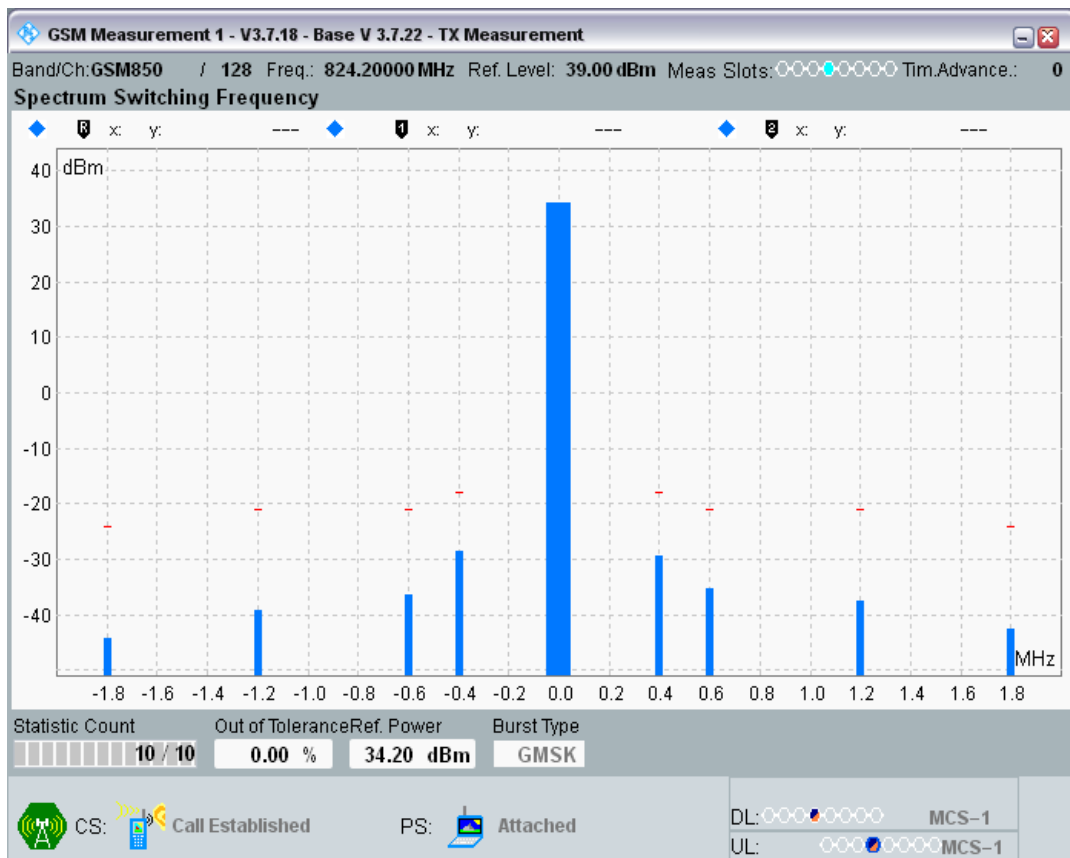

GSM850 Channel=128 PCL=19




GSM850 Channel=190 PCL=5

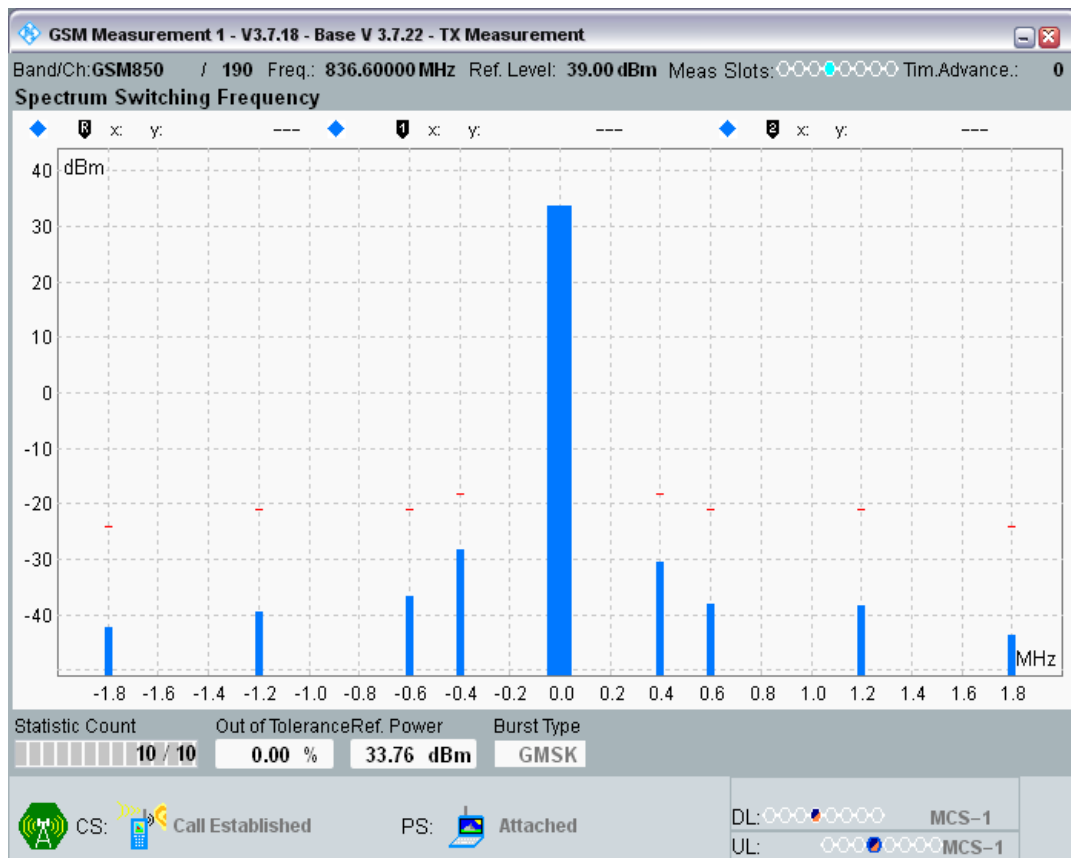

GSM850 Channel=190 PCL=19




GSM850 Channel=251 PCL=5

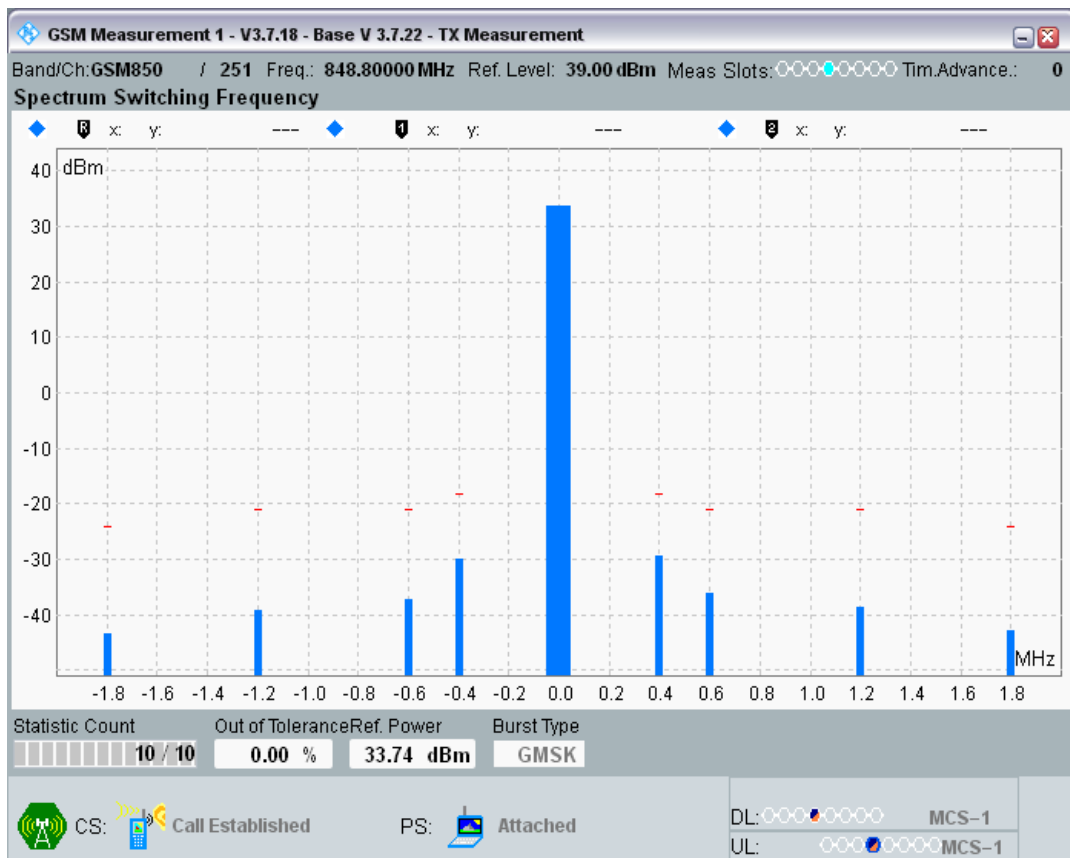


GSM850 Channel=251 PCL=19




GSM900 Channel=975 PCL=5

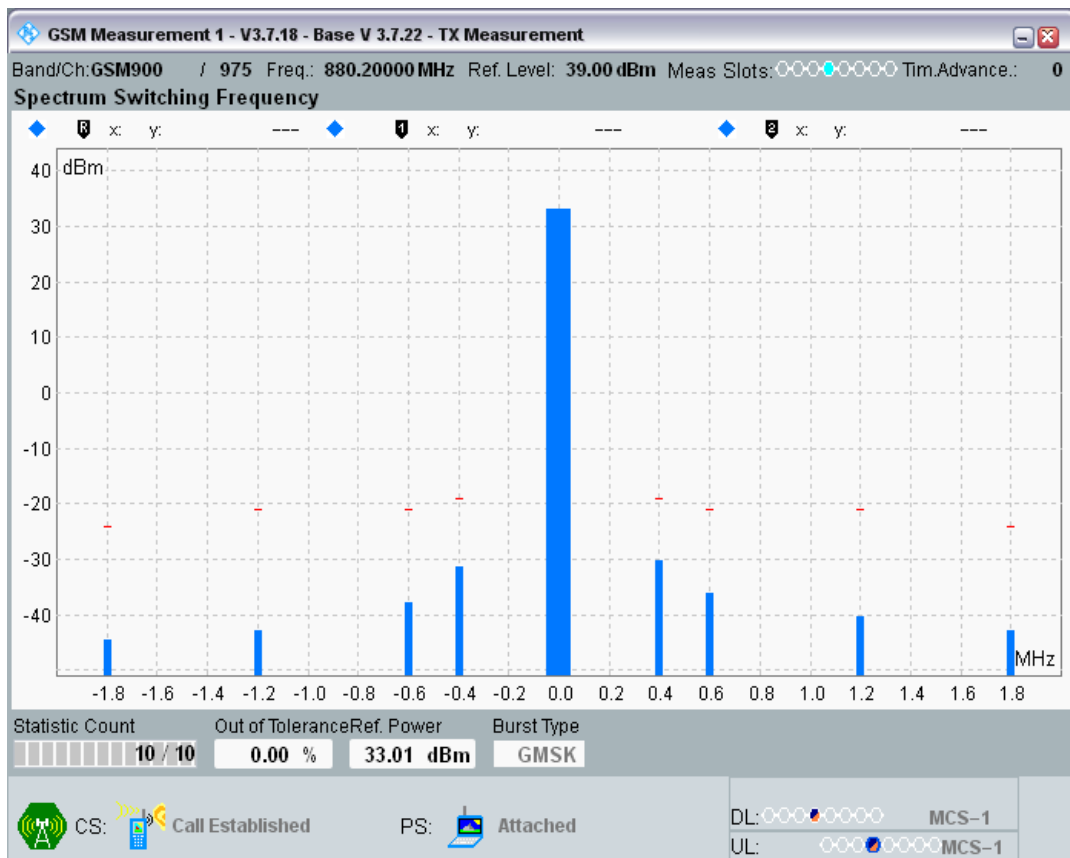

GSM900 Channel=975 PCL=19

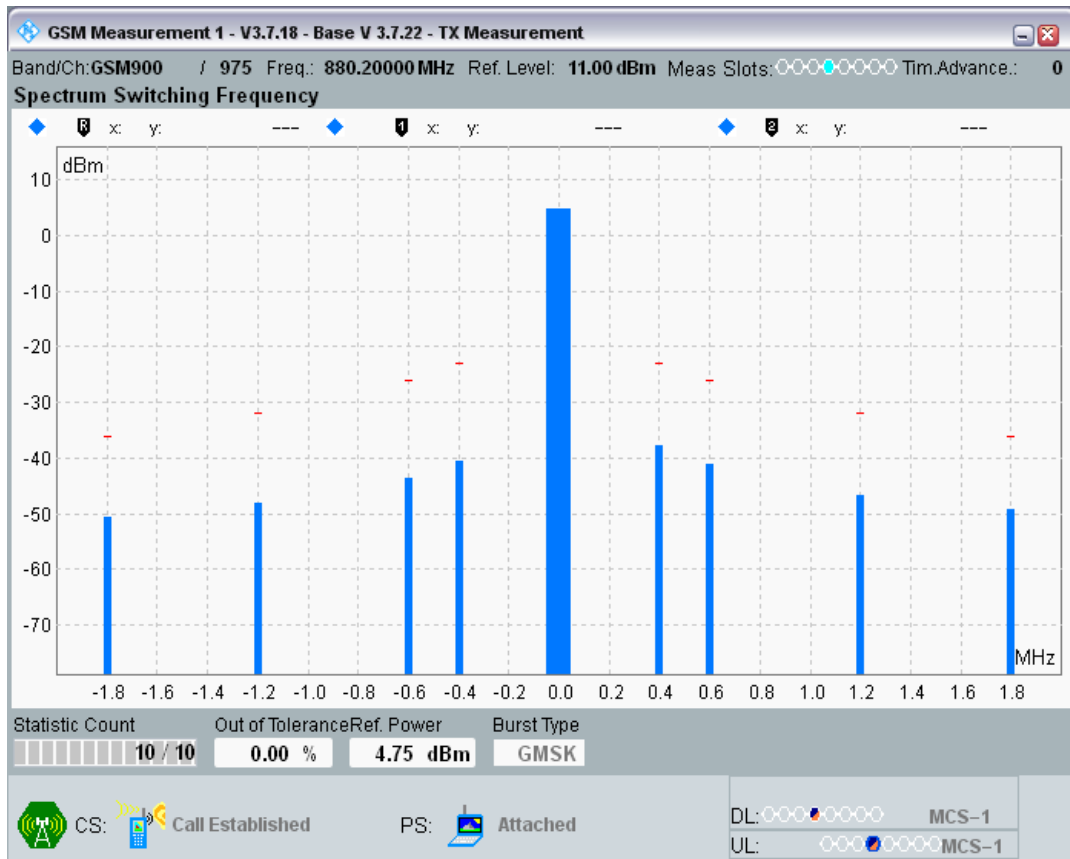


GSM900 Channel=38 PCL=5

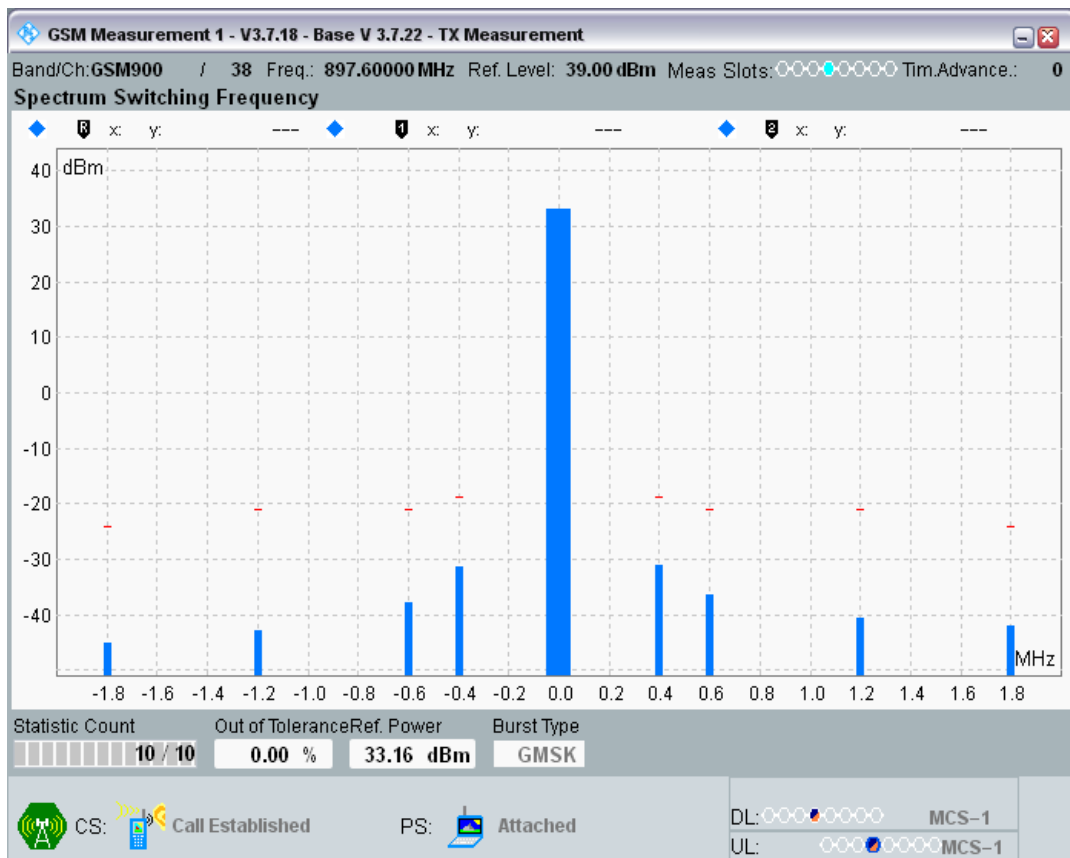


GSM900 Channel=38 PCL=19



GSM900 Channel=124 PCL=5

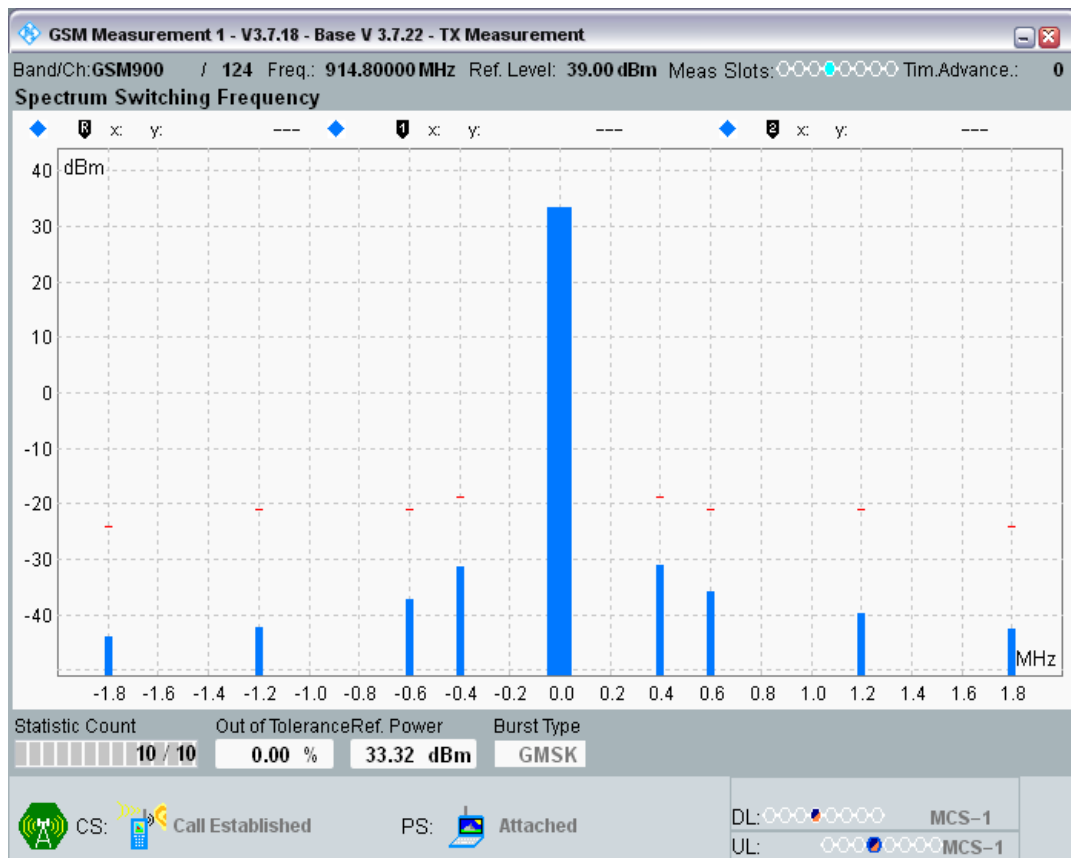

GSM900 Channel=124 PCL=19

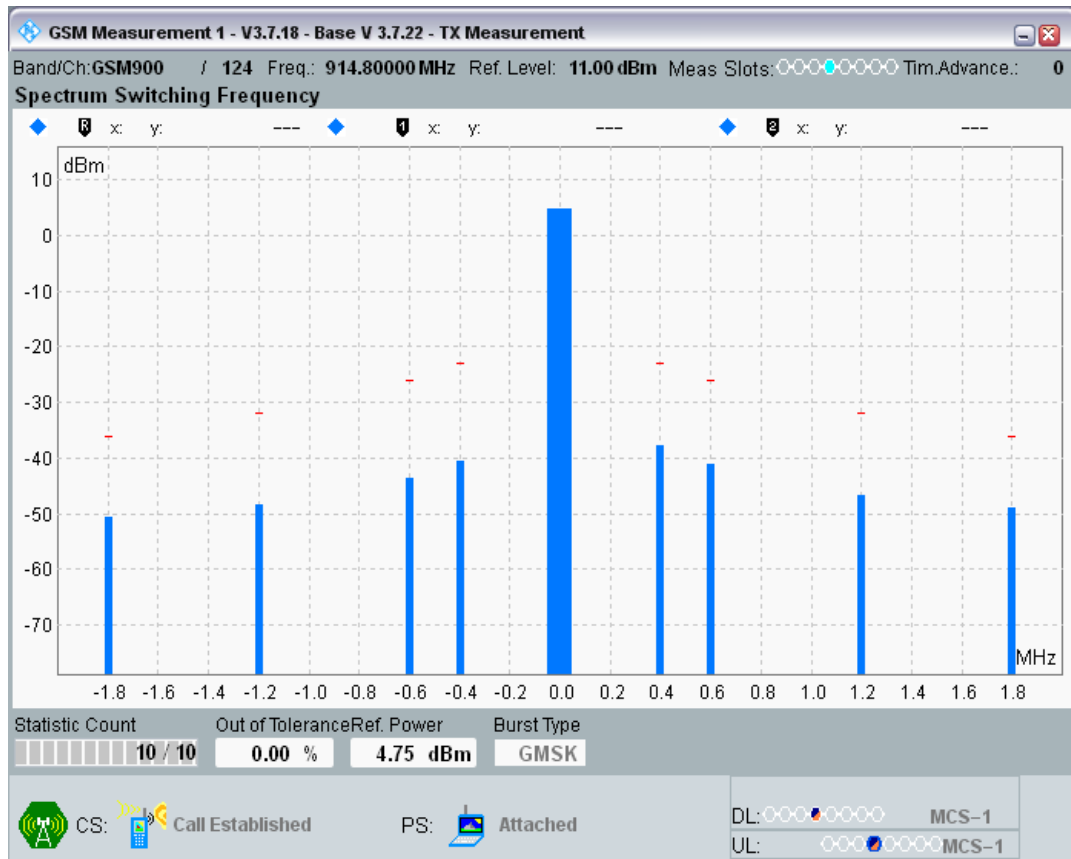

Clause 4.2.12 Conducted spurious emissions - MS allocated a channel

Band	Channel	Frequency (MHz)	PCL	Range	RBW	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1800	512	1710.2	5	100 kHz-50 MHz	10 kHz	0.12	-52.52	-36	PASS
GSM1800	512	1710.2	5	50 MHz-500 MHz	100 kHz	213.65	-65.48	-36	PASS
GSM1800	512	1710.2	5	500 MHz-925 MHz	3 MHz	791.98	-56.65	-36	PASS
GSM1800	512	1710.2	5	960 MHz-1000 MHz	3 MHz	962.12	-57.33	-36	PASS
GSM1800	512	1710.2	5	1000 MHz-1680 MHz	3 MHz	1607.92	-56.23	-30	PASS
GSM1800	512	1710.2	5	1680 MHz-1690 MHz	1 MHz	1680.23	-61.28	-30	PASS
GSM1800	512	1710.2	5	1690 MHz-1700 MHz	300 kHz	1696.26	-65.69	-30	PASS
GSM1800	512	1710.2	5	1700 MHz-1704.20 MHz	100 kHz	1704.15	-61.57	-30	PASS
GSM1800	512	1710.2	5	1704.20 MHz-1708.40 MHz	30 kHz	1708.40	-56.54	-30	PASS
GSM1800	512	1710.2	5	1712.00 MHz-1716.20 MHz	30 kHz	1712.29	-54.75	-30	PASS
GSM1800	512	1710.2	5	1716.20 MHz-1795 MHz	100 kHz	1716.28	-62.09	-30	PASS
GSM1800	512	1710.2	5	1795 MHz-1805 MHz	300 kHz	1804.98	-65.27	-30	PASS
GSM1800	512	1710.2	5	1880 MHz-12.75	3 MHz	3420.20	-41.50	-30	PASS

				GHz					
GSM1800	698	1747.4	5	100 kHz-50 MHz	10 kHz	0.13	-53.69	-36	PASS
GSM1800	698	1747.4	5	50 MHz-500 MHz	100 kHz	205.25	-65.91	-36	PASS
GSM1800	698	1747.4	5	500 MHz-925 MHz	3 MHz	712.50	-56.34	-36	PASS
GSM1800	698	1747.4	5	960 MHz-1000 MHz	3 MHz	962.44	-57.33	-36	PASS
GSM1800	698	1747.4	5	1000 MHz-1680 MHz	3 MHz	1624.92	-56.46	-30	PASS
GSM1800	698	1747.4	5	1680 MHz-1690 MHz	1 MHz	1687.02	-61.31	-30	PASS
GSM1800	698	1747.4	5	1690 MHz-1700 MHz	300 kHz	1692.59	-65.42	-30	PASS
GSM1800	698	1747.4	5	1700 MHz-1741.40 MHz	100 kHz	1741.40	-63.28	-30	PASS
GSM1800	698	1747.4	5	1741.40 MHz-1745.60 MHz	30 kHz	1745.40	-56.57	-30	PASS
GSM1800	698	1747.4	5	1749.20 MHz-1753.40 MHz	30 kHz	1749.24	-58.66	-30	PASS
GSM1800	698	1747.4	5	1753.40 MHz-1795 MHz	100 kHz	1753.61	-63.87	-30	PASS
GSM1800	698	1747.4	5	1795 MHz-1805 MHz	300 kHz	1801.08	-65.45	-30	PASS
GSM1800	698	1747.4	5	1880 MHz-12.75 GHz	3 MHz	3494.61	-44.56	-30	PASS
GSM1800	885	1784.8	5	100 kHz-50 MHz	10 kHz	0.13	-54.29	-36	PASS
GSM1800	885	1784.8	5	50 MHz-500 MHz	100 kHz	209.60	-65.21	-36	PASS
GSM1800	885	1784.8	5	500 MHz-925 MHz	3 MHz	711.65	-54.26	-36	PASS
GSM1800	885	1784.8	5	960 MHz-1000 MHz	3 MHz	961.88	-57.35	-36	PASS
GSM1800	885	1784.8	5	1000 MHz-1680 MHz	3 MHz	1561.68	-56.40	-30	PASS
GSM1800	885	1784.8	5	1680 MHz-1690 MHz	1 MHz	1680.45	-61.20	-30	PASS
GSM1800	885	1784.8	5	1690 MHz-1700 MHz	300 kHz	1690.95	-65.59	-30	PASS
GSM1800	885	1784.8	5	1700 MHz-1778.80 MHz	100 kHz	1778.80	-63.94	-30	PASS
GSM1800	885	1784.8	5	1778.80 MHz-1783.00 MHz	30 kHz	1782.97	-58.62	-30	PASS
GSM1800	885	1784.8	5	1786.60 MHz-1790.80 MHz	30 kHz	1786.63	-56.19	-30	PASS
GSM1800	885	1784.8	5	1790.80 MHz-1795 MHz	100 kHz	1790.87	-61.24	-30	PASS
GSM1800	885	1784.8	5	1795 MHz-1805 MHz	300 kHz	1800.68	-65.23	-30	PASS
GSM1800	885	1784.8	5	1880 MHz-12.75 GHz	3 MHz	3569.87	-46.90	-30	PASS
GSM1900	512	1850.2	5	100 kHz-50 MHz	10 kHz	0.12	-56.55	-36	PASS

GSM1900	512	1850.2	5	50 MHz-500 MHz	100 kHz	484.25	-67.46	-36	PASS
GSM1900	512	1850.2	5	500 MHz-925 MHz	3 MHz	890.58	-58.80	-36	PASS
GSM1900	512	1850.2	5	960 MHz-1000 MHz	3 MHz	970.60	-59.34	-36	PASS
GSM1900	512	1850.2	5	1000 MHz-1775 MHz	3 MHz	1595.98	-57.50	-30	PASS
GSM1900	512	1850.2	5	1775 MHz-1785 MHz	1 MHz	1775.16	-62.46	-30	PASS
GSM1900	512	1850.2	5	1785 MHz-1795 MHz	300 kHz	1789.39	-66.77	-30	PASS
GSM1900	512	1850.2	5	1795 MHz-1844.20 MHz	100 kHz	1839.72	-55.25	-30	PASS
GSM1900	512	1850.2	5	1844.20 MHz-1848.40 MHz	30 kHz	1848.33	-55.65	-30	PASS
GSM1900	512	1850.2	5	1852.00 MHz-1856.20 MHz	30 kHz	1852.27	-56.97	-30	PASS
GSM1900	512	1850.2	5	1856.20 MHz-1920 MHz	100 kHz	1863.47	-54.35	-30	PASS
GSM1900	512	1850.2	5	1920 MHz-1930 MHz	300 kHz	1928.24	-64.61	-30	PASS
GSM1900	512	1850.2	5	1990 MHz-12.75 GHz	3 MHz	3700.01	-55.97	-30	PASS
GSM1900	661	1880	5	100 kHz-50 MHz	10 kHz	0.12	-56.68	-36	PASS
GSM1900	661	1880	5	50 MHz-500 MHz	100 kHz	293.90	-67.87	-36	PASS
GSM1900	661	1880	5	500 MHz-925 MHz	3 MHz	780.50	-58.81	-36	PASS
GSM1900	661	1880	5	960 MHz-1000 MHz	3 MHz	963.76	-59.28	-36	PASS
GSM1900	661	1880	5	1000 MHz-1775 MHz	3 MHz	1624.65	-57.37	-30	PASS
GSM1900	661	1880	5	1775 MHz-1785 MHz	1 MHz	1784.34	-62.85	-30	PASS
GSM1900	661	1880	5	1785 MHz-1795 MHz	300 kHz	1793.59	-66.37	-30	PASS
GSM1900	661	1880	5	1795 MHz-1874.00 MHz	100 kHz	1873.53	-54.64	-30	PASS
GSM1900	661	1880	5	1874.00 MHz-1878.20 MHz	30 kHz	1878.06	-56.65	-30	PASS
GSM1900	661	1880	5	1881.80 MHz-1886.00 MHz	30 kHz	1882.22	-56.88	-30	PASS
GSM1900	661	1880	5	1886.00 MHz-1920 MHz	100 kHz	1914.19	-54.64	-30	PASS
GSM1900	661	1880	5	1920 MHz-1930 MHz	300 kHz	1922.41	-66.27	-30	PASS
GSM1900	661	1880	5	1990 MHz-12.75 GHz	3 MHz	2470.06	-56.63	-30	PASS
GSM1900	810	1909.8	5	100 kHz-50 MHz	10 kHz	0.12	-54.61	-36	PASS
GSM1900	810	1909.8	5	50 MHz-500 MHz	100 kHz	347.60	-67.27	-36	PASS

GSM1900	810	1909.8	5	500 MHz-925 MHz	3 MHz	918.63	-58.78	-36	PASS
GSM1900	810	1909.8	5	960 MHz-1000 MHz	3 MHz	972.44	-59.38	-36	PASS
GSM1900	810	1909.8	5	1000 MHz-1775 MHz	3 MHz	1597.53	-57.19	-30	PASS
GSM1900	810	1909.8	5	1775 MHz-1785 MHz	1 MHz	1776.91	-62.88	-30	PASS
GSM1900	810	1909.8	5	1785 MHz-1795 MHz	300 kHz	1790.71	-67.03	-30	PASS
GSM1900	810	1909.8	5	1795 MHz-1903.80 MHz	100 kHz	1869.20	-54.97	-30	PASS
GSM1900	810	1909.8	5	1903.80 MHz-1908.00 MHz	30 kHz	1904.35	-57.43	-30	PASS
GSM1900	810	1909.8	5	1911.60 MHz-1915.80 MHz	30 kHz	1911.80	-56.68	-30	PASS
GSM1900	810	1909.8	5	1915.80 MHz-1920 MHz	100 kHz	1918.61	-54.71	-30	PASS
GSM1900	810	1909.8	5	1920 MHz-1930 MHz	300 kHz	1929.30	-65.90	-30	PASS
GSM1900	810	1909.8	5	1990 MHz-12.75 GHz	3 MHz	5729.51	-58.56	-30	PASS
GSM850	128	824.2	5	100 kHz-50 MHz	10 kHz	0.12	-46.12	-36	PASS
GSM850	128	824.2	5	50 MHz-500 MHz	100 kHz	267.50	-59.27	-36	PASS
GSM850	128	824.2	5	500 MHz-794 MHz	3 MHz	792.82	-50.61	-36	PASS
GSM850	128	824.2	5	794 MHz-804 MHz	1 MHz	798.16	-54.93	-36	PASS
GSM850	128	824.2	5	804 MHz-814 MHz	300 kHz	811.29	-59.22	-36	PASS
GSM850	128	824.2	5	814 MHz-818.20 MHz	100 kHz	815.16	-62.08	-36	PASS
GSM850	128	824.2	5	818.20 MHz-822.40 MHz	30 kHz	822.34	-65.63	-36	PASS
GSM850	128	824.2	5	826.00 MHz-830.20 MHz	30 kHz	826.43	-64.75	-36	PASS
GSM850	128	824.2	5	830.20 MHz-859 MHz	100 kHz	838.44	-62.64	-36	PASS
GSM850	128	824.2	5	859 MHz-869 MHz	1 MHz	861.97	-55.14	-36	PASS
GSM850	128	824.2	5	869 MHz-1000 MHz	3 MHz	897.43	-50.84	-36	PASS
GSM850	128	824.2	5	1000 MHz-1805 MHz	3 MHz	1648.03	-47.98	-30	PASS
GSM850	128	824.2	5	1805 MHz-12.75 GHz	3 MHz	5770.46	-49.61	-30	PASS
GSM850	190	836.6	5	100 kHz-50 MHz	10 kHz	0.12	-47.52	-36	PASS
GSM850	190	836.6	5	50 MHz-500 MHz	100 kHz	192.95	-59.24	-36	PASS
GSM850	190	836.6	5	500 MHz-794 MHz	3 MHz	782.53	-50.55	-36	PASS
GSM850	190	836.6	5	794 MHz-804 MHz	1 MHz	794.26	-54.99	-36	PASS
GSM850	190	836.6	5	804 MHz-814 MHz	300 kHz	811.10	-58.89	-36	PASS


					kHz				
GSM850	190	836.6	5	814 MHz-830.60 MHz	100 kHz	818.38	-62.39	-36	PASS
GSM850	190	836.6	5	830.60 MHz-834.80 MHz	30 kHz	831.96	-64.99	-36	PASS
GSM850	190	836.6	5	838.40 MHz-842.60 MHz	30 kHz	838.75	-65.21	-36	PASS
GSM850	190	836.6	5	842.60 MHz-859 MHz	100 kHz	849.90	-62.60	-36	PASS
GSM850	190	836.6	5	859 MHz-869 MHz	1 MHz	860.28	-55.10	-36	PASS
GSM850	190	836.6	5	869 MHz-1000 MHz	3 MHz	926.64	-50.90	-36	PASS
GSM850	190	836.6	5	1000 MHz-1805 MHz	3 MHz	1672.98	-48.95	-30	PASS
GSM850	190	836.6	5	1805 MHz-12.75 GHz	3 MHz	5856.33	-48.70	-30	PASS
GSM850	251	848.8	5	100 kHz-50 MHz	10 kHz	0.12	-47.06	-36	PASS
GSM850	251	848.8	5	50 MHz-500 MHz	100 kHz	384.05	-58.87	-36	PASS
GSM850	251	848.8	5	500 MHz-794 MHz	3 MHz	781.95	-50.57	-36	PASS
GSM850	251	848.8	5	794 MHz-804 MHz	1 MHz	803.23	-55.11	-36	PASS
GSM850	251	848.8	5	804 MHz-814 MHz	300 kHz	805.45	-59.15	-36	PASS
GSM850	251	848.8	5	814 MHz-842.80 MHz	100 kHz	818.46	-62.27	-36	PASS
GSM850	251	848.8	5	842.80 MHz-847.00 MHz	30 kHz	843.01	-64.75	-36	PASS
GSM850	251	848.8	5	850.60 MHz-854.80 MHz	30 kHz	854.00	-64.88	-36	PASS
GSM850	251	848.8	5	854.80 MHz-859 MHz	100 kHz	855.92	-62.38	-36	PASS
GSM850	251	848.8	5	859 MHz-869 MHz	1 MHz	862.65	-55.12	-36	PASS
GSM850	251	848.8	5	869 MHz-1000 MHz	3 MHz	909.87	-50.93	-36	PASS
GSM850	251	848.8	5	1000 MHz-1805 MHz	3 MHz	1697.94	-48.69	-30	PASS
GSM850	251	848.8	5	1805 MHz-12.75 GHz	3 MHz	12483.11	-49.82	-30	PASS
GSM900	975	880.2	5	100 kHz-50 MHz	10 kHz	0.12	-54.11	-36	PASS
GSM900	975	880.2	5	50 MHz-500 MHz	100 kHz	360.20	-62.23	-36	PASS
GSM900	975	880.2	5	500 MHz-850 MHz	3 MHz	850.00	-57.22	-36	PASS
GSM900	975	880.2	5	850 MHz-860 MHz	1 MHz	859.95	-57.22	-36	PASS
GSM900	975	880.2	5	860 MHz-870 MHz	300 kHz	861.27	-61.63	-36	PASS
GSM900	975	880.2	5	870 MHz-874.20 MHz	100 kHz	874.19	-55.50	-36	PASS
GSM900	975	880.2	5	874.20 MHz-878.40 MHz	30 kHz	878.39	-53.90	-36	PASS

				MHz					
GSM900	975	880.2	5	882.00 MHz-886.20 MHz	30 kHz	882.05	-52.91	-36	PASS
GSM900	975	880.2	5	886.20 MHz-925 MHz	100 kHz	902.07	-50.02	-36	PASS
GSM900	975	880.2	5	960 MHz-1000 MHz	3 MHz	970.64	-58.12	-36	PASS
GSM900	975	880.2	5	1000 MHz-1805 MHz	3 MHz	1760.73	-43.24	-30	PASS
GSM900	975	880.2	5	1805 MHz-12.75 GHz	3 MHz	4400.65	-46.29	-30	PASS
GSM900	38	897.6	5	100 kHz-50 MHz	10 kHz	0.12	-52.70	-36	PASS
GSM900	38	897.6	5	50 MHz-500 MHz	100 kHz	441.95	-56.73	-36	PASS
GSM900	38	897.6	5	500 MHz-850 MHz	3 MHz	519.60	-55.57	-36	PASS
GSM900	38	897.6	5	850 MHz-860 MHz	1 MHz	859.60	-61.80	-36	PASS
GSM900	38	897.6	5	860 MHz-870 MHz	300 kHz	860.11	-66.47	-36	PASS
GSM900	38	897.6	5	870 MHz-891.60 MHz	100 kHz	891.60	-58.50	-36	PASS
GSM900	38	897.6	5	891.60 MHz-895.80 MHz	30 kHz	895.56	-54.47	-36	PASS
GSM900	38	897.6	5	899.40 MHz-903.60 MHz	30 kHz	899.50	-51.98	-36	PASS
GSM900	38	897.6	5	903.60 MHz-925 MHz	100 kHz	919.59	-45.87	-36	PASS
GSM900	38	897.6	5	960 MHz-1000 MHz	3 MHz	969.60	-57.48	-36	PASS
GSM900	38	897.6	5	1000 MHz-1805 MHz	3 MHz	1795.34	-44.35	-30	PASS
GSM900	38	897.6	5	1805 MHz-12.75 GHz	3 MHz	2693.23	-37.38	-30	PASS
GSM900	124	914.8	5	100 kHz-50 MHz	10 kHz	0.12	-53.62	-36	PASS
GSM900	124	914.8	5	50 MHz-500 MHz	100 kHz	468.05	-60.13	-36	PASS
GSM900	124	914.8	5	500 MHz-850 MHz	3 MHz	789.45	-57.83	-36	PASS
GSM900	124	914.8	5	850 MHz-860 MHz	1 MHz	851.76	-62.57	-36	PASS
GSM900	124	914.8	5	860 MHz-870 MHz	300 kHz	862.76	-66.92	-36	PASS
GSM900	124	914.8	5	870 MHz-908.80 MHz	100 kHz	908.80	-58.62	-36	PASS
GSM900	124	914.8	5	908.80 MHz-913.00 MHz	30 kHz	912.90	-55.79	-36	PASS
GSM900	124	914.8	5	916.60 MHz-920.80 MHz	30 kHz	916.71	-54.12	-36	PASS
GSM900	124	914.8	5	920.80 MHz-925 MHz	100 kHz	920.85	-54.81	-36	PASS
GSM900	124	914.8	5	960 MHz-1000 MHz	3 MHz	968.96	-58.54	-36	PASS

GSM900	124	914.8	5	1000 MHz-1805 MHz	3 MHz	1636.76	-58.35	-30	PASS
GSM900	124	914.8	5	1805 MHz-12.75 GHz	3 MHz	1829.42	-36.41	-30	PASS


GSM1800 Channel=512 PCL=5

Conducted spurious emissions

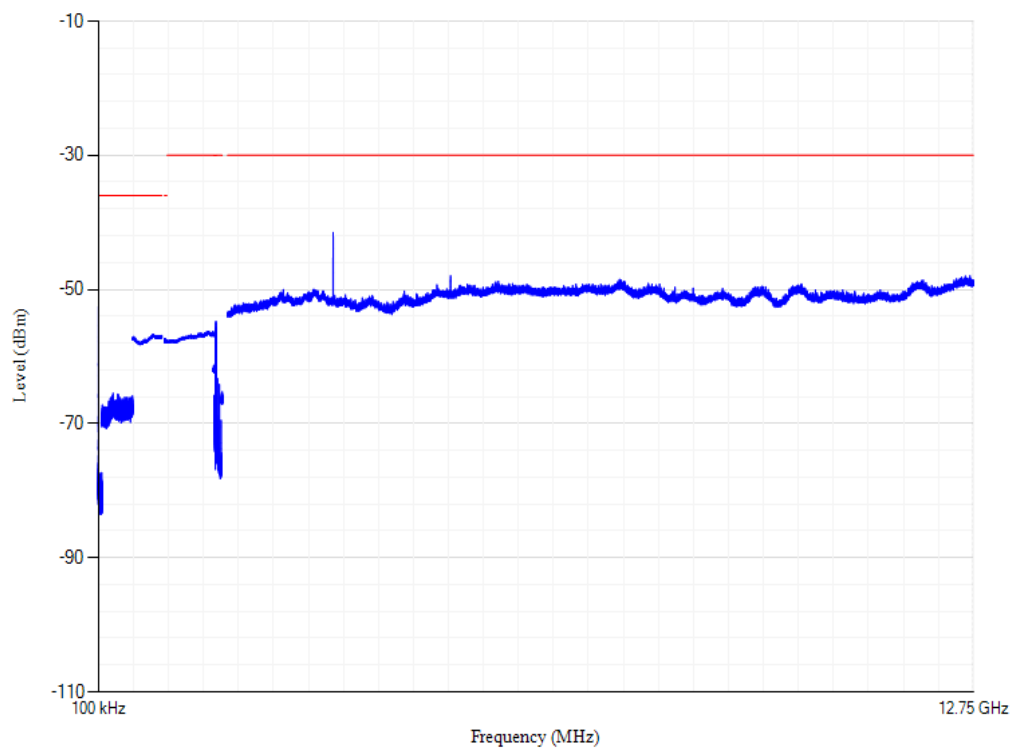


GSM1800 Channel=885 PCL=5

Conducted spurious emissions

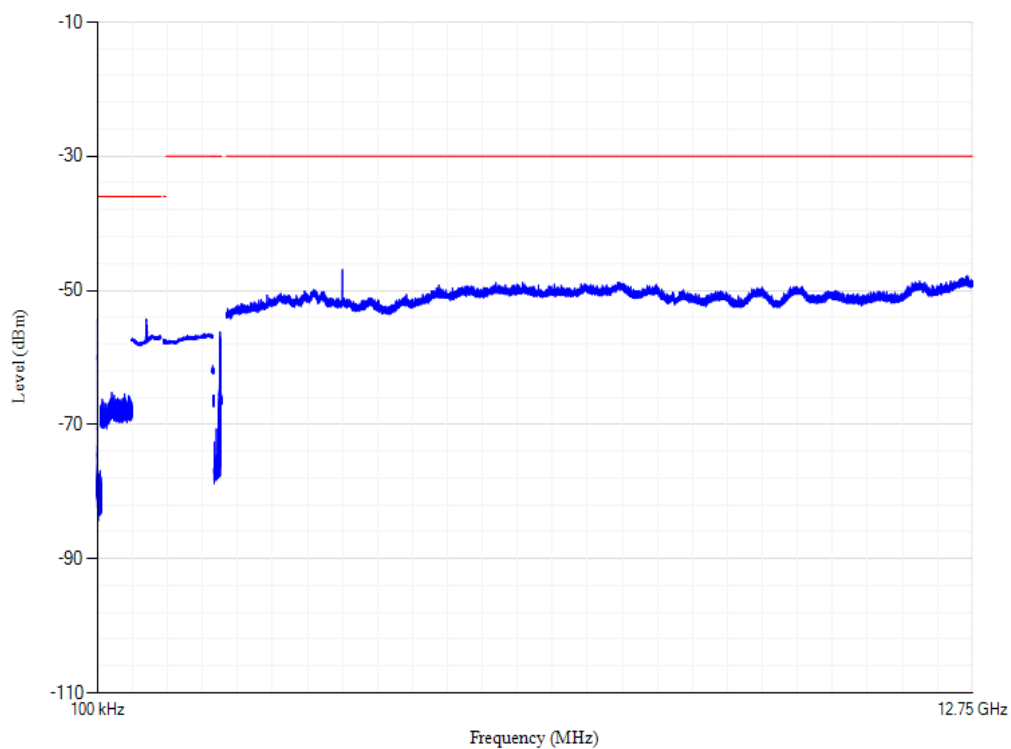


GSM1800 Channel=698 PCL=5

Conducted spurious emissions

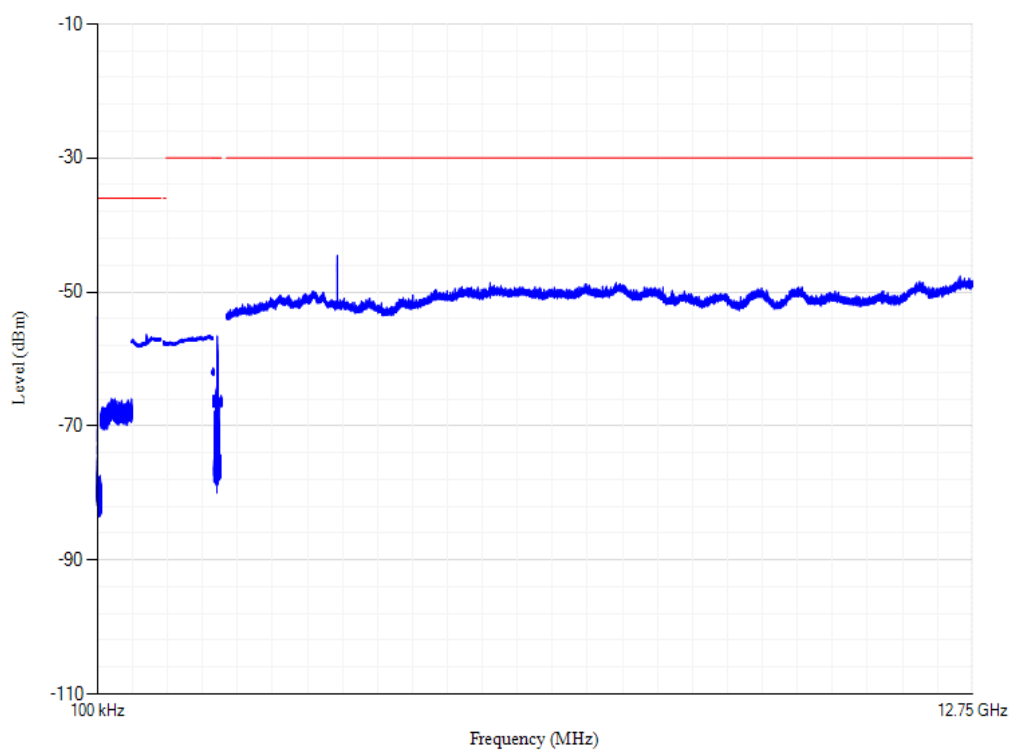


GSM1900 Channel=661 PCL=5

Conducted spurious emissions

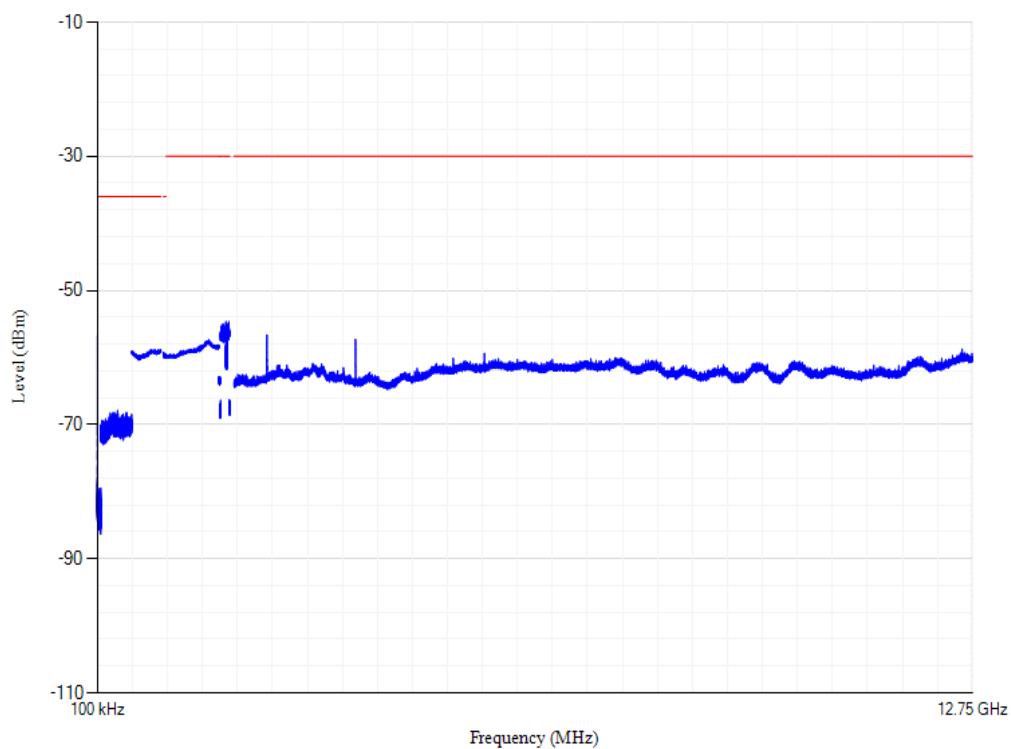


GSM1900 Channel=512 PCL=5

Conducted spurious emissions

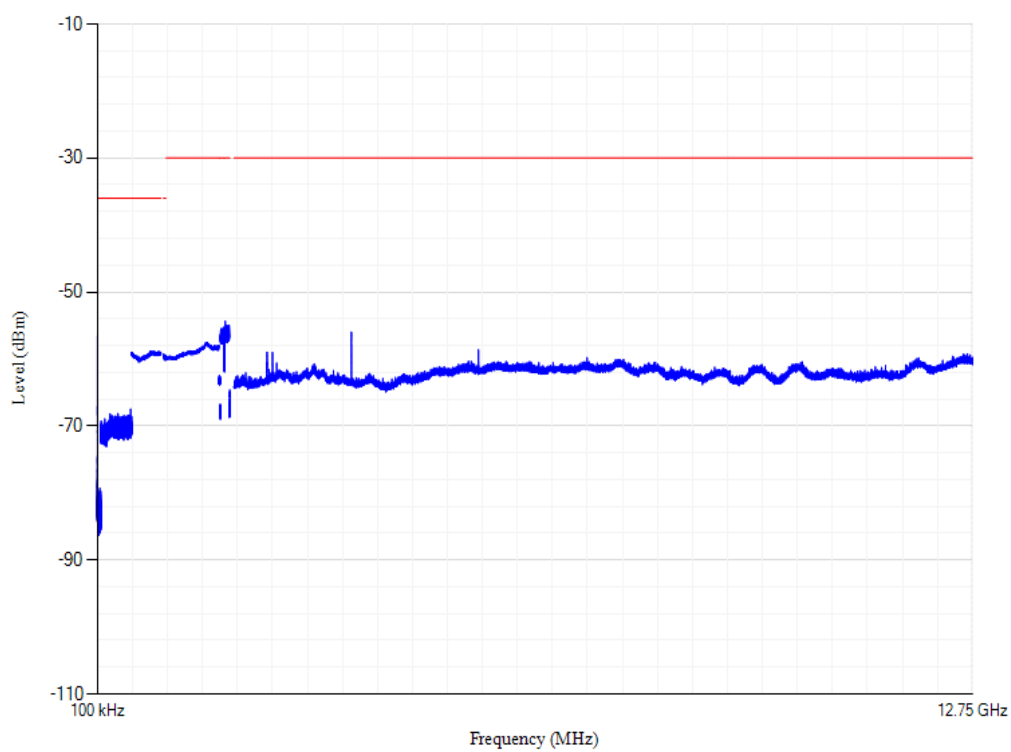


GSM1900 Channel=810 PCL=5

Conducted spurious emissions

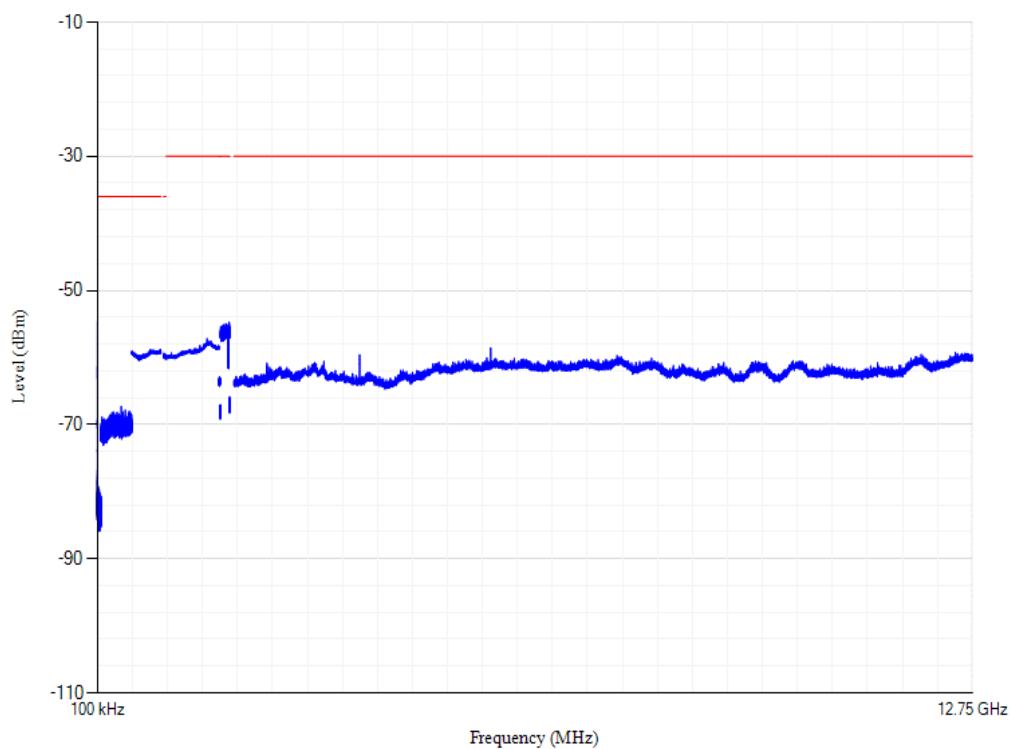


GSM850 Channel=251 PCL=5

Conducted spurious emissions

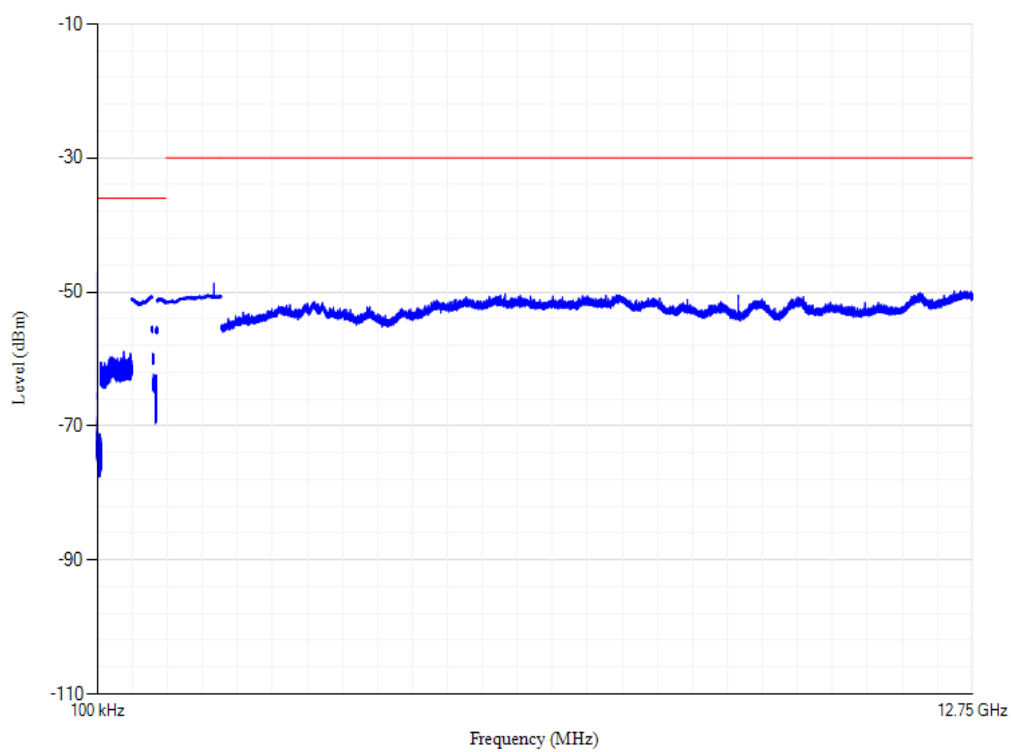


GSM850 Channel=190 PCL=5

Conducted spurious emissions

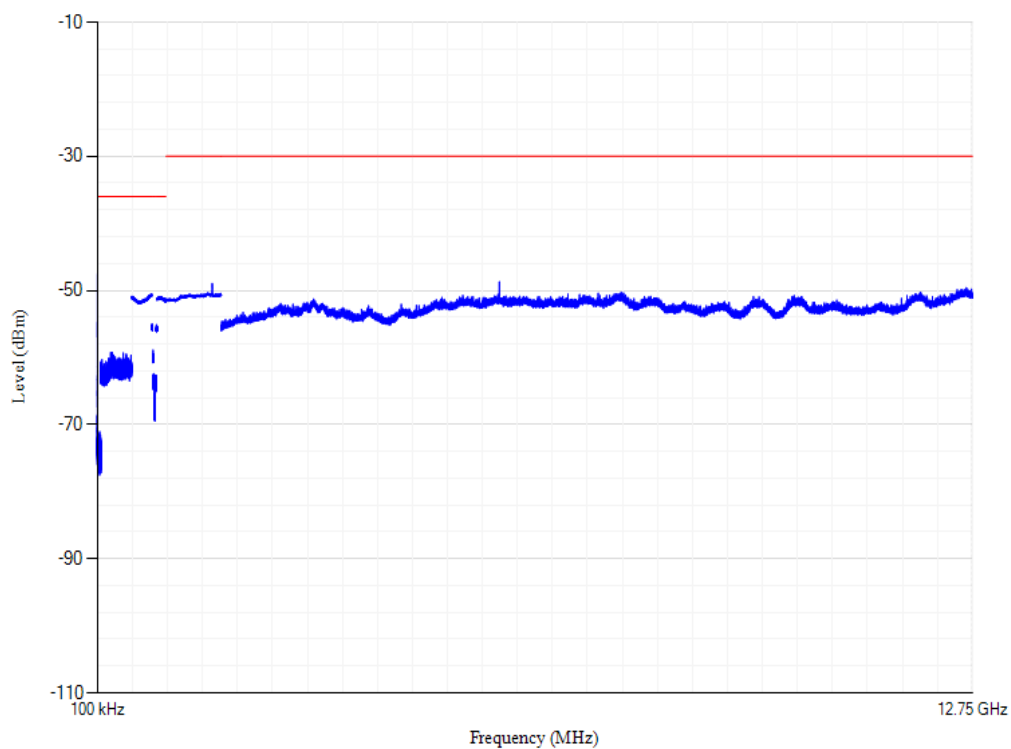


GSM850 Channel=128 PCL=5

Conducted spurious emissions

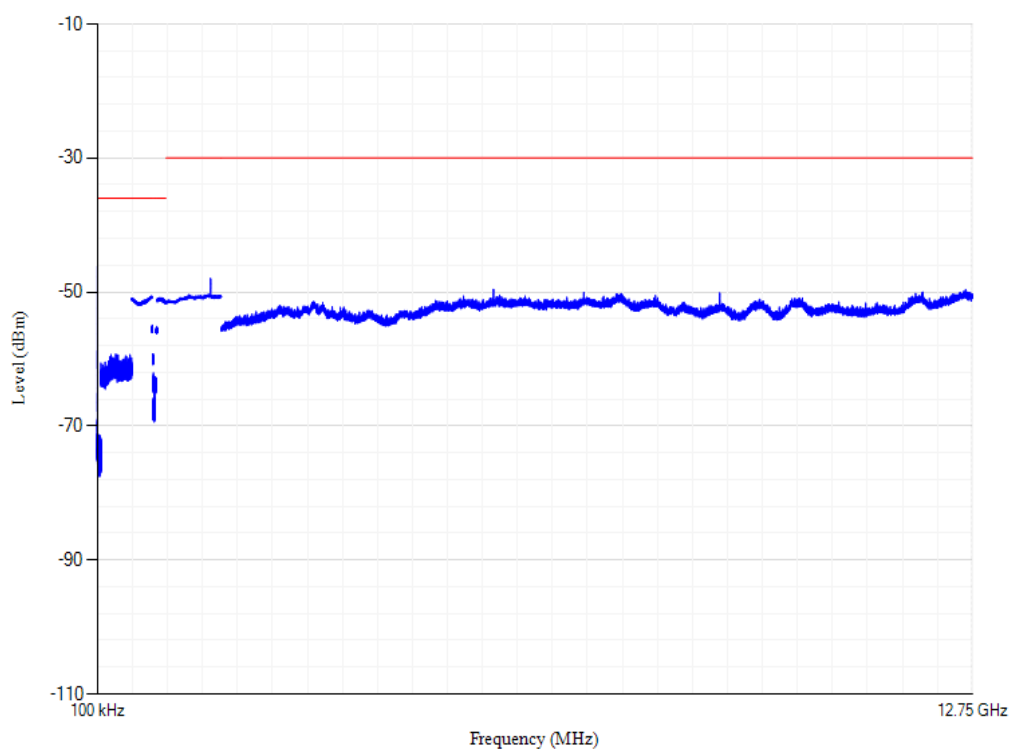


GSM900 Channel=975 PCL=5

Conducted spurious emissions

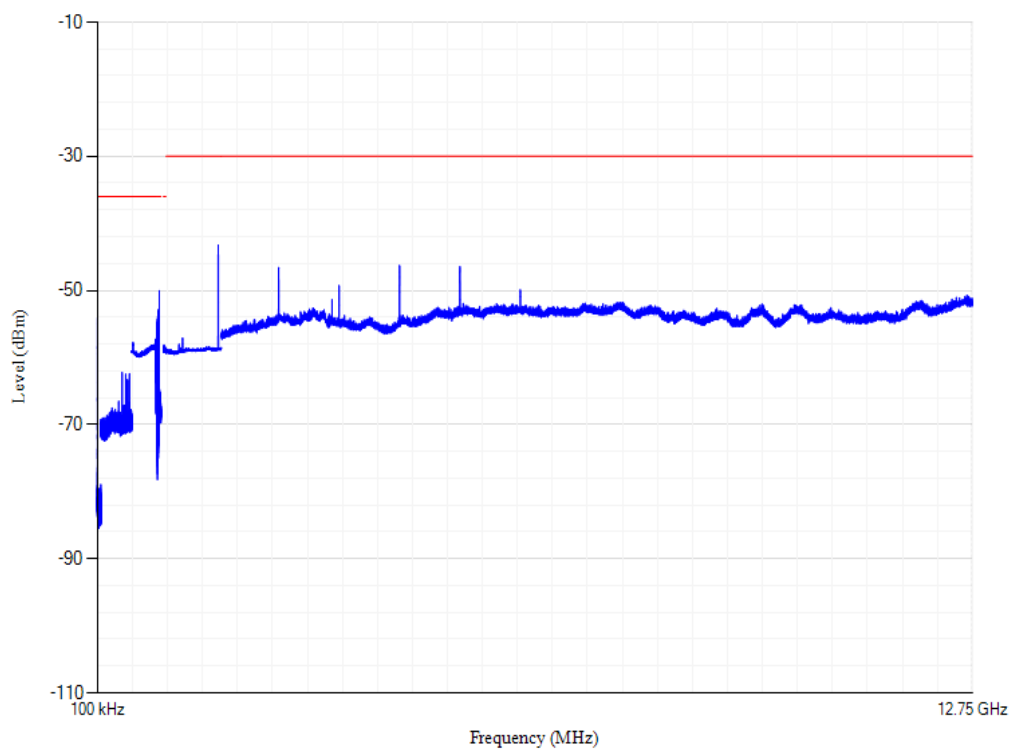


GSM900 Channel=38 PCL=5

Conducted spurious emissions

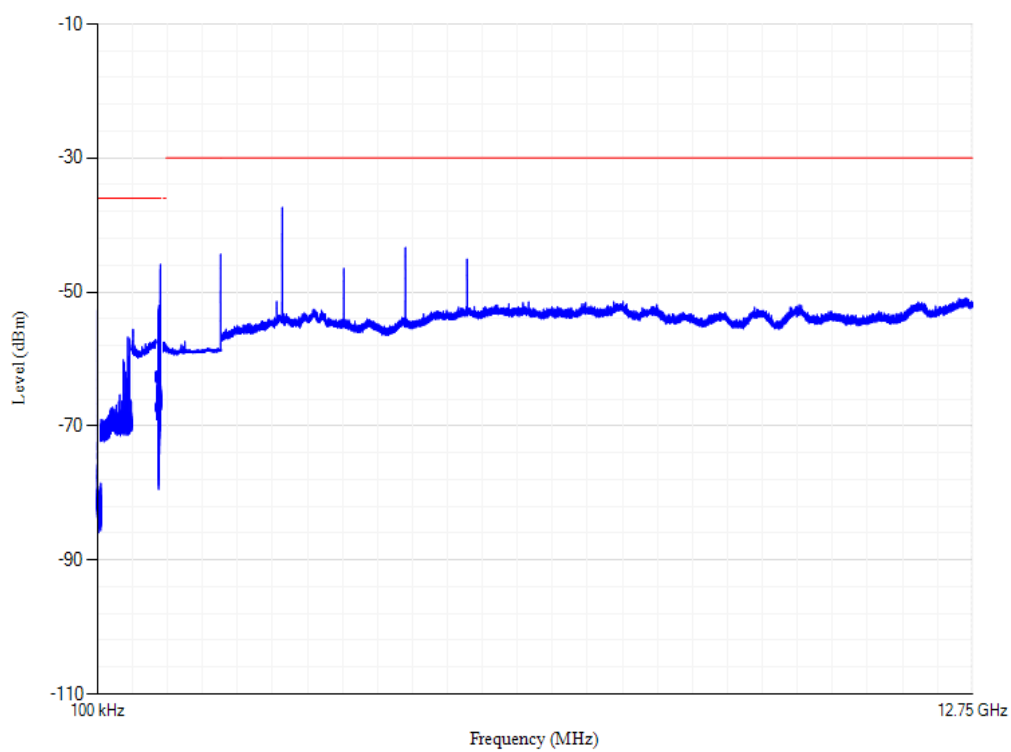

GSM900 Channel=124 PCL=5

Conducted spurious emissions

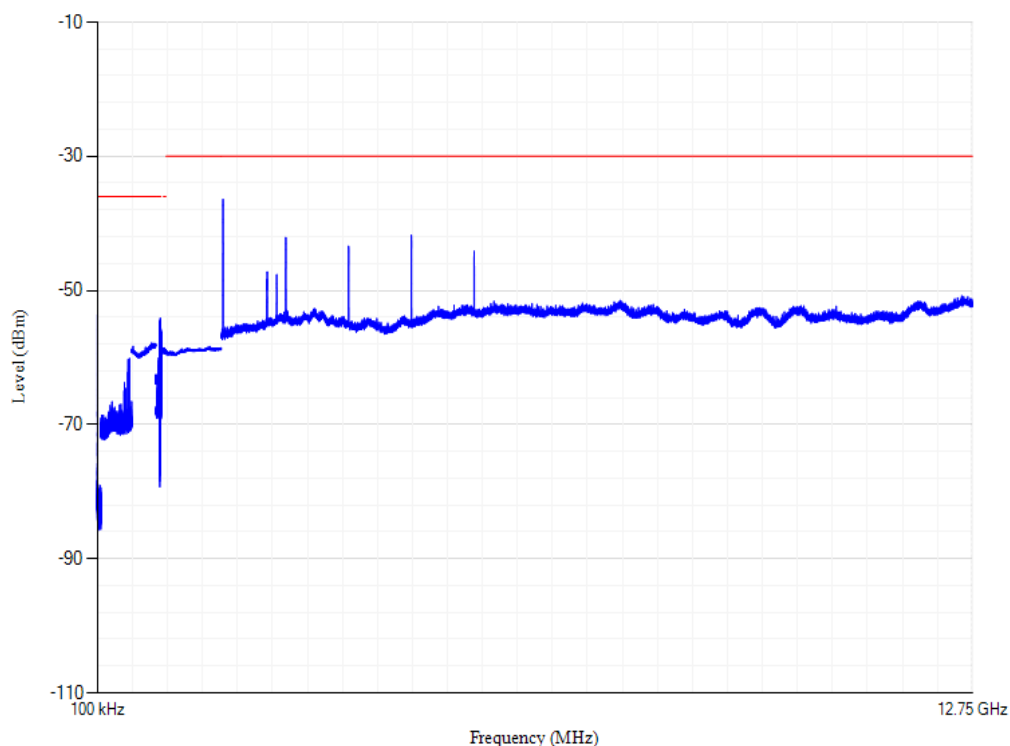


Clause 4.2.13 Conducted spurious emission - MS in idle mode

Band	Channel	Frequency (MHz)	PCL	Range	RBW	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1800	698	1747.4	0	100 kHz-50 MHz	10 kHz	0.10	-62.63	-57	PASS
GSM1800	698	1747.4	0	50 MHz-880 MHz	100 kHz	787.37	-79.74	-57	PASS
GSM1800	698	1747.4	0	880 MHz-915 MHz	100 kHz	911.96	-84.26	-59	PASS
GSM1800	698	1747.4	0	915 MHz-1000 MHz	100 kHz	948.24	-78.36	-57	PASS
GSM1800	698	1747.4	0	1000 MHz-1710 MHz	100 kHz	1683.73	-83.69	-47	PASS
GSM1800	698	1747.4	0	1710 MHz-1785 MHz	100 kHz	1780.20	-79.02	-53	PASS
GSM1800	698	1747.4	0	1785 MHz-12.75 GHz	100 kHz	2463.99	-70.34	-47	PASS
GSM1900	661	1880	0	100 kHz-50 MHz	10 kHz	0.10	-62.60	-57	PASS
GSM1900	661	1880	0	50 MHz-1000 MHz	100 kHz	944.24	-73.08	-57	PASS
GSM1900	661	1880	0	1000 MHz-1805 MHz	100 kHz	1611.00	-83.61	-47	PASS
GSM1900	661	1880	0	1805 MHz-1910 MHz	100 kHz	1901.50	-83.65	-53	PASS

GSM1900	661	1880	0	1910 MHz-12.75 GHz	100 kHz	12610.75	-77.46	-47	PASS
GSM850	190	836.6	5	100 kHz-50 MHz	10 kHz	0.12	-63.83	-57	PASS
GSM850	190	836.6	5	50 MHz-1000 MHz	100 kHz	948.23	-78.17	-57	PASS
GSM850	190	836.6	5	1000 MHz-1805 MHz	100 kHz	1624.68	-84.72	-47	PASS
GSM850	190	836.6	5	1805 MHz-1910 MHz	100 kHz	1882.49	-84.77	-53	PASS
GSM850	190	836.6	5	1910 MHz-12.75 GHz	100 kHz	2478.68	-78.16	-47	PASS
GSM900	38	897.6	5	100 kHz-50 MHz	10 kHz	0.12	-63.39	-57	PASS
GSM900	38	897.6	5	50 MHz-880 MHz	100 kHz	738.49	-81.23	-57	PASS
GSM900	38	897.6	5	880 MHz-915 MHz	100 kHz	885.50	-85.20	-59	PASS
GSM900	38	897.6	5	915 MHz-1000 MHz	100 kHz	948.15	-78.81	-57	PASS
GSM900	38	897.6	5	1000 MHz-1710 MHz	100 kHz	1704.32	-84.74	-47	PASS
GSM900	38	897.6	5	1710 MHz-1785 MHz	100 kHz	1782.45	-85.20	-53	PASS
GSM900	38	897.6	5	1785 MHz-12.75 GHz	100 kHz	6221.61	-78.63	-47	PASS


GSM1800 Channel=698 PCL=0

Conducted spurious emissions

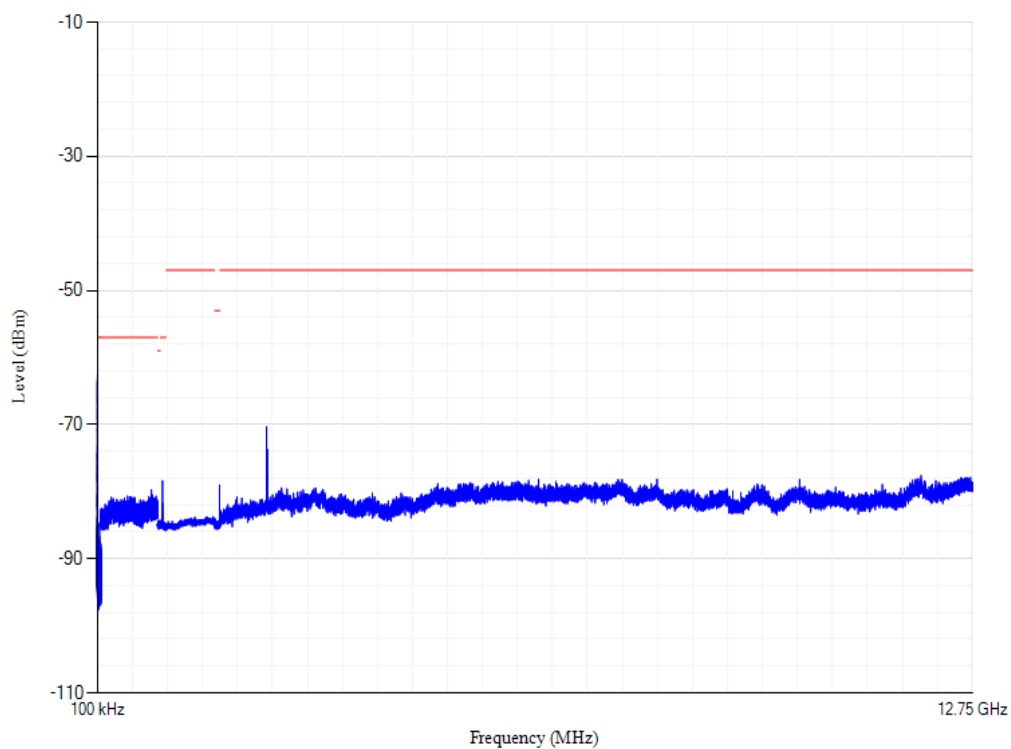


GSM1900 Channel=661 PCL=0

Conducted spurious emissions

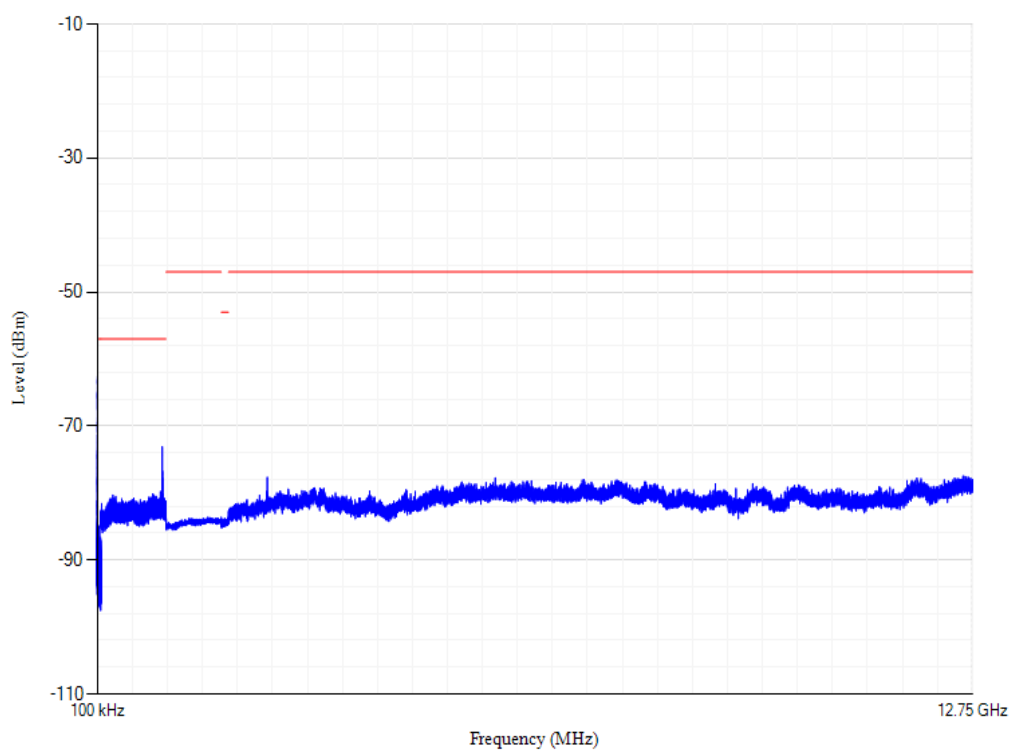


GSM850 Channel=190 PCL=5

Conducted spurious emissions

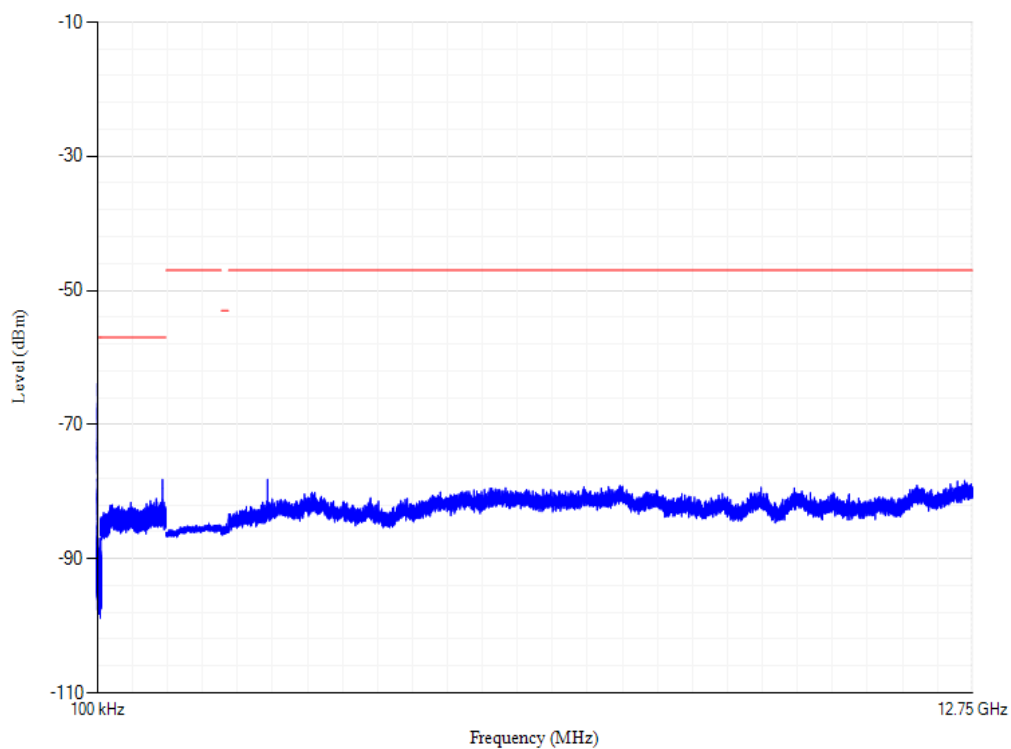

GSM900 Channel=38 PCL=5

Conducted spurious emissions

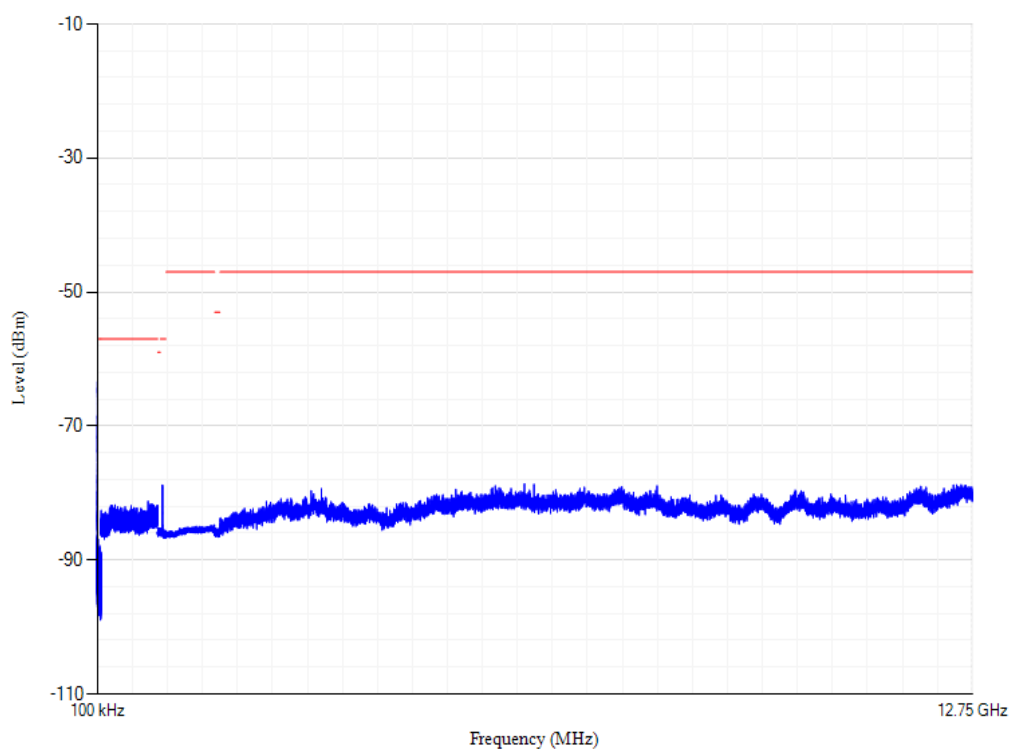

Clause 4.2.32 Intermodulation rejection - speech channels

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Interfer1 Freq (MHz)	Interfer1 Level (dBm)	Interfer2 Freq (MHz)	Interfer2 Level (dBm)	BER (%)	Limit (%)	Verdict
GSM1800	512	1710.2	1805.2	1804.4	-49	1803.6	-50	0.00	2.439	PASS
GSM1800	512	1710.2	1805.2	1806	-49	1806.8	-50	0.00	2.439	PASS
GSM1800	698	1747.4	1842.4	1841.6	-49	1840.8	-50	0.00	2.439	PASS
GSM1800	698	1747.4	1842.4	1843.2	-49	1844	-50	0.00	2.439	PASS
GSM1800	885	1784.8	1879.8	1879	-49	1878.2	-50	0.00	2.439	PASS
GSM1800	885	1784.8	1879.8	1880.6	-49	1881.4	-50	0.00	2.439	PASS
GSM1900	512	1850.2	1930.2	1929.4	-49	1928.6	-49	0.00	2.439	PASS
GSM1900	512	1850.2	1930.2	1931	-49	1931.8	-49	0.01	2.439	PASS
GSM1900	661	1880	1960	1959.2	-49	1958.4	-49	0.00	2.439	PASS
GSM1900	661	1880	1960	1960.8	-49	1961.6	-49	0.00	2.439	PASS
GSM1900	810	1909.8	1989.8	1989	-49	1988.2	-49	0.00	2.439	PASS
GSM1900	810	1909.8	1989.8	1990.6	-49	1991.4	-49	0.00	2.439	PASS
GSM850	128	824.2	869.2	868.4	-49	867.6	-50	1.94	2.439	PASS
GSM850	128	824.2	869.2	870	-49	870.8	-50	1.80	2.439	PASS
GSM850	190	836.6	881.6	880.8	-49	880	-50	0.00	2.439	PASS
GSM850	190	836.6	881.6	882.4	-49	883.2	-50	0.00	2.439	PASS
GSM850	251	848.8	893.8	893	-49	892.2	-50	0.00	2.439	PASS
GSM850	251	848.8	893.8	894.6	-49	895.4	-50	0.00	2.439	PASS
P-GSM	1	890.2	935.2	934.4	-49	933.6	-50	1.37	2.439	PASS
P-GSM	1	890.2	935.2	936	-49	936.8	-50	0.85	2.439	PASS
P-GSM	62	902.4	947.4	946.6	-49	945.8	-50	0.00	2.439	PASS
P-GSM	62	902.4	947.4	948.2	-49	949	-50	0.00	2.439	PASS
P-GSM	124	914.8	959.8	959	-49	958.2	-50	0.00	2.439	PASS
P-GSM	124	914.8	959.8	960.6	-49	961.4	-50	0.00	2.439	PASS

Clause 4.2.33 Intermodulation rejection - control channels

Band	Channel	Propagation	UL Frequency (MHz)	DL Frequency (MHz)	Interfer 1 Freq (MHz)	Interfer 1 Level (dBm)	Interfer 2 Freq (MHz)	Interfer 2 Level (dBm)	FE R (%)	Limit(%)	Verdict
GSM1800	512	TUhigh/No FH	1710.2	1805.2	1804.4	-49	1803.6	-50	0.00	4.368	PASS
GSM1800	512	TUhigh/No FH	1710.2	1805.2	1806	-49	1806.8	-50	0.00	4.368	PASS
GSM1800	698	TUhigh/No FH	1747.4	1842.4	1841.6	-49	1840.8	-50	0.00	4.368	PASS
GSM1800	698	TUhigh/No FH	1747.4	1842.4	1843.2	-49	1844	-50	0.00	4.368	PASS
GSM1800	885	TUhigh/No FH	1784.8	1879.8	1879	-49	1878.2	-50	0.00	4.368	PASS
GSM1800	885	TUhigh/No FH	1784.8	1879.8	1880.6	-49	1881.4	-50	0.00	4.368	PASS

GSM1900	512	TUhigh/No FH	1850.2	1930.2	1929.4	-49	1928.6	-49	1.52	4.368	PASS
GSM1900	512	TUhigh/No FH	1850.2	1930.2	1931	-49	1931.8	-49	0.00	4.368	PASS
GSM1900	661	TUhigh/No FH	1880	1960	1959.2	-49	1958.4	-49	0.00	4.368	PASS
GSM1900	661	TUhigh/No FH	1880	1960	1960.8	-49	1961.6	-49	0.00	4.368	PASS
GSM1900	810	TUhigh/No FH	1909.8	1989.8	1989	-49	1988.2	-49	0.00	4.368	PASS
GSM1900	810	TUhigh/No FH	1909.8	1989.8	1990.6	-49	1991.4	-49	0.00	4.368	PASS
GSM850	128	TUhigh/No FH	824.2	869.2	868.4	-49	867.6	-50	1.02	8.961	PASS
GSM850	128	TUhigh/No FH	824.2	869.2	870	-49	870.8	-50	0.00	8.961	PASS
GSM850	190	TUhigh/No FH	836.6	881.6	880.8	-49	880	-50	0.00	8.961	PASS
GSM850	190	TUhigh/No FH	836.6	881.6	882.4	-49	883.2	-50	0.00	8.961	PASS
GSM850	251	TUhigh/No FH	848.8	893.8	893	-49	892.2	-50	0.00	8.961	PASS
GSM850	251	TUhigh/No FH	848.8	893.8	894.6	-49	895.4	-50	0.00	8.961	PASS
P-GSM	1	TUhigh/No FH	890.2	935.2	934.4	-49	933.6	-50	0.00	8.961	PASS
P-GSM	1	TUhigh/No FH	890.2	935.2	936	-49	936.8	-50	0.00	8.961	PASS
P-GSM	62	TUhigh/No FH	902.4	947.4	946.6	-49	945.8	-50	0.00	8.961	PASS
P-GSM	62	TUhigh/No FH	902.4	947.4	948.2	-49	949	-50	0.00	8.961	PASS
P-GSM	124	TUhigh/No FH	914.8	959.8	959	-49	958.2	-50	0.00	8.961	PASS
P-GSM	124	TUhigh/No FH	914.8	959.8	960.6	-49	961.4	-50	0.00	8.961	PASS

Clause 4.2.35 AM suppression - speech channels

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Interfer Freq (MHz)	Interfer Level (dBm)	BER (%)	Limit (%)	Verdict
GSM1800	512	1710.2	1805.2	1811.2	-31	0.00	2.439	PASS
GSM1800	698	1747.4	1842.4	1848.4	-31	0.00	2.439	PASS
GSM1800	885	1784.8	1879.8	1885.8	-31	0.00	2.439	PASS
GSM1900	512	1850.2	1930.2	1936.2	-31	0.00	2.439	PASS

GSM1900	661	1880	1960	1966	-31	0.00	2.439	PASS
GSM1900	810	1909.8	1989.8	1995.8	-31	0.00	2.439	PASS
GSM850	128	824.2	869.2	875.2	-31	1.60	2.439	PASS
GSM850	190	836.6	881.6	887.6	-31	0.00	2.439	PASS
GSM850	251	848.8	893.8	899.8	-31	0.00	2.439	PASS
GSM900	975	880.2	915.2	921.2	-31	0.00	2.439	PASS
GSM900	38	897.6	942.6	948.6	-31	0.83	2.439	PASS
GSM900	124	914.8	959.8	965.8	-31	0.00	2.439	PASS

Clause 4.2.36 AM suppression - control channels

Band	Channel	Propagation	UL Frequency (MHz)	DL Frequency (MHz)	Interfer Freq (MHz)	Interfer Level (dBm)	FER (%)	Limit (%)	Verdict
GSM1800	512	TUhigh/No FH	1710.2	1805.2	1811.2	-31	0.00	4.368	PASS
GSM1800	698	TUhigh/No FH	1747.4	1842.4	1848.4	-31	0.00	4.368	PASS
GSM1800	885	TUhigh/No FH	1784.8	1879.8	1885.8	-31	0.00	4.368	PASS
GSM1900	512	TUhigh/No FH	1850.2	1930.2	1936.2	-31	0.00	4.368	PASS
GSM1900	661	TUhigh/No FH	1880	1960	1966	-31	0.00	4.368	PASS
GSM1900	810	TUhigh/No FH	1909.8	1989.8	1995.8	-31	0.00	4.368	PASS
GSM850	128	TUhigh/No FH	824.2	869.2	875.2	-31	0.51	8.961	PASS
GSM850	190	TUhigh/No FH	836.6	881.6	887.6	-31	0.00	8.961	PASS
GSM850	251	TUhigh/No FH	848.8	893.8	899.8	-31	0.00	8.961	PASS
GSM900	975	TUhigh/No FH	880.2	915.2	921.2	-31	0.00	8.961	PASS
GSM900	38	TUhigh/No FH	897.6	942.6	948.6	-31	0.00	8.961	PASS
GSM900	124	TUhigh/No FH	914.8	959.8	965.8	-31	0.00	8.961	PASS

Clause 4.2.38 Adjacent channel rejection - speech channels (TCH)

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Adjacent Channel	Interfer Freq (MHz)	Interfer Level (dBm)	Propagation	Result (%)	Limit (%)	Verdict
GSM1800	698	1747.4	1747.4	FER Adj -1	1842.2	-89	TUhigh	0.00	3.371	PASS
GSM1800	698	1747.4	1747.4	Class1b RBER Adj	1842.2	-89	TUhigh	0.00	0.027	PASS

				-1						
GSM1800	698	1747.4	1747.4	ClassII RBER Adj -1	1842.2	-89	TUhigh	0.00	8.333	PASS
GSM1800	698	1747.4	1747.4	FER Adj +1	1842.6	-89	TUhigh	0.00	3.371	PASS
GSM1800	698	1747.4	1747.4	ClassIb RBER Adj +1	1842.6	-89	TUhigh	0.00	0.027	PASS
GSM1800	698	1747.4	1747.4	ClassII RBER Adj +1	1842.6	-89	TUhigh	0.00	8.333	PASS
GSM1800	698	1747.4	1747.4	FER Adj -2	1842	-57	TUhigh	0.00	3.371	PASS
GSM1800	698	1747.4	1747.4	ClassIb RBER Adj -2	1842	-57	TUhigh	0.00	0.027	PASS
GSM1800	698	1747.4	1747.4	ClassII RBER Adj -2	1842	-57	TUhigh	0.00	8.333	PASS
GSM1800	698	1747.4	1747.4	FER Adj +2	1842.8	-57	TUhigh	0.00	3.371	PASS
GSM1800	698	1747.4	1747.4	ClassIb RBER Adj +2	1842.8	-57	TUhigh	0.00	0.027	PASS
GSM1800	698	1747.4	1747.4	ClassII RBER Adj +2	1842.8	-57	TUhigh	0.00	8.333	PASS
GSM1900	661	1880	1880	FER Adj -1	1959.8	-89	TUhigh	0.00	3.371	PASS
GSM1900	661	1880	1880	ClassIb RBER Adj -1	1959.8	-89	TUhigh	0.00	0.027	PASS
GSM1900	661	1880	1880	ClassII RBER Adj -1	1959.8	-89	TUhigh	0.00	8.333	PASS
GSM1900	661	1880	1880	FER Adj +1	1960.2	-89	TUhigh	0.00	3.371	PASS
GSM1900	661	1880	1880	ClassIb RBER Adj +1	1960.2	-89	TUhigh	0.00	0.027	PASS
GSM1900	661	1880	1880	ClassII RBER Adj +1	1960.2	-89	TUhigh	0.00	8.333	PASS
GSM1900	661	1880	1880	FER Adj -2	1959.6	-57	TUhigh	0.00	3.371	PASS
GSM1900	661	1880	1880	ClassIb	1959.6	-57	TUhigh	0.00	0.027	PASS

				RBER Adj -2						
GSM1900	661	1880	1880	ClassII RBER Adj -2	1959.6	-57	TUhigh	0.00	8.333	PASS
GSM1900	661	1880	1880	FER Adj +2	1960.4	-57	TUhigh	0.00	3.371	PASS
GSM1900	661	1880	1880	ClassIb RBER Adj +2	1960.4	-57	TUhigh	0.00	0.027	PASS
GSM1900	661	1880	1880	ClassII RBER Adj +2	1960.4	-57	TUhigh	0.00	8.333	PASS
GSM850	190	836.6	836.6	FER Adj -1	881.4	-89	TUhigh	0.00	6.742	PASS
GSM850	190	836.6	836.6	ClassIb RBER Adj -1	881.4	-89	TUhigh	0.00	0.042	PASS
GSM850	190	836.6	836.6	ClassII RBER Adj -1	881.4	-89	TUhigh	0.00	8.333	PASS
GSM850	190	836.6	836.6	FER Adj +1	881.8	-89	TUhigh	0.00	6.742	PASS
GSM850	190	836.6	836.6	ClassIb RBER Adj +1	881.8	-89	TUhigh	0.00	0.042	PASS
GSM850	190	836.6	836.6	ClassII RBER Adj +1	881.8	-89	TUhigh	0.00	8.333	PASS
GSM850	190	836.6	836.6	FER Adj -2	881.2	-57	TUhigh	0.00	6.742	PASS
GSM850	190	836.6	836.6	ClassIb RBER Adj -2	881.2	-57	TUhigh	0.00	0.042	PASS
GSM850	190	836.6	836.6	ClassII RBER Adj -2	881.2	-57	TUhigh	0.00	8.333	PASS
GSM850	190	836.6	836.6	FER Adj +2	882	-57	TUhigh	0.00	6.742	PASS
GSM850	190	836.6	836.6	ClassIb RBER Adj +2	882	-57	TUhigh	0.00	0.042	PASS
GSM850	190	836.6	836.6	ClassII RBER Adj +2	882	-57	TUhigh	0.00	8.333	PASS
GSM900	38	897.6	897.6	FER Adj -1	942.4	-89	TUhigh	0.30	6.742	PASS

GSM900	38	897.6	897.6	ClassIb RBER Adj -1	942.4	-89	TUhigh	0.03	0.042	PASS
GSM900	38	897.6	897.6	ClassII RBER Adj -1	942.4	-89	TUhigh	1.95	8.333	PASS
GSM900	38	897.6	897.6	FER Adj +1	942.8	-89	TUhigh	3.20	6.742	PASS
GSM900	38	897.6	897.6	ClassIb RBER Adj +1	942.8	-89	TUhigh	0.00	0.042	PASS
GSM900	38	897.6	897.6	ClassII RBER Adj +1	942.8	-89	TUhigh	2.50	8.333	PASS
GSM900	38	897.6	897.6	FER Adj -2	942.2	-57	TUhigh	4.50	6.742	PASS
GSM900	38	897.6	897.6	ClassIb RBER Adj -2	942.2	-57	TUhigh	0.00	0.042	PASS
GSM900	38	897.6	897.6	ClassII RBER Adj -2	942.2	-57	TUhigh	2.74	8.333	PASS
GSM900	38	897.6	897.6	FER Adj +2	943	-57	TUhigh	2.00	6.742	PASS
GSM900	38	897.6	897.6	ClassIb RBER Adj +2	943	-57	TUhigh	0.00	0.042	PASS
GSM900	38	897.6	897.6	ClassII RBER Adj +2	943	-57	TUhigh	2.38	8.333	PASS

Clause 4.2.42 Reference sensitivity - TCH

Band	Channel	UL Frequency (MHz)	DL Frequency (MHz)	Type	Ref Sensitivity Level (dBm)	BER (%)	Limit (%)	Verdict
GSM1800	512	1710.2	1710.2	FER TU50	-102	0.00	4.478	PASS
GSM1800	512	1710.2	1710.2	ClassIb RBER TU50	-102	0.00	0.032	PASS
GSM1800	512	1710.2	1710.2	ClassII RBER TU50	-102	0.03	8.33	PASS
GSM1800	512	1710.2	1710.2	ClassII RBER RA130	-102	0.02	7.5	PASS
GSM1800	512	1710.2	1710.2	ClassII RBER HT100	-102	0.02	9.333	PASS
GSM1800	Hopping	-	-	FER Static	-102	0.00	0.122	PASS
GSM1800	Hopping	-	-	ClassIb RBER	-102	0.00	0.41	PASS

				Static				
GSM1800	Hopping	-	-	ClassII RBER Static	-102	0.02	2.439	PASS
GSM1800	698	1747.4	1747.4	FER TU50	-102	0.00	4.478	PASS
GSM1800	698	1747.4	1747.4	ClassIb RBER TU50	-102	0.00	0.032	PASS
GSM1800	698	1747.4	1747.4	ClassII RBER TU50	-102	0.00	8.33	PASS
GSM1800	698	1747.4	1747.4	ClassII RBER RA130	-102	0.01	7.5	PASS
GSM1800	698	1747.4	1747.4	ClassII RBER HT100	-102	0.01	9.333	PASS
GSM1800	885	1784.8	1784.8	FER TU50	-102	0.00	4.478	PASS
GSM1800	885	1784.8	1784.8	ClassIb RBER TU50	-102	0.00	0.032	PASS
GSM1800	885	1784.8	1784.8	ClassII RBER TU50	-102	0.00	8.33	PASS
GSM1800	885	1784.8	1784.8	ClassII RBER RA130	-102	0.00	7.5	PASS
GSM1800	885	1784.8	1784.8	ClassII RBER HT100	-102	0.01	9.333	PASS
GSM1900	512	1850.2	1850.2	FER TU50	-102	0.00	4.478	PASS
GSM1900	512	1850.2	1850.2	ClassIb RBER TU50	-102	0.00	0.032	PASS
GSM1900	512	1850.2	1850.2	ClassII RBER TU50	-102	0.42	8.33	PASS
GSM1900	512	1850.2	1850.2	ClassII RBER RA130	-102	0.03	7.5	PASS
GSM1900	512	1850.2	1850.2	ClassII RBER HT100	-102	0.00	9.333	PASS
GSM1900	Hopping	-	-	FER Static	-102	0.00	0.122	PASS
GSM1900	Hopping	-	-	ClassIb RBER Static	-102	0.00	0.41	PASS
GSM1900	Hopping	-	-	ClassII RBER Static	-102	0.01	2.439	PASS
GSM1900	661	1880	1880	FER TU50	-102	0.00	4.478	PASS
GSM1900	661	1880	1880	ClassIb RBER TU50	-102	0.00	0.032	PASS
GSM1900	661	1880	1880	ClassII RBER TU50	-102	0.00	8.33	PASS
GSM1900	661	1880	1880	ClassII RBER RA130	-102	0.01	7.5	PASS
GSM1900	661	1880	1880	ClassII RBER HT100	-102	0.01	9.333	PASS

GSM1900	810	1909.8	1909.8	FER TU50	-102	0.00	4.478	PASS
GSM1900	810	1909.8	1909.8	ClassIb RBER TU50	-102	0.00	0.032	PASS
GSM1900	810	1909.8	1909.8	ClassII RBER TU50	-102	0.00	8.33	PASS
GSM1900	810	1909.8	1909.8	ClassII RBER RA130	-102	0.00	7.5	PASS
GSM1900	810	1909.8	1909.8	ClassII RBER HT100	-102	0.00	9.333	PASS
GSM850	128	824.2	824.2	FER TU50	-102	0.00	6.742	PASS
GSM850	128	824.2	824.2	ClassIb RBER TU50	-102	0.00	0.042	PASS
GSM850	128	824.2	824.2	ClassII RBER TU50	-102	0.00	8.33	PASS
GSM850	128	824.2	824.2	ClassII RBER RA250	-102	0.00	7.5	PASS
GSM850	128	824.2	824.2	ClassII RBER HT100	-102	0.00	9.333	PASS
GSM850	Hopping	-	-	FER Static	-102	0.00	0.122	PASS
GSM850	Hopping	-	-	ClassIb RBER Static	-102	0.00	0.41	PASS
GSM850	Hopping	-	-	ClassII RBER Static	-102	0.00	2.439	PASS
GSM850	190	836.6	836.6	FER TU50	-102	0.00	6.742	PASS
GSM850	190	836.6	836.6	ClassIb RBER TU50	-102	0.00	0.042	PASS
GSM850	190	836.6	836.6	ClassII RBER TU50	-102	0.00	8.33	PASS
GSM850	190	836.6	836.6	ClassII RBER RA250	-102	0.00	7.5	PASS
GSM850	190	836.6	836.6	ClassII RBER HT100	-102	0.00	9.333	PASS
GSM850	251	848.8	848.8	FER TU50	-102	0.00	6.742	PASS
GSM850	251	848.8	848.8	ClassIb RBER TU50	-102	0.00	0.042	PASS
GSM850	251	848.8	848.8	ClassII RBER TU50	-102	0.00	8.33	PASS
GSM850	251	848.8	848.8	ClassII RBER RA250	-102	0.00	7.5	PASS
GSM850	251	848.8	848.8	ClassII RBER HT100	-102	0.00	9.333	PASS
GSM900	975	880.2	880.2	FER TU50	-102	0.00	6.742	PASS
GSM900	975	880.2	880.2	ClassIb RBER TU50	-102	0.00	0.042	PASS

GSM900	975	880.2	880.2	ClassII RBER TU50	-102	0.01	8.33	PASS
GSM900	975	880.2	880.2	ClassII RBER RA250	-102	0.01	7.5	PASS
GSM900	975	880.2	880.2	ClassII RBER HT100	-102	0.00	9.333	PASS
GSM900	Hopping	-	-	FER Static	-102	0.00	0.122	PASS
GSM900	Hopping	-	-	ClassIb RBER Static	-102	0.00	0.41	PASS
GSM900	Hopping	-	-	ClassII RBER Static	-102	0.01	2.439	PASS
GSM900	38	897.6	897.6	FER TU50	-102	0.00	6.742	PASS
GSM900	38	897.6	897.6	ClassIb RBER TU50	-102	0.00	0.042	PASS
GSM900	38	897.6	897.6	ClassII RBER TU50	-102	4.92	8.33	PASS
GSM900	38	897.6	897.6	ClassII RBER RA250	-102	4.75	7.5	PASS
GSM900	38	897.6	897.6	ClassII RBER HT100	-102	4.54	9.333	PASS
GSM900	124	914.8	914.8	FER TU50	-102	0.00	6.742	PASS
GSM900	124	914.8	914.8	ClassIb RBER TU50	-102	0.00	0.042	PASS
GSM900	124	914.8	914.8	ClassII RBER TU50	-102	0.00	8.33	PASS
GSM900	124	914.8	914.8	ClassII RBER RA250	-102	0.00	7.5	PASS
GSM900	124	914.8	914.8	ClassII RBER HT100	-102	0.00	9.333	PASS

Clause 4.2.43 Reference sensitivity - FACCH

Band	Channel	Propagation	UL Frequency (MHz)	DL Frequency (MHz)	Ref Sensitivity Level (dBm)	FER (%)	Limit (%)	Verdict
GSM1800	512	TUhigh	1710.2	1805.2	-102	0.00	8.961	PASS
GSM1800	698	TUhigh	1747.4	1842.4	-102	0.00	8.961	PASS
GSM1800	885	TUhigh	1784.8	1879.8	-102	0.00	8.961	PASS
GSM1900	512	TUhigh	1850.2	1930.2	-102	0.00	8.961	PASS
GSM1900	661	TUhigh	1880	1960	-102	0.00	8.961	PASS
GSM1900	810	TUhigh	1909.8	1989.8	-102	0.00	8.961	PASS
GSM850	128	TUhigh	824.2	869.2	-102	0.91	8.961	PASS
GSM850	190	TUhigh	836.6	881.6	-102	0.00	8.961	PASS
GSM850	251	TUhigh	848.8	893.8	-102	0.53	8.961	PASS
GSM900	975	TUhigh	880.2	915.2	-102	0.00	8.961	PASS
GSM900	38	TUhigh	897.6	942.6	-102	0.00	8.961	PASS

GSM900	124	TUhigh	914.8	959.8	-102	0.00	8.961	PASS
--------	-----	--------	-------	-------	------	------	-------	------